

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314079

Luminaire Tested: P3SQAS05R359735DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314079
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R359735DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 542.0 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314079

CATALOG NUMBER: P3SQAS05R359735DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

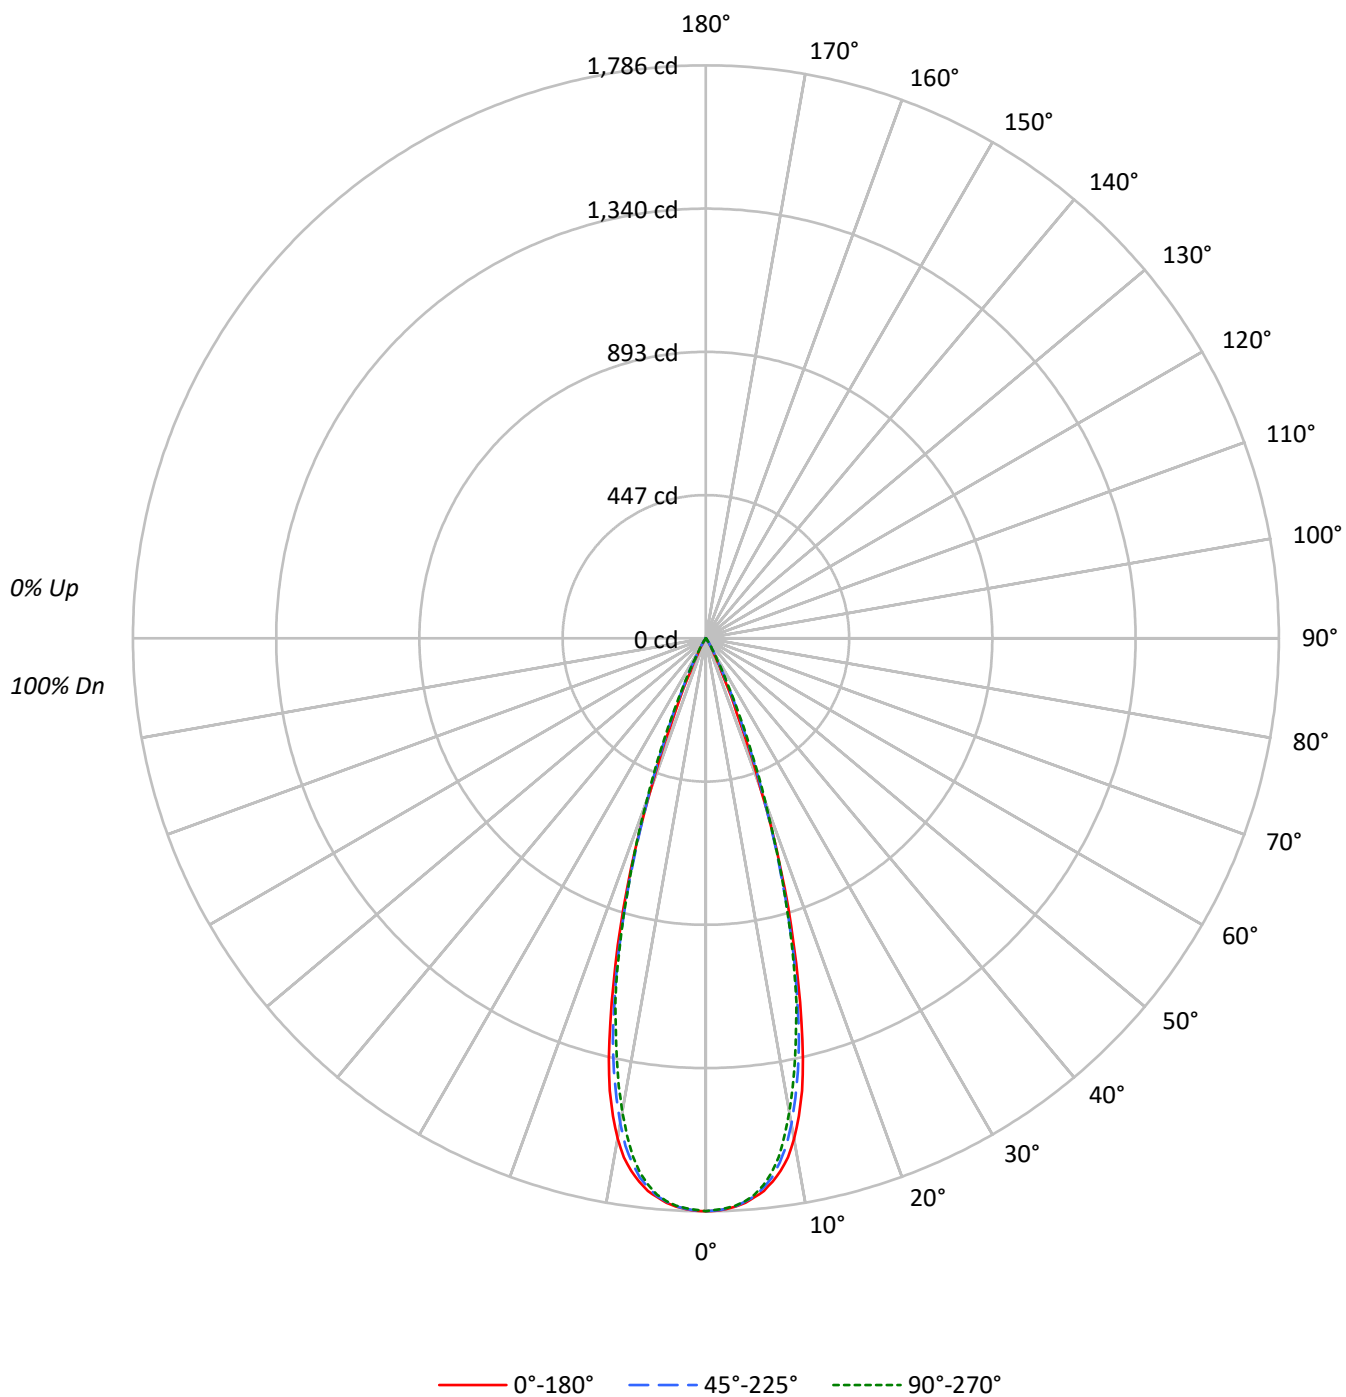

TEST NUMBER: P1314079

CATALOG NUMBER: P3SQAS05R359735DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	94	93	92
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	91	90	89
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	88	87	86
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	84	83
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	81	80
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	80	79	78
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	77	76	75
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	75	74	73
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	73	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	307538	307538	307538
5°	302264	301607	300968
10°	277009	268685	262162
15°	198357	192027	189709
20°	91986	95138	98474
25°	21815	31050	32381
30°	6403	7338	8253
35°	1472	2355	2166
40°	315	629	427
45°	122	122	122
50°	134	0	134
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 141 cd/sqm

TEST NUMBER: P1314079

CATALOG NUMBER: P3SQAS05R359735DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.3	29.6
10°-20°	286.6	52.9
20°-30°	86.2	15.9
30°-40°	8.2	1.5
40°-50°	0.6	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	533.1	98.4
0°-40°	541.4	99.9
0°-60°	542.0	100.0
0°-90°	542.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	542.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1786	1786	1786	1786	1786	
5°	1748	1748	1745	1742	1741	162
15°	1112	1104	1077	1072	1064	294
25°	115	126	163	170	170	74
35°	7	9	11	12	10	6
45°	0	0	0	0	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1314079

CATALOG NUMBER: P3SQAS05R359735DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1785.7	1785.7	1785.7	1785.7	1785.7
1°	1784.8	1784.8	1783.8	1783.8	1782.0
2°	1780.6	1781.0	1779.2	1778.7	1777.3
3°	1774.0	1772.6	1772.6	1771.7	1770.8
4°	1763.8	1761.0	1760.0	1760.5	1758.6
5°	1748.4	1747.9	1744.6	1742.3	1740.9
6°	1731.5	1728.3	1721.3	1715.2	1713.8
7°	1706.3	1699.3	1693.3	1680.7	1678.8
8°	1675.5	1664.3	1651.2	1633.5	1632.6
9°	1637.7	1619.5	1601.3	1577.5	1569.1
10°	1584.0	1567.2	1536.4	1515.4	1499.1
11°	1517.3	1496.3	1460.3	1435.1	1421.6
12°	1441.6	1422.0	1380.0	1357.1	1338.0
13°	1344.5	1328.2	1289.0	1263.8	1248.8
14°	1232.0	1219.9	1182.5	1171.3	1166.2
15°	1112.5	1104.1	1077.0	1072.4	1064.0
17.5°	818.9	804.8	789.4	792.2	795.0
20°	501.9	521.5	519.1	529.4	537.3
22.5°	250.2	275.4	304.9	322.6	331.5
25°	114.8	126.5	163.4	170.4	170.4
27.5°	57.9	60.7	77.0	78.4	82.2
30°	32.2	34.5	36.9	41.1	41.5
32.5°	16.3	19.1	20.1	22.4	21.5
35°	7.0	9.3	11.2	12.1	10.3
37.5°	3.3	4.2	6.1	5.6	4.2
40°	1.4	1.9	2.8	2.3	1.9
42.5°	0.9	0.9	1.4	0.9	0.9
45°	0.5	0.5	0.5	0.5	0.5
47.5°	0.5	0.5	0.0	0.5	0.5
50°	0.5	0.0	0.0	0.0	0.5
52.5°	0.5	0.0	0.0	0.0	0.5
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314079
CATALOG NUMBER: P3SQAS05R359735DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)