

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314285

Luminaire Tested: P3SQAS09R609735DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314285
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R609735DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 855.0 lumens
Efficiency: N/A
Efficacy: 77.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.93 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314285

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MB

Luminous Intensity Polar Plot

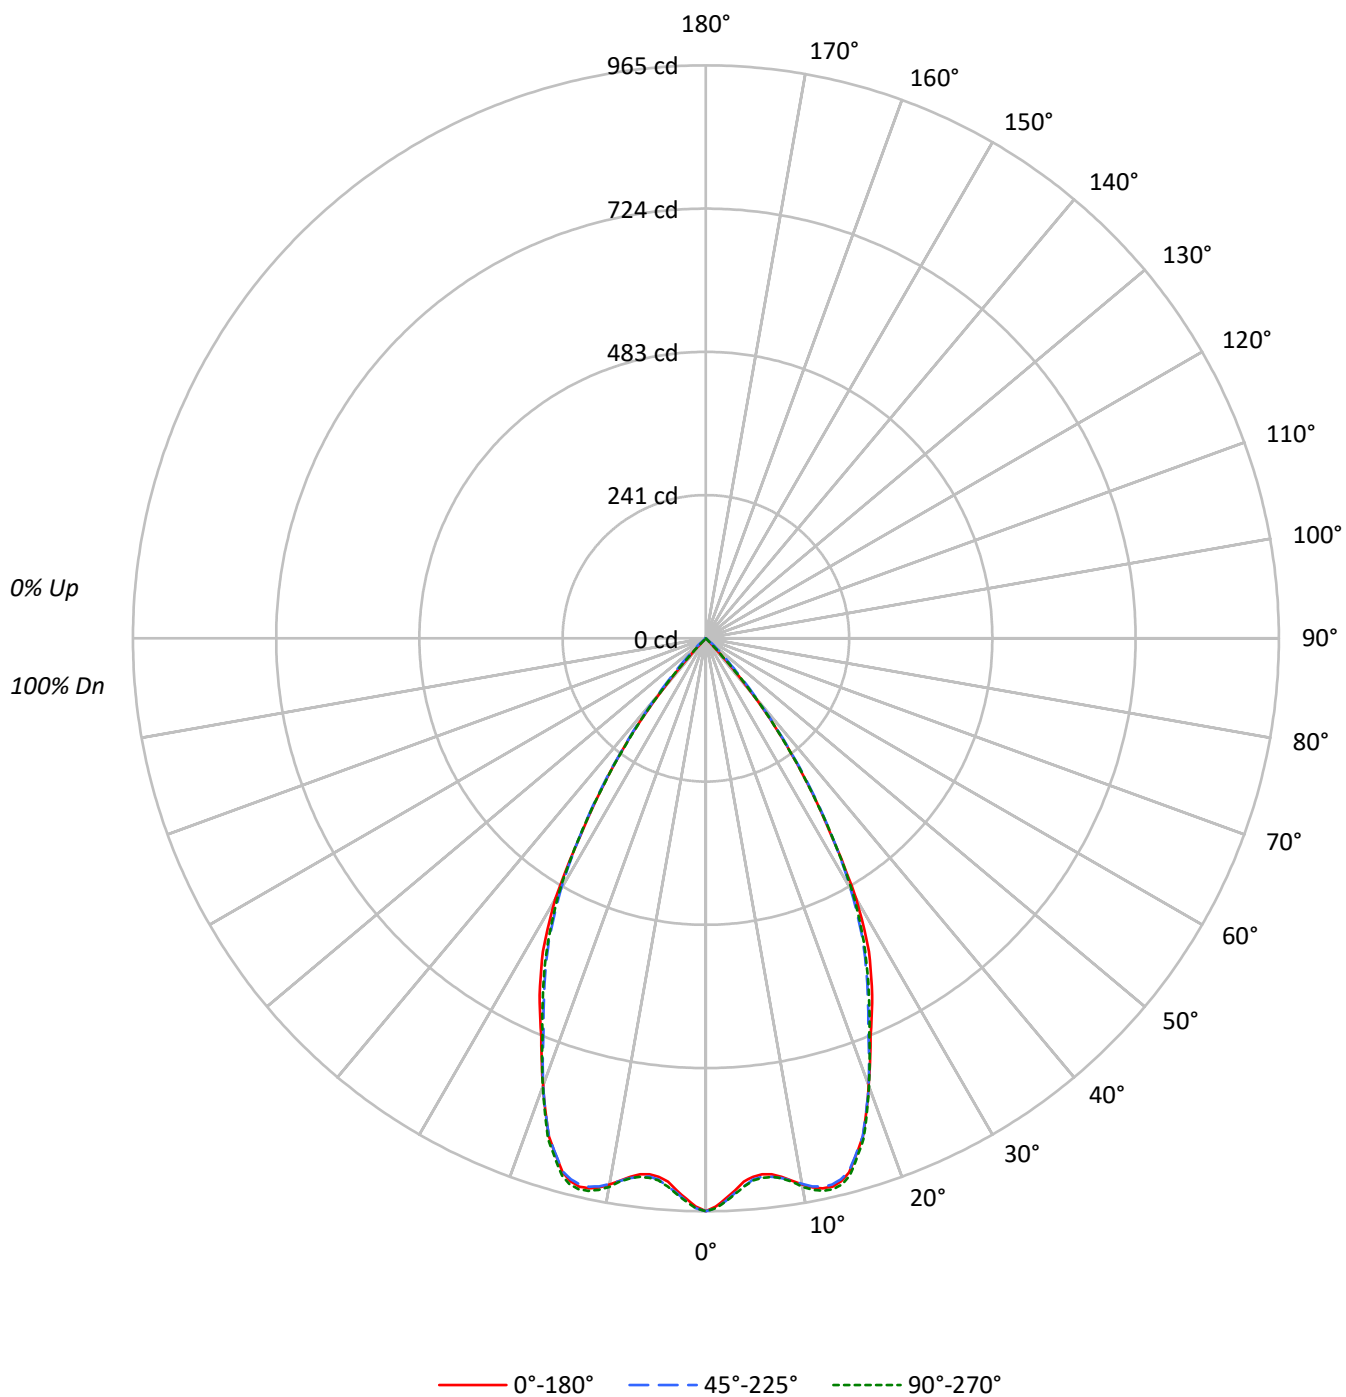

TEST NUMBER: P1314285

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88
4	98	91	86	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	166160	166160	166160
5°	157373	158186	158428
10°	163355	163128	164072
15°	166067	165817	167030
20°	146950	146950	147207
25°	125931	122187	123213
30°	100745	97086	98578
35°	62506	63788	62359
40°	27428	30193	28215
45°	341	9791	828
50°	0	1099	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 9791 cd/sqm

TEST NUMBER: P1314285

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.1	10.3
10°-20°	255.4	29.9
20°-30°	296.5	34.7
30°-40°	186.7	21.8
40°-50°	28.0	3.3
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	640.1	74.9
0°-40°	826.8	96.7
0°-60°	855.0	100.0
0°-90°	855.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	855.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	965	965	965	965	965	
5°	910	914	915	917	916	88
15°	931	928	930	936	937	255
25°	663	655	643	646	648	301
35°	297	298	303	297	297	186
45°	1	13	40	17	3	18
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1314285

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	964.8	964.8	964.8	964.8	964.8
1°	957.3	960.0	960.0	960.7	960.0
2°	944.3	948.4	948.4	950.5	949.1
3°	931.4	934.8	935.5	938.2	937.5
4°	917.1	922.5	924.6	925.9	925.3
5°	910.3	913.7	915.0	917.1	916.4
6°	907.5	910.3	911.6	913.7	913.7
7°	909.6	911.6	913.7	915.0	913.7
8°	915.7	917.8	917.8	920.5	918.4
9°	924.6	925.3	925.3	928.7	926.6
10°	934.1	932.8	932.8	937.5	938.2
11°	942.3	940.9	940.3	945.0	946.4
12°	947.1	944.3	944.3	950.5	951.2
13°	947.8	944.3	944.3	950.5	952.5
14°	942.3	938.2	938.9	945.7	947.8
15°	931.4	928.0	930.0	936.2	936.8
17.5°	879.6	877.5	878.9	883.0	883.7
20°	801.8	800.5	801.8	801.8	803.2
22.5°	724.8	721.4	714.6	718.7	719.3
25°	662.7	655.2	643.0	645.7	648.4
27.5°	594.6	585.0	572.1	575.5	576.2
30°	506.6	501.8	488.2	491.6	495.7
32.5°	391.4	404.3	396.1	395.5	396.1
35°	297.3	298.0	303.4	297.3	296.6
37.5°	208.0	208.6	212.7	205.9	206.6
40°	122.0	130.9	134.3	131.6	125.5
42.5°	38.2	67.5	76.4	66.1	42.3
45°	1.4	13.0	40.2	17.0	3.4
47.5°	0.0	0.7	19.1	1.4	0.0
50°	0.0	0.0	4.1	0.0	0.0
52.5°	0.0	0.0	0.7	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314285
CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)