

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314287

Luminaire Tested: P3SQAS09R609735DE010 E3SQCD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314287
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R609735DE010 E3SQCD1MW
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3SQCD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 871.0 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.92 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314287

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MW

Luminous Intensity Polar Plot

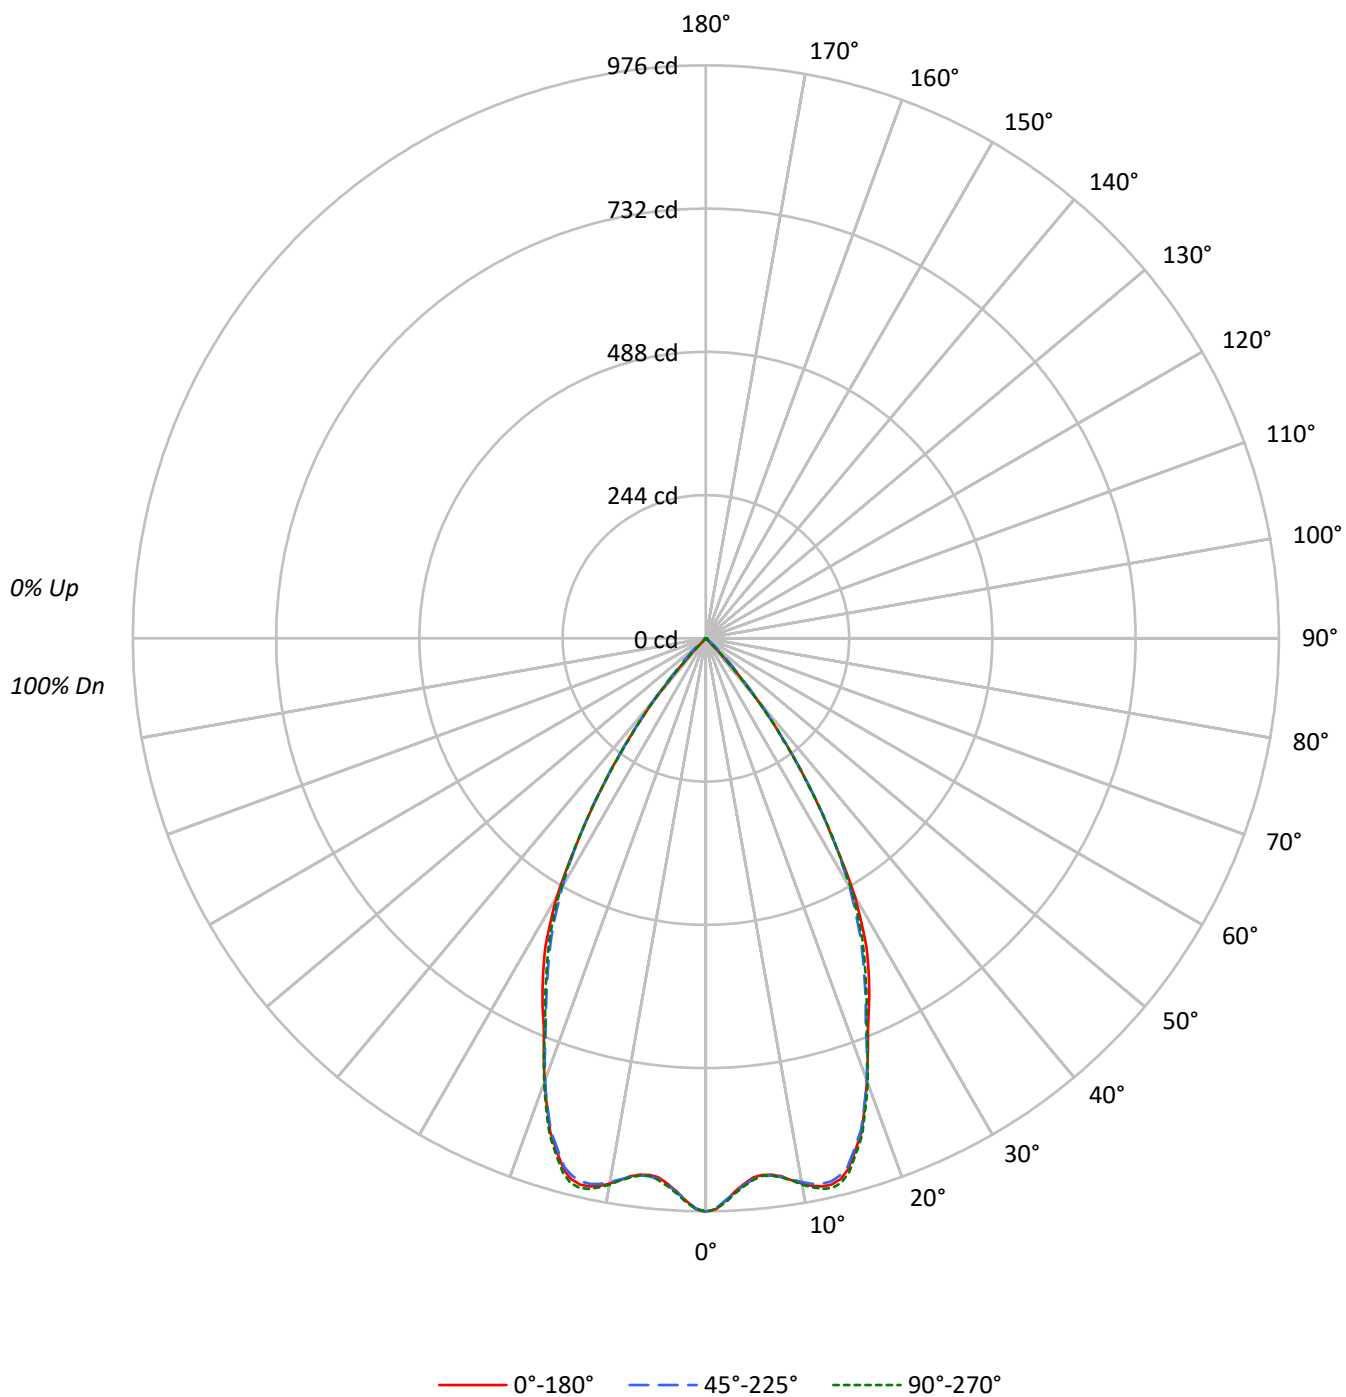

TEST NUMBER: P1314287

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	79		83
5	93	85	79	75	91	84	79	75	82	77	74		80	76	73		79
6	88	80	74	70	87	79	73	69	77	73	69		76	72	68		75
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	168175	168175	168175
5°	159396	159863	160105
10°	164929	164457	165296
15°	166940	166209	167921
20°	147005	146877	147628
25°	125095	121465	122510
30°	100964	97444	99055
35°	63893	64482	63746
40°	29879	31093	30328
45°	1827	10960	2168
50°	911	2545	911
55°	1021	1021	1021
60°	930	930	930
65°	815	1100	815
70°	1007	1007	1007
75°	932	932	932
80°	694	694	694
85°	1383	1383	1383

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 10960 cd/sqm

TEST NUMBER: P1314287

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.0	10.2
10°-20°	256.3	29.4
20°-30°	295.5	33.9
30°-40°	189.7	21.8
40°-50°	33.0	3.8
50°-60°	3.1	0.4
60°-70°	2.4	0.3
70°-80°	1.5	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	640.8	73.6
0°-40°	830.5	95.4
0°-60°	866.7	99.5
0°-90°	871.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	871.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	976	976	976	976	976	
5°	922	924	925	927	926	89
15°	936	933	932	938	942	257
25°	658	651	639	640	645	300
35°	304	302	307	300	303	190
45°	8	22	45	27	9	25
55°	3	3	3	3	3	3
65°	2	3	3	3	2	2
75°	1	1	1	1	1	1
85°	1	1	1	1	1	0
90°	0	0	0	0	0	

TEST NUMBER: P1314287

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	976.5	976.5	976.5	976.5	976.5
1°	972.4	971.7	971.1	971.7	972.4
2°	958.8	958.1	957.4	960.2	961.5
3°	943.8	944.5	945.2	946.5	947.2
4°	931.5	932.9	933.6	934.9	935.6
5°	922.0	924.0	924.7	926.8	926.1
6°	919.3	920.6	921.3	922.0	920.6
7°	920.6	921.3	922.0	923.4	922.0
8°	925.4	926.1	926.8	927.5	927.5
9°	934.9	933.6	932.9	935.6	934.9
10°	943.1	941.1	940.4	944.5	945.2
11°	949.9	947.2	946.5	951.3	952.7
12°	954.7	950.6	949.9	956.1	958.8
13°	954.7	949.3	949.3	956.1	960.2
14°	949.3	943.1	943.1	950.6	955.4
15°	936.3	932.9	932.2	938.4	941.8
17.5°	881.8	877.7	878.4	885.2	885.9
20°	802.1	800.0	801.4	802.7	805.5
22.5°	721.0	719.6	712.1	714.2	715.5
25°	658.3	650.8	639.2	639.9	644.7
27.5°	592.2	584.7	568.3	571.7	576.5
30°	507.7	501.5	490.0	492.0	498.1
32.5°	398.6	410.9	400.0	403.4	401.4
35°	303.9	301.9	306.7	300.5	303.2
37.5°	214.0	214.7	216.7	211.2	211.2
40°	132.9	136.3	138.3	135.6	134.9
42.5°	55.9	76.3	80.4	76.3	56.6
45°	7.5	22.5	45.0	26.6	8.9
47.5°	3.4	4.8	23.9	4.8	3.4
50°	3.4	3.4	9.5	3.4	3.4
52.5°	3.4	3.4	3.4	3.4	3.4
55°	3.4	3.4	3.4	3.4	3.4
57.5°	3.4	3.4	3.4	3.4	3.4
60°	2.7	2.7	2.7	2.7	2.7
62.5°	2.7	2.7	2.7	2.7	2.7
65°	2.0	2.7	2.7	2.7	2.0
67.5°	2.0	2.0	2.0	2.0	2.0
70°	2.0	2.0	2.0	2.0	2.0
72.5°	1.4	1.4	1.4	1.4	1.4
75°	1.4	1.4	1.4	1.4	1.4
77.5°	1.4	1.4	1.4	1.4	1.4
80°	0.7	0.7	0.7	0.7	0.7
82.5°	0.7	0.7	0.7	0.7	0.7
85°	0.7	0.7	0.7	0.7	0.7
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314287

CATALOG NUMBER: P3SQAS09R609735DE010 E3SQCD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)