

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314690

Luminaire Tested: P3SQAS20R309735D010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314690
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS20R309735D010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1827.0 lumens
Efficiency: N/A
Efficacy: 63.4 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314690

CATALOG NUMBER: P3SQAS20R309735D010 E3SQPH1MMS

Luminous Intensity Polar Plot

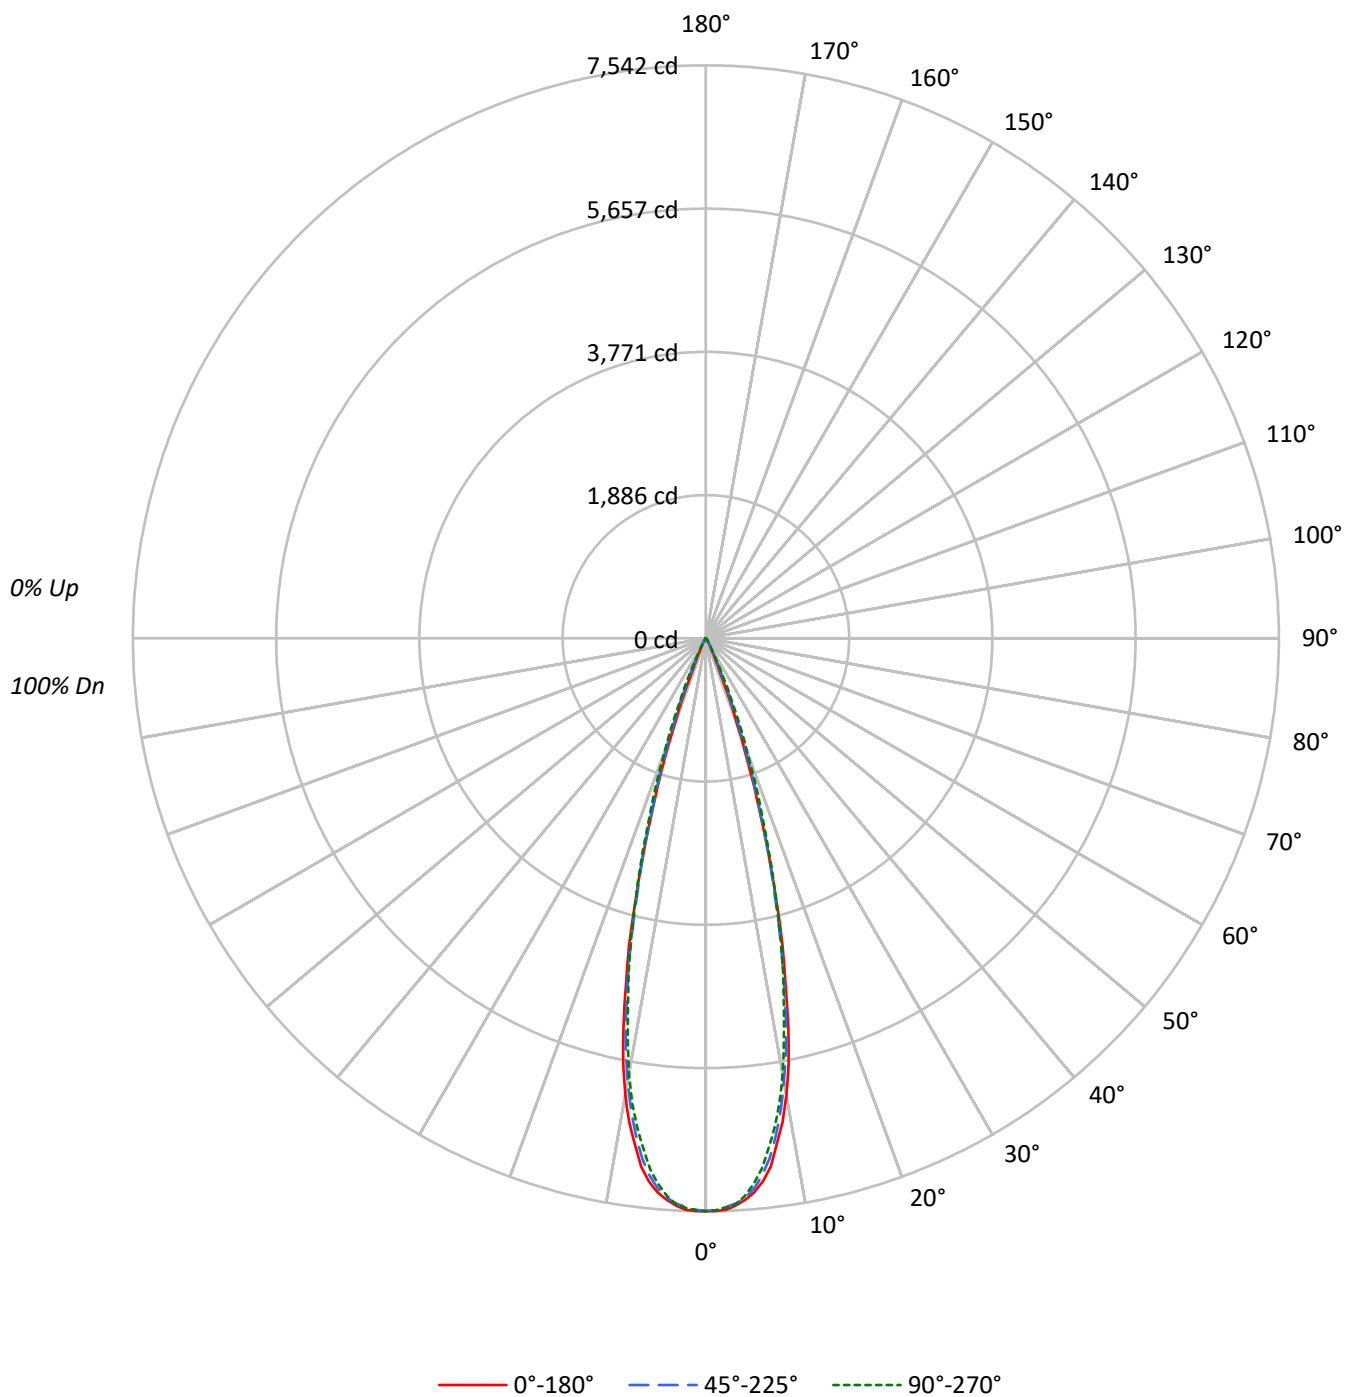

TEST NUMBER: P1314690

CATALOG NUMBER: P3SQAS20R309735D010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1298576	1298576	1298576
5°	1265140	1256426	1246088
10°	1067674	1034884	1018078
15°	643406	625434	636952
20°	218244	252022	290693
25°	40115	62861	74224
30°	13781	15352	17222
35°	3974	4962	5298
40°	1057	1776	1416
45°	390	390	390
50°	429	0	429
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 453 cd/sqm

TEST NUMBER: P1314690

CATALOG NUMBER: P3SQAS20R309735D010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	652.0	35.7
10°-20°	952.9	52.2
20°-30°	201.6	11.0
30°-40°	18.6	1.0
40°-50°	1.8	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1806.5	98.9
0°-40°	1825.1	99.9
0°-60°	1827.0	100.0
0°-90°	1827.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1827.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7540	7540	7540	7540	7540	
5°	7318	7304	7268	7246	7208	661
15°	3609	3596	3508	3590	3572	952
25°	211	236	331	389	391	154
35°	19	24	24	28	25	16
45°	2	2	2	2	2	2
55°	0	0	0	0	0	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1314690

CATALOG NUMBER: P3SQAS20R309735D010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7540.1	7540.1	7540.1	7540.1	7540.1
1°	7541.7	7533.8	7522.8	7538.5	7527.5
2°	7525.9	7507.0	7491.3	7507.0	7502.3
3°	7478.7	7462.9	7451.9	7459.8	7459.8
4°	7407.8	7390.5	7381.0	7382.6	7359.0
5°	7318.0	7303.8	7267.6	7245.6	7207.8
6°	7185.7	7151.0	7106.9	7070.7	7021.9
7°	7006.1	6952.6	6889.6	6826.6	6765.1
8°	6717.9	6692.7	6607.6	6565.1	6503.7
9°	6447.0	6385.5	6294.2	6224.9	6191.8
10°	6105.2	6013.8	5917.7	5862.6	5821.6
11°	5700.4	5607.4	5530.2	5449.9	5386.9
12°	5224.7	5145.9	5057.7	5004.2	4930.1
13°	4660.8	4649.8	4550.5	4533.2	4523.7
14°	4177.2	4133.1	4035.5	4062.2	4068.5
15°	3608.6	3596.0	3507.8	3589.7	3572.4
17.5°	2260.3	2265.0	2320.2	2449.3	2490.3
20°	1190.8	1227.0	1375.1	1531.0	1586.1
22.5°	482.0	562.3	713.5	819.1	889.9
25°	211.1	236.3	330.8	389.1	390.6
27.5°	119.7	121.3	159.1	165.4	168.5
30°	69.3	70.9	77.2	81.9	86.6
32.5°	37.8	41.0	42.5	48.8	48.8
35°	18.9	23.6	23.6	28.4	25.2
37.5°	11.0	12.6	14.2	14.2	12.6
40°	4.7	6.3	7.9	7.9	6.3
42.5°	1.6	3.2	3.2	3.2	4.7
45°	1.6	1.6	1.6	1.6	1.6
47.5°	1.6	1.6	0.0	1.6	1.6
50°	1.6	0.0	0.0	0.0	1.6
52.5°	1.6	0.0	0.0	0.0	1.6
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314690

CATALOG NUMBER: P3SQAS20R309735D010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)