

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314871

Luminaire Tested: P3SQAS02R309740DE010 E3SQPHLD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314871
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R309740DE010 E3SQPHLD1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 97CRI , E3SQPHLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 179.0 lumens
Efficiency: N/A
Efficacy: 49.7 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314871

CATALOG NUMBER: P3SQAS02R309740DE010 E3SQPHLD1MW

Luminous Intensity Polar Plot

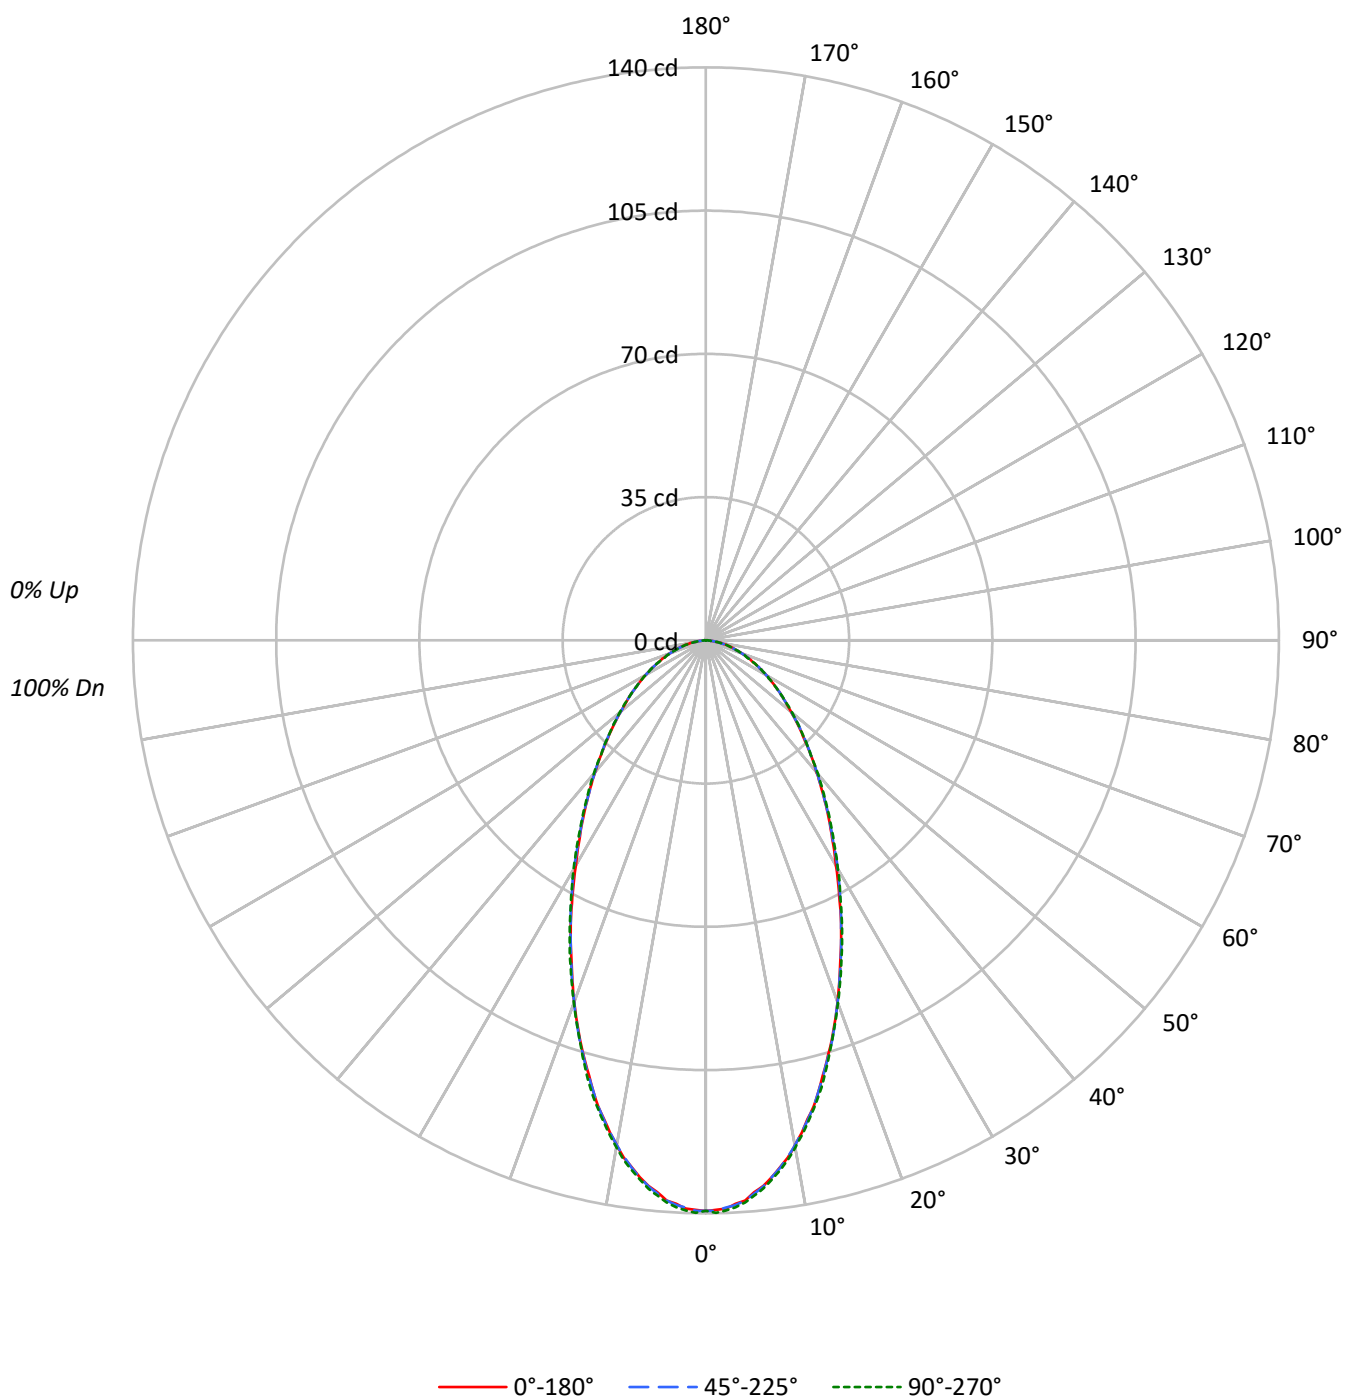

TEST NUMBER: P1314871

CATALOG NUMBER: P3SQAS02R309740DE010 E3SQPHLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	103	100	108	105	102	99	101	98	96		97	95	93		93
2	103	96	90	85	100	94	89	84	91	86	83		87	84	81		85
3	95	86	80	74	93	85	79	74	82	77	72		79	75	71		77
4	89	78	71	65	86	77	70	65	75	69	64		73	67	63		71
5	83	72	64	58	81	71	63	58	69	62	57		67	61	57		65
6	77	66	58	52	76	65	58	52	63	57	52		62	56	51		60
7	72	61	53	48	71	60	53	47	58	52	47		57	51	47		56
8	68	56	49	44	67	56	48	43	54	48	43		53	47	43		52
9	64	52	45	40	63	52	45	40	51	44	40		50	44	40		49
10	61	49	42	37	60	48	42	37	48	41	37		47	41	37		46

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24008	24008	24008
5°	23408	23460	23546
10°	21912	21912	22000
15°	19648	19684	19827
20°	17246	17246	17283
25°	14860	14860	14955
30°	12648	12807	12847
35°	10933	10975	11038
40°	9465	9510	9577
45°	8257	8330	8330
50°	7288	7288	7368
55°	6546	6546	6546
60°	5890	5890	5890
65°	5257	5257	5257
70°	4733	4733	4733
75°	4259	4126	4126
80°	3670	3471	3471
85°	2371	2371	2371

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 8330 cd/sqm

TEST NUMBER: P1314871

CATALOG NUMBER: P3SQAS02R309740DE010 E3SQPHLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.6	7.1
10°-20°	30.8	17.2
20°-30°	35.9	20.1
30°-40°	32.7	18.3
40°-50°	26.4	14.8
50°-60°	19.5	10.9
60°-70°	12.9	7.2
70°-80°	6.7	3.7
80°-90°	1.5	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	79.3	44.3
0°-40°	112.0	62.6
0°-60°	158.0	88.3
0°-90°	179.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	179.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	139	139	139	139	139	
5°	135	135	136	136	136	13
15°	110	110	110	110	111	31
25°	78	78	78	78	79	36
35°	52	52	52	52	52	33
45°	34	34	34	34	34	26
55°	22	22	22	22	22	20
65°	13	13	13	13	13	13
75°	6	6	6	6	6	7
85°	1	1	1	1	1	1
90°	0	0	0	0	0	

TEST NUMBER: P1314871

CATALOG NUMBER: P3SQAS02R309740DE010 E3SQPHLD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	139.4	139.4	139.4	139.4	139.4
1°	139.2	139.2	139.4	139.2	139.9
2°	138.9	138.7	138.7	138.7	139.4
3°	137.9	137.9	138.2	137.9	138.7
4°	137.2	136.9	137.2	136.9	137.7
5°	135.4	135.4	135.7	135.7	136.2
6°	134.0	134.0	134.2	134.0	134.7
7°	132.2	132.2	132.2	132.2	132.7
8°	130.0	130.0	130.2	130.2	130.7
9°	128.0	127.8	127.8	127.8	128.5
10°	125.3	125.3	125.3	125.3	125.8
11°	122.6	122.6	122.6	122.6	123.1
12°	119.6	119.6	119.8	119.6	120.3
13°	116.9	116.9	116.9	116.9	117.4
14°	113.7	113.4	113.7	113.7	114.4
15°	110.2	110.4	110.4	110.4	111.2
17.5°	102.3	102.3	102.5	102.0	102.5
20°	94.1	93.8	94.1	94.1	94.3
22.5°	85.7	85.9	85.9	85.9	86.4
25°	78.2	78.0	78.2	78.2	78.7
27.5°	70.6	70.8	71.1	70.8	71.3
30°	63.6	64.1	64.4	63.9	64.6
32.5°	57.4	57.4	57.7	57.9	58.2
35°	52.0	51.7	52.2	52.2	52.5
37.5°	46.8	46.8	46.8	47.0	47.3
40°	42.1	42.1	42.3	42.3	42.6
42.5°	37.9	37.6	37.9	37.9	37.9
45°	33.9	34.2	34.2	34.2	34.2
47.5°	30.5	30.5	30.7	30.5	30.7
50°	27.2	27.2	27.2	27.2	27.5
52.5°	24.3	24.3	24.3	24.3	24.5
55°	21.8	21.5	21.8	21.5	21.8
57.5°	19.3	19.3	19.3	19.3	19.3
60°	17.1	16.8	17.1	16.8	17.1
62.5°	14.9	14.9	14.9	14.9	14.9
65°	12.9	12.9	12.9	12.9	12.9
67.5°	11.1	11.1	11.1	10.9	10.9
70°	9.4	9.4	9.4	9.4	9.4
72.5°	7.9	7.7	7.7	7.7	7.7
75°	6.4	6.2	6.2	6.2	6.2
77.5°	5.0	5.0	4.7	4.7	5.0
80°	3.7	3.5	3.5	3.5	3.5
82.5°	2.2	2.2	2.2	2.2	2.2
85°	1.2	1.2	1.2	1.2	1.2
87.5°	0.2	0.2	0.2	0.5	0.5



TEST NUMBER: P1314871

CATALOG NUMBER: P3SQAS02R309740DE010 E3SQPHLD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)