

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1315101

Luminaire Tested: P3SQAS05R609740DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1315101
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R609740DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R60 optic, 4000K CCT AND, 97CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 608.0 lumens
Efficiency: N/A
Efficacy: 84.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.93 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1315101

CATALOG NUMBER: P3SQAS05R609740DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

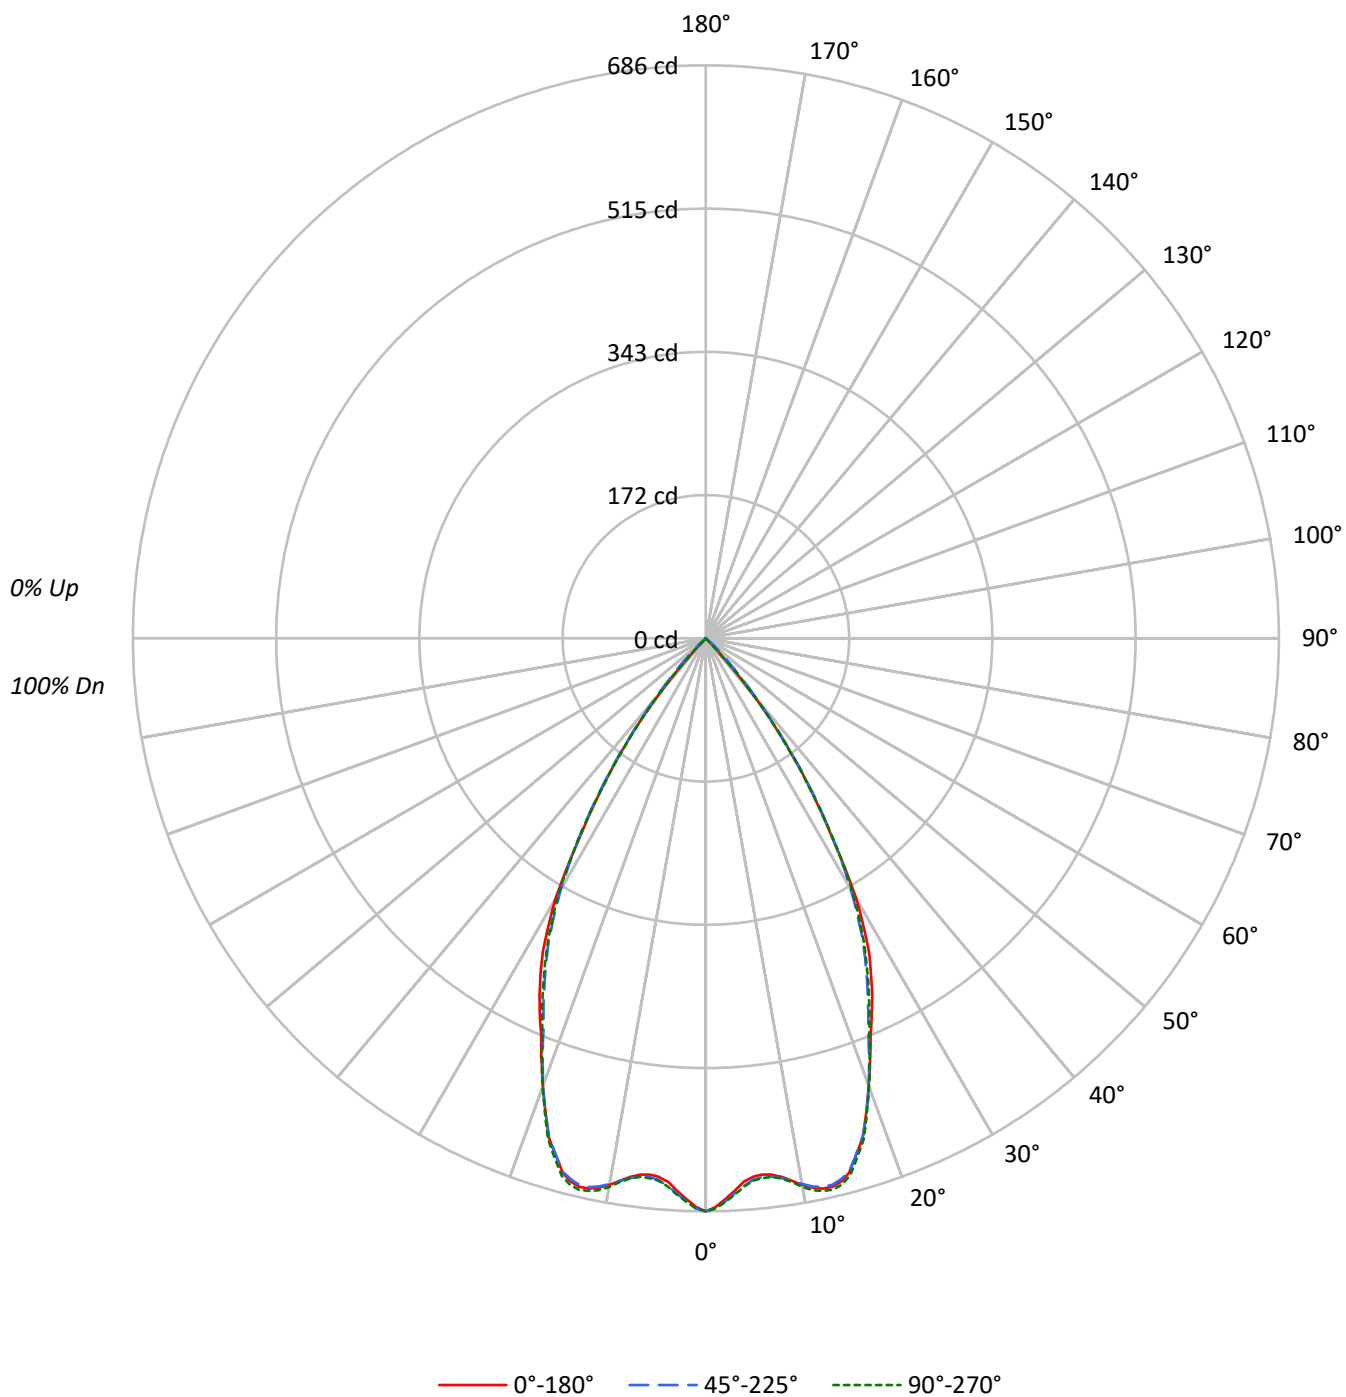

TEST NUMBER: P1315101

CATALOG NUMBER: P3SQAS05R609740DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88
4	98	91	86	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	118162	118162	118162
5°	111906	112493	112666
10°	116172	115998	116680
15°	118087	117926	118782
20°	104504	104504	104687
25°	89560	86880	87621
30°	71651	69046	70100
35°	44446	45371	44341
40°	19514	21470	20054
45°	244	6966	585
50°	0	777	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 6966 cd/sqm

TEST NUMBER: P1315101

CATALOG NUMBER: P3SQAS05R609740DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.7	10.3
10°-20°	181.6	29.9
20°-30°	210.9	34.7
30°-40°	132.8	21.8
40°-50°	19.9	3.3
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	455.2	74.9
0°-40°	588.0	96.7
0°-60°	608.0	100.0
0°-90°	608.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	608.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	686	686	686	686	686	
5°	647	650	651	652	652	62
15°	662	660	661	666	666	182
25°	471	466	457	459	461	214
35°	211	212	216	211	211	132
45°	1	9	29	12	2	13
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1315101

CATALOG NUMBER: P3SQAS05R609740DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	686.1	686.1	686.1	686.1	686.1
1°	680.7	682.7	682.7	683.2	682.7
2°	671.5	674.4	674.4	675.9	674.9
3°	662.3	664.7	665.2	667.2	666.7
4°	652.1	656.0	657.5	658.4	658.0
5°	647.3	649.7	650.7	652.1	651.7
6°	645.4	647.3	648.3	649.7	649.7
7°	646.8	648.3	649.7	650.7	649.7
8°	651.2	652.6	652.6	654.6	653.1
9°	657.5	658.0	658.0	660.4	658.9
10°	664.3	663.3	663.3	666.7	667.2
11°	670.1	669.1	668.6	672.0	673.0
12°	673.5	671.5	671.5	675.9	676.4
13°	674.0	671.5	671.5	675.9	677.4
14°	670.1	667.2	667.7	672.5	674.0
15°	662.3	659.9	661.4	665.7	666.2
17.5°	625.5	624.0	625.0	627.9	628.4
20°	570.2	569.2	570.2	570.2	571.2
22.5°	515.4	513.0	508.1	511.0	511.5
25°	471.3	466.0	457.2	459.2	461.1
27.5°	422.8	416.0	406.8	409.2	409.7
30°	360.3	356.9	347.2	349.6	352.5
32.5°	278.3	287.5	281.7	281.2	281.7
35°	211.4	211.9	215.8	211.4	210.9
37.5°	147.9	148.4	151.3	146.4	146.9
40°	86.8	93.1	95.5	93.6	89.2
42.5°	27.2	48.0	54.3	47.0	30.1
45°	1.0	9.2	28.6	12.1	2.4
47.5°	0.0	0.5	13.6	1.0	0.0
50°	0.0	0.0	2.9	0.0	0.0
52.5°	0.0	0.0	0.5	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1315101

CATALOG NUMBER: P3SQAS05R609740DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)