

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1315208

Luminaire Tested: P3SQAS09R359740DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1315208
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R359740DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 823.0 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1315208

CATALOG NUMBER: P3SQAS09R359740DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

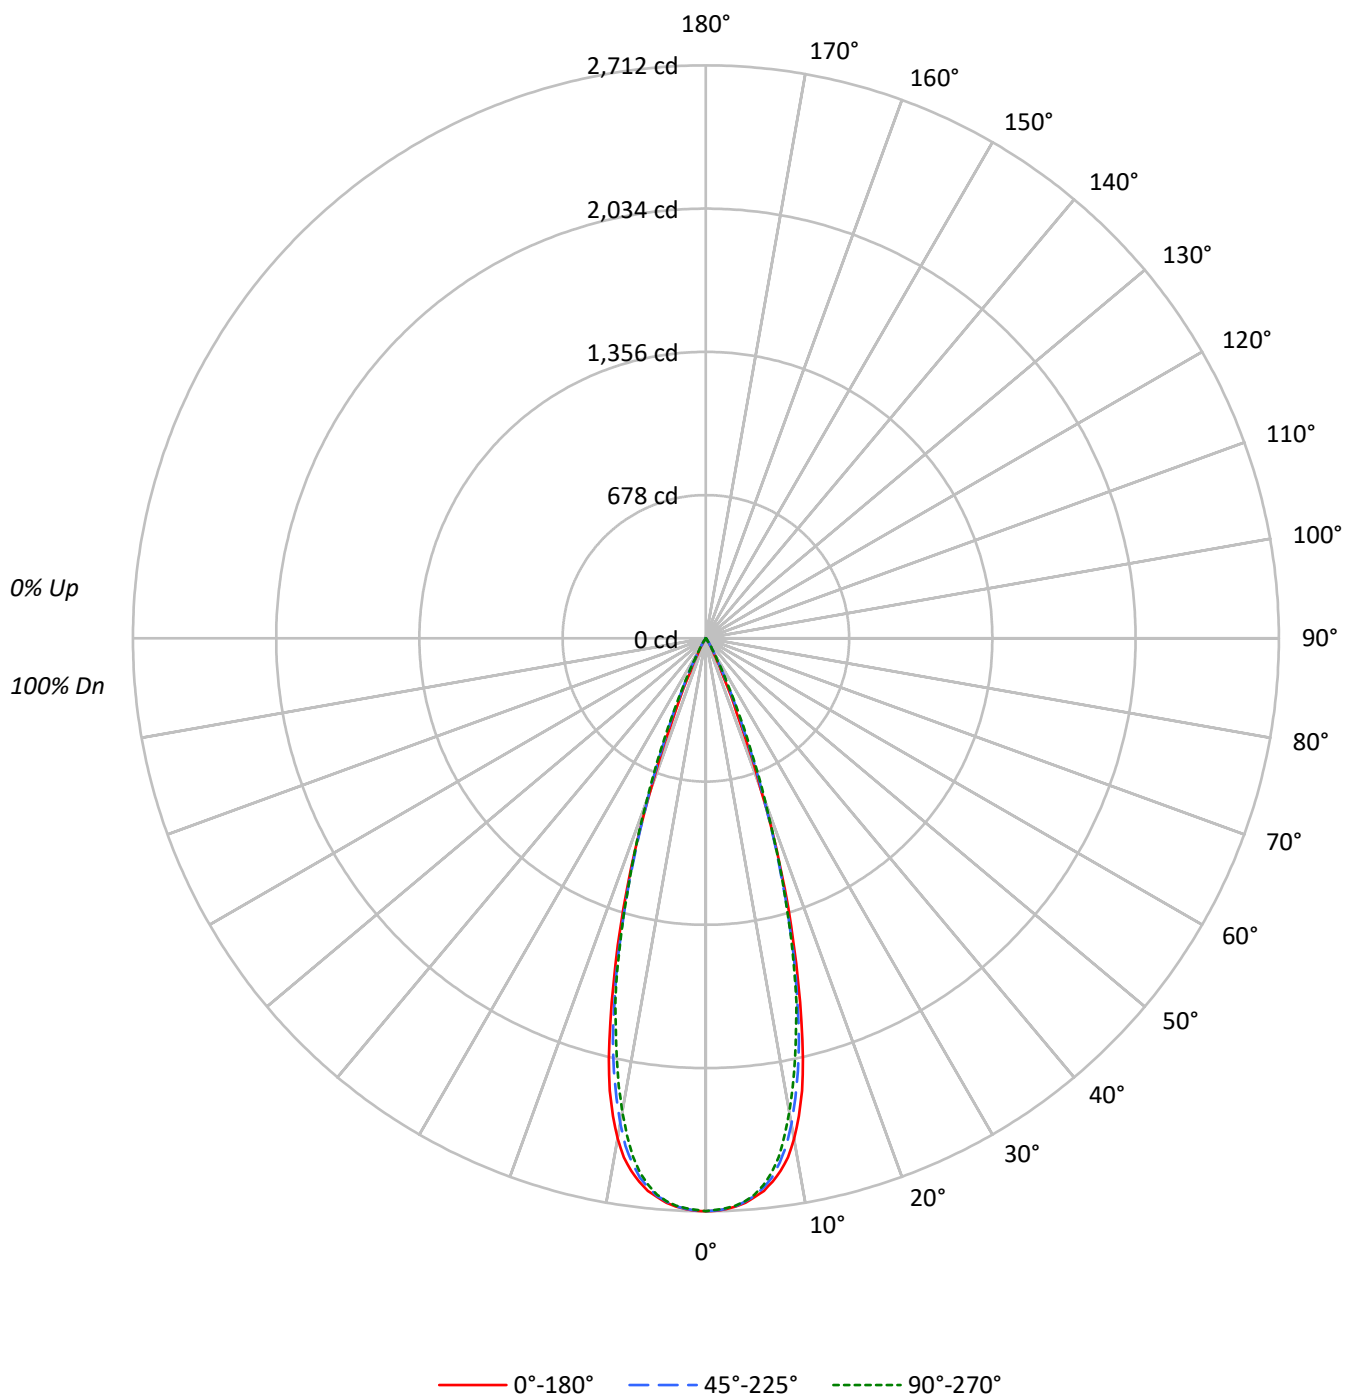

TEST NUMBER: P1315208

CATALOG NUMBER: P3SQAS09R359740DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	103	101	103	101	99		100	98	97		97
3	108	103	100	97	106	102	99	96	99	97	94		97	95	93		95
4	104	99	95	92	103	98	94	92	96	93	91		94	92	90		93
5	101	95	91	88	100	95	91	88	93	90	87		92	89	87		90
6	98	92	88	85	97	91	88	85	90	87	84		89	86	84		88
7	96	89	85	82	94	89	85	82	87	84	81		86	83	81		85
8	93	86	82	79	92	86	82	79	85	81	79		84	81	79		83
9	90	84	80	77	89	83	79	77	82	79	76		82	79	76		81
10	88	81	77	75	87	81	77	74	80	77	74		80	76	74		79

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	466982	466982	466982
5°	458963	457978	456992
10°	420638	407994	398061
15°	301199	291589	288058
20°	139674	144476	149534
25°	33141	47146	49160
30°	9725	11136	12548
35°	2229	3574	3280
40°	472	967	629
45°	170	170	170
50°	188	0	188
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 198 cd/sqm

TEST NUMBER: P1315208

CATALOG NUMBER: P3SQAS09R359740DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.4	29.6
10°-20°	435.2	52.9
20°-30°	130.9	15.9
30°-40°	12.5	1.5
40°-50°	0.8	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	809.6	98.4
0°-40°	822.1	99.9
0°-60°	823.0	100.0
0°-90°	823.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	823.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2712	2712	2712	2712	2712	
5°	2655	2654	2649	2646	2643	246
15°	1689	1676	1635	1628	1616	446
25°	174	192	248	259	259	112
35°	11	14	17	18	16	10
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1315208

CATALOG NUMBER: P3SQAS09R359740DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2711.5	2711.5	2711.5	2711.5	2711.5
1°	2710.1	2710.1	2708.7	2708.7	2705.8
2°	2703.7	2704.4	2701.6	2700.9	2698.7
3°	2693.8	2691.7	2691.7	2690.2	2688.8
4°	2678.2	2673.9	2672.5	2673.2	2670.4
5°	2654.8	2654.1	2649.1	2645.6	2643.4
6°	2629.3	2624.3	2613.7	2604.5	2602.3
7°	2591.0	2580.4	2571.1	2552.0	2549.2
8°	2544.2	2527.2	2507.3	2480.4	2479.0
9°	2486.8	2459.1	2431.5	2395.3	2382.6
10°	2405.3	2379.7	2333.0	2301.1	2276.2
11°	2303.9	2272.0	2217.4	2179.1	2158.6
12°	2189.0	2159.3	2095.5	2060.7	2031.7
13°	2041.6	2016.8	1957.2	1919.0	1896.3
14°	1870.8	1852.3	1795.6	1778.6	1770.8
15°	1689.3	1676.5	1635.4	1628.3	1615.6
17.5°	1243.4	1222.1	1198.7	1203.0	1207.2
20°	762.1	791.8	788.3	803.9	815.9
22.5°	380.0	418.2	462.9	489.8	503.3
25°	174.4	192.1	248.1	258.7	258.7
27.5°	87.9	92.2	117.0	119.1	124.8
30°	48.9	52.5	56.0	62.4	63.1
32.5°	24.8	29.1	30.5	34.0	32.6
35°	10.6	14.2	17.0	18.4	15.6
37.5°	5.0	6.4	9.2	8.5	6.4
40°	2.1	2.8	4.3	3.5	2.8
42.5°	1.4	1.4	2.1	1.4	1.4
45°	0.7	0.7	0.7	0.7	0.7
47.5°	0.7	0.7	0.0	0.7	0.7
50°	0.7	0.0	0.0	0.0	0.7
52.5°	0.7	0.0	0.0	0.0	0.7
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1315208

CATALOG NUMBER: P3SQAS09R359740DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)