

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1315257

Luminaire Tested: P3SQAS09R609740DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1315257
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R609740DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R60 optic, 4000K CCT AND, 97CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 889.0 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.93 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1315257

CATALOG NUMBER: P3SQAS09R609740DE010 E3SQCD1MB

Luminous Intensity Polar Plot

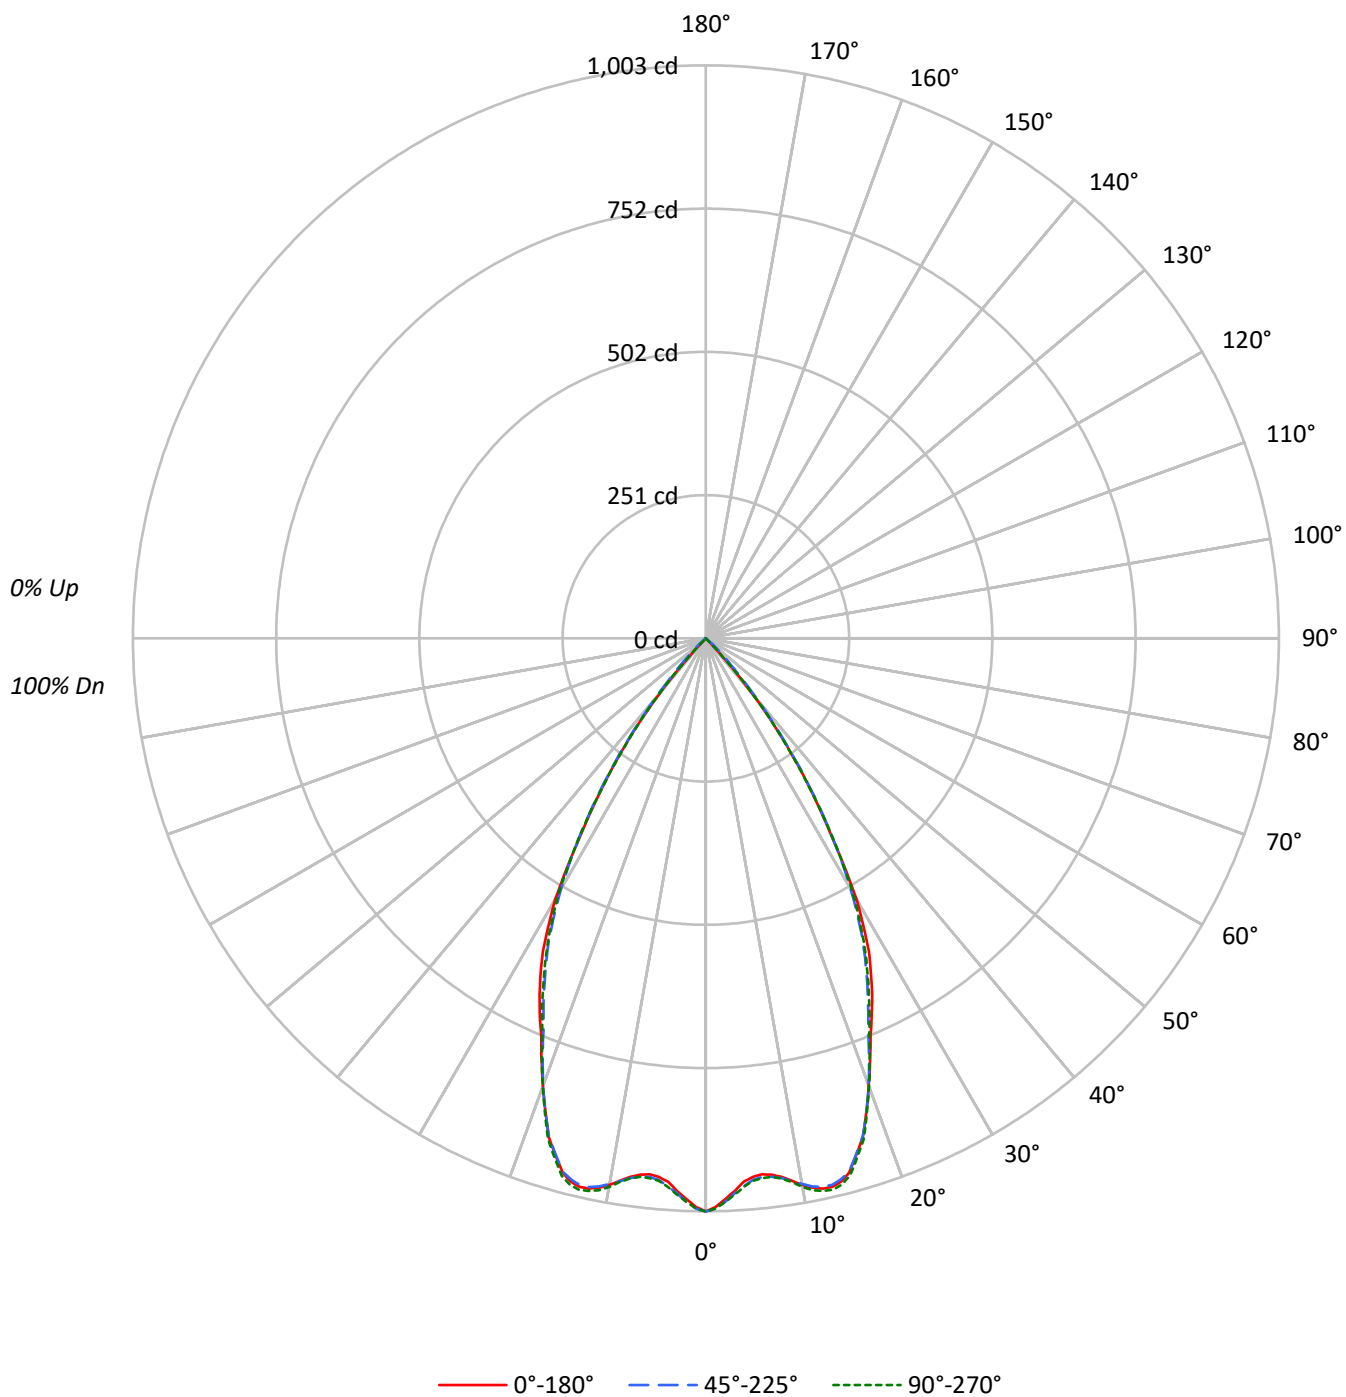

TEST NUMBER: P1315257

CATALOG NUMBER: P3SQAS09R609740DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	81	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75	72	69	67
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71	67	64	63
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68	64	61	59
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64	60	57	56
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61	57	54	53

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	172774	172774	172774
5°	163631	164479	164721
10°	169860	169598	170595
15°	172664	172414	173680
20°	152797	152797	153053
25°	130947	127033	128116
30°	104762	100944	102495
35°	64987	66332	64840
40°	28530	31407	29317
45°	341	10181	852
50°	0	1152	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 10181 cd/sqm

TEST NUMBER: P1315257

CATALOG NUMBER: P3SQAS09R609740DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.6	10.3
10°-20°	265.6	29.9
20°-30°	308.3	34.7
30°-40°	194.2	21.8
40°-50°	29.2	3.3
50°-60°	0.2	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.5	74.9
0°-40°	859.7	96.7
0°-60°	889.0	100.0
0°-90°	889.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	889.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1003	1003	1003	1003	1003	
5°	946	950	951	954	953	91
15°	968	965	967	973	974	266
25°	689	681	668	671	674	313
35°	309	310	316	309	308	193
45°	1	14	42	18	4	19
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1315257

CATALOG NUMBER: P3SQAS09R609740DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1003.2	1003.2	1003.2	1003.2	1003.2
1°	995.4	998.2	998.2	998.9	998.2
2°	981.9	986.2	986.2	988.3	986.9
3°	968.4	972.0	972.7	975.5	974.8
4°	953.5	959.2	961.3	962.8	962.1
5°	946.5	950.0	951.4	953.5	952.8
6°	943.6	946.5	947.9	950.0	950.0
7°	945.7	947.9	950.0	951.4	950.0
8°	952.1	954.3	954.3	957.1	955.0
9°	961.3	962.1	962.1	965.6	963.5
10°	971.3	969.8	969.8	974.8	975.5
11°	979.8	978.4	977.6	982.6	984.0
12°	984.7	981.9	981.9	988.3	989.0
13°	985.4	981.9	981.9	988.3	990.4
14°	979.8	975.5	976.2	983.3	985.4
15°	968.4	964.9	967.0	973.4	974.1
17.5°	914.6	912.4	913.8	918.1	918.8
20°	833.7	832.3	833.7	833.7	835.1
22.5°	753.6	750.1	743.0	747.2	747.9
25°	689.1	681.3	668.5	671.4	674.2
27.5°	618.2	608.3	594.8	598.4	599.1
30°	526.8	521.8	507.6	511.2	515.4
32.5°	406.9	420.4	411.9	411.2	411.9
35°	309.1	309.8	315.5	309.1	308.4
37.5°	216.2	216.9	221.2	214.1	214.8
40°	126.9	136.1	139.7	136.8	130.4
42.5°	39.7	70.2	79.4	68.8	44.0
45°	1.4	13.5	41.8	17.7	3.5
47.5°	0.0	0.7	19.9	1.4	0.0
50°	0.0	0.0	4.3	0.0	0.0
52.5°	0.0	0.0	0.7	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1315257

CATALOG NUMBER: P3SQAS09R609740DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)