

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1315484

Luminaire Tested: P3SQAS17R259740DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1315484
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS17R259740DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 97CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1626.0 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.45 / 0.41
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1315484

CATALOG NUMBER: P3SQAS17R259740DE010 E3SQCD1MB

Luminous Intensity Polar Plot

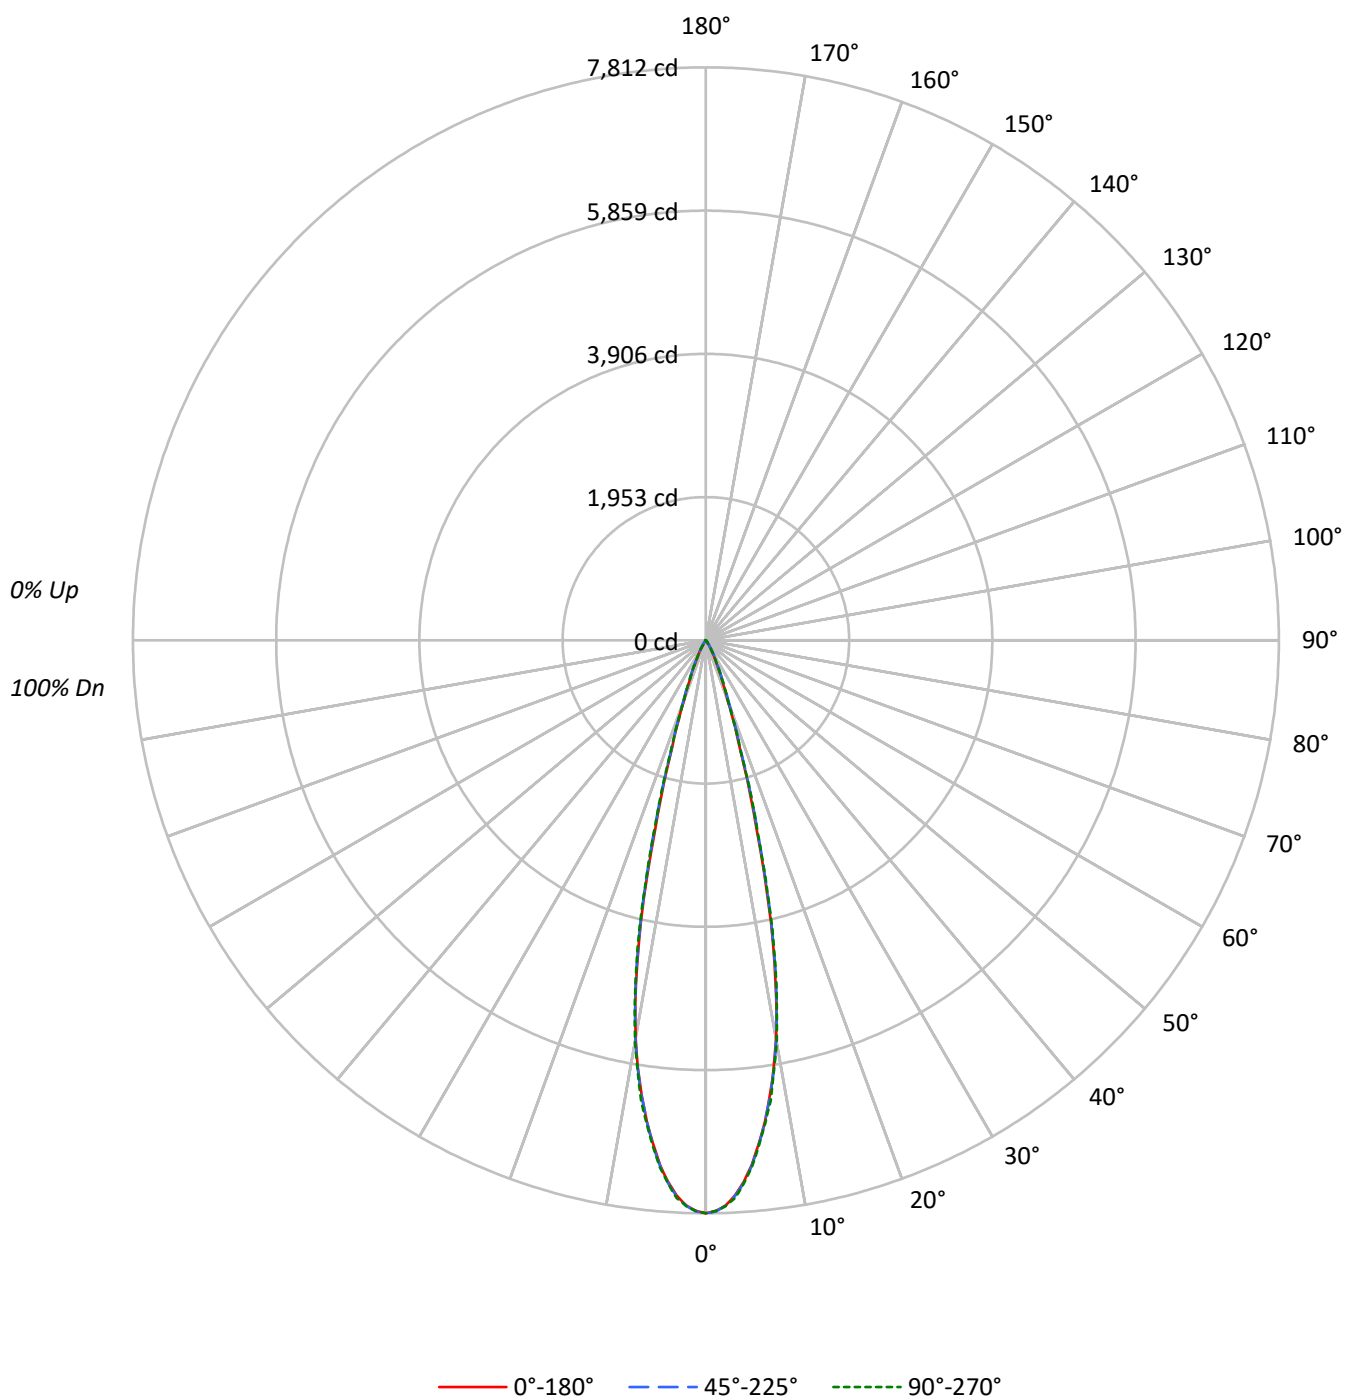

TEST NUMBER: P1315484

CATALOG NUMBER: P3SQAS17R259740DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	110	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	102	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	95	92		96	93	91		94
5	103	97	93	90	101	96	93	90	95	92	89		93	91	89		92
6	100	94	90	87	99	93	90	87	92	89	87		91	88	86		90
7	97	91	87	85	96	91	87	84	90	86	84		89	86	84		88
8	95	89	85	82	94	88	85	82	87	84	82		87	84	82		86
9	93	86	83	80	92	86	82	80	85	82	80		85	82	80		84
10	91	84	81	78	90	84	80	78	83	80	78		83	80	78		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1345334	1345334	1345334
5°	1240487	1243287	1245881
10°	963149	966646	971875
15°	475984	495989	496221
20°	160274	171014	163463
25°	66376	73730	68277
30°	26051	32753	26290
35°	6812	13372	7085
40°	2518	5328	2518
45°	292	1510	292
50°	0	322	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1510 cd/sqm

TEST NUMBER: P1315484

CATALOG NUMBER: P3SQAS17R259740DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	633.0	38.9
10°-20°	765.6	47.1
20°-30°	186.9	11.5
30°-40°	36.3	2.2
40°-50°	4.1	0.3
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1585.5	97.5
0°-40°	1621.8	99.7
0°-60°	1626.0	100.0
0°-90°	1626.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1626.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7812	7812	7812	7812	7812	
5°	7175	7185	7192	7223	7207	631
15°	2670	2733	2782	2809	2783	752
25°	349	368	388	372	359	178
35°	32	46	64	46	34	29
45°	1	4	6	4	1	2
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1315484

CATALOG NUMBER: P3SQAS17R259740DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7811.6	7811.6	7811.6	7811.6	7811.6
1°	7781.6	7786.6	7787.9	7795.4	7780.4
2°	7710.5	7711.8	7715.5	7730.5	7716.8
3°	7579.5	7588.3	7589.5	7609.5	7613.2
4°	7401.2	7406.1	7416.1	7449.8	7419.9
5°	7175.4	7185.3	7191.6	7222.8	7206.6
6°	6895.9	6898.4	6912.2	6948.3	6925.9
7°	6611.5	6610.3	6611.5	6640.2	6634.0
8°	6268.5	6262.2	6282.2	6317.1	6340.8
9°	5910.4	5919.2	5931.7	5965.3	5937.9
10°	5507.5	5531.2	5527.5	5530.0	5557.4
11°	5043.5	5050.9	5052.2	5078.4	5074.7
12°	4498.3	4498.3	4539.5	4581.9	4568.2
13°	3948.2	3986.9	3959.4	3968.2	4023.0
14°	3307.0	3336.9	3374.4	3409.3	3381.9
15°	2669.6	2733.2	2781.8	2809.3	2783.1
17.5°	1529.4	1550.6	1591.8	1596.7	1580.5
20°	874.5	900.7	933.1	923.1	891.9
22.5°	550.1	557.6	590.0	573.8	566.3
25°	349.3	368.0	388.0	371.7	359.3
27.5°	217.1	229.5	250.7	233.3	219.6
30°	131.0	142.2	164.7	141.0	132.2
32.5°	68.6	84.8	103.5	86.1	68.6
35°	32.4	46.2	63.6	46.2	33.7
37.5°	20.0	24.9	38.7	24.9	20.0
40°	11.2	16.2	23.7	16.2	11.2
42.5°	5.0	8.7	11.2	8.7	6.2
45°	1.2	3.7	6.2	3.7	1.2
47.5°	0.0	0.0	3.7	1.2	0.0
50°	0.0	0.0	1.2	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1315484
CATALOG NUMBER: P3SQAS17R259740DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)