

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1316012

Luminaire Tested: P3SQAS05R559827DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1316012
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R559827DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 98CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 449.0 lumens
Efficiency: N/A
Efficacy: 62.4 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.81
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1316012

CATALOG NUMBER: P3SQAS05R559827DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

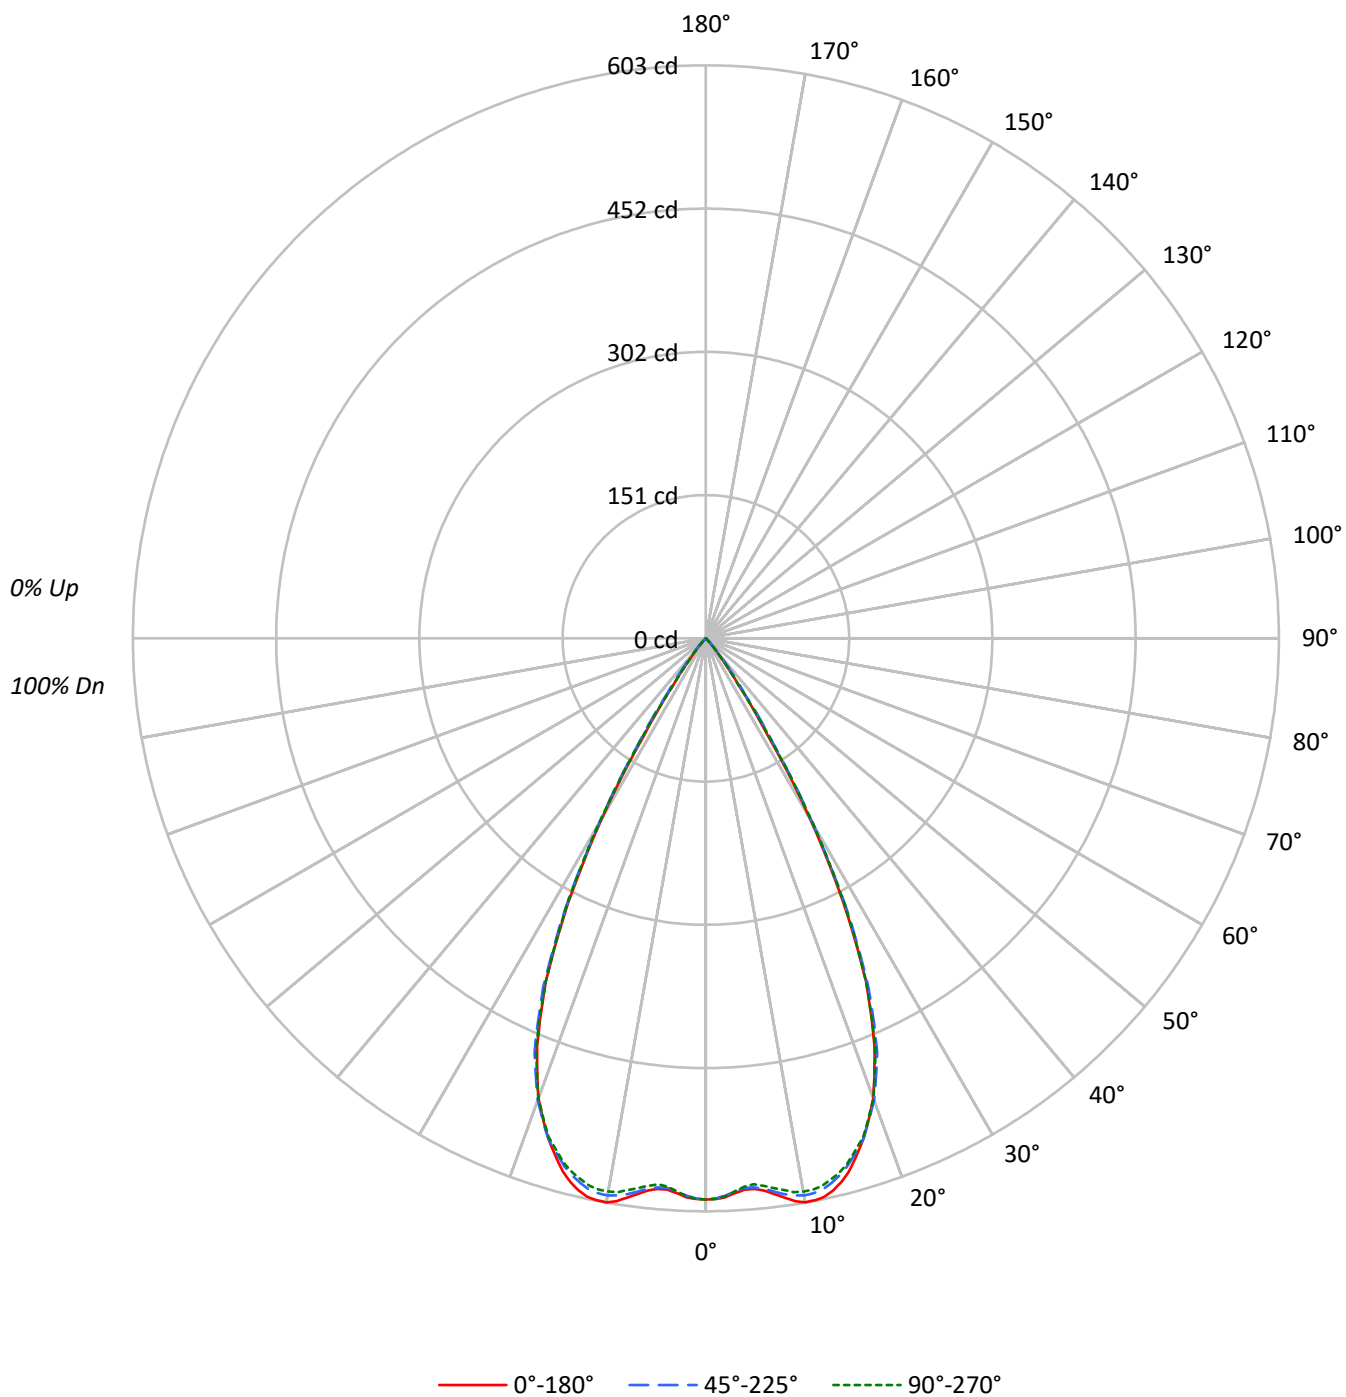

TEST NUMBER: P1316012

CATALOG NUMBER: P3SQAS05R559827DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	103	97	93	90	95	91	89		92	90	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	85	82		86
5	96	88	83	79	94	87	82	79	85	81	78		84	80	77		82
6	91	83	78	74	90	83	78	74	81	77	74		80	76	73		79
7	87	79	74	70	86	79	73	70	77	73	69		76	72	69		75
8	84	75	70	66	83	75	70	66	74	69	66		73	69	65		72
9	80	72	66	63	79	71	66	63	70	66	62		69	65	62		69
10	77	68	63	59	76	68	63	59	67	62	59		66	62	59		66

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	101715	101715	101715
5°	100547	100253	99717
10°	105400	104123	103406
15°	103645	102539	102165
20°	94405	94790	94460
25°	75745	76923	75745
30°	43472	44566	44904
35°	12404	14927	12762
40°	3170	4564	3260
45°	341	1607	244
50°	0	268	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1607 cd/sqm

TEST NUMBER: P1316012

CATALOG NUMBER: P3SQAS05R559827DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.1	12.5
10°-20°	160.0	35.6
20°-30°	176.2	39.3
30°-40°	52.6	11.7
40°-50°	4.0	0.9
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	392.3	87.4
0°-40°	444.9	99.1
0°-60°	449.0	100.0
0°-90°	449.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	449.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	591	591	591	591	591	
5°	582	581	580	578	577	56
15°	581	577	575	573	573	161
25°	399	399	405	404	399	175
35°	59	63	71	65	61	49
45°	1	3	7	3	1	3
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1316012

CATALOG NUMBER: P3SQAS05R559827DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	590.6	590.6	590.6	590.6	590.6
1°	590.2	590.2	589.6	589.2	590.2
2°	588.5	588.5	586.8	586.5	587.5
3°	584.7	584.4	583.0	582.0	582.7
4°	581.6	580.9	579.9	578.2	578.5
5°	581.6	580.6	579.9	577.5	576.8
6°	584.4	583.7	582.3	579.9	579.2
7°	589.2	587.8	586.5	583.3	582.7
8°	594.4	593.3	590.6	587.5	586.1
9°	599.6	597.1	593.7	590.6	590.2
10°	602.7	599.2	595.4	591.6	591.3
11°	602.3	599.2	594.7	591.3	590.9
12°	600.9	596.5	592.7	588.5	588.9
13°	596.1	592.0	588.2	585.1	584.4
14°	589.6	585.8	582.3	579.2	579.6
15°	581.3	577.1	575.1	572.7	573.0
17.5°	552.0	550.9	552.0	549.2	550.3
20°	515.1	514.1	517.2	515.8	515.4
22.5°	463.7	465.1	471.0	469.2	466.1
25°	398.6	398.6	404.8	404.1	398.6
27.5°	313.7	316.2	319.9	321.7	317.5
30°	218.6	224.1	224.1	227.5	225.8
32.5°	122.0	133.8	136.5	138.3	131.4
35°	59.0	62.7	71.0	64.8	60.7
37.5°	28.3	30.0	38.3	31.0	29.0
40°	14.1	16.2	20.3	16.9	14.5
42.5°	5.9	8.6	10.7	8.6	5.9
45°	1.4	3.4	6.6	3.4	1.0
47.5°	0.0	0.3	3.1	0.7	0.0
50°	0.0	0.0	1.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1316012
CATALOG NUMBER: P3SQAS05R559827DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)