

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1316650

Luminaire Tested: P3SQAS02R209830DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1316650
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R209830DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 98CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 201.0 lumens
Efficiency: N/A
Efficacy: 55.8 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.36 / 0.33
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1316650

CATALOG NUMBER: P3SQAS02R209830DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

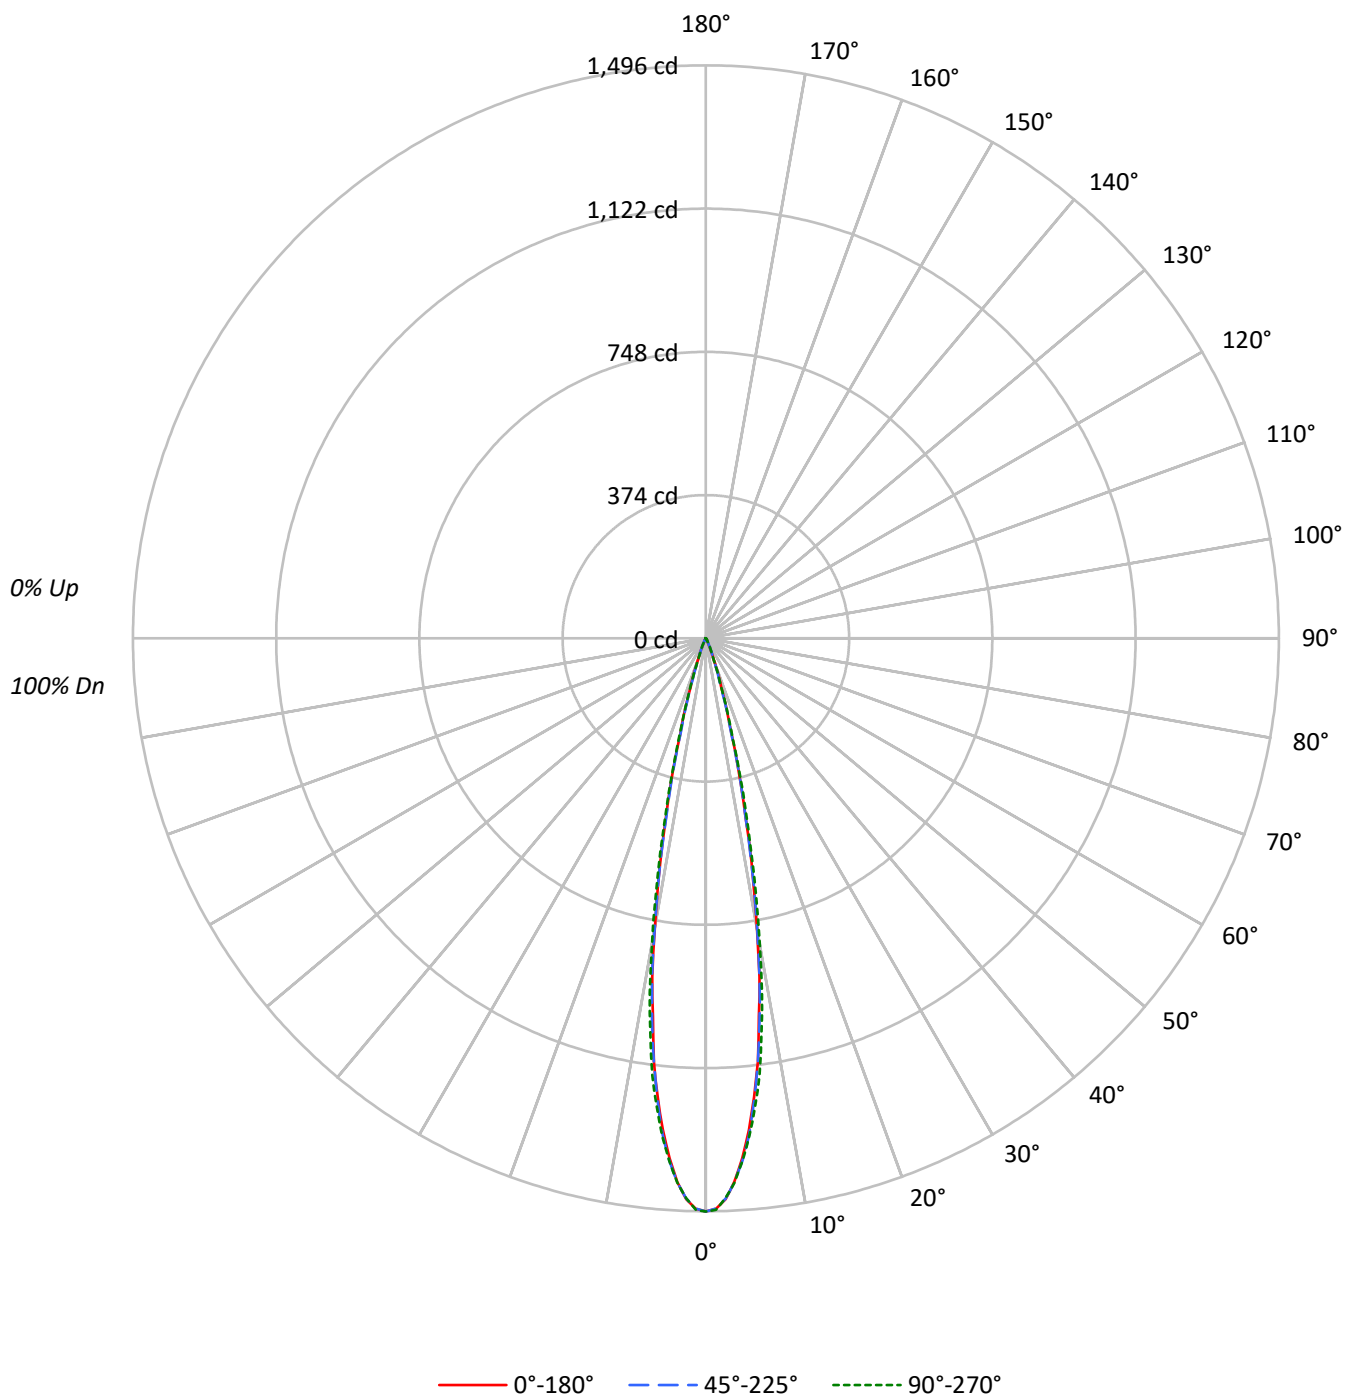

TEST NUMBER: P1316650

CATALOG NUMBER: P3SQAS02R209830DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	106		104	103	102		101
2	113	109	107	105	111	108	106	104	105	103	101		102	101	99		99
3	110	106	103	100	108	105	102	100	102	100	98		100	98	97		98
4	107	103	99	97	106	102	99	96	100	97	95		98	96	94		96
5	105	100	97	94	104	99	96	94	98	95	93		96	94	92		95
6	103	98	94	92	102	97	94	91	96	93	91		95	92	90		93
7	101	95	92	90	100	95	92	89	94	91	89		93	90	89		92
8	99	93	90	88	98	93	90	88	92	89	87		91	89	87		91
9	97	92	88	86	96	91	88	86	91	88	86		90	87	86		89
10	95	90	87	85	95	90	87	85	89	86	84		88	86	84		88

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	257731	257731	257731
5°	222653	224727	225557
10°	134028	135287	142020
15°	46357	45270	48889
20°	12169	11455	11491
25°	2660	3192	3649
30°	1134	1134	1173
35°	631	568	610
40°	292	315	360
45°	97	122	122
50°	54	54	54
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 122 cd/sqm

TEST NUMBER: P1316650

CATALOG NUMBER: P3SQAS02R209830DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.0	53.3
10°-20°	81.5	40.5
20°-30°	10.1	5.0
30°-40°	1.9	0.9
40°-50°	0.5	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	198.6	98.8
0°-40°	200.5	99.8
0°-60°	201.0	100.0
0°-90°	201.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	201.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1496	1496	1496	1496	1496	
5°	1288	1287	1300	1299	1305	106
15°	260	251	254	269	274	81
25°	14	16	17	18	19	10
35°	3	3	3	3	3	2
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1316650

CATALOG NUMBER: P3SQAS02R209830DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1496.5	1496.5	1496.5	1496.5	1496.5
1°	1489.5	1487.7	1489.2	1486.1	1492.4
2°	1465.7	1463.9	1463.9	1462.1	1463.0
3°	1421.3	1424.2	1422.4	1418.6	1423.4
4°	1360.8	1364.0	1366.9	1367.0	1367.8
5°	1287.9	1287.0	1299.9	1299.0	1304.7
6°	1204.8	1203.7	1209.3	1218.6	1230.0
7°	1113.5	1100.4	1115.3	1134.1	1149.5
8°	995.3	998.7	1008.9	1031.1	1043.5
9°	895.0	875.1	896.8	923.3	936.7
10°	766.4	750.3	773.6	801.5	812.1
12.5°	482.4	468.5	476.0	505.3	510.0
15°	260.0	250.7	253.9	269.1	274.2
17.5°	132.7	124.3	122.5	132.2	133.2
20°	66.4	64.5	62.5	63.4	62.7
22.5°	30.8	33.5	33.1	31.3	33.5
25°	14.0	15.9	16.8	17.5	19.2
27.5°	8.6	8.2	9.5	10.2	10.4
30°	5.7	5.6	5.7	5.9	5.9
32.5°	4.1	3.9	3.8	3.8	3.9
35°	3.0	3.0	2.7	2.9	2.9
37.5°	2.1	2.1	2.0	2.1	2.1
40°	1.3	1.4	1.4	1.4	1.6
42.5°	0.7	0.9	0.9	0.9	0.9
45°	0.4	0.5	0.5	0.5	0.5
47.5°	0.2	0.2	0.2	0.4	0.4
50°	0.2	0.2	0.2	0.2	0.2
52.5°	0.2	0.0	0.0	0.0	0.2
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)