

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1316869

Luminaire Tested: P3SQAS05R459830DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1316869
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R459830DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 98CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 498.0 lumens
Efficiency: N/A
Efficacy: 69.2 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.74 / 0.67
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1316869

CATALOG NUMBER: P3SQAS05R459830DE010 E3SQCD1MB

Luminous Intensity Polar Plot

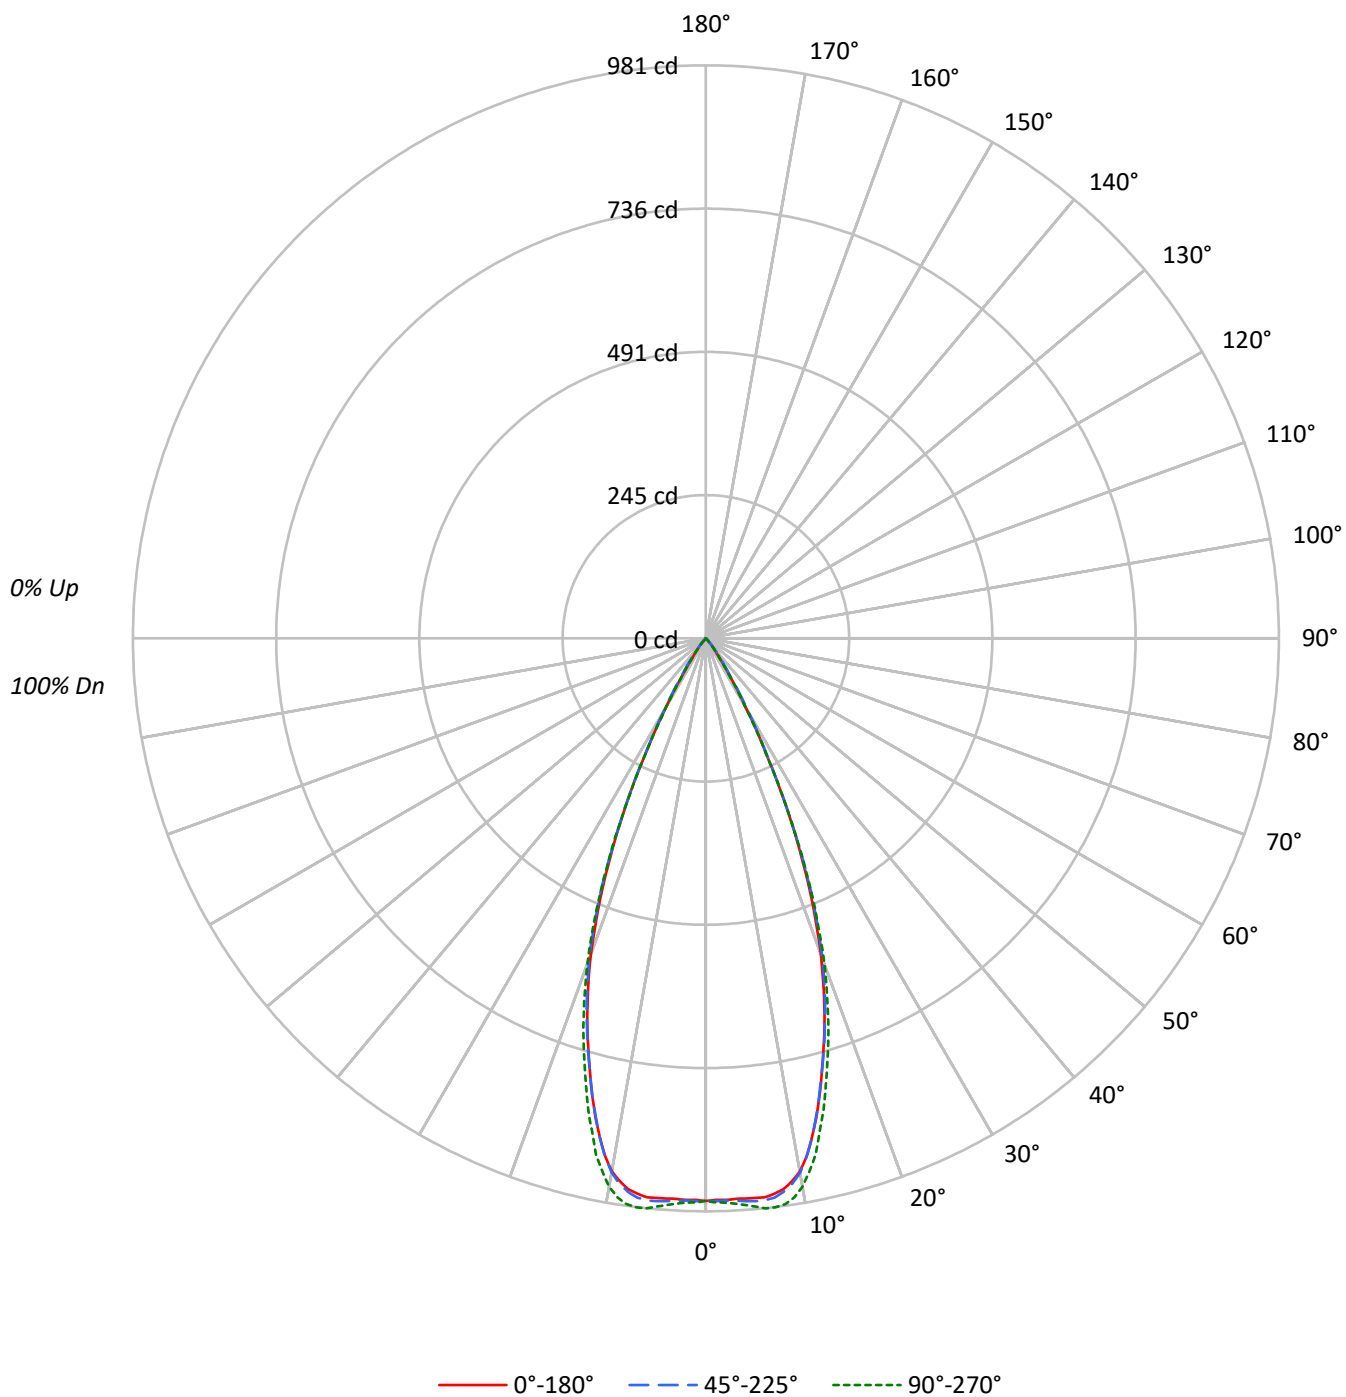

TEST NUMBER: P1316869

CATALOG NUMBER: P3SQAS05R459830DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	96		98	96	94		95
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		89
5	98	91	86	83	96	90	86	82	88	85	82		87	83	81		85
6	94	87	82	78	93	86	81	78	85	81	78		83	80	77		82
7	91	83	78	75	89	82	78	74	81	77	74		80	76	74		79
8	87	79	75	71	86	79	74	71	78	74	71		77	73	70		76
9	84	76	71	68	83	76	71	68	75	71	68		74	70	68		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	165885	165885	165885
5°	166259	167227	168887
10°	162096	162428	166695
15°	136755	136826	141319
20°	105567	107070	108829
25°	65483	65559	65977
30°	27026	28716	26568
35°	8410	10281	8094
40°	2585	3575	2406
45°	170	1364	170
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1364 cd/sqm

TEST NUMBER: P1316869

CATALOG NUMBER: P3SQAS05R459830DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.7	18.4
10°-20°	213.2	42.8
20°-30°	156.4	31.4
30°-40°	33.6	6.7
40°-50°	3.2	0.6
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	461.2	92.6
0°-40°	494.8	99.4
0°-60°	498.0	100.0
0°-90°	498.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	498.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	963	963	963	963	963	
5°	962	964	967	974	977	91
15°	767	766	767	780	793	211
25°	345	344	345	345	347	155
35°	40	43	49	42	38	31
45°	1	2	6	2	1	2
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1316869

CATALOG NUMBER: P3SQAS05R459830DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	963.2	963.2	963.2	963.2	963.2
1°	961.4	963.6	963.6	965.1	965.8
2°	962.1	963.6	963.2	965.8	966.9
3°	961.0	963.6	964.3	967.3	969.1
4°	961.4	963.6	965.8	970.3	972.8
5°	961.7	964.3	967.3	974.0	976.9
6°	962.1	964.0	967.3	975.8	981.4
7°	958.4	961.0	964.7	975.4	981.4
8°	952.5	954.0	956.9	971.0	978.0
9°	941.4	941.0	945.5	961.0	969.1
10°	926.9	922.5	928.8	944.3	953.2
11°	903.6	898.8	904.4	921.0	929.5
12°	873.3	873.3	874.4	889.2	904.0
13°	841.1	837.4	839.6	856.2	866.6
14°	805.5	801.8	804.0	816.6	832.9
15°	767.0	765.5	767.4	779.6	792.6
17.5°	675.6	672.3	678.9	691.1	697.8
20°	576.0	581.6	584.2	591.9	593.8
22.5°	461.6	467.5	471.2	472.4	473.5
25°	344.6	343.5	345.0	345.0	347.2
27.5°	226.6	226.6	230.6	228.0	225.4
30°	135.9	141.4	144.4	139.6	133.6
32.5°	74.0	79.6	84.4	77.4	72.2
35°	40.0	42.9	48.9	41.8	38.5
37.5°	21.8	24.4	28.1	23.7	21.8
40°	11.5	14.1	15.9	14.1	10.7
42.5°	3.7	7.0	9.3	7.0	3.3
45°	0.7	2.2	5.6	2.2	0.7
47.5°	0.0	0.4	2.6	0.4	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1316869

CATALOG NUMBER: P3SQAS05R459830DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)