

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317225

Luminaire Tested: P3SQAS17R159830DE010 E3SQPHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317225
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS17R159830DE010 E3SQPHLP1MW
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 98CRI , E3SQPHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 649.0 lumens
Efficiency: N/A
Efficacy: 31.8 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.63
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317225

CATALOG NUMBER: P3SQAS17R159830DE010 E3SQPHLP1MW

Luminous Intensity Polar Plot

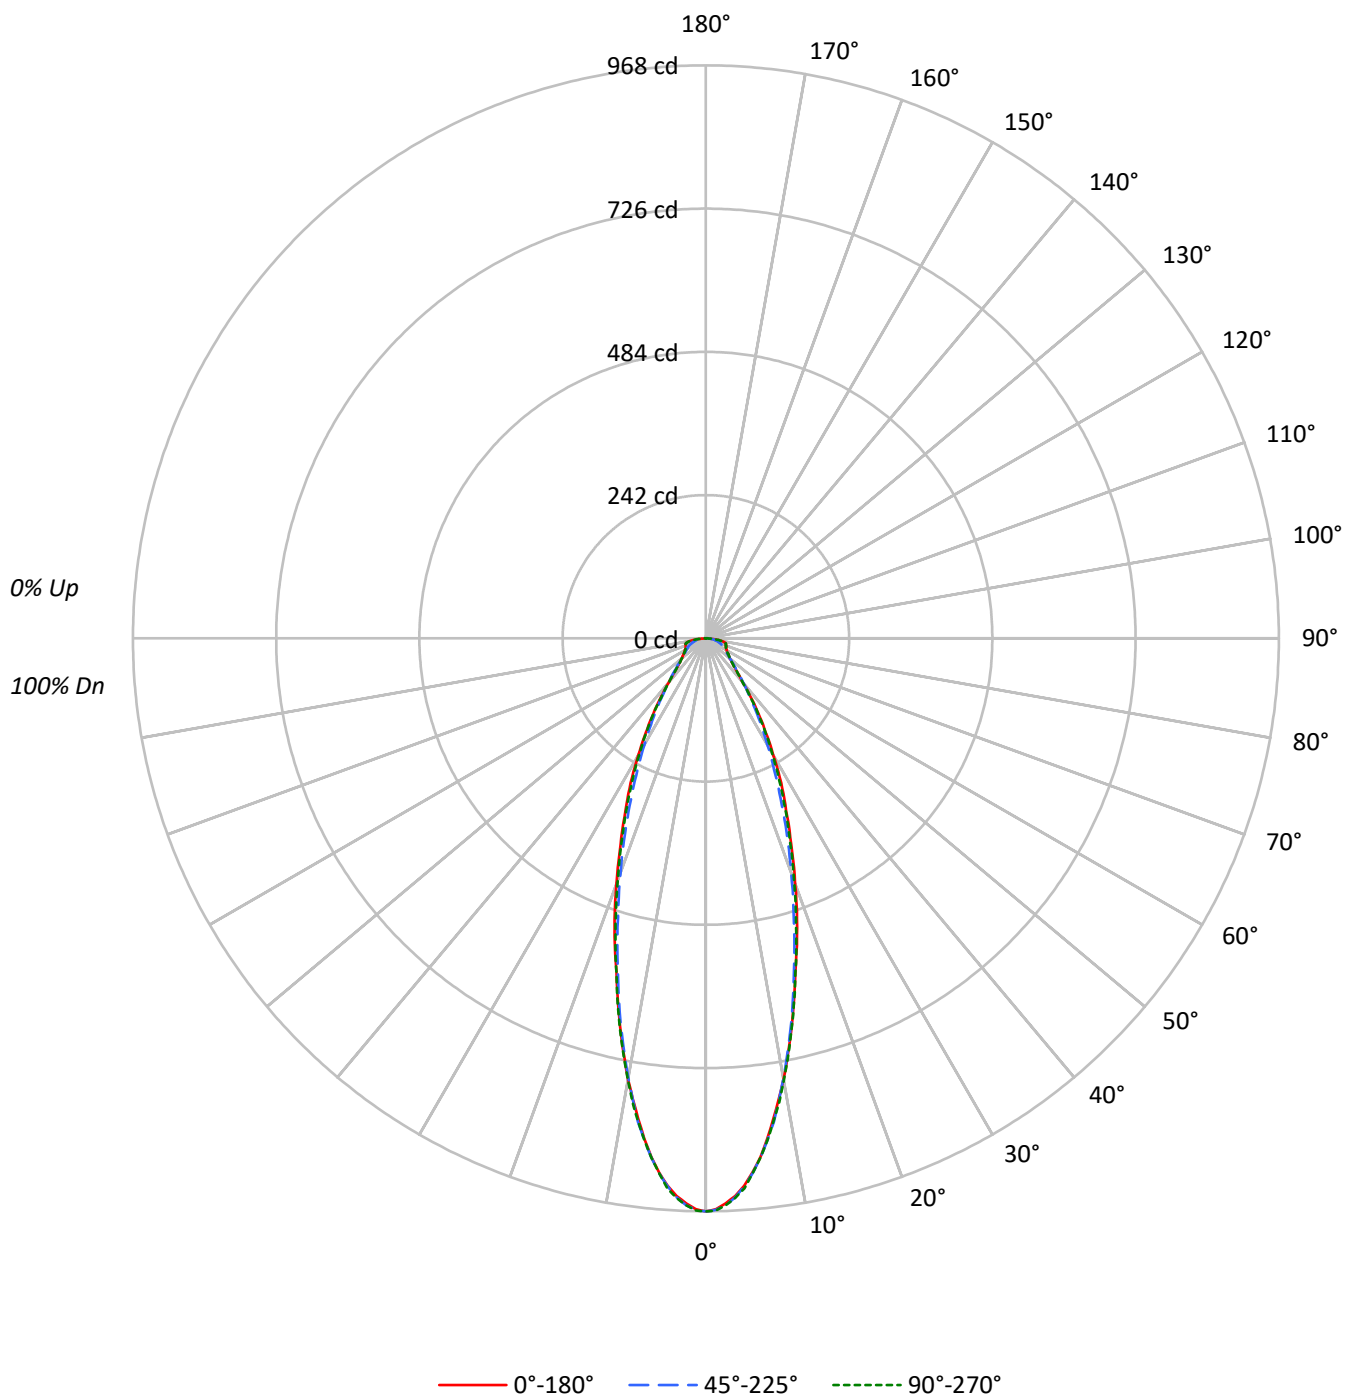

TEST NUMBER: P1317225

CATALOG NUMBER: P3SQAS17R159830DE010 E3SQPHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	108	104	101	109	105	102	100	101	99	96		97	95	94		94
2	104	98	93	88	102	96	91	87	93	89	85		90	86	83		87
3	98	90	84	79	96	88	83	78	86	81	77		83	79	76		81
4	92	83	76	71	90	82	76	71	80	74	70		77	73	69		75
5	87	77	70	65	85	76	70	65	74	69	64		72	68	64		71
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67
7	78	68	61	56	77	67	60	56	66	60	56		64	59	55		63
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		60
9	71	60	54	49	70	60	53	49	59	53	49		58	53	49		57
10	68	57	51	47	67	57	51	47	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	166729	166729	166729
5°	156595	156785	156785
10°	132279	131859	132681
15°	104037	102557	104233
20°	80843	77177	79762
25°	61018	56780	60124
30°	45381	41404	44446
35°	32399	30170	31894
40°	21942	22212	21695
45°	16343	17195	16343
50°	14174	14174	14174
55°	13782	13061	13782
60°	14191	12951	13778
65°	15323	13407	15323
70°	18379	13646	18379
75°	23489	14107	23489
80°	29159	15174	27968
85°	23317	14030	25491

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 29159 cd/sqm

TEST NUMBER: P1317225

CATALOG NUMBER: P3SQAS17R159830DE010 E3SQPHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.7	12.6
10°-20°	161.4	24.9
20°-30°	142.7	22.0
30°-40°	93.7	14.4
40°-50°	54.8	8.4
50°-60°	40.3	6.2
60°-70°	34.4	5.3
70°-80°	28.3	4.4
80°-90°	11.7	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.7	59.4
0°-40°	479.4	73.9
0°-60°	574.5	88.5
0°-90°	649.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	649.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	968	968	968	968	968	
5°	906	906	907	908	907	81
15°	584	584	575	582	585	163
25°	321	310	299	307	316	148
35°	154	148	144	147	152	97
45°	67	68	71	68	67	54
55°	46	45	44	45	46	41
65°	38	34	33	34	38	38
75°	35	26	21	27	35	36
85°	12	13	7	12	13	13
90°	0	0	0	0	0	

TEST NUMBER: P1317225

CATALOG NUMBER: P3SQAS17R159830DE010 E3SQPHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	968.1	968.1	968.1	968.1	968.1
1°	964.6	965.8	965.8	966.9	966.9
2°	955.2	957.5	958.7	958.7	958.7
3°	943.4	944.6	945.8	946.9	946.9
4°	926.9	928.1	928.1	930.5	931.6
5°	905.8	905.8	906.9	908.1	906.9
6°	881.1	881.1	882.2	882.2	882.2
7°	851.7	852.8	854.0	855.2	854.0
8°	819.9	821.1	824.6	824.6	823.4
9°	788.1	789.3	789.3	792.8	792.8
10°	756.4	756.4	754.0	756.4	758.7
12.5°	670.5	669.3	665.8	669.3	671.7
15°	583.5	583.5	575.2	582.3	584.6
17.5°	512.9	502.3	494.1	501.1	507.0
20°	441.1	430.5	421.1	428.2	435.2
22.5°	376.4	368.2	356.4	363.5	371.7
25°	321.1	310.5	298.8	307.0	316.4
27.5°	275.3	261.1	249.4	258.8	267.0
30°	228.2	218.8	208.2	215.3	223.5
32.5°	188.2	181.2	172.9	178.8	185.9
35°	154.1	148.2	143.5	147.0	151.7
37.5°	123.5	121.2	118.8	120.0	120.0
40°	97.6	98.8	98.8	98.8	96.5
42.5°	80.0	81.2	83.5	81.2	80.0
45°	67.1	68.2	70.6	68.2	67.1
47.5°	58.8	60.0	61.2	58.8	58.8
50°	52.9	52.9	52.9	52.9	52.9
52.5°	49.4	48.2	48.2	48.2	49.4
55°	45.9	44.7	43.5	44.7	45.9
57.5°	42.3	41.2	40.0	41.2	42.3
60°	41.2	38.8	37.6	38.8	40.0
62.5°	38.8	36.5	35.3	36.5	38.8
65°	37.6	34.1	32.9	34.1	37.6
67.5°	36.5	31.8	29.4	31.8	36.5
70°	36.5	29.4	27.1	30.6	36.5
72.5°	35.3	28.2	23.5	28.2	35.3
75°	35.3	25.9	21.2	27.1	35.3
77.5°	32.9	23.5	17.6	24.7	32.9
80°	29.4	21.2	15.3	22.4	28.2
82.5°	21.2	17.6	11.8	17.6	21.2
85°	11.8	12.9	7.1	11.8	12.9
87.5°	1.2	3.5	2.4	7.1	5.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)