

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317268

Luminaire Tested: P3SQAS17R309830DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317268
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS17R309830DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 98CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1363.0 lumens
Efficiency: N/A
Efficacy: 66.8 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317268

CATALOG NUMBER: P3SQAS17R309830DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

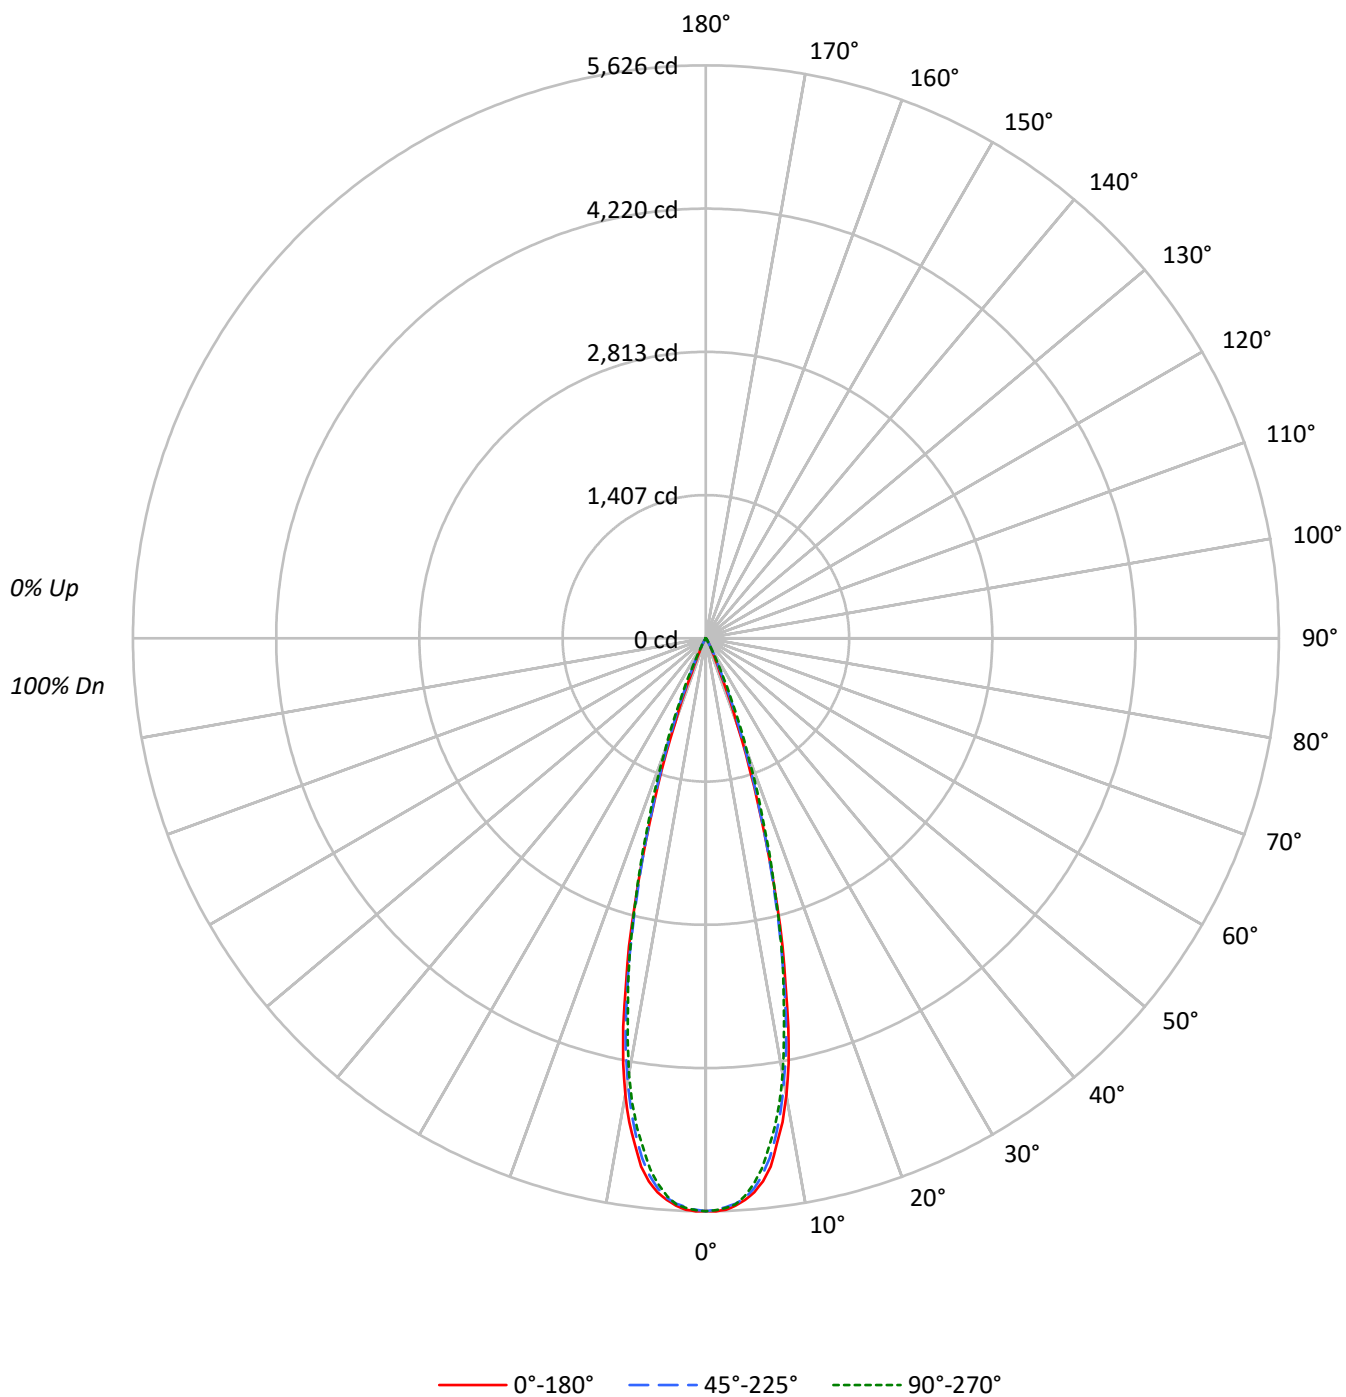

TEST NUMBER: P1317268

CATALOG NUMBER: P3SQAS17R309830DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	968787	968787	968787
5°	943841	937341	929613
10°	796506	772058	759519
15°	479996	466588	475182
20°	162822	188022	216870
25°	29929	46899	55374
30°	10281	11455	12847
35°	2964	3700	3953
40°	787	1326	1057
45°	292	292	292
50°	322	0	322
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 339 cd/sqm

TEST NUMBER: P1317268

CATALOG NUMBER: P3SQAS17R309830DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	486.4	35.7
10°-20°	710.9	52.2
20°-30°	150.4	11.0
30°-40°	13.9	1.0
40°-50°	1.4	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1347.7	98.9
0°-40°	1361.6	99.9
0°-60°	1363.0	100.0
0°-90°	1363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1363.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5625	5625	5625	5625	5625	
5°	5460	5449	5422	5405	5377	493
15°	2692	2683	2617	2678	2665	710
25°	158	176	247	290	291	115
35°	14	18	18	21	19	12
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317268

CATALOG NUMBER: P3SQAS17R309830DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5625.2	5625.2	5625.2	5625.2	5625.2
1°	5626.3	5620.5	5612.2	5624.0	5615.8
2°	5614.6	5600.5	5588.7	5600.5	5597.0
3°	5579.3	5567.6	5559.4	5565.2	5565.2
4°	5526.4	5513.5	5506.5	5507.6	5490.0
5°	5459.5	5448.9	5421.9	5405.4	5377.2
6°	5360.8	5334.9	5302.0	5275.0	5238.6
7°	5226.8	5186.8	5139.8	5092.8	5047.0
8°	5011.8	4993.0	4929.5	4897.8	4851.9
9°	4809.6	4763.8	4695.7	4644.0	4619.3
10°	4554.6	4486.5	4414.8	4373.7	4343.1
11°	4252.7	4183.3	4125.7	4065.8	4018.8
12°	3897.8	3839.0	3773.2	3733.3	3678.0
13°	3477.1	3468.9	3394.8	3381.9	3374.9
14°	3116.3	3083.4	3010.6	3030.6	3035.3
15°	2692.1	2682.7	2616.9	2678.0	2665.1
17.5°	1686.3	1689.8	1730.9	1827.3	1857.8
20°	888.4	915.4	1025.9	1142.2	1183.3
22.5°	359.6	419.5	532.3	611.0	663.9
25°	157.5	176.3	246.8	290.2	291.4
27.5°	89.3	90.5	118.7	123.4	125.7
30°	51.7	52.9	57.6	61.1	64.6
32.5°	28.2	30.6	31.7	36.4	36.4
35°	14.1	17.6	17.6	21.2	18.8
37.5°	8.2	9.4	10.6	10.6	9.4
40°	3.5	4.7	5.9	5.9	4.7
42.5°	1.2	2.4	2.4	2.4	3.5
45°	1.2	1.2	1.2	1.2	1.2
47.5°	1.2	1.2	0.0	1.2	1.2
50°	1.2	0.0	0.0	0.0	1.2
52.5°	1.2	0.0	0.0	0.0	1.2
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317268

CATALOG NUMBER: P3SQAS17R309830DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)