

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317617

Luminaire Tested: P3SQAS02R559835DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317617
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R559835DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 98CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 243.0 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.81
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317617

CATALOG NUMBER: P3SQAS02R559835DE010 E3SQCD1MB

Luminous Intensity Polar Plot

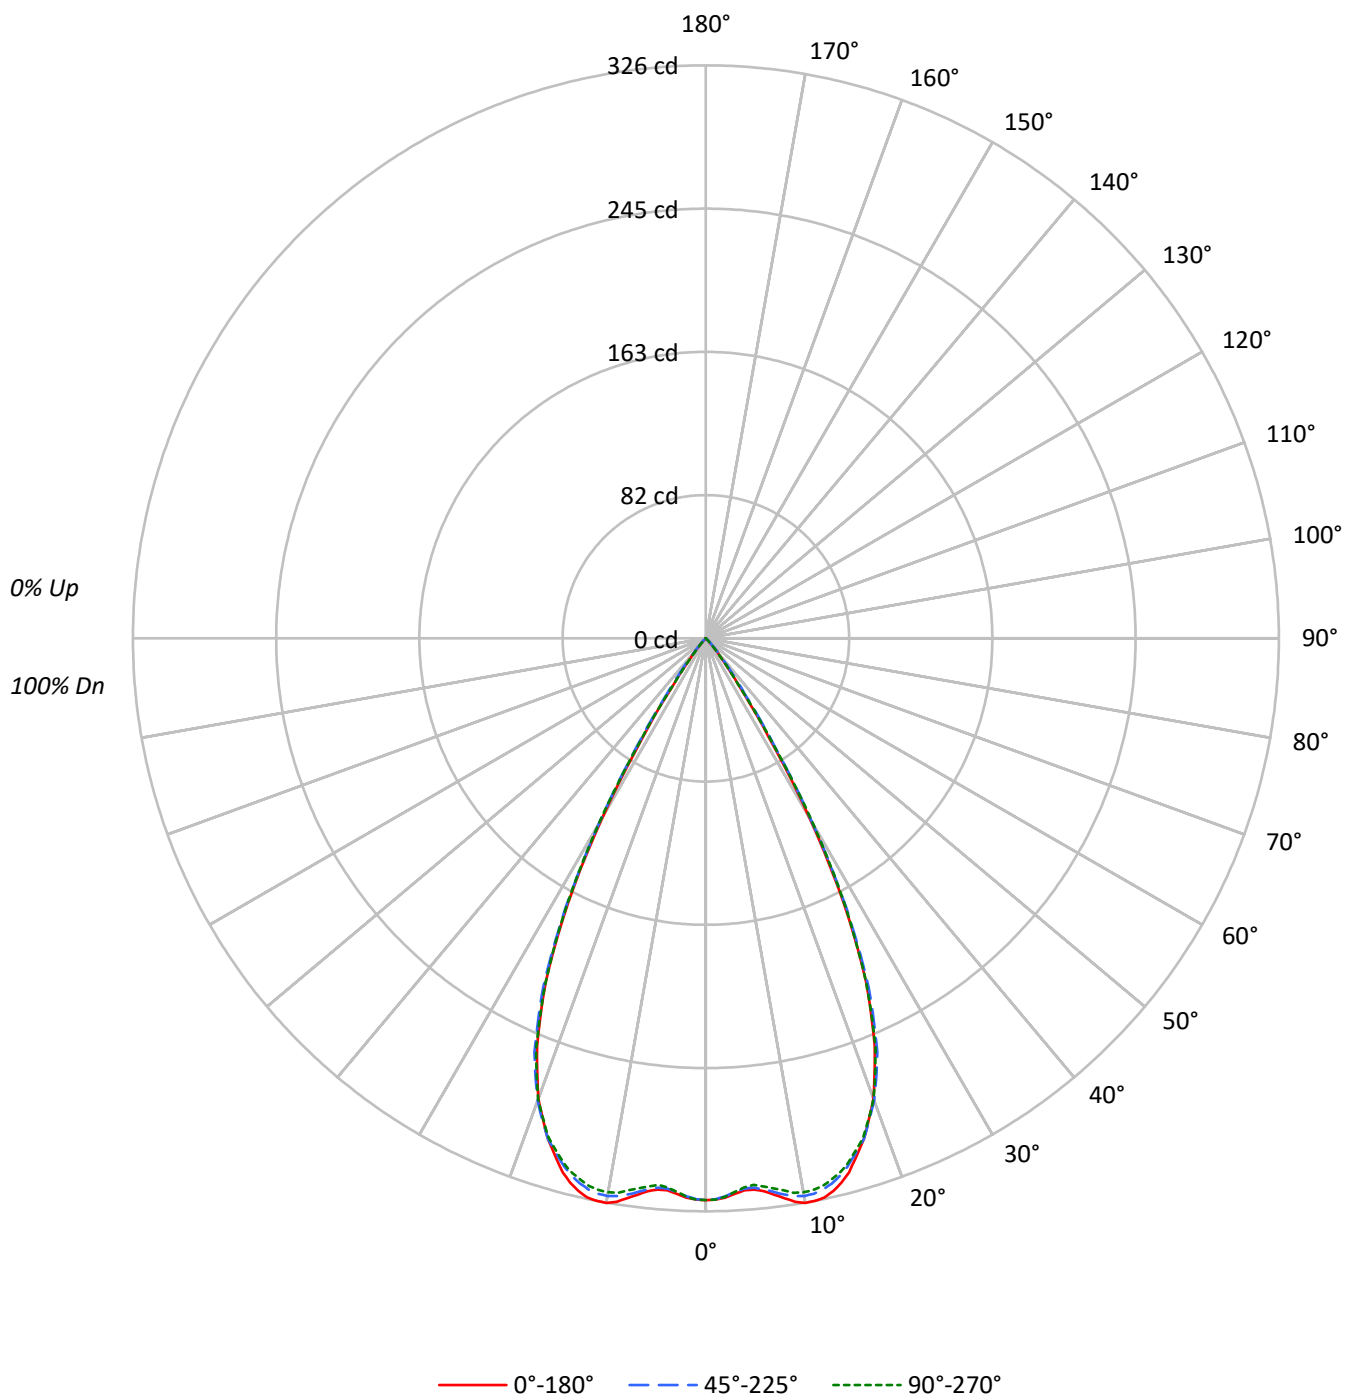

TEST NUMBER: P1317617

CATALOG NUMBER: P3SQAS02R559835DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	103	97	93	90	95	91	89		92	90	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	85	82		86
5	96	88	83	79	94	87	82	79	85	81	78		84	80	77		82
6	91	83	78	74	90	83	78	74	81	77	74		80	76	73		79
7	87	79	74	70	86	79	73	70	77	73	69		76	72	69		75
8	84	75	70	66	83	75	70	66	74	69	66		73	69	65		72
9	80	72	66	63	79	71	66	63	70	66	62		69	65	62		69
10	77	68	63	59	76	68	63	59	67	62	59		66	62	59		66

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	55042	55042	55042
5°	54423	54250	53973
10°	57046	56346	55961
15°	56093	55486	55290
20°	51097	51299	51134
25°	40989	41635	40989
30°	23526	24122	24301
35°	6707	8073	6896
40°	1731	2473	1754
45°	170	852	146
50°	0	161	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 852 cd/sqm

TEST NUMBER: P1317617

CATALOG NUMBER: P3SQAS02R559835DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.3	12.5
10°-20°	86.6	35.6
20°-30°	95.4	39.3
30°-40°	28.5	11.7
40°-50°	2.2	0.9
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	212.3	87.4
0°-40°	240.8	99.1
0°-60°	243.0	100.0
0°-90°	243.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	243.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	320	320	320	320	320	
5°	315	314	314	312	312	31
15°	315	312	311	310	310	87
25°	216	216	219	219	216	94
35°	32	34	38	35	33	26
45°	1	2	4	2	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317617

CATALOG NUMBER: P3SQAS02R559835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	319.6	319.6	319.6	319.6	319.6
1°	319.4	319.4	319.1	318.9	319.4
2°	318.5	318.5	317.6	317.4	317.9
3°	316.5	316.3	315.5	315.0	315.3
4°	314.8	314.4	313.8	312.9	313.1
5°	314.8	314.2	313.8	312.5	312.2
6°	316.3	315.9	315.2	313.8	313.5
7°	318.9	318.1	317.4	315.7	315.3
8°	321.7	321.1	319.6	317.9	317.2
9°	324.5	323.2	321.3	319.6	319.4
10°	326.2	324.3	322.2	320.2	320.0
11°	326.0	324.3	321.9	320.0	319.8
12°	325.2	322.8	320.7	318.5	318.7
13°	322.6	320.4	318.3	316.6	316.3
14°	319.1	317.0	315.2	313.5	313.7
15°	314.6	312.4	311.2	309.9	310.1
17.5°	298.7	298.2	298.7	297.2	297.8
20°	278.8	278.2	279.9	279.1	279.0
22.5°	251.0	251.7	254.9	253.9	252.3
25°	215.7	215.7	219.1	218.7	215.7
27.5°	169.8	171.1	173.2	174.1	171.8
30°	118.3	121.3	121.3	123.1	122.2
32.5°	66.1	72.4	73.9	74.8	71.1
35°	31.9	34.0	38.4	35.1	32.8
37.5°	15.3	16.2	20.7	16.8	15.7
40°	7.7	8.8	11.0	9.1	7.8
42.5°	3.2	4.7	5.8	4.7	3.2
45°	0.7	1.9	3.5	1.9	0.6
47.5°	0.0	0.2	1.7	0.4	0.0
50°	0.0	0.0	0.6	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317617

CATALOG NUMBER: P3SQAS02R559835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)