

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317737

Luminaire Tested: P3SQAS05R409835DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317737
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R409835DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 98CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 549.0 lumens
Efficiency: N/A
Efficacy: 76.3 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.69 / 0.6
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317737

CATALOG NUMBER: P3SQAS05R409835DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

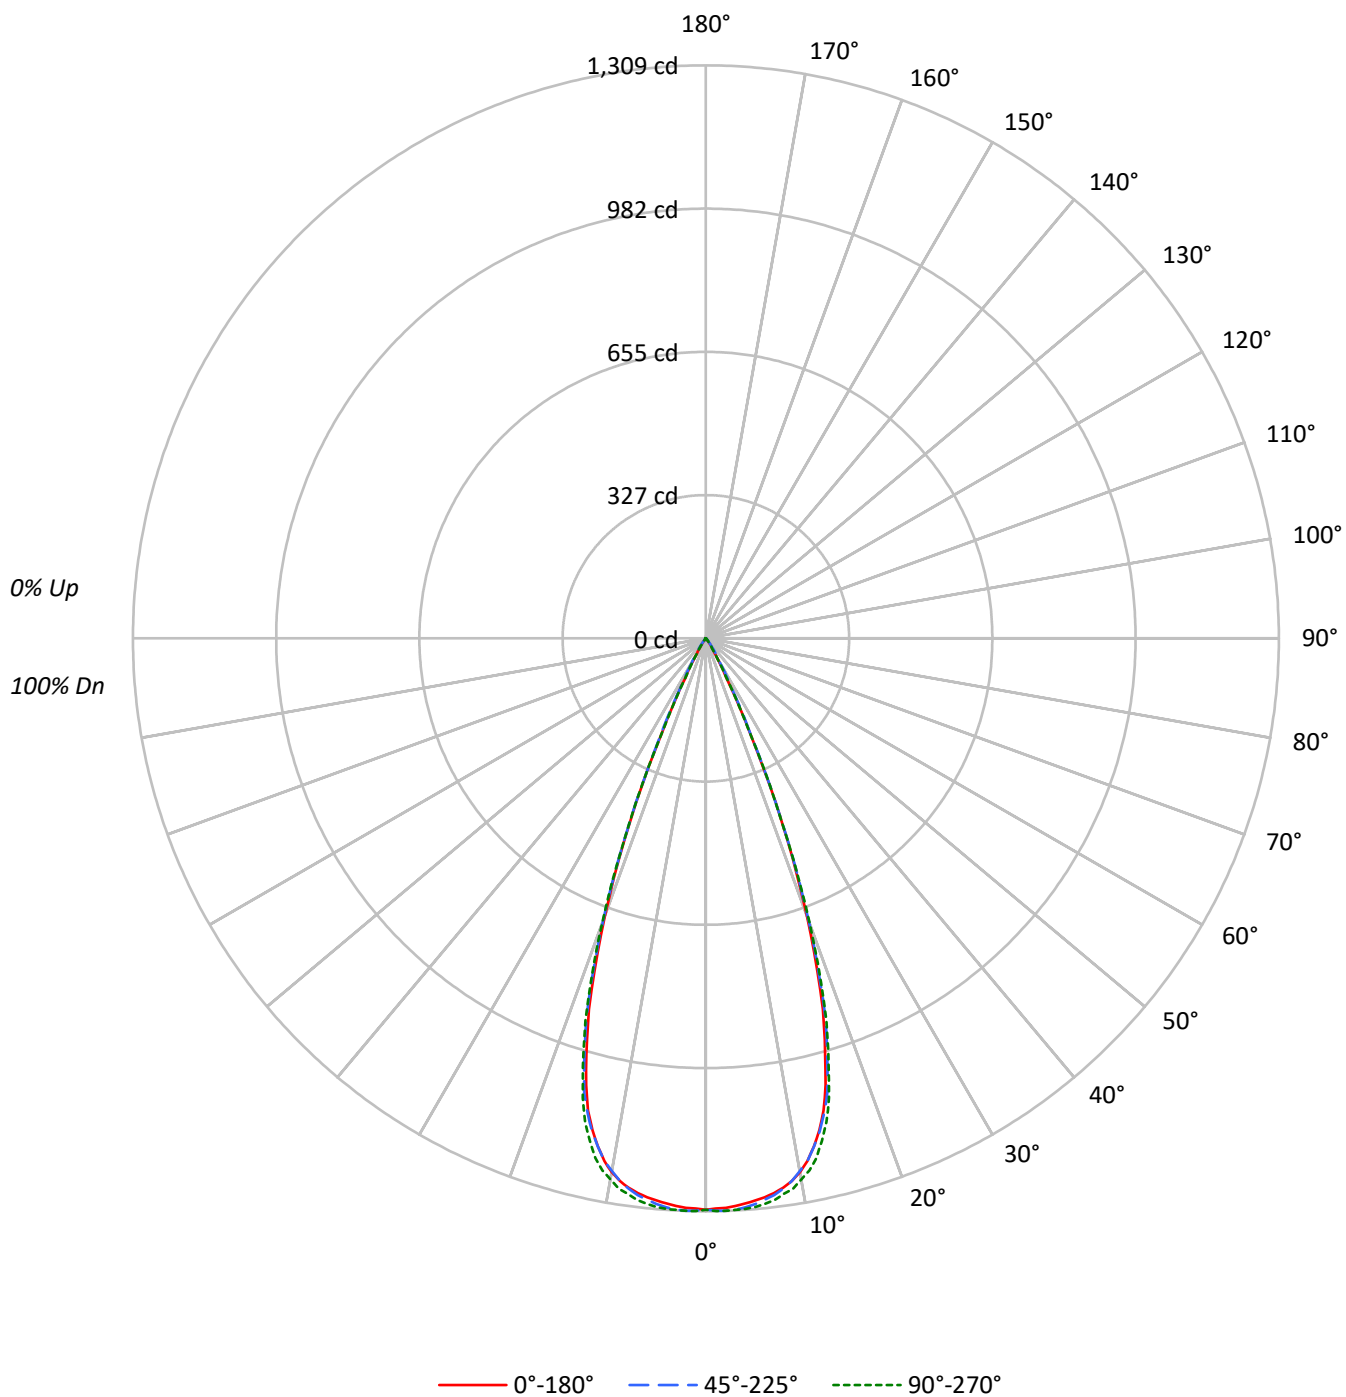

TEST NUMBER: P1317737

CATALOG NUMBER: P3SQAS05R409835DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	97	93	90	102	96	92	89	94	91	88		92	90	87		91
5	100	93	89	86	98	93	88	85	91	87	85		89	86	84		88
6	96	90	85	82	95	89	85	82	88	84	81		86	83	81		85
7	93	86	82	79	92	86	81	78	85	81	78		83	80	78		82
8	90	83	79	76	89	83	78	75	82	78	75		81	77	75		80
9	87	80	76	73	86	80	75	73	79	75	72		78	75	72		77
10	85	77	73	70	84	77	73	70	76	72	70		76	72	70		75

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	224837	224837	224837
5°	222895	224295	225367
10°	216553	216134	219526
15°	188390	191421	193756
20°	123638	126057	127670
25°	44086	46652	43858
30°	9605	12986	9685
35°	3091	5361	3007
40°	967	1641	877
45°	97	560	97
50°	0	107	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 560 cd/sqm

TEST NUMBER: P1317737

CATALOG NUMBER: P3SQAS05R409835DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.1	22.2
10°-20°	284.3	51.8
20°-30°	127.5	23.2
30°-40°	13.8	2.5
40°-50°	1.3	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	533.9	97.3
0°-40°	547.7	99.8
0°-60°	549.0	100.0
0°-90°	549.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	549.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1306	1306	1306	1306	1306	
5°	1289	1293	1297	1299	1304	122
15°	1057	1064	1074	1080	1087	281
25°	232	239	246	250	231	124
35°	15	17	26	17	14	11
45°	0	1	2	1	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317737

CATALOG NUMBER: P3SQAS05R409835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1305.5	1305.5	1305.5	1305.5	1305.5
1°	1302.8	1305.5	1307.9	1305.9	1308.6
2°	1301.7	1304.8	1308.2	1306.3	1308.6
3°	1298.6	1302.4	1306.3	1305.2	1307.5
4°	1294.3	1297.4	1303.2	1303.2	1306.7
5°	1289.3	1292.8	1297.4	1299.4	1303.6
6°	1283.9	1285.8	1289.3	1293.2	1299.0
7°	1276.9	1276.9	1281.2	1285.0	1292.8
8°	1267.3	1266.5	1269.6	1274.6	1281.6
9°	1255.3	1252.6	1254.9	1262.2	1272.7
10°	1238.3	1235.9	1235.9	1245.2	1255.3
11°	1216.2	1215.5	1215.8	1224.7	1238.3
12°	1186.5	1187.2	1187.2	1197.3	1213.9
13°	1152.8	1152.4	1155.9	1167.1	1178.3
14°	1111.9	1114.2	1117.7	1127.7	1139.3
15°	1056.6	1064.3	1073.6	1079.8	1086.7
17.5°	888.4	896.1	908.9	913.9	915.5
20°	674.6	685.8	687.8	697.8	696.6
22.5°	452.3	451.5	453.1	454.3	454.6
25°	232.0	238.9	245.5	249.7	230.8
27.5°	100.9	112.9	121.4	110.2	102.1
30°	48.3	54.9	65.3	55.3	48.7
32.5°	26.3	30.5	41.4	30.2	25.9
35°	14.7	17.0	25.5	16.6	14.3
37.5°	8.5	9.3	13.9	9.3	8.1
40°	4.3	5.4	7.3	5.4	3.9
42.5°	1.5	2.7	3.9	2.7	1.5
45°	0.4	0.8	2.3	0.8	0.4
47.5°	0.0	0.0	1.2	0.0	0.0
50°	0.0	0.0	0.4	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317737

CATALOG NUMBER: P3SQAS05R409835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)