

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317909

Luminaire Tested: P3SQAS09R559835DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317909
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R559835DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 98CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 744.0 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.81
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317909

CATALOG NUMBER: P3SQAS09R559835DE010 E3SQCD1MB

Luminous Intensity Polar Plot

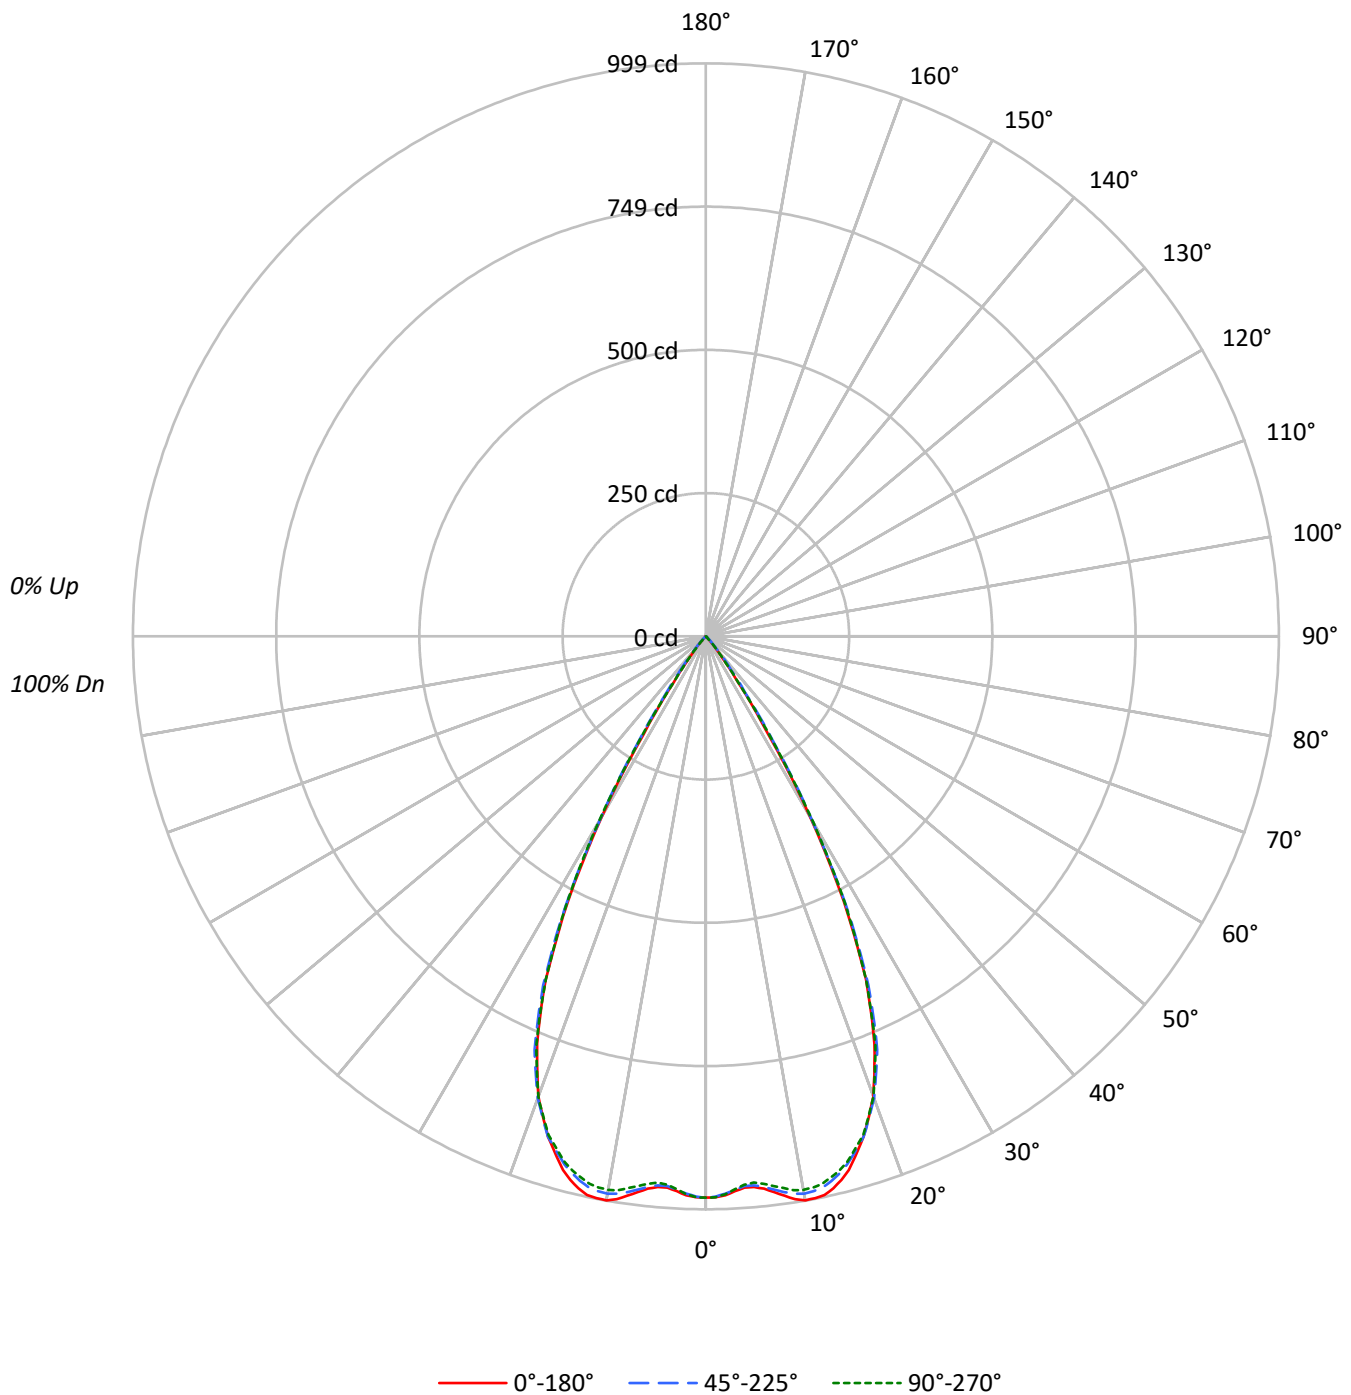

TEST NUMBER: P1317909

CATALOG NUMBER: P3SQAS09R559835DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	103	97	93	90	95	91	89		92	90	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	85	82		86
5	96	88	83	79	94	87	82	79	85	81	78		84	80	77		82
6	91	83	78	74	90	83	78	74	81	77	74		80	76	73		79
7	87	79	74	70	86	79	73	70	77	73	69		76	72	69		75
8	84	75	70	66	83	75	70	66	74	69	66		73	69	65		72
9	80	72	66	63	79	71	66	63	70	66	62		69	65	62		69
10	77	68	63	59	76	68	63	59	67	62	59		66	62	59		66

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	168537	168537	168537
5°	166622	166121	165239
10°	174635	172536	171347
15°	171737	169900	169294
20°	156426	157049	156536
25°	125494	127451	125494
30°	72029	73839	74415
35°	20541	24746	21130
40°	5261	7576	5396
45°	560	2655	414
50°	0	455	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 2655 cd/sqm

TEST NUMBER: P1317909

CATALOG NUMBER: P3SQAS09R559835DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.9	12.5
10°-20°	265.1	35.6
20°-30°	292.0	39.3
30°-40°	87.2	11.7
40°-50°	6.7	0.9
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	650.1	87.4
0°-40°	737.3	99.1
0°-60°	744.0	100.0
0°-90°	744.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	744.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	979	979	979	979	979	
5°	964	962	961	957	956	93
15°	963	956	953	949	950	267
25°	660	660	671	670	660	289
35°	98	104	118	107	100	81
45°	2	6	11	6	2	4
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317909

CATALOG NUMBER: P3SQAS09R559835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	978.6	978.6	978.6	978.6	978.6
1°	978.0	978.0	976.9	976.3	978.0
2°	975.2	975.2	972.3	971.8	973.5
3°	968.9	968.3	966.0	964.3	965.5
4°	963.8	962.6	960.9	958.1	958.6
5°	963.8	962.0	960.9	956.9	955.8
6°	968.3	967.2	964.9	960.9	959.8
7°	976.3	974.0	971.8	966.6	965.5
8°	984.9	983.2	978.6	973.5	971.2
9°	993.5	989.5	983.8	978.6	978.0
10°	998.6	992.9	986.6	980.3	979.8
11°	998.0	992.9	985.5	979.8	979.2
12°	995.8	988.3	982.0	975.2	975.8
13°	987.8	980.9	974.6	969.5	968.3
14°	976.9	970.6	964.9	959.8	960.3
15°	963.2	956.3	952.9	948.9	949.5
17.5°	914.6	912.9	914.6	910.1	911.8
20°	853.5	851.8	856.9	854.6	854.1
22.5°	768.4	770.7	780.4	777.5	772.4
25°	660.4	660.4	670.7	669.5	660.4
27.5°	519.9	523.9	530.2	533.0	526.2
30°	362.2	371.3	371.3	377.1	374.2
32.5°	202.2	221.7	226.2	229.1	217.7
35°	97.7	104.0	117.7	107.4	100.5
37.5°	46.8	49.7	63.4	51.4	48.0
40°	23.4	26.9	33.7	28.0	24.0
42.5°	9.7	14.3	17.7	14.3	9.7
45°	2.3	5.7	10.9	5.7	1.7
47.5°	0.0	0.6	5.1	1.1	0.0
50°	0.0	0.0	1.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317909

CATALOG NUMBER: P3SQAS09R559835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)