

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317919

Luminaire Tested: P3SQAS09R609835DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317919
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R609835DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 98CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 716.0 lumens
Efficiency: N/A
Efficacy: 65.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.93 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317919

CATALOG NUMBER: P3SQAS09R609835DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

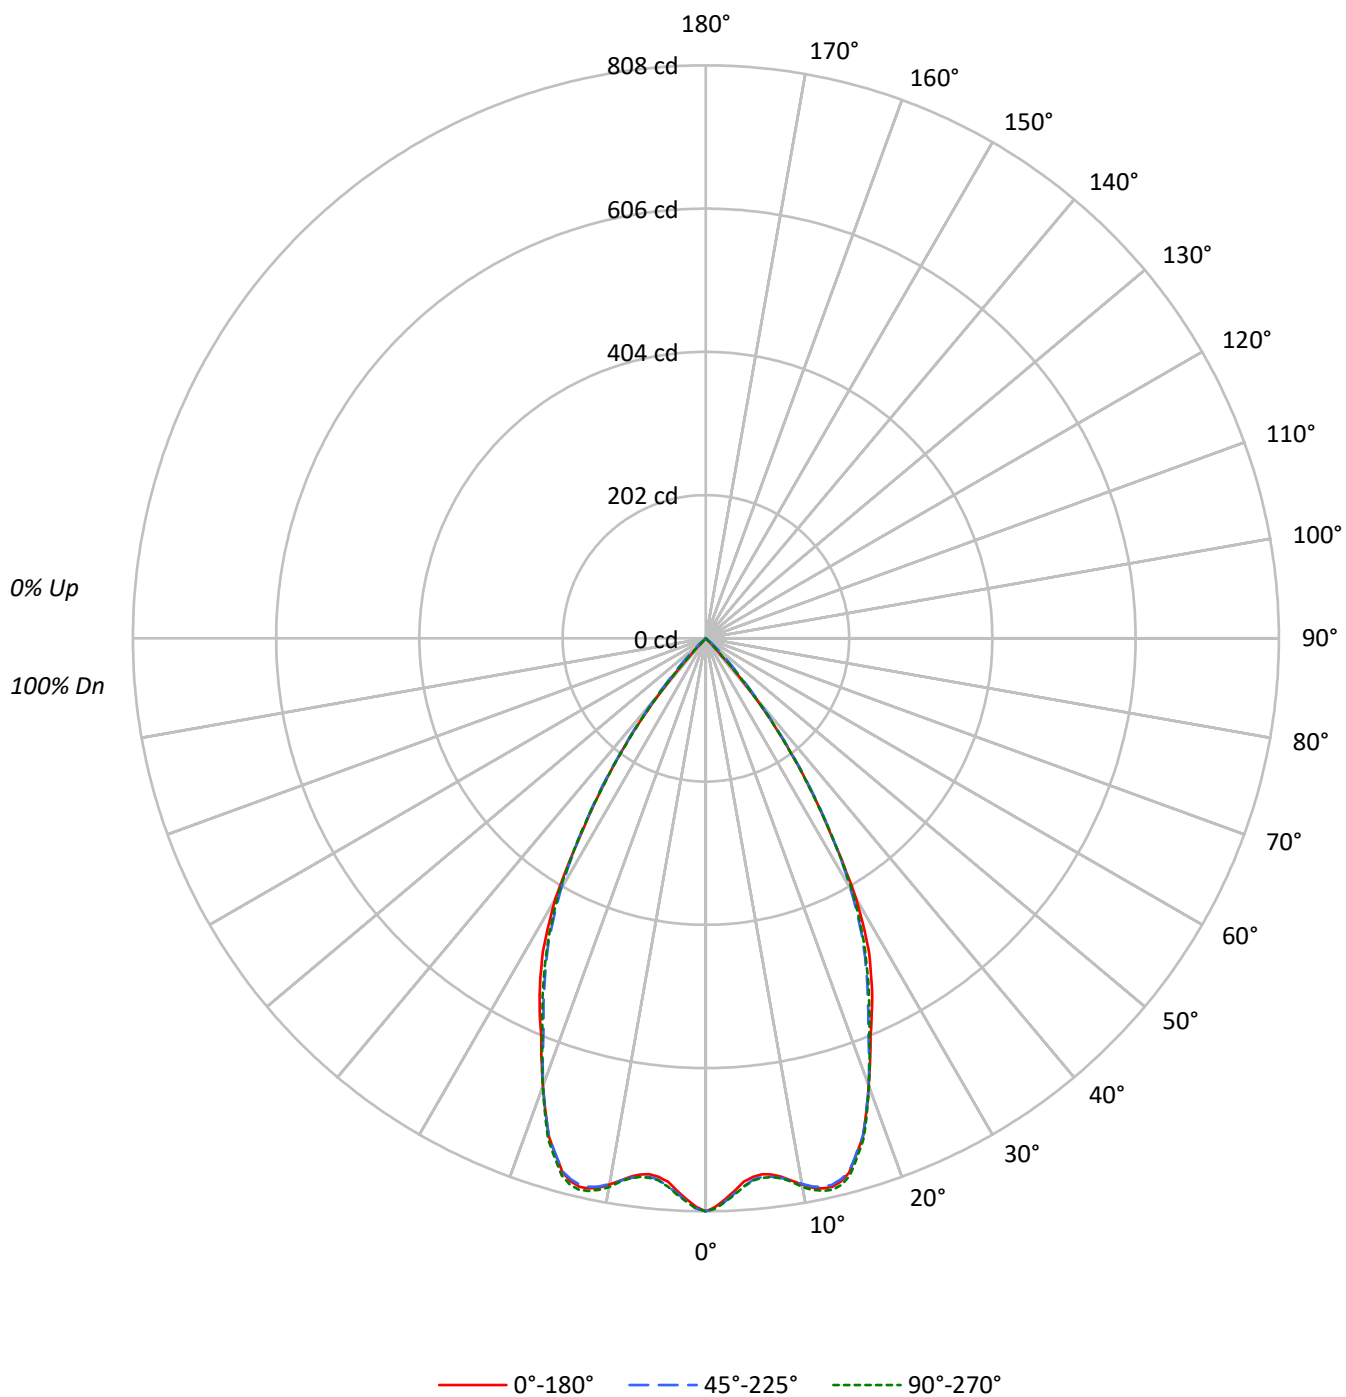

TEST NUMBER: P1317919

CATALOG NUMBER: P3SQAS09R609835DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88
4	98	91	86	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	139156	139156	139156
5°	131787	132478	132668
10°	136808	136598	137403
15°	139072	138858	139875
20°	123070	123070	123271
25°	105465	102310	103184
30°	84359	81296	82549
35°	52351	53423	52225
40°	22977	25292	23629
45°	268	8208	706
50°	0	911	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 8208 cd/sqm

TEST NUMBER: P1317919

CATALOG NUMBER: P3SQAS09R609835DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.8	10.3
10°-20°	213.9	29.9
20°-30°	248.3	34.7
30°-40°	156.4	21.8
40°-50°	23.5	3.3
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	536.0	74.9
0°-40°	692.4	96.7
0°-60°	716.0	100.0
0°-90°	716.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	716.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	808	808	808	808	808	
5°	762	765	766	768	767	74
15°	780	777	779	784	784	214
25°	555	549	538	541	543	252
35°	249	250	254	249	248	155
45°	1	11	34	14	3	15
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317919

CATALOG NUMBER: P3SQAS09R609835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	808.0	808.0	808.0	808.0	808.0
1°	801.7	804.0	804.0	804.5	804.0
2°	790.8	794.2	794.2	796.0	794.8
3°	780.0	782.8	783.4	785.7	785.1
4°	768.0	772.6	774.3	775.4	774.8
5°	762.3	765.1	766.3	768.0	767.4
6°	760.0	762.3	763.4	765.1	765.1
7°	761.7	763.4	765.1	766.3	765.1
8°	766.8	768.6	768.6	770.8	769.1
9°	774.3	774.8	774.8	777.7	776.0
10°	782.3	781.1	781.1	785.1	785.7
11°	789.1	788.0	787.4	791.4	792.5
12°	793.1	790.8	790.8	796.0	796.5
13°	793.7	790.8	790.8	796.0	797.7
14°	789.1	785.7	786.3	792.0	793.7
15°	780.0	777.1	778.8	784.0	784.5
17.5°	736.6	734.9	736.0	739.4	740.0
20°	671.5	670.3	671.5	671.5	672.6
22.5°	607.0	604.1	598.4	601.8	602.4
25°	555.0	548.7	538.4	540.7	543.0
27.5°	497.9	489.9	479.1	481.9	482.5
30°	424.2	420.2	408.8	411.7	415.1
32.5°	327.7	338.6	331.7	331.2	331.7
35°	249.0	249.5	254.1	249.0	248.4
37.5°	174.2	174.7	178.1	172.4	173.0
40°	102.2	109.6	112.5	110.2	105.1
42.5°	32.0	56.5	64.0	55.4	35.4
45°	1.1	10.8	33.7	14.3	2.9
47.5°	0.0	0.6	16.0	1.1	0.0
50°	0.0	0.0	3.4	0.0	0.0
52.5°	0.0	0.0	0.6	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317919

CATALOG NUMBER: P3SQAS09R609835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)