

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1317932

Luminaire Tested: P3SQAS09R709835DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1317932
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R709835DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 3500K CCT AND, 98CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 675.0 lumens
Efficiency: N/A
Efficacy: 61.4 lumens/watt
Spacing Criteria (0/90/45): 1 / 0.99 / 1.03
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1317932

CATALOG NUMBER: P3SQAS09R709835DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

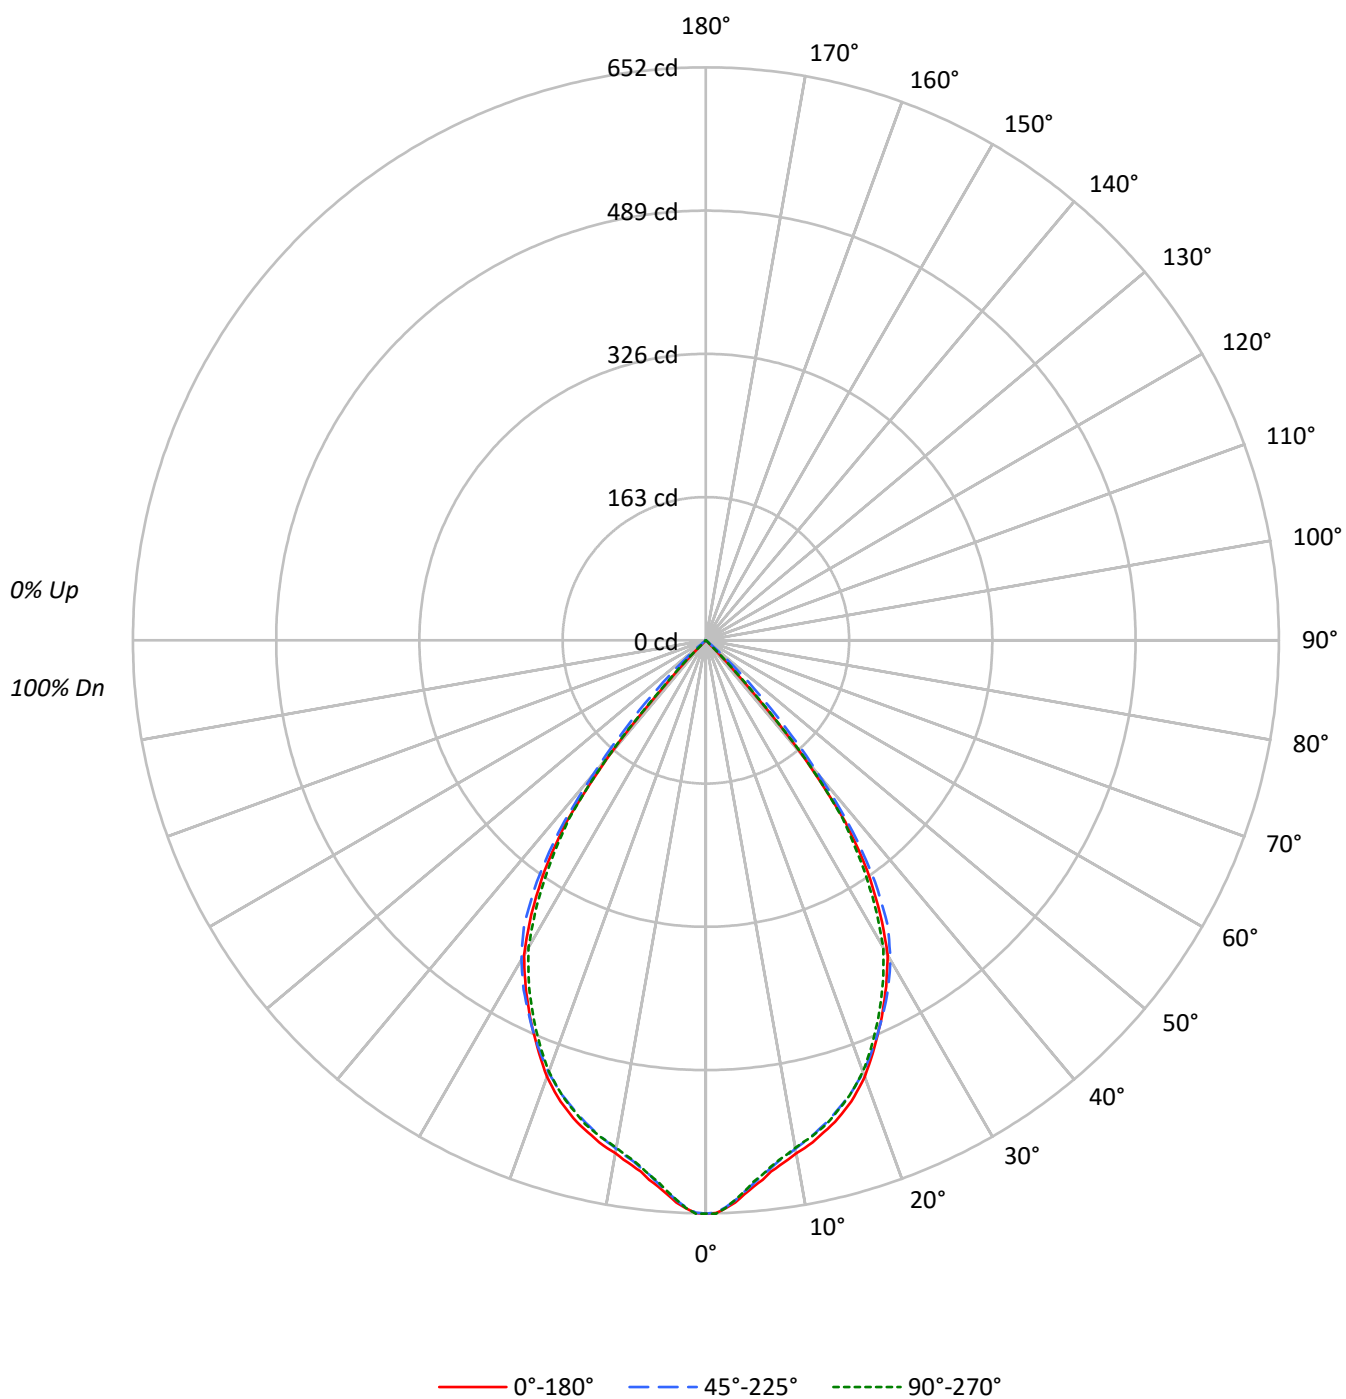

TEST NUMBER: P1317932

CATALOG NUMBER: P3SQAS09R709835DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	98	95	105	101	97	94	98	95	92		95	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	96	89	83	79	95	88	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	86	77	71	67	85	76	71	66	75	70	66		73	69	65		72
7	82	72	66	62	80	71	66	61	70	65	61		69	64	61		68
8	78	68	61	57	76	67	61	57	66	61	57		65	60	57		64
9	74	63	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	53	50	58	53	49		58	53	49		57

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	112358	112358	112358
5°	107860	107272	106978
10°	103616	102724	102514
15°	101166	99740	99936
20°	96879	95926	95725
25°	89921	90149	88723
30°	82291	83444	80262
35°	67320	70558	64692
40°	38759	45166	39793
45°	560	18778	1948
50°	0	1983	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 18778 cd/sqm

TEST NUMBER: P1317932

CATALOG NUMBER: P3SQAS09R709835DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.2	8.6
10°-20°	157.7	23.4
20°-30°	216.7	32.1
30°-40°	196.5	29.1
40°-50°	45.7	6.8
50°-60°	0.2	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	432.6	64.1
0°-40°	629.1	93.2
0°-60°	675.0	100.0
0°-90°	675.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	675.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	652	652	652	652	652	
5°	624	622	620	619	619	59
15°	567	563	559	559	560	159
25°	473	476	474	470	467	217
35°	320	325	336	321	308	192
45°	2	26	77	33	8	28
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1317932

CATALOG NUMBER: P3SQAS09R709835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	652.4	652.4	652.4	652.4	652.4
1°	651.9	650.7	651.3	651.9	652.4
2°	646.7	645.6	645.6	646.2	646.2
3°	640.5	638.2	638.2	637.6	637.6
4°	631.9	630.2	629.0	628.5	628.5
5°	623.9	622.2	620.5	619.3	618.8
6°	617.1	614.2	611.9	611.3	611.9
7°	609.1	607.4	605.1	603.4	603.9
8°	603.4	601.1	598.2	597.1	597.1
9°	598.2	595.9	593.1	590.8	591.9
10°	592.5	590.2	587.4	585.7	586.2
11°	588.5	585.7	582.2	581.1	581.7
12°	583.9	580.5	577.1	576.5	577.7
13°	578.2	574.8	571.4	571.4	572.5
14°	573.1	569.1	565.7	565.7	567.4
15°	567.4	563.4	559.4	559.4	560.5
17.5°	550.3	546.8	542.8	542.8	543.4
20°	528.6	526.9	523.4	521.7	522.3
22.5°	501.2	501.2	499.5	496.6	495.5
25°	473.2	475.5	474.4	469.8	466.9
27.5°	444.1	448.1	448.7	441.8	436.7
30°	413.8	417.3	419.6	411.6	403.6
32.5°	369.3	379.6	385.3	374.5	357.9
35°	320.2	324.8	335.6	321.4	307.7
37.5°	260.3	266.0	275.1	263.7	255.7
40°	172.4	195.2	200.9	195.2	177.0
42.5°	62.2	109.6	131.9	111.9	73.1
45°	2.3	25.7	77.1	33.1	8.0
47.5°	0.0	0.6	34.8	1.1	0.0
50°	0.0	0.0	7.4	0.0	0.0
52.5°	0.0	0.0	0.6	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317932
CATALOG NUMBER: P3SQAS09R709835DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)