

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1318092

Luminaire Tested: P3SQAS17R159835DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1318092
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS17R159835DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 98CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1550.0 lumens
Efficiency: N/A
Efficacy: 76.0 lumens/watt
Spacing Criteria (0/90/45): 0.29 / 0.29 / 0.29
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1318092

CATALOG NUMBER: P3SQAS17R159835DE010 E3SQCD1MB

Luminous Intensity Polar Plot

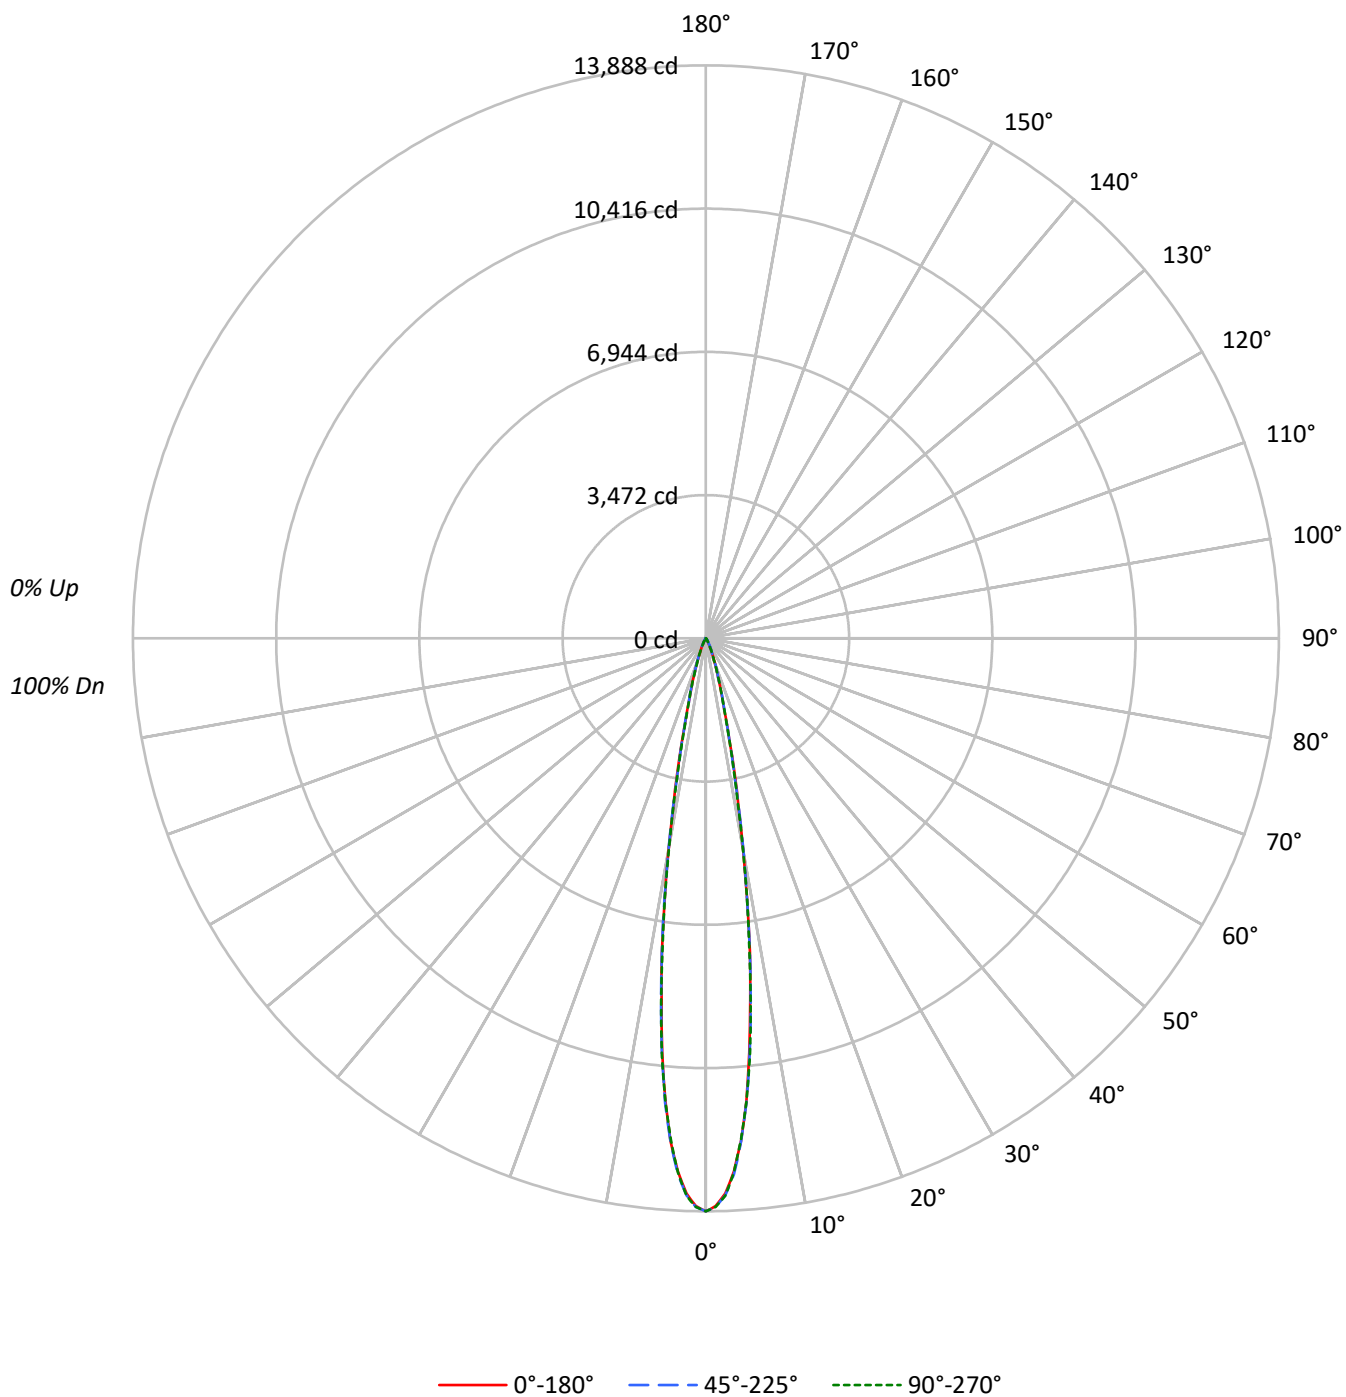

TEST NUMBER: P1318092

CATALOG NUMBER: P3SQAS17R159835DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	106		104	103	102		101
2	113	109	107	105	111	108	106	104	105	103	101		102	101	99		99
3	110	106	103	100	108	105	102	100	102	100	98		100	98	97		98
4	107	103	99	97	106	102	99	96	100	97	95		98	96	94		96
5	105	100	97	94	104	99	96	94	98	95	93		96	94	92		95
6	103	97	94	92	102	97	94	91	96	93	91		94	92	90		93
7	101	95	92	90	100	95	92	89	94	91	89		93	90	88		92
8	99	93	90	88	98	93	90	88	92	89	87		91	89	87		90
9	97	91	88	86	96	91	88	86	90	88	86		90	87	85		89
10	95	90	87	84	95	90	86	84	89	86	84		88	86	84		88

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2391811	2391811	2391811
5°	1947378	1953740	1949936
10°	908411	916561	904984
15°	285259	287666	285919
20°	113026	117516	109434
25°	45663	55222	44029
30°	18276	25117	17301
35°	5403	11080	5151
40°	1664	4137	1371
45°	292	901	292
50°	0	322	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 901 cd/sqm

TEST NUMBER: P1318092

CATALOG NUMBER: P3SQAS17R159835DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	869.5	56.1
10°-20°	520.0	33.6
20°-30°	131.2	8.5
30°-40°	26.8	1.7
40°-50°	2.5	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1520.7	98.1
0°-40°	1547.5	99.8
0°-60°	1550.0	100.0
0°-90°	1550.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1550.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	13888	13888	13888	13888	13888	
5°	11264	11244	11301	11273	11279	867
15°	1600	1613	1613	1590	1604	520
25°	240	262	291	258	232	123
35°	26	34	53	33	24	21
45°	1	2	4	2	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1318092

CATALOG NUMBER: P3SQAS17R159835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	13887.9	13887.9	13887.9	13887.9	13887.9
1°	13762.9	13809.5	13785.0	13804.6	13782.5
2°	13465.0	13527.5	13507.9	13501.8	13518.9
3°	12940.3	13012.6	13010.1	12991.8	12962.3
4°	12224.3	12194.9	12240.2	12235.3	12185.1
5°	11264.3	11243.5	11301.1	11272.9	11279.1
6°	10089.8	10180.6	10161.0	10163.4	10186.7
7°	8828.3	8877.3	8919.0	8953.4	8905.5
8°	7669.8	7657.5	7661.2	7700.4	7568.0
9°	6372.7	6448.7	6399.6	6321.2	6371.4
10°	5194.5	5241.1	5241.1	5172.4	5174.9
11°	4141.4	4179.4	4152.4	4169.6	4061.7
12°	3338.4	3244.0	3221.9	3239.0	3237.8
13°	2548.8	2555.0	2548.8	2547.6	2535.3
14°	1998.4	2030.2	2016.7	1983.6	1968.9
15°	1599.9	1613.4	1613.4	1590.1	1603.6
17.5°	961.2	977.1	980.8	964.8	964.8
20°	616.7	624.0	641.2	617.9	597.1
22.5°	380.1	396.0	425.4	391.1	373.9
25°	240.3	262.4	290.6	257.5	231.7
27.5°	150.8	169.2	193.7	161.8	145.9
30°	91.9	104.2	126.3	101.8	87.0
32.5°	51.5	61.3	79.7	58.8	49.0
35°	25.7	34.3	52.7	33.1	24.5
37.5°	14.7	18.4	33.1	15.9	13.5
40°	7.4	9.8	18.4	9.8	6.1
42.5°	2.5	4.9	7.4	4.9	2.5
45°	1.2	2.5	3.7	2.5	1.2
47.5°	0.0	0.0	1.2	0.0	0.0
50°	0.0	0.0	1.2	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1318092

CATALOG NUMBER: P3SQAS17R159835DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)