

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1318358

Luminaire Tested: P3SQAS20R609835D010 E3SQCD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1318358
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS20R609835D010 E3SQCD1MW
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 98CRI , E3SQCD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2037.1 lumens
Efficiency: N/A
Efficacy: 74.3 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.92 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1318358

CATALOG NUMBER: P3SQAS20R609835D010 E3SQCD1MW

Luminous Intensity Polar Plot

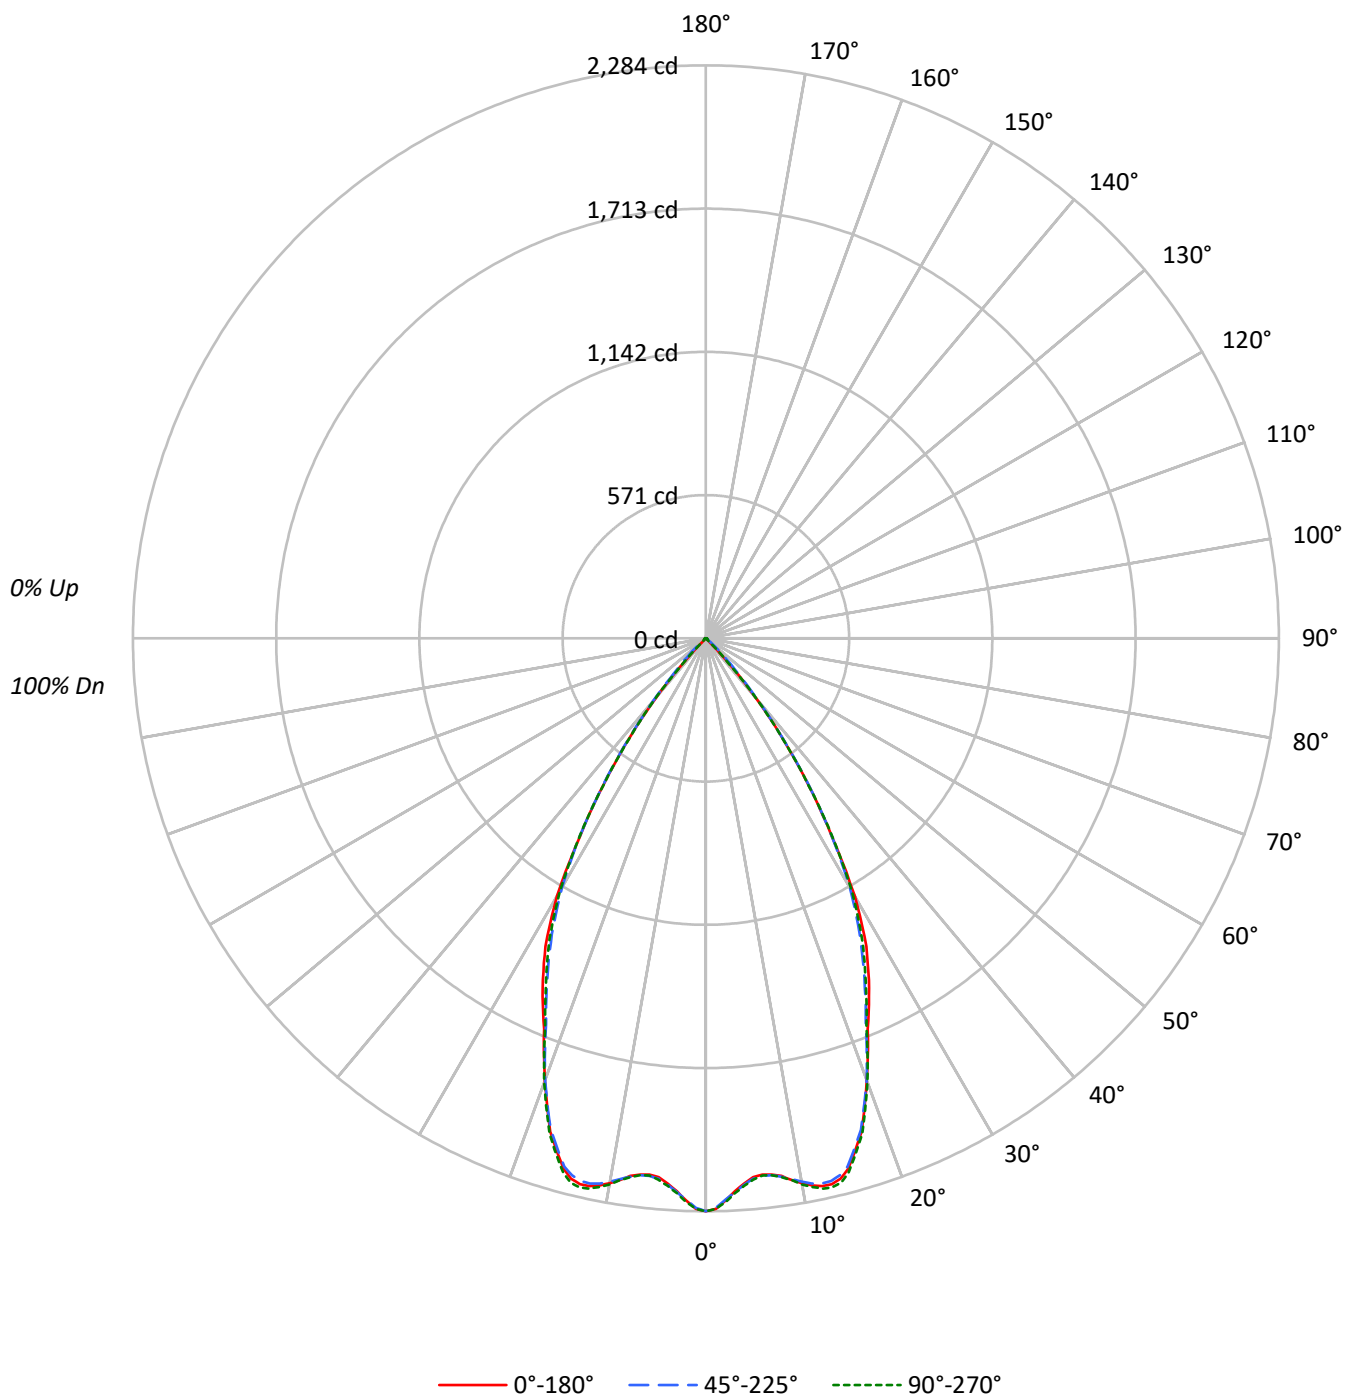

TEST NUMBER: P1318358

CATALOG NUMBER: P3SQAS20R609835D010 E3SQCD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	79		83
5	93	85	79	75	91	84	79	75	82	77	74		80	76	73		79
6	88	80	74	70	87	79	73	69	77	73	69		76	72	68		75
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	393322	393322	393322
5°	372782	373871	374425
10°	385732	384612	386571
15°	390419	388725	392701
20°	343788	343495	345254
25°	292546	284071	286484
30°	236113	227880	231678
35°	149442	150788	149106
40°	69874	72729	70953
45°	4262	25622	5042
50°	2143	5975	2143
55°	2402	2402	2402
60°	2204	2204	2204
65°	1956	2608	1956
70°	2417	2417	2417
75°	2129	2129	2129
80°	1587	1587	1587
85°	3162	3162	3162

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 25622 cd/sqm

TEST NUMBER: P1318358

CATALOG NUMBER: P3SQAS20R609835D010 E3SQCD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.1	10.2
10°-20°	599.5	29.4
20°-30°	691.0	33.9
30°-40°	443.7	21.8
40°-50°	77.2	3.8
50°-60°	7.4	0.4
60°-70°	5.6	0.3
70°-80°	3.4	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1498.6	73.6
0°-40°	1942.4	95.4
0°-60°	2027.0	99.5
0°-90°	2037.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2037.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2284	2284	2284	2284	2284	
5°	2156	2161	2163	2167	2166	208
15°	2190	2182	2180	2194	2202	600
25°	1540	1522	1495	1496	1508	702
35°	711	706	717	703	709	444
45°	18	53	105	62	21	58
55°	8	8	8	8	8	7
65°	5	6	6	6	5	5
75°	3	3	3	3	3	3
85°	2	2	2	2	2	1
90°	0	0	0	0	0	

TEST NUMBER: P1318358

CATALOG NUMBER: P3SQAS20R609835D010 E3SQCD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2283.8	2283.8	2283.8	2283.8	2283.8
1°	2274.2	2272.6	2271.0	2272.6	2274.2
2°	2242.3	2240.7	2239.1	2245.5	2248.7
3°	2207.3	2208.9	2210.5	2213.6	2215.2
4°	2178.6	2181.8	2183.4	2186.6	2188.1
5°	2156.3	2161.1	2162.6	2167.4	2165.8
6°	2149.9	2153.1	2154.7	2156.3	2153.1
7°	2153.1	2154.7	2156.3	2159.5	2156.3
8°	2164.2	2165.8	2167.4	2169.0	2169.0
9°	2186.6	2183.4	2181.8	2188.1	2186.6
10°	2205.7	2200.9	2199.3	2208.9	2210.5
11°	2221.6	2215.2	2213.6	2224.8	2228.0
12°	2232.8	2223.2	2221.6	2236.0	2242.3
13°	2232.8	2220.0	2220.0	2236.0	2245.5
14°	2220.0	2205.7	2205.7	2223.2	2234.4
15°	2189.7	2181.8	2180.2	2194.5	2202.5
17.5°	2062.2	2052.7	2054.3	2070.2	2071.8
20°	1875.8	1871.0	1874.2	1877.4	1883.8
22.5°	1686.1	1682.9	1665.4	1670.2	1673.4
25°	1539.5	1522.0	1494.9	1496.5	1507.6
27.5°	1384.9	1367.4	1329.1	1337.1	1348.3
30°	1187.3	1173.0	1145.9	1150.6	1165.0
32.5°	932.3	961.0	935.5	943.5	938.7
35°	710.8	706.0	717.2	702.8	709.2
37.5°	500.4	502.0	506.8	494.0	494.0
40°	310.8	318.7	323.5	317.1	315.6
42.5°	130.7	178.5	188.1	178.5	132.3
45°	17.5	52.6	105.2	62.2	20.7
47.5°	8.0	11.2	55.8	11.2	8.0
50°	8.0	8.0	22.3	8.0	8.0
52.5°	8.0	8.0	8.0	8.0	8.0
55°	8.0	8.0	8.0	8.0	8.0
57.5°	8.0	8.0	8.0	8.0	8.0
60°	6.4	6.4	6.4	6.4	6.4
62.5°	6.4	6.4	6.4	6.4	6.4
65°	4.8	6.4	6.4	6.4	4.8
67.5°	4.8	4.8	4.8	4.8	4.8
70°	4.8	4.8	4.8	4.8	4.8
72.5°	3.2	3.2	3.2	3.2	3.2
75°	3.2	3.2	3.2	3.2	3.2
77.5°	3.2	3.2	3.2	3.2	3.2
80°	1.6	1.6	1.6	1.6	1.6
82.5°	1.6	1.6	1.6	1.6	1.6
85°	1.6	1.6	1.6	1.6	1.6
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1318358

CATALOG NUMBER: P3SQAS20R609835D010 E3SQCD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)