

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMARK

Report Number: P980903

Luminaire Tested: **NFFLD-C25-7027-33**

Issue Date: 04/10/2025



**Test Information**

Test Method: LM-79-08  
Report Number: P980903  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 04/10/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMARK  
Catalog Number: NFFLD-C25-7027-33  
Description: NIGHT FALCON MEDIUM SIZE 90W 70CRI 2700K LED FIXTURE NEMA 3  
Light Source: (8) 2700K CCT, 70 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	10793 lumens	Max Intensity:	59043.8 candela
Efficiency:	N/A	Max Intensity Angle:	2°H x 2°V
Efficacy:	120.5 lumens/watt		
Luminous Opening:	Rectangular (W 0.75' x L: 0.38' x H: 0')		
Beam Angle (50%):	20.9°H x 20.7°V	Field Angle (10%):	45.3°H x 44.8°V
Beam Lumens:	4673.6 lumens	Field Lumens:	9520.4 lumens
Beam Efficiency:	43.3%	Field Efficiency:	88.2%

Input Watts (W): 89.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.99  
Total Harmonic Distortion (THDi): 6.32%  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

### Iso-Candela Plot

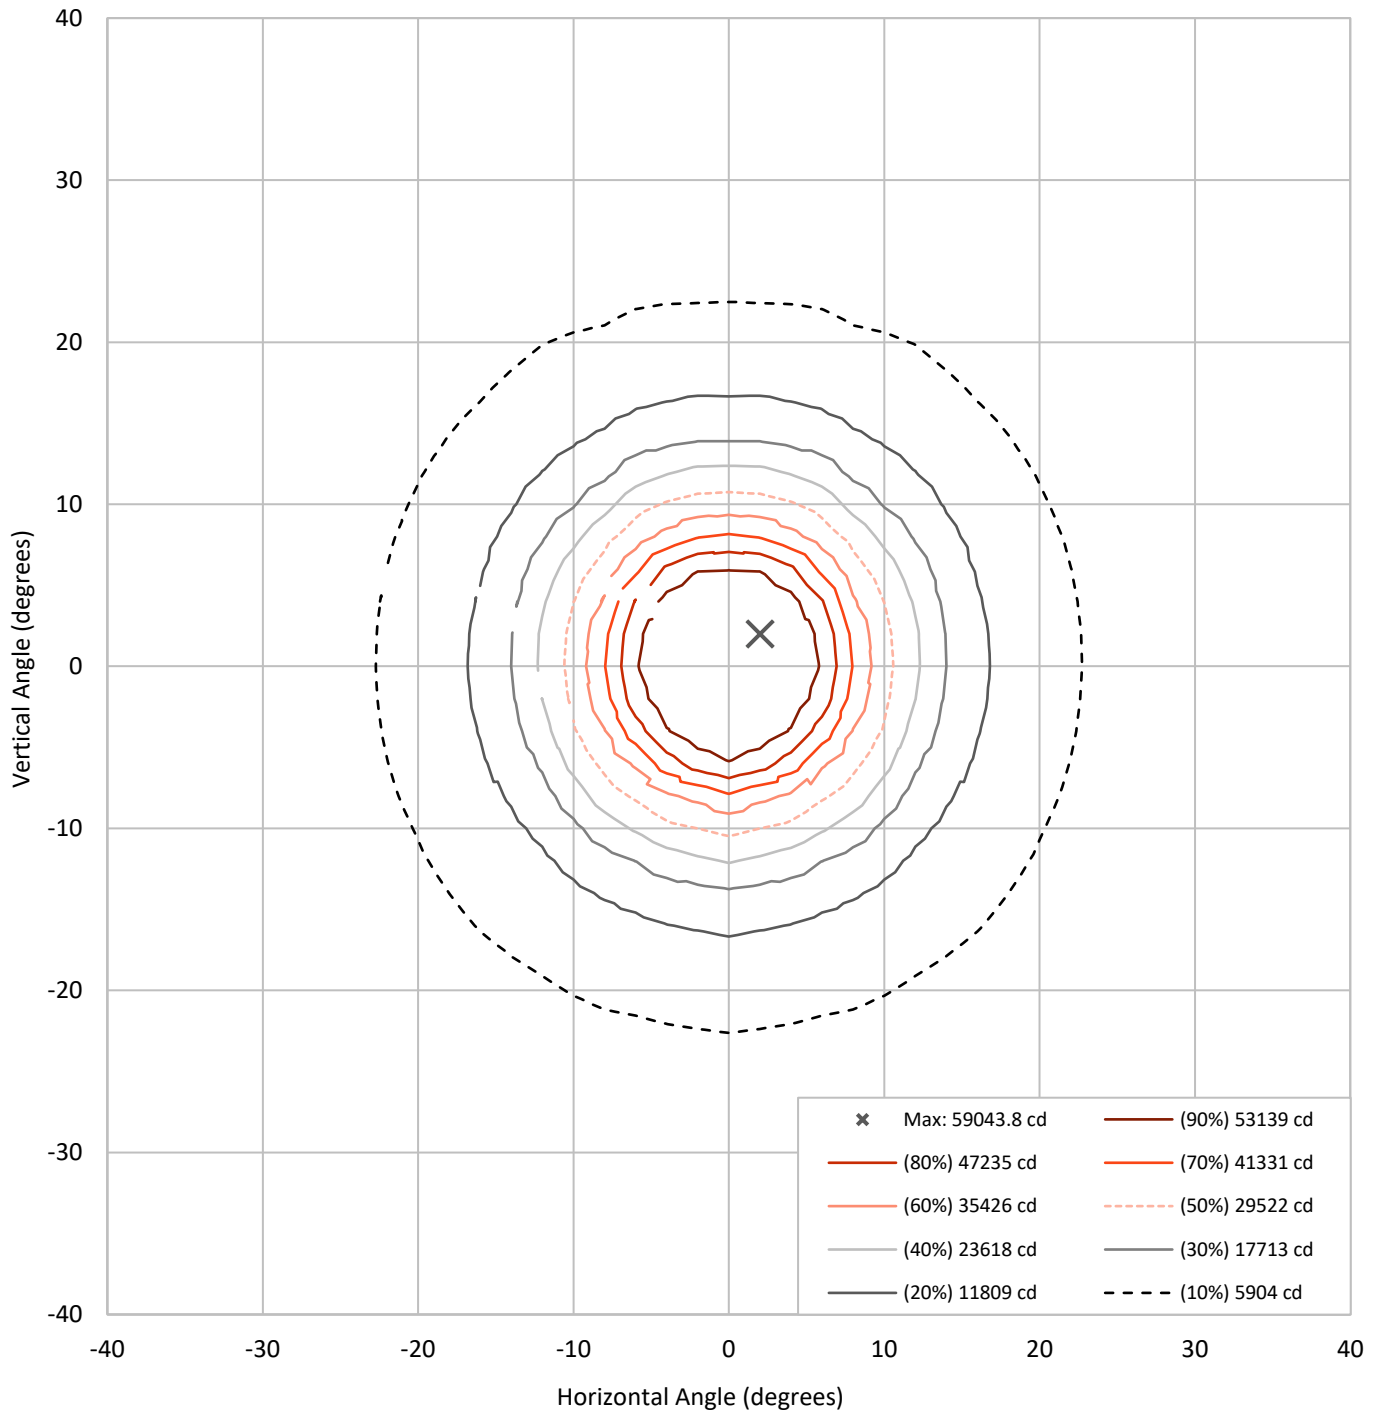




REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

### Lumen Table

90															
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70															
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30		0.0	0.0	0.0	0.0	0.0	0.7	2.9	2.9	0.7	0.0	0.0	0.0	0.0	
20	0.0	0.0	0.0	0.0	0.0	6.0	56.4	113.9	113.9	56.4	6.0	0.0	0.0	0.0	0.0
10		0.0	0.0	0.0	1.0	55.4	218.4	447.8	447.8	218.4	55.4	1.0	0.0	0.0	
0	0.0	0.0	0.0	0.0	4.8	110.8	437.1	1299.8	1299.8	437.1	110.8	4.8	0.0	0.0	0.0
-10		0.0	0.0	0.0	4.6	108.6	421.7	1252.2	1252.2	421.7	108.6	4.6	0.0	0.0	
-20	0.0	0.0	0.0	0.0	0.9	51.4	209.2	420.6	420.6	209.2	51.4	0.9	0.0	0.0	0.0
-30		0.0	0.0	0.0	0.0	4.8	52.6	111.3	111.3	52.6	4.8	0.0	0.0	0.0	
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.5	3.1	3.1	0.5	0.0	0.0	0.0	0.0	0.0
-50		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-90															

REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33


### Luminous Intensity Polar Plot

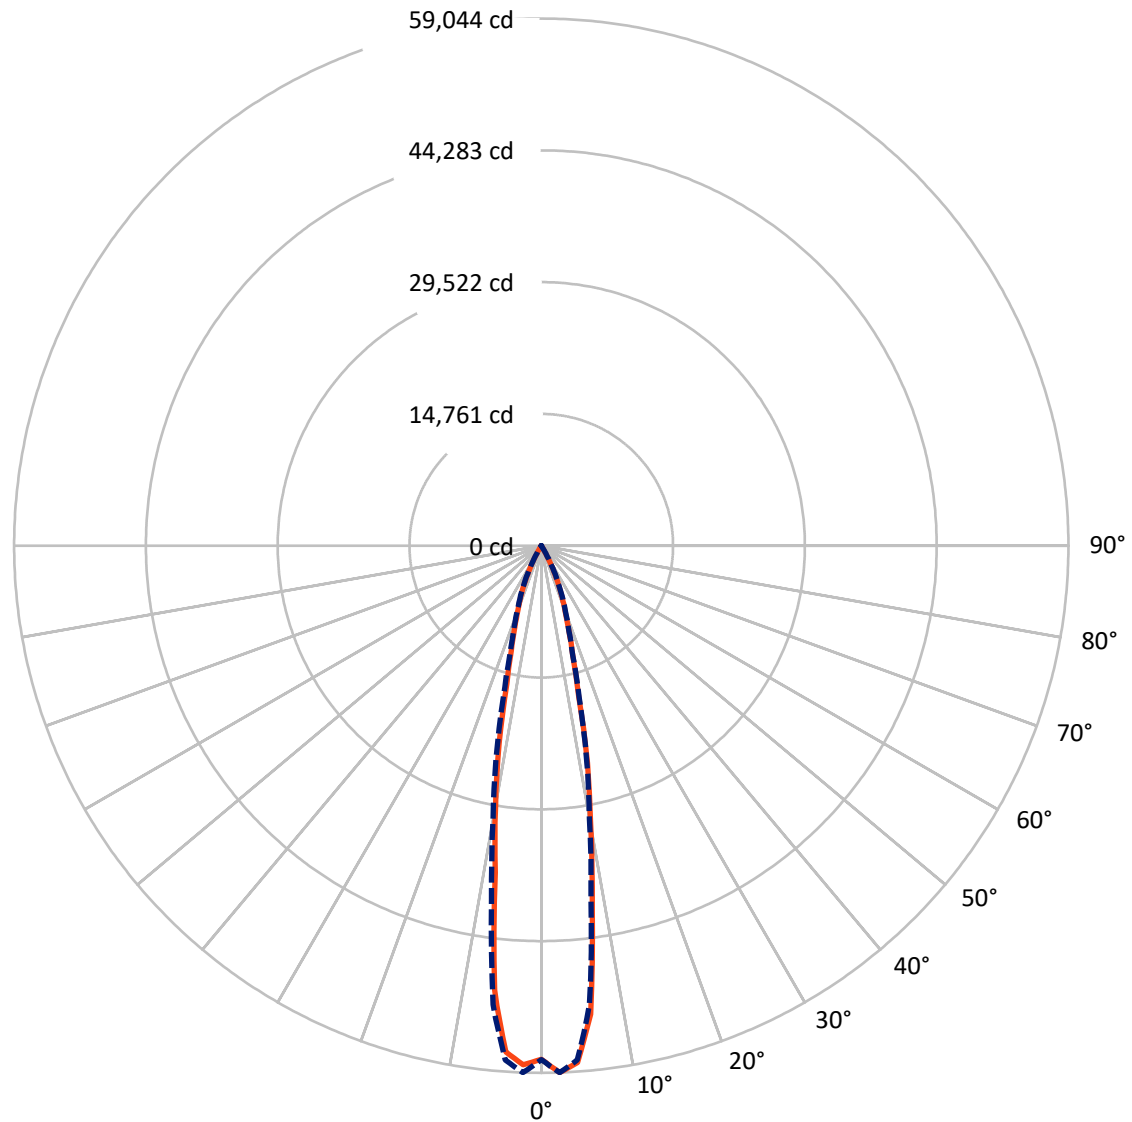

— Vertical Distribution Through 2-Deg      - - - Horizontal Distribution Through 2-Deg

REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

### Luminous Intensity Plot

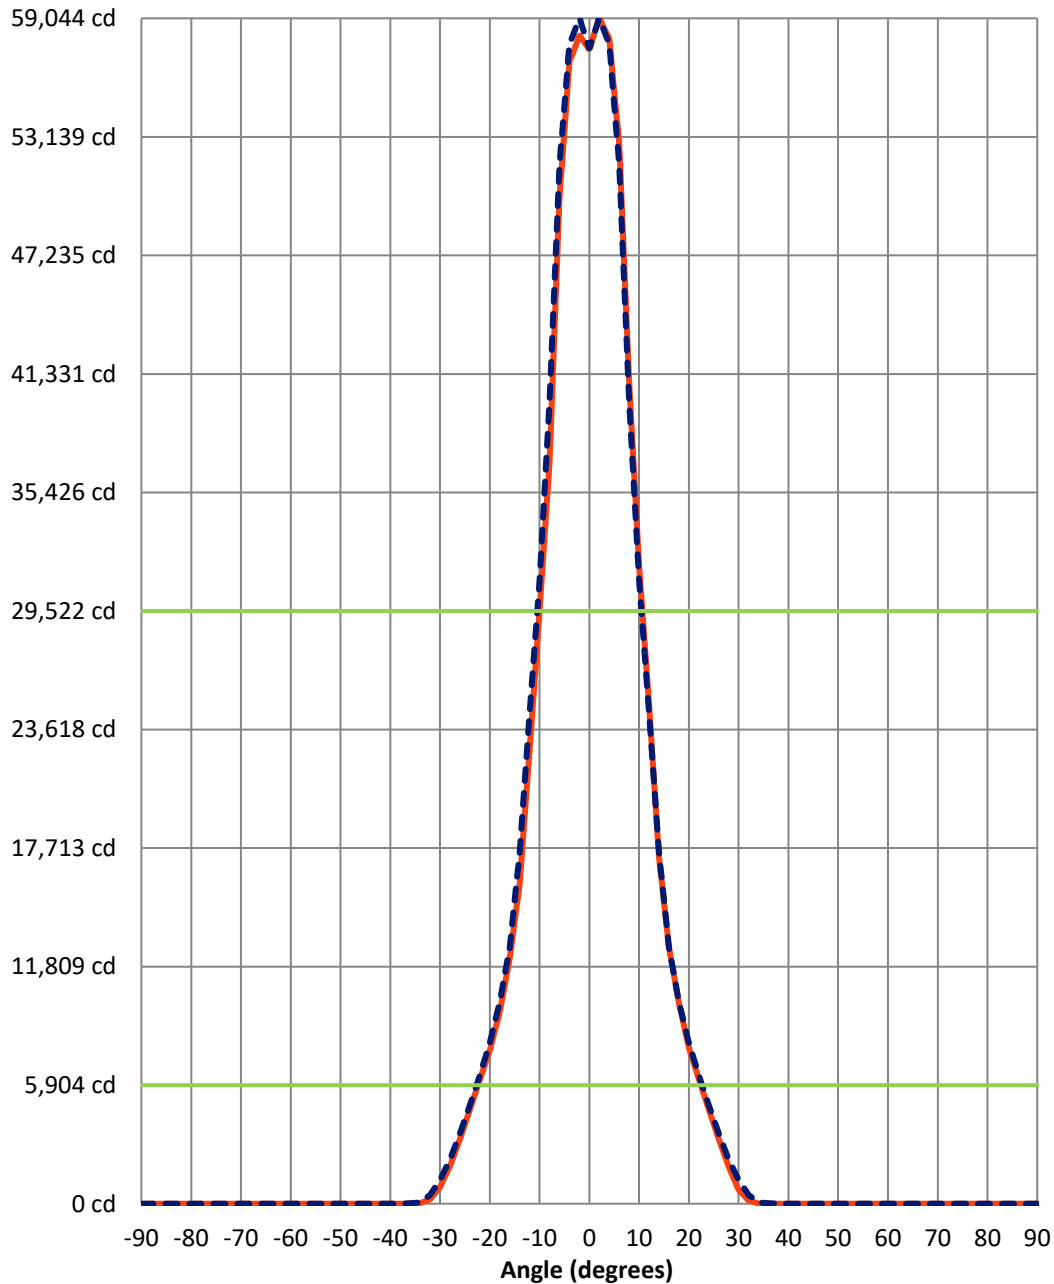

**Beam:**  
H Angle: 20.9°  
V Angle: 20.7°  
Lumens: 4673.6  
Efficiency: 43.3%

**Field:**  
H Angle: 45.3°  
V Angle: 44.8°  
Lumens: 9520.4  
Efficiency: 88.2%

**Spill:**  
Lumens: 1272.7  
Efficiency: 11.8%

— Vertical Distribution through 2-Deg  
- - Horizontal Distribution through 2-Deg



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

FIELD  
 BEAM

**CANDELA DISTRIBUTION:**

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	5.6	11.1	5.6	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	141.9	164.2	155.9	197.6	128.0	133.6	66.8	8.3	0.0	0.0	0.0
30°	651.2	693.0	673.5	759.8	509.3	523.2	375.7	186.5	83.5	22.3	0.0
28°	1809.0	1845.2	1764.5	1745.0	1330.3	1288.6	1046.5	637.3	367.4	183.7	47.3
26°	3206.1	3225.6	3150.5	3064.2	2502.0	2393.5	2040.0	1374.9	937.9	565.0	281.1
24°	4720.2	4703.5	4650.6	4483.6	3849.0	3657.0	3239.5	2418.5	1786.8	1210.7	759.8
22°	6275.9	6214.7	6167.4	5936.4	5257.3	4979.0	4519.8	3612.5	2810.9	2073.4	1452.8
20°	7837.3	7776.0	7684.2	7417.0	6615.5	6298.2	5811.1	4876.0	3940.9	3094.8	2273.8
18°	9949.6	10005.3	9754.8	9273.3	8201.8	7648.0	6994.0	6056.1	5056.9	4113.4	3161.6
16°	12730.0	12782.8	12229.0	11586.1	10116.6	9359.6	8343.8	7161.0	6081.1	5134.8	4091.2
14°	17311.0	17266.4	16197.7	14942.5	12640.9	11285.5	9983.0	8441.2	7074.7	6022.7	4920.5
12°	25089.8	24836.5	23066.5	20578.3	16178.2	13729.1	11853.3	9866.1	8118.3	6838.1	5658.1
10°	32142.2	31783.2	30079.9	27163.2	21672.1	17263.7	14079.8	11371.8	9276.1	7692.5	6303.8
8°	42116.9	40956.3	37215.8	32665.4	27552.8	22022.8	17135.6	13033.3	10369.9	8471.8	6904.9
6°	52937.6	52759.5	48373.3	39884.8	32053.1	26459.1	20350.1	14884.1	11374.6	9156.4	7397.5
4°	58245.0	58022.4	55094.5	47716.5	36200.0	29439.8	22941.2	16453.8	12209.5	9690.8	7756.5
2°	57565.9	59043.8	57741.3	51685.2	39976.7	31054.0	24433.0	17508.6	12768.9	10052.6	8023.7



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
0°	57237.5	57515.8	57925.0	52606.4	41056.5	31496.5	24666.7	17720.1	12933.1	10152.8	8065.5
-2°	58695.9	58175.4	56786.7	50533.0	39186.3	30747.9	23689.9	17029.9	12657.6	9974.7	7912.4
-4°	58089.2	56845.1	52737.2	44582.7	35148.0	28933.3	21468.9	15674.5	12034.2	9579.5	7623.0
-6°	52737.2	50065.4	44360.1	36302.9	31056.8	25426.5	18557.8	14004.6	11140.8	8995.0	7197.1
-8°	40536.1	36948.6	34468.9	30413.9	26539.8	20742.6	15521.4	12334.8	10119.4	8290.9	6704.5
-10°	31254.4	29545.5	27987.0	24346.7	20673.0	16420.4	12944.3	10756.7	9034.0	7514.4	6122.9
-12°	24073.9	22615.6	20767.6	17803.6	15574.3	13200.3	10920.9	9340.1	7984.8	6737.9	5502.2
-14°	16854.5	15947.2	15020.5	13473.1	12306.9	10823.5	9226.0	8012.6	7010.7	5908.6	4736.9
-16°	12713.3	12217.9	11683.5	10709.4	9999.7	8944.9	7753.8	6893.8	6089.5	5034.7	3910.3
-18°	10002.5	9554.4	9231.6	8627.7	8149.0	7372.5	6570.9	5844.5	5065.3	4016.0	2994.6
-20°	7876.2	7642.4	7369.7	6996.8	6726.8	6122.9	5363.1	4661.7	3943.7	2975.1	2112.4
-22°	6376.1	6184.1	5955.9	5594.1	5326.9	4764.7	4046.6	3512.3	2858.3	2015.0	1333.1
-24°	4873.2	4689.5	4489.2	4141.3	3882.4	3392.6	2783.1	2357.3	1848.0	1143.9	656.8
-26°	3403.7	3220.1	3058.6	2733.0	2518.7	2118.0	1658.7	1344.2	960.2	487.0	222.6
-28°	2048.4	1875.8	1767.3	1483.4	1333.1	1052.0	784.8	578.9	367.4	144.7	27.8
-30°	940.7	832.2	765.4	578.9	509.3	350.7	236.6	164.2	83.5	13.9	0.0
-32°	272.7	219.9	186.5	136.4	125.2	66.8	25.0	8.3	2.8	0.0	0.0
-34°	41.7	25.0	8.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	13.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	128.0	22.3	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	400.8	119.7	47.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	879.5	356.2	155.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	1500.1	796.0	378.5	39.0	22.3	0.0	0.0	0.0	0.0	0.0	0.0
18°	2209.8	1344.2	706.9	155.9	83.5	0.0	0.0	0.0	0.0	0.0	0.0
16°	2972.4	1945.4	1129.9	389.6	203.2	0.0	0.0	0.0	0.0	0.0	0.0
14°	3684.8	2557.7	1589.2	723.6	350.7	36.2	0.0	0.0	0.0	0.0	0.0
12°	4389.0	3158.8	2051.2	1071.5	528.8	94.6	0.0	0.0	0.0	0.0	0.0
10°	5009.6	3698.8	2485.3	1402.7	704.1	167.0	2.8	2.8	0.0	0.0	0.0
8°	5527.3	4152.4	2855.5	1692.1	871.1	258.8	19.5	8.3	0.0	0.0	0.0
6°	5939.2	4517.0	3158.8	1928.7	1013.1	339.5	36.2	13.9	0.0	0.0	0.0
4°	6225.8	4773.0	3381.5	2104.0	1121.6	403.6	50.1	22.3	0.0	0.0	0.0
2°	6401.2	4912.2	3503.9	2201.4	1182.8	442.5	61.2	25.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
0°	6448.5	4953.9	3537.3	2226.5	1202.3	456.4	64.0	27.8	0.0	0.0	0.0
-2°	6365.0	4887.1	3473.3	2170.8	1163.3	436.9	61.2	25.0	0.0	0.0	0.0
-4°	6164.6	4709.0	3306.3	2042.8	1082.6	389.6	50.1	22.3	0.0	0.0	0.0
-6°	5852.9	4425.2	3053.1	1842.4	957.4	320.1	33.4	13.9	0.0	0.0	0.0
-8°	5429.9	4038.3	2727.5	1583.6	801.5	236.6	16.7	8.3	0.0	0.0	0.0
-10°	4889.9	3548.5	2329.5	1283.0	631.8	150.3	2.8	0.0	0.0	0.0	0.0
-12°	4258.2	2980.7	1878.6	949.0	459.2	83.5	0.0	0.0	0.0	0.0	0.0
-14°	3542.9	2360.1	1402.7	598.4	289.4	30.6	0.0	0.0	0.0	0.0	0.0
-16°	2780.3	1728.3	949.0	272.7	144.7	0.0	0.0	0.0	0.0	0.0	0.0
-18°	2020.5	1124.4	562.2	91.8	50.1	0.0	0.0	0.0	0.0	0.0	0.0
-20°	1313.6	590.0	272.7	19.5	11.1	0.0	0.0	0.0	0.0	0.0	0.0
-22°	732.0	203.2	94.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	311.7	64.0	27.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	91.8	8.3	2.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	8.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
 CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	88°	90°
90°	0.0	0.0
88°	0.0	0.0
86°	0.0	0.0
84°	0.0	0.0
82°	0.0	0.0
80°	0.0	0.0
78°	0.0	0.0
76°	0.0	0.0
74°	0.0	0.0
72°	0.0	0.0
70°	0.0	0.0
68°	0.0	0.0
66°	0.0	0.0
64°	0.0	0.0
62°	0.0	0.0
60°	0.0	0.0
58°	0.0	0.0
56°	0.0	0.0
54°	0.0	0.0
52°	0.0	0.0
50°	0.0	0.0
48°	0.0	0.0
46°	0.0	0.0
44°	0.0	0.0
42°	0.0	0.0
40°	0.0	0.0
38°	0.0	0.0
36°	0.0	0.0
34°	0.0	0.0
32°	0.0	0.0
30°	0.0	0.0
28°	0.0	0.0
26°	0.0	0.0
24°	0.0	0.0
22°	0.0	0.0
20°	0.0	0.0
18°	0.0	0.0
16°	0.0	0.0
14°	0.0	0.0
12°	0.0	0.0
10°	0.0	0.0
8°	0.0	0.0
6°	0.0	0.0
4°	0.0	0.0
2°	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	88°	90°
0°	0.0	0.0
-2°	0.0	0.0
-4°	0.0	0.0
-6°	0.0	0.0
-8°	0.0	0.0
-10°	0.0	0.0
-12°	0.0	0.0
-14°	0.0	0.0
-16°	0.0	0.0
-18°	0.0	0.0
-20°	0.0	0.0
-22°	0.0	0.0
-24°	0.0	0.0
-26°	0.0	0.0
-28°	0.0	0.0
-30°	0.0	0.0
-32°	0.0	0.0
-34°	0.0	0.0
-36°	0.0	0.0
-38°	0.0	0.0
-40°	0.0	0.0
-42°	0.0	0.0
-44°	0.0	0.0
-46°	0.0	0.0
-48°	0.0	0.0
-50°	0.0	0.0
-52°	0.0	0.0
-54°	0.0	0.0
-56°	0.0	0.0
-58°	0.0	0.0
-60°	0.0	0.0
-62°	0.0	0.0
-64°	0.0	0.0
-66°	0.0	0.0
-68°	0.0	0.0
-70°	0.0	0.0
-72°	0.0	0.0
-74°	0.0	0.0
-76°	0.0	0.0
-78°	0.0	0.0
-80°	0.0	0.0
-82°	0.0	0.0
-84°	0.0	0.0
-86°	0.0	0.0
-88°	0.0	0.0



REPORT NUMBER: P980903  
CATALOG NUMBER: NFFLD-C25-7027-33

**CANDELA DISTRIBUTION (continued):**

	88°	90°
-90°	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Lumark

Report Number: SP1-2501-319-2

Test Date: 02/04/2025

Luminaire Tested: NFFLD-C25-7027-33

Data in this report applies to families of products including NFFLD-C25-7027-33


**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2501-319-2  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 02/06/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Lumark  
 Catalog Number: **NFFLD-C25-7027-33**  
 Description: LUMARK NIGHT FALCON 10500LM NEMA 3

**Spectral Parameters**

CCT (K): 2716  
 CIE u': 0.2616  
 CIE v': 0.5278  
 Duv: 0.0005  
 CIE x: 0.4595  
 CIE y: 0.4119  
 CIE z: 0.1286  
 Peak Wavelength (nm): 596  
 Dominant Wavelength (nm): 583  
 Purity: 61.57412  
 Rf: 77.1  
 Rg: 93.1

CRI (Ra):	71.8		
R1:	67.9	R9:	-37.4
R2:	84.8	R10:	67.9
R3:	93.3	R11:	63.5
R4:	67.0	R12:	63.1
R5:	68.4	R13:	71.2
R6:	81.2	R14:	96.5
R7:	74.3	R15:	58.2
R8:	37.8		

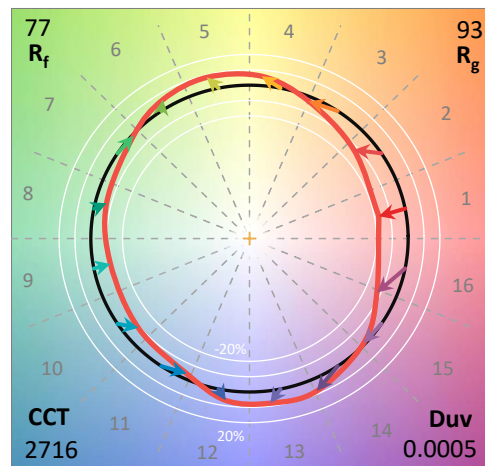

**Test Conditions**


Stabilization Time: 44M  
 Operation Time: 1H 44M  
 Sphere Temperature (°C): 24.9

REPORT NUMBER: SP1-2501-319-2


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	12/16/2024	6/16/2025
Power Meter	INXT2011004	1/21/2025	1/21/2026
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2501-319-2

CIE 1931 Chromaticity Diagram

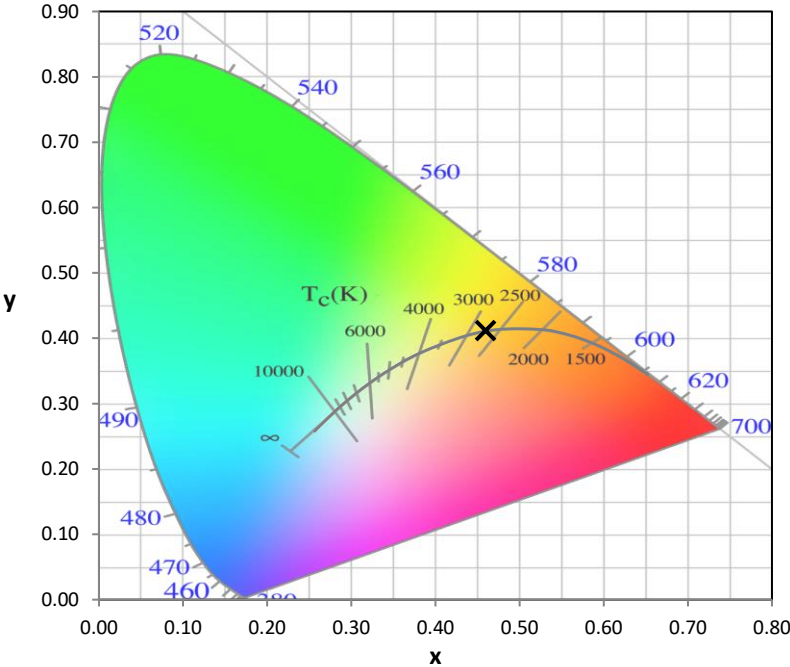


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

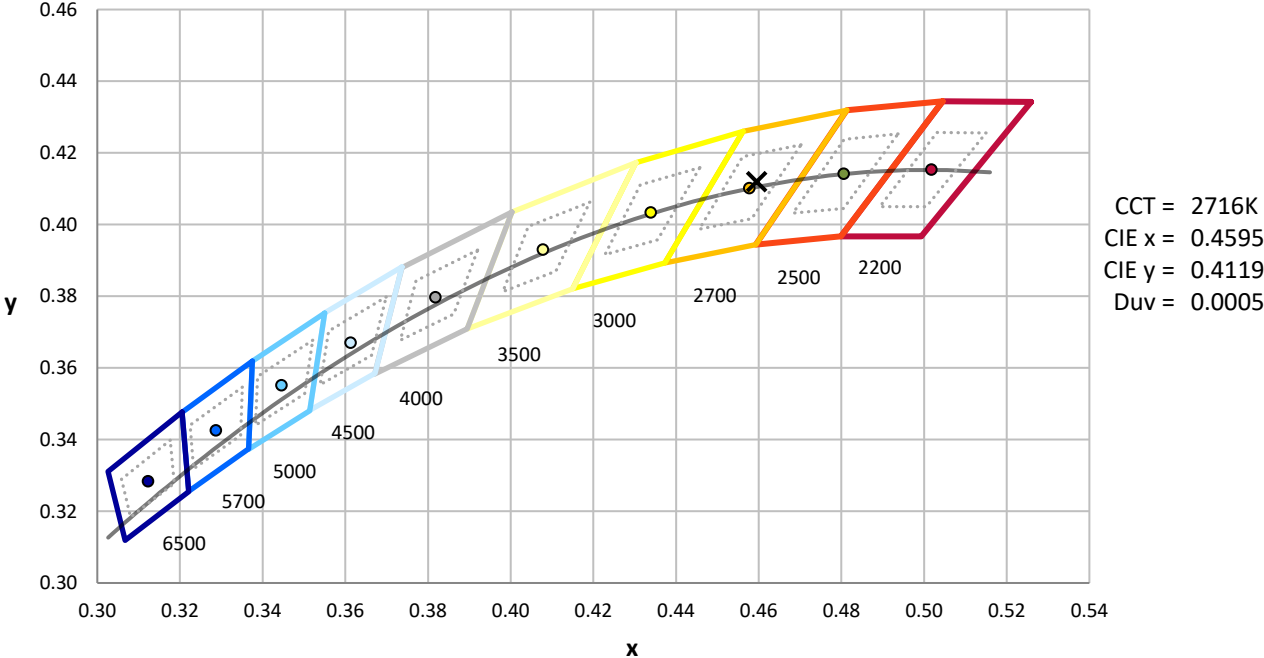

Point lies inside the ANSI 2700K 4-step quadrangle

REPORT NUMBER: SP1-2501-319-2

**Photopic Flux vs. Wavelength**

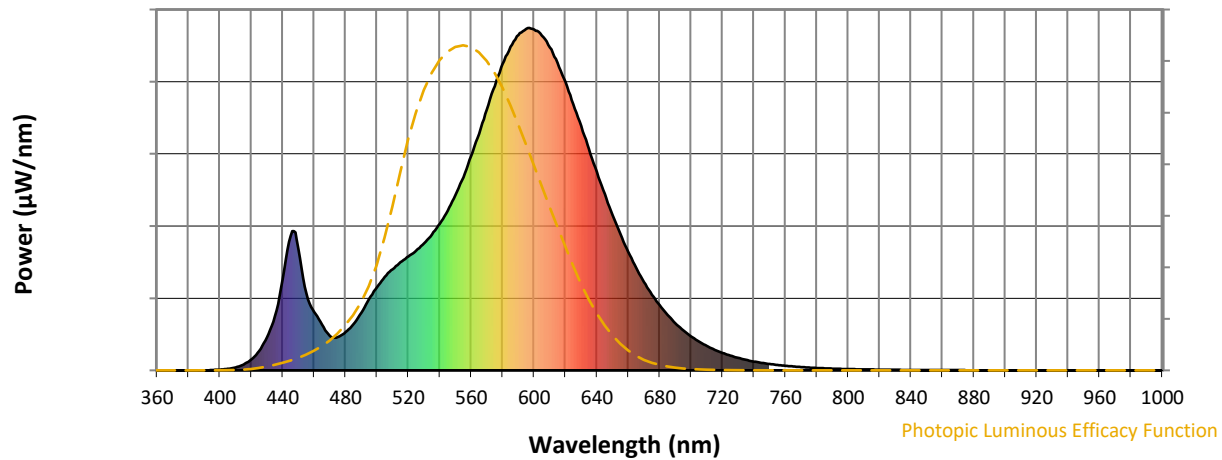


**Photopic Lumens: NR**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)
360	0	NR	490	168	NR	620	843	NR	750	19	NR	880	0	NR
365	0	NR	495	208	NR	625	777	NR	755	16	NR	885	0	NR
370	0	NR	500	243	NR	630	714	NR	760	13	NR	890	0	NR
375	0	NR	505	273	NR	635	647	NR	765	11	NR	895	0	NR
380	0	NR	510	296	NR	640	580	NR	770	10	NR	900	0	NR
385	0	NR	515	316	NR	645	515	NR	775	8	NR	905	0	NR
390	0	NR	520	333	NR	650	453	NR	780	7	NR	910	0	NR
395	1	NR	525	350	NR	655	398	NR	785	6	NR	915	0	NR
400	2	NR	530	371	NR	660	346	NR	790	5	NR	920	0	NR
405	4	NR	535	397	NR	665	300	NR	795	4	NR	925	0	NR
410	9	NR	540	429	NR	670	258	NR	800	4	NR	930	0	NR
415	17	NR	545	467	NR	675	221	NR	805	3	NR	935	0	NR
420	32	NR	550	513	NR	680	190	NR	810	3	NR	940	0	NR
425	57	NR	555	564	NR	685	162	NR	815	2	NR	945	0	NR
430	97	NR	560	627	NR	690	138	NR	820	2	NR	950	0	NR
435	159	NR	565	691	NR	695	117	NR	825	2	NR	955	0	NR
440	267	NR	570	762	NR	700	99	NR	830	2	NR	960	0	NR
445	393	NR	575	830	NR	705	84	NR	835	1	NR	965	0	NR
450	355	NR	580	895	NR	710	71	NR	840	1	NR	970	0	NR
455	226	NR	585	945	NR	715	60	NR	845	1	NR	975	0	NR
460	171	NR	590	980	NR	720	51	NR	850	1	NR	980	0	NR
465	134	NR	595	997	NR	725	43	NR	855	1	NR	985	0	NR
470	100	NR	600	996	NR	730	36	NR	860	1	NR	990	0	NR
475	97	NR	605	978	NR	735	31	NR	865	1	NR	995	0	NR
480	112	NR	610	943	NR	740	26	NR	870	1	NR	1000	0	NR
485	135	NR	615	898	NR	745	22	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-2

Scotopic Flux vs. Wavelength

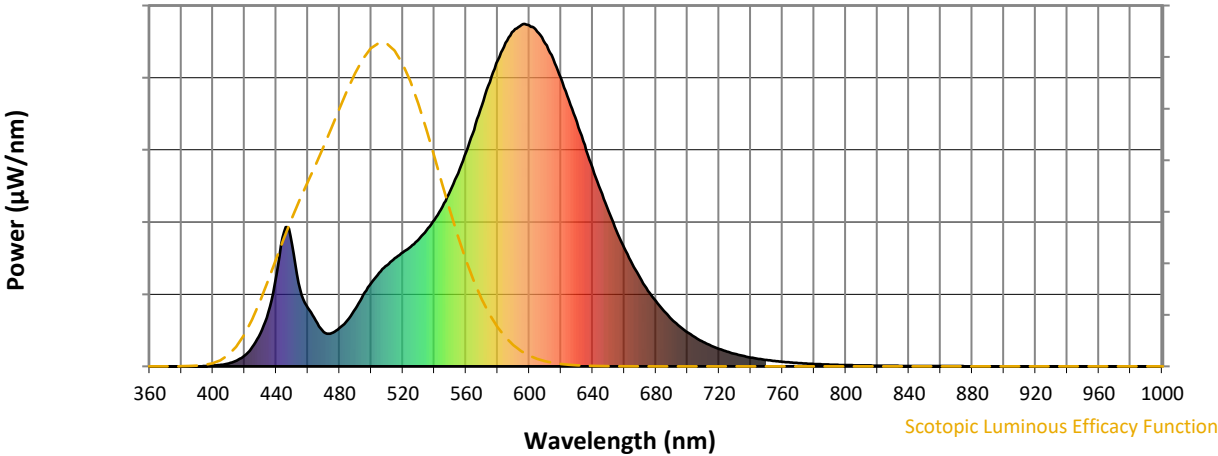


Scotopic Lumens: NR S/P: 1.13

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	168	NR	620	843	NR	750	19	NR	880	0	NR
365	0	NR	495	208	NR	625	777	NR	755	16	NR	885	0	NR
370	0	NR	500	243	NR	630	714	NR	760	13	NR	890	0	NR
375	0	NR	505	273	NR	635	647	NR	765	11	NR	895	0	NR
380	0	NR	510	296	NR	640	580	NR	770	10	NR	900	0	NR
385	0	NR	515	316	NR	645	515	NR	775	8	NR	905	0	NR
390	0	NR	520	333	NR	650	453	NR	780	7	NR	910	0	NR
395	1	NR	525	350	NR	655	398	NR	785	6	NR	915	0	NR
400	2	NR	530	371	NR	660	346	NR	790	5	NR	920	0	NR
405	4	NR	535	397	NR	665	300	NR	795	4	NR	925	0	NR
410	9	NR	540	429	NR	670	258	NR	800	4	NR	930	0	NR
415	17	NR	545	467	NR	675	221	NR	805	3	NR	935	0	NR
420	32	NR	550	513	NR	680	190	NR	810	3	NR	940	0	NR
425	57	NR	555	564	NR	685	162	NR	815	2	NR	945	0	NR
430	97	NR	560	627	NR	690	138	NR	820	2	NR	950	0	NR
435	159	NR	565	691	NR	695	117	NR	825	2	NR	955	0	NR
440	267	NR	570	762	NR	700	99	NR	830	2	NR	960	0	NR
445	393	NR	575	830	NR	705	84	NR	835	1	NR	965	0	NR
450	355	NR	580	895	NR	710	71	NR	840	1	NR	970	0	NR
455	226	NR	585	945	NR	715	60	NR	845	1	NR	975	0	NR
460	171	NR	590	980	NR	720	51	NR	850	1	NR	980	0	NR
465	134	NR	595	997	NR	725	43	NR	855	1	NR	985	0	NR
470	100	NR	600	996	NR	730	36	NR	860	1	NR	990	0	NR
475	97	NR	605	978	NR	735	31	NR	865	1	NR	995	0	NR
480	112	NR	610	943	NR	740	26	NR	870	1	NR	1000	0	NR
485	135	NR	615	898	NR	745	22	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-2

**Melanopic Flux vs. Wavelength**

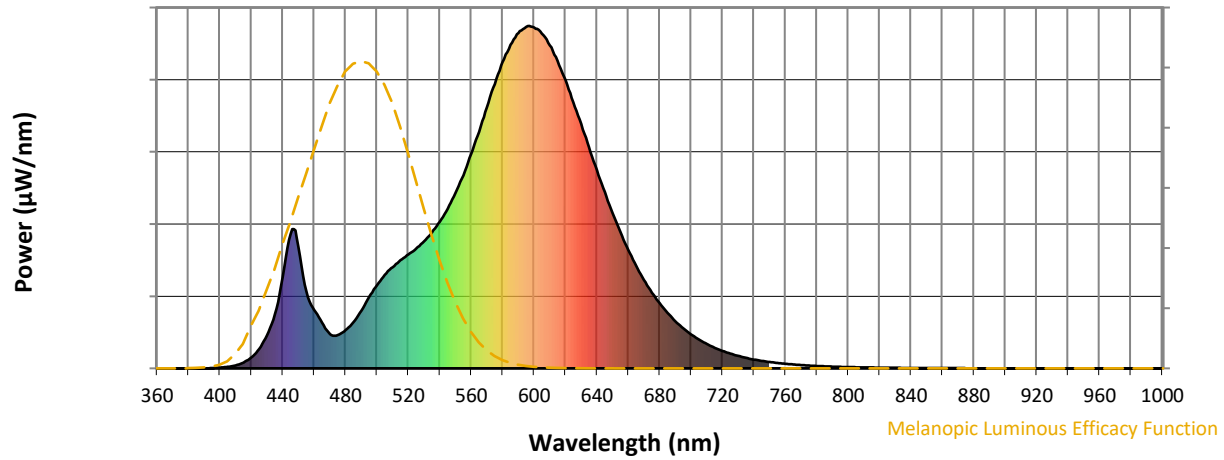


**Melanopic Lumens: NR**

**M/P: 2.06**





λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	168	NR	620	843	NR	750	19	NR	880	0	NR
365	0	NR	495	208	NR	625	777	NR	755	16	NR	885	0	NR
370	0	NR	500	243	NR	630	714	NR	760	13	NR	890	0	NR
375	0	NR	505	273	NR	635	647	NR	765	11	NR	895	0	NR
380	0	NR	510	296	NR	640	580	NR	770	10	NR	900	0	NR
385	0	NR	515	316	NR	645	515	NR	775	8	NR	905	0	NR
390	0	NR	520	333	NR	650	453	NR	780	7	NR	910	0	NR
395	1	NR	525	350	NR	655	398	NR	785	6	NR	915	0	NR
400	2	NR	530	371	NR	660	346	NR	790	5	NR	920	0	NR
405	4	NR	535	397	NR	665	300	NR	795	4	NR	925	0	NR
410	9	NR	540	429	NR	670	258	NR	800	4	NR	930	0	NR
415	17	NR	545	467	NR	675	221	NR	805	3	NR	935	0	NR
420	32	NR	550	513	NR	680	190	NR	810	3	NR	940	0	NR
425	57	NR	555	564	NR	685	162	NR	815	2	NR	945	0	NR
430	97	NR	560	627	NR	690	138	NR	820	2	NR	950	0	NR
435	159	NR	565	691	NR	695	117	NR	825	2	NR	955	0	NR
440	267	NR	570	762	NR	700	99	NR	830	2	NR	960	0	NR
445	393	NR	575	830	NR	705	84	NR	835	1	NR	965	0	NR
450	355	NR	580	895	NR	710	71	NR	840	1	NR	970	0	NR
455	226	NR	585	945	NR	715	60	NR	845	1	NR	975	0	NR
460	171	NR	590	980	NR	720	51	NR	850	1	NR	980	0	NR
465	134	NR	595	997	NR	725	43	NR	855	1	NR	985	0	NR
470	100	NR	600	996	NR	730	36	NR	860	1	NR	990	0	NR
475	97	NR	605	978	NR	735	31	NR	865	1	NR	995	0	NR
480	112	NR	610	943	NR	740	26	NR	870	1	NR	1000	0	NR
485	135	NR	615	898	NR	745	22	NR	875	0	NR			

**Summary**

$R_f = 77.1$   
 $R_g = 93.1$   
 $CIE R_a = 71.8$   
 $R_9 = -37.4$

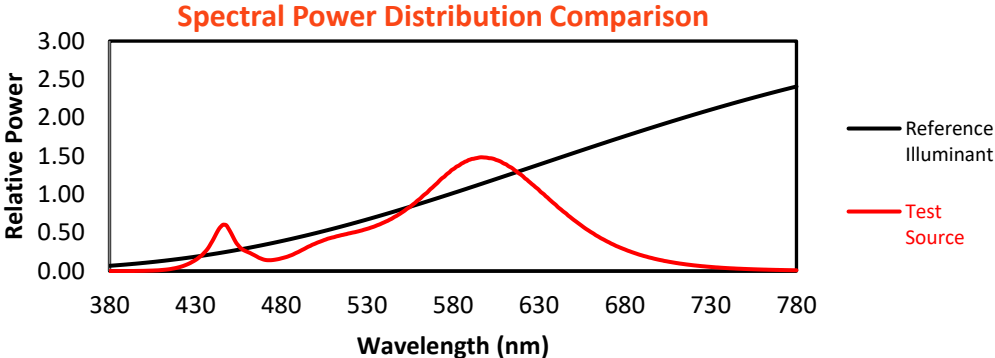


**Color Vector Graphics**

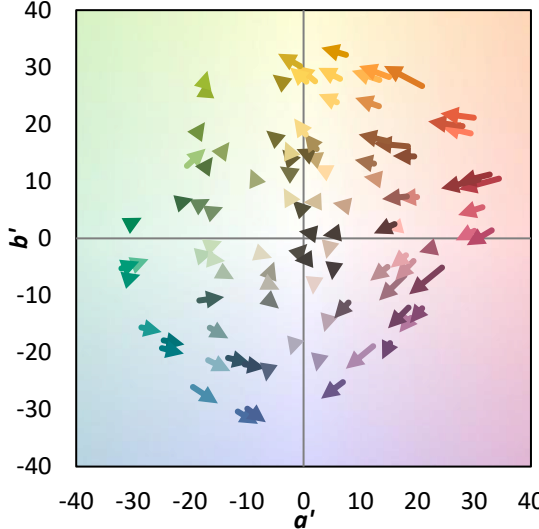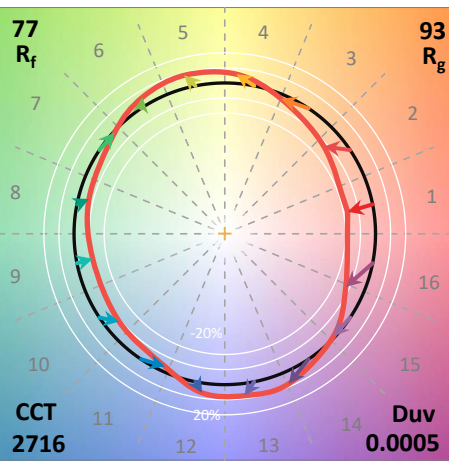
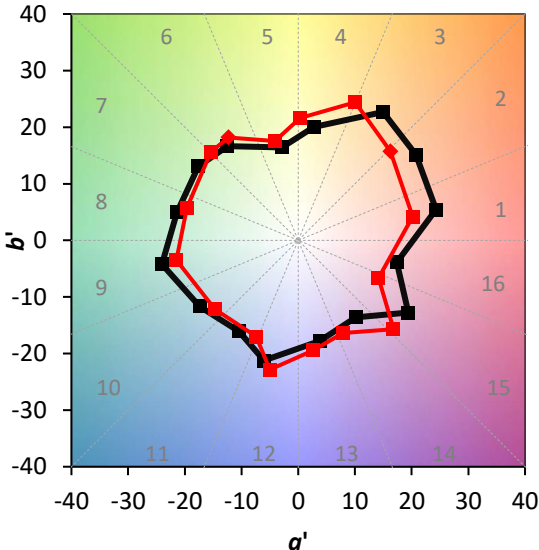
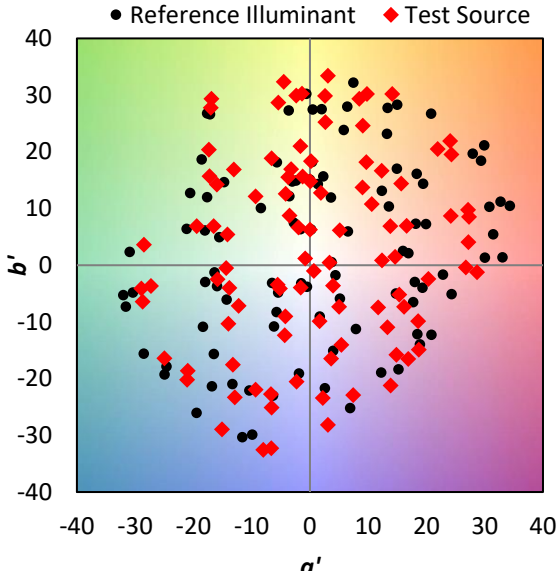


**Individual Sample Fidelity Index ( $R_{f,i}$ )**



CES01 = 86	CES26 = 71	CES51 = 88	CES76 = 70
CES02 = 63	CES27 = 90	CES52 = 86	CES77 = 82
CES03 = 31	CES28 = 91	CES53 = 80	CES78 = 72
CES04 = 71	CES29 = 71	CES54 = 86	CES79 = 88
CES05 = 50	CES30 = 77	CES55 = 85	CES80 = 87
CES06 = 52	CES31 = 74	CES56 = 77	CES81 = 65
CES07 = 42	CES32 = 70	CES57 = 76	CES82 = 94
CES08 = 41	CES33 = 77	CES58 = 78	CES83 = 90
CES09 = 29	CES34 = 84	CES59 = 85	CES84 = 90
CES10 = 77	CES35 = 92	CES60 = 93	CES85 = 74
CES11 = 60	CES36 = 98	CES61 = 84	CES86 = 56
CES12 = 66	CES37 = 91	CES62 = 94	CES87 = 78
CES13 = 43	CES38 = 85	CES63 = 79	CES88 = 77
CES14 = 74	CES39 = 96	CES64 = 74	CES89 = 65
CES15 = 72	CES40 = 93	CES65 = 70	CES90 = 77
CES16 = 48	CES41 = 90	CES66 = 73	CES91 = 87
CES17 = 51	CES42 = 92	CES67 = 71	CES92 = 56
CES18 = 57	CES43 = 82	CES68 = 74	CES93 = 73
CES19 = 73	CES44 = 99	CES69 = 83	CES94 = 48
CES20 = 67	CES45 = 86	CES70 = 70	CES95 = 68
CES21 = 87	CES46 = 81	CES71 = 72	CES96 = 76
CES22 = 80	CES47 = 83	CES72 = 89	CES97 = 81
CES23 = 92	CES48 = 70	CES73 = 64	CES98 = 75
CES24 = 91	CES49 = 81	CES74 = 92	CES99 = 63
CES25 = 73	CES50 = 87	CES75 = 75	

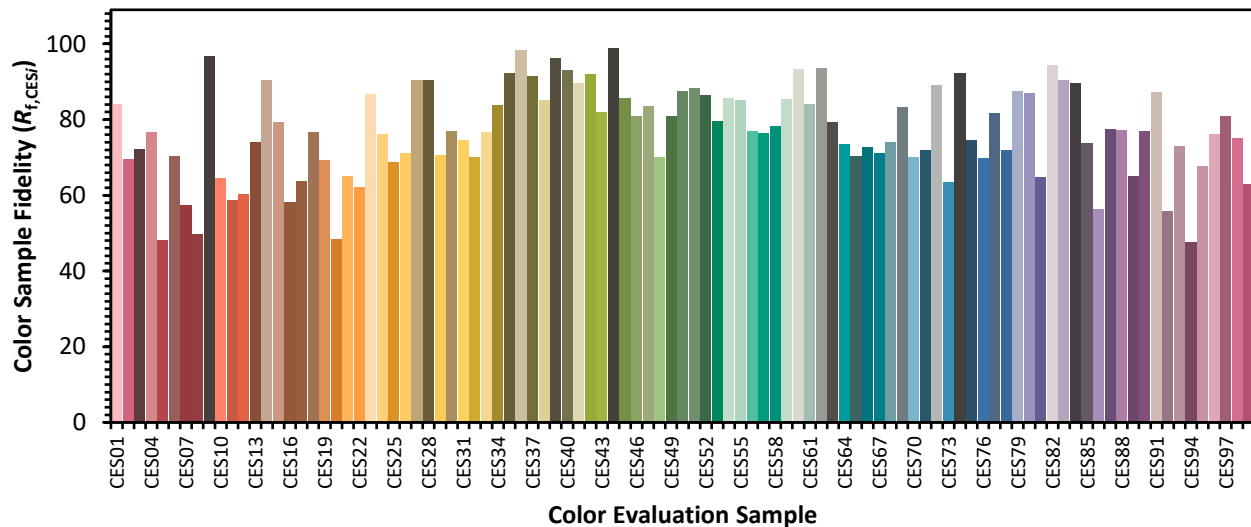

Color Rendition by Hue-Angle Bin

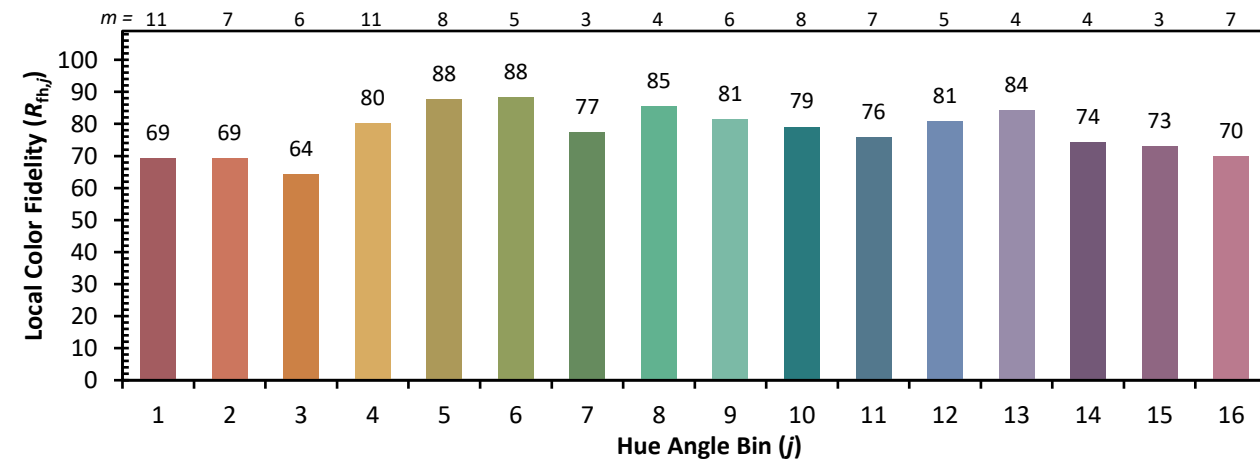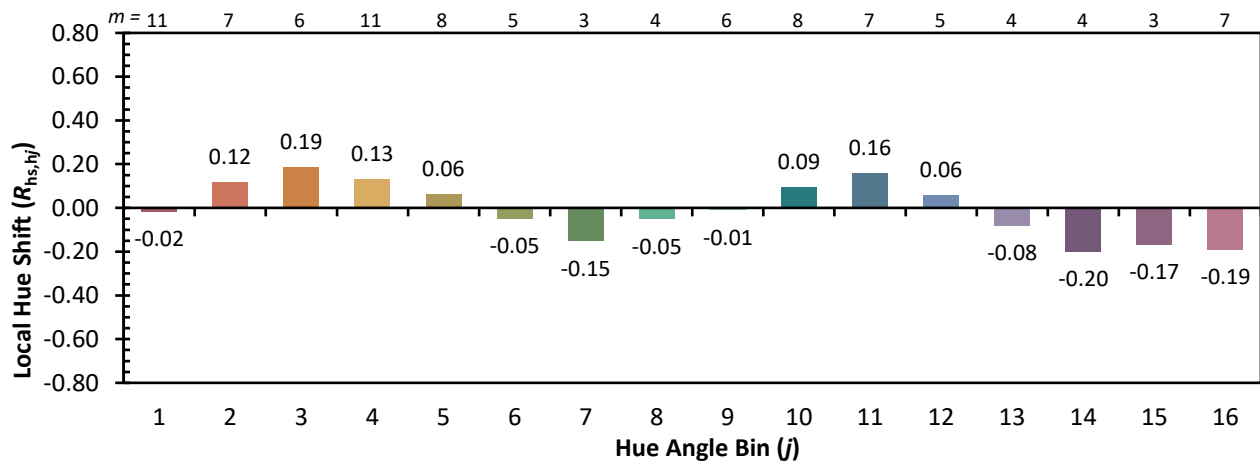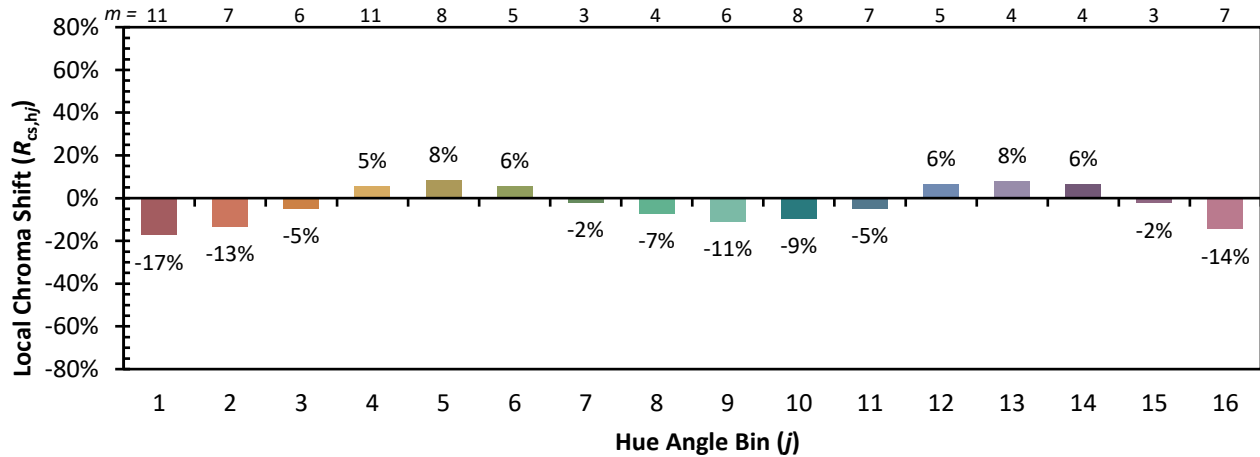

Measure Comparisons

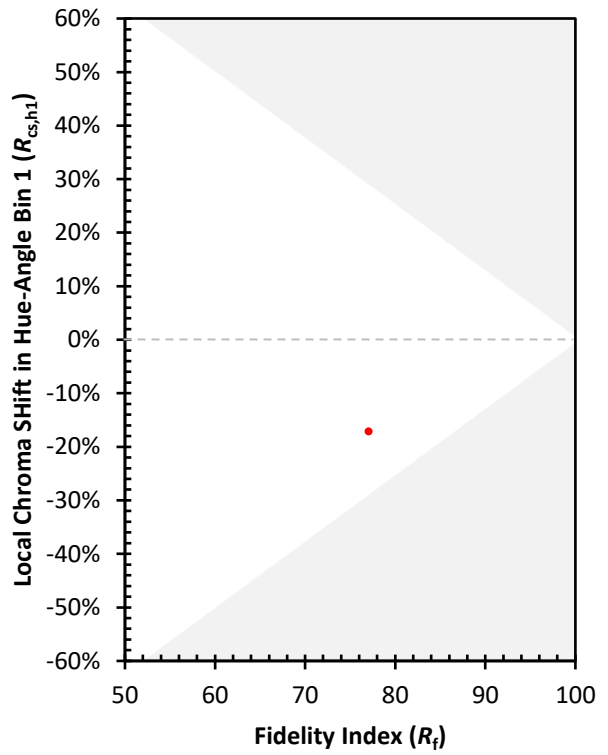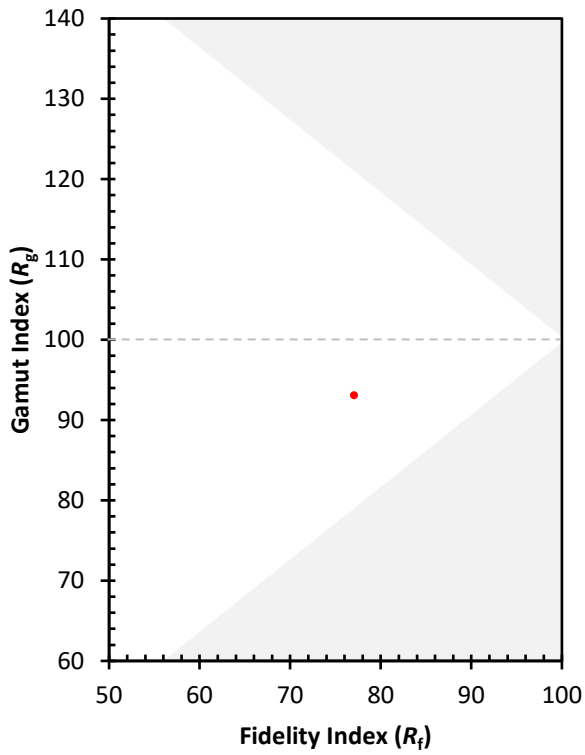

(END OF REPORT)