

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMARK

Report Number: P980929

Luminaire Tested: **NFFLD-L-C75-7060-33**

Issue Date: 04/10/2025



Test Information

Test Method: LM-79-08
Report Number: P980929
Test Lab: INNOVATION CENTER(G2)
Issue Date: 04/10/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMARK
Catalog Number: NFFLD-L-C75-7060-33
Description: NIGHT FALCON LARGE SIZE 240W 70CRI 5700K LED FIXTURE NEMA 3
Light Source: (16) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER


Summary

Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	31514.1 lumens	Max Intensity:	172399.3 candela
Efficiency:	N/A	Max Intensity Angle:	2°H x 2°V
Efficacy:	130.9 lumens/watt		
Luminous Opening:	Rectangular (W 0.75' x L: 1.1' x H: 0')		
Beam Angle (50%):	20.9°H x 20.7°V	Field Angle (10%):	45.3°H x 44.8°V
Beam Lumens:	13646.4 lumens	Field Lumens:	27798.1 lumens
Beam Efficiency:	43.3%	Field Efficiency:	88.2%

Input Watts (W): 240.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.99
Total Harmonic Distortion (THDi): 4.60%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

REPORT NUMBER: P980929
CATALOG NUMBER: NFFLD-L-C75-7060-33

Iso-Candela Plot

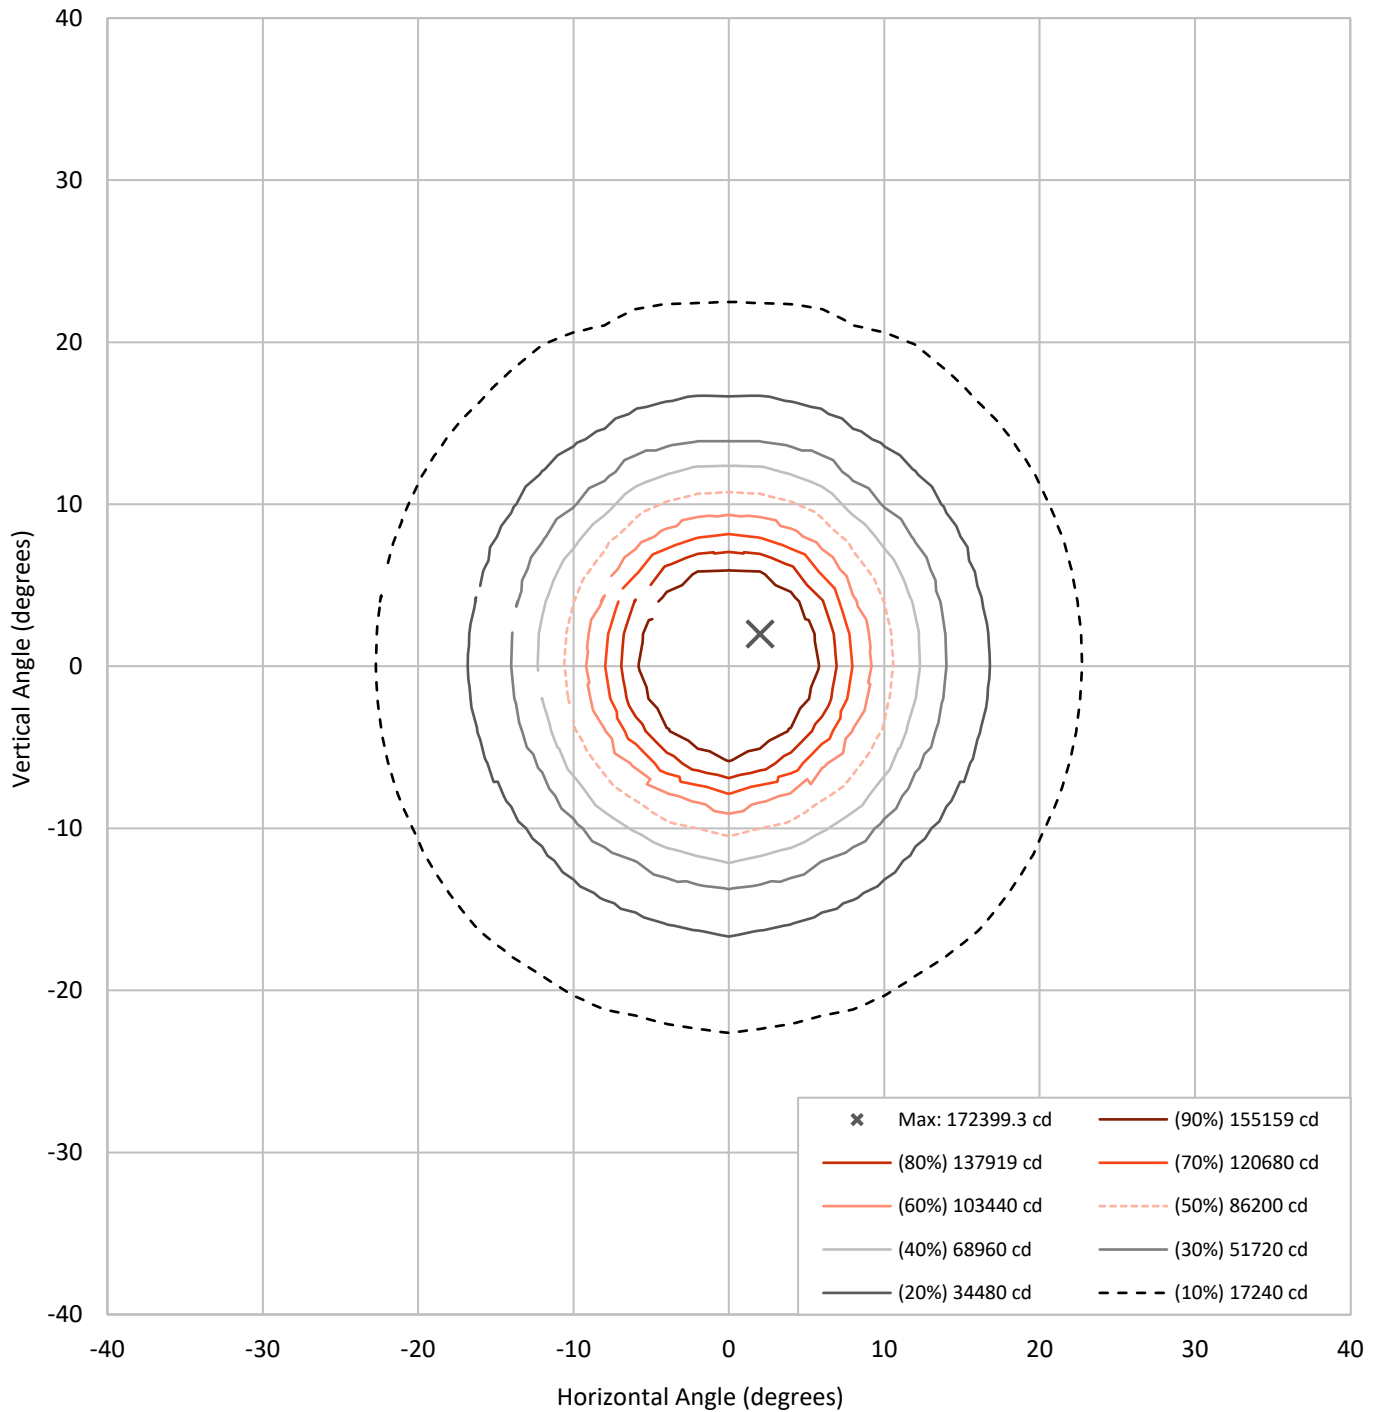




REPORT NUMBER: P980929
 CATALOG NUMBER: NFFLD-L-C75-7060-33

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40		0.0	0.0	0.0	0.0	0.0	2.1	8.6	8.6	2.1	0.0	0.0	0.0	0.0	0.0		
30	0.0	0.0	0.0	0.0	0.0	17.5	164.6	332.7	332.7	164.6	17.5	0.0	0.0	0.0	0.0	0.0	
20		0.0	0.0	0.0	3.0	161.8	637.6	1307.6	1307.6	637.6	161.8	3.0	0.0	0.0	0.0		
10	0.0	0.0	0.0	0.0	14.0	323.4	1276.3	3795.2	3795.2	1276.3	323.4	14.0	0.0	0.0	0.0	0.0	
0		0.0	0.0	0.0	13.4	317.1	1231.3	3656.1	3656.1	1231.3	317.1	13.4	0.0	0.0	0.0		
-10	0.0	0.0	0.0	0.0	2.5	149.9	610.9	1228.1	1228.1	610.9	149.9	2.5	0.0	0.0	0.0	0.0	
-20		0.0	0.0	0.0	0.0	14.1	153.6	325.1	325.1	153.6	14.1	0.0	0.0	0.0	0.0		
-30	0.0	0.0	0.0	0.0	0.0	1.4	9.1	9.1	1.4	0.0	0.0	0.0	0.0	0.0	0.0		
-40		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

REPORT NUMBER: P980929
CATALOG NUMBER: NFFLD-L-C75-7060-33


Luminous Intensity Polar Plot

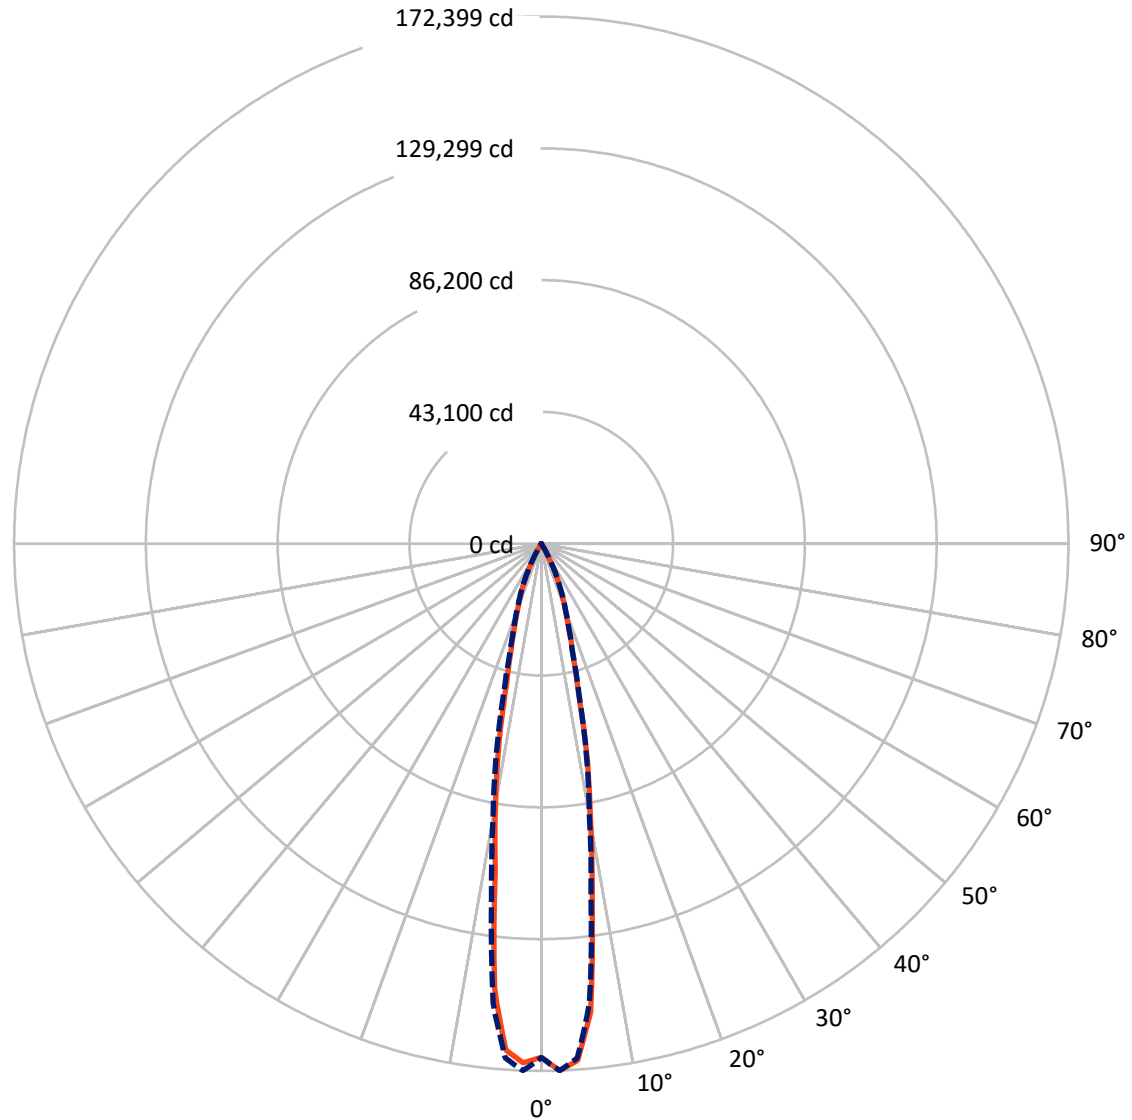

— Vertical Distribution Through 2-Deg - - - Horizontal Distribution Through 2-Deg

REPORT NUMBER: P980929
 CATALOG NUMBER: NFFLD-L-C75-7060-33

Luminous Intensity Plot

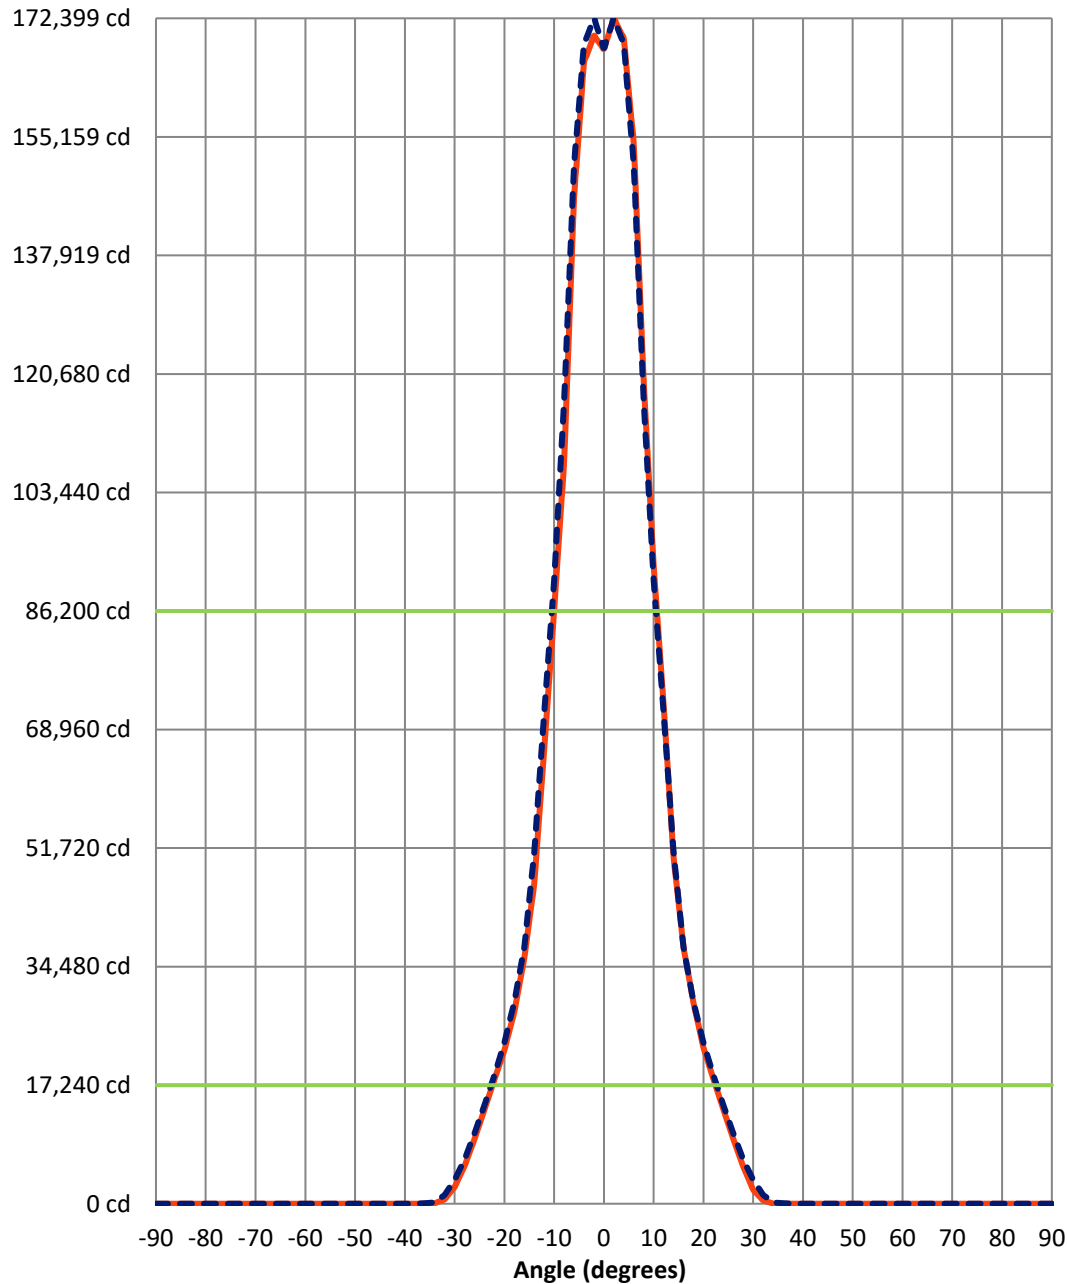

Beam:
 H Angle: 20.9°
 V Angle: 20.7°
 Lumens: 13646.4
 Efficiency: 43.3%

Field:
 H Angle: 45.3°
 V Angle: 44.8°
 Lumens: 27798.1
 Efficiency: 88.2%

Spill:
 Lumens: 3716
 Efficiency: 11.8%

- Vertical Distribution through 2-Deg
- - - Horizontal Distribution through 2-Deg



REPORT NUMBER: P980929
 CATALOG NUMBER: NFFLD-L-C75-7060-33

FIELD
 BEAM

CANDELA DISTRIBUTION:

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	16.3	32.5	16.3	16.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	414.4	479.5	455.1	577.0	373.8	390.1	195.0	24.4	0.0	0.0	0.0
30°	1901.6	2023.4	1966.6	2218.5	1487.1	1527.7	1097.0	544.5	243.8	65.0	0.0
28°	5282.1	5387.7	5152.1	5095.2	3884.4	3762.5	3055.5	1860.9	1072.7	536.3	138.1
26°	9361.5	9418.4	9199.0	8947.0	7305.5	6988.6	5956.6	4014.4	2738.6	1649.6	820.8
24°	13782.2	13733.4	13579.0	13091.5	11238.7	10677.9	9459.0	7061.7	5217.1	3534.9	2218.5
22°	18324.8	18146.0	18007.9	17333.4	15350.6	14537.9	13197.1	10547.9	8207.6	6054.1	4241.9
20°	22883.6	22704.9	22436.7	21656.6	19316.2	18389.8	16967.7	14237.3	11506.8	9036.4	6639.2
18°	29051.5	29214.0	28482.7	27076.8	23948.2	22331.0	20421.4	17682.8	14765.5	12010.7	9231.5
16°	37169.7	37324.1	35706.9	33829.8	29539.1	27328.7	24362.6	20908.9	17755.9	14993.0	11945.6
14°	50545.5	50415.5	47295.0	43630.1	36909.6	32952.1	29149.0	24647.0	20657.0	17585.3	14367.3
12°	73258.5	72519.0	67350.7	60085.8	47238.1	40087.0	34609.9	28807.7	23704.4	19966.3	16520.8
10°	93850.5	92802.2	87829.0	79312.6	63279.4	50407.4	41110.9	33204.0	27084.9	22461.1	18406.0
8°	122975.2	119586.5	108664.8	95378.3	80450.3	64303.3	50033.6	38055.4	30278.6	24736.4	20161.3
6°	154570.2	154050.1	141243.1	116457.9	93590.5	77256.7	59419.4	43459.4	33212.2	26735.5	21599.7
4°	170067.0	169416.9	160868.1	139325.3	105698.7	85959.9	66985.0	48042.6	35650.0	28295.7	22648.0
2°	168084.2	172399.3	168596.2	150913.4	116726.0	90673.2	71340.7	51122.5	37283.4	29352.2	23428.1



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
0°	167125.3	167937.9	169132.5	153603.2	119879.0	91965.2	72023.3	51740.1	37762.9	29644.7	23550.0
-2°	171383.5	169863.9	165808.8	147549.1	114418.2	89779.3	69171.0	49724.8	36958.4	29124.6	23103.0
-4°	169612.0	165979.5	153985.1	130175.1	102626.9	84480.9	62686.2	45767.3	35138.1	27970.7	22257.9
-6°	153985.1	146183.9	129525.0	105999.3	90681.3	74241.8	54186.1	40891.5	32529.5	26264.2	21014.6
-8°	118359.4	107884.6	100644.1	88804.1	77492.3	60565.2	45320.3	36015.7	29547.2	24208.2	19576.2
-10°	91258.3	86268.7	81718.0	71088.8	60362.1	47945.1	37795.4	31408.1	26377.9	21941.0	17877.8
-12°	70292.4	66034.2	60638.4	51983.9	45474.7	38543.0	31887.6	27271.8	23314.3	19673.8	16065.7
-14°	49212.8	46563.6	43857.6	39339.4	35934.5	31603.1	26938.7	23395.6	20470.1	17252.1	13830.9
-16°	37120.9	35674.4	34114.2	31270.0	29197.8	26117.9	22639.8	20128.8	17780.3	14700.5	11417.4
-18°	29205.9	27897.6	26954.9	25191.5	23793.8	21526.5	19186.2	17065.2	14789.9	11726.2	8743.9
-20°	22997.4	22314.8	21518.4	20429.5	19641.2	17877.8	15659.4	13611.5	11515.0	8687.0	6167.9
-22°	18617.3	18056.6	17390.3	16333.8	15553.7	13912.2	11815.6	10255.4	8345.7	5883.4	3892.5
-24°	14229.1	13692.8	13107.7	12091.9	11336.2	9905.9	8126.3	6883.0	5395.9	3339.9	1917.8
-26°	9938.5	9402.1	8930.8	7980.0	7354.3	6184.1	4843.3	3925.0	2803.6	1422.1	650.1
-28°	5981.0	5477.1	5160.2	4331.3	3892.5	3071.7	2291.6	1690.3	1072.7	422.6	81.3
-30°	2746.7	2429.8	2234.7	1690.3	1487.1	1023.9	690.7	479.5	243.8	40.6	0.0
-32°	796.4	642.0	544.5	398.2	365.7	195.0	73.1	24.4	8.1	0.0	0.0
-34°	121.9	73.1	24.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	40.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	373.8	65.0	16.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	1170.2	349.4	138.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	2567.9	1040.2	455.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	4380.1	2324.1	1105.2	113.8	65.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	6452.3	3925.0	2064.1	455.1	243.8	0.0	0.0	0.0	0.0	0.0	0.0
16°	8678.9	5680.3	3299.3	1137.7	593.2	0.0	0.0	0.0	0.0	0.0	0.0
14°	10759.2	7468.1	4640.1	2112.8	1023.9	105.6	0.0	0.0	0.0	0.0	0.0
12°	12815.2	9223.3	5989.1	3128.6	1544.0	276.3	0.0	0.0	0.0	0.0	0.0
10°	14627.3	10799.8	7256.8	4095.7	2056.0	487.6	8.1	8.1	0.0	0.0	0.0
8°	16138.8	12124.4	8337.6	4940.8	2543.5	755.7	56.9	24.4	0.0	0.0	0.0
6°	17341.5	13189.0	9223.3	5631.5	2958.0	991.4	105.6	40.6	0.0	0.0	0.0
4°	18178.5	13936.6	9873.4	6143.5	3274.9	1178.3	146.3	65.0	0.0	0.0	0.0
2°	18690.5	14342.9	10231.0	6427.9	3453.7	1292.1	178.8	73.1	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
0°	18828.6	14464.8	10328.5	6501.0	3510.6	1332.7	186.9	81.3	0.0	0.0	0.0
-2°	18584.8	14269.8	10141.6	6338.5	3396.8	1275.8	178.8	73.1	0.0	0.0	0.0
-4°	17999.7	13749.7	9654.0	5964.7	3161.1	1137.7	146.3	65.0	0.0	0.0	0.0
-6°	17089.6	12920.8	8914.5	5379.6	2795.4	934.5	97.5	40.6	0.0	0.0	0.0
-8°	15854.4	11791.2	7963.8	4623.9	2340.4	690.7	48.8	24.4	0.0	0.0	0.0
-10°	14277.9	10361.0	6801.7	3746.2	1844.7	438.8	8.1	0.0	0.0	0.0	0.0
-12°	12433.2	8703.3	5485.2	2771.1	1340.8	243.8	0.0	0.0	0.0	0.0	0.0
-14°	10344.8	6891.1	4095.7	1747.2	845.1	89.4	0.0	0.0	0.0	0.0	0.0
-16°	8118.2	5046.4	2771.1	796.4	422.6	0.0	0.0	0.0	0.0	0.0	0.0
-18°	5899.7	3283.0	1641.5	268.2	146.3	0.0	0.0	0.0	0.0	0.0	0.0
-20°	3835.6	1722.8	796.4	56.9	32.5	0.0	0.0	0.0	0.0	0.0	0.0
-22°	2137.2	593.2	276.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	910.1	186.9	81.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	268.2	24.4	8.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	24.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	42°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	44°	46°	48°	50°	52°	54°	56°	58°	60°	62°	64°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-2°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-4°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-6°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-8°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-12°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-14°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-16°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-18°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-22°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-24°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-26°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-28°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-32°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-34°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-36°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-38°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-42°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-44°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-46°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-48°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-52°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-54°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-56°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-58°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-62°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-64°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-66°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-68°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-72°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-74°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-76°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-78°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-82°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-84°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-86°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-88°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	66°	68°	70°	72°	74°	76°	78°	80°	82°	84°	86°
-90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P980929
CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	88°	90°
90°	0.0	0.0
88°	0.0	0.0
86°	0.0	0.0
84°	0.0	0.0
82°	0.0	0.0
80°	0.0	0.0
78°	0.0	0.0
76°	0.0	0.0
74°	0.0	0.0
72°	0.0	0.0
70°	0.0	0.0
68°	0.0	0.0
66°	0.0	0.0
64°	0.0	0.0
62°	0.0	0.0
60°	0.0	0.0
58°	0.0	0.0
56°	0.0	0.0
54°	0.0	0.0
52°	0.0	0.0
50°	0.0	0.0
48°	0.0	0.0
46°	0.0	0.0
44°	0.0	0.0
42°	0.0	0.0
40°	0.0	0.0
38°	0.0	0.0
36°	0.0	0.0
34°	0.0	0.0
32°	0.0	0.0
30°	0.0	0.0
28°	0.0	0.0
26°	0.0	0.0
24°	0.0	0.0
22°	0.0	0.0
20°	0.0	0.0
18°	0.0	0.0
16°	0.0	0.0
14°	0.0	0.0
12°	0.0	0.0
10°	0.0	0.0
8°	0.0	0.0
6°	0.0	0.0
4°	0.0	0.0
2°	0.0	0.0



REPORT NUMBER: P980929

CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	88°	90°
0°	0.0	0.0
-2°	0.0	0.0
-4°	0.0	0.0
-6°	0.0	0.0
-8°	0.0	0.0
-10°	0.0	0.0
-12°	0.0	0.0
-14°	0.0	0.0
-16°	0.0	0.0
-18°	0.0	0.0
-20°	0.0	0.0
-22°	0.0	0.0
-24°	0.0	0.0
-26°	0.0	0.0
-28°	0.0	0.0
-30°	0.0	0.0
-32°	0.0	0.0
-34°	0.0	0.0
-36°	0.0	0.0
-38°	0.0	0.0
-40°	0.0	0.0
-42°	0.0	0.0
-44°	0.0	0.0
-46°	0.0	0.0
-48°	0.0	0.0
-50°	0.0	0.0
-52°	0.0	0.0
-54°	0.0	0.0
-56°	0.0	0.0
-58°	0.0	0.0
-60°	0.0	0.0
-62°	0.0	0.0
-64°	0.0	0.0
-66°	0.0	0.0
-68°	0.0	0.0
-70°	0.0	0.0
-72°	0.0	0.0
-74°	0.0	0.0
-76°	0.0	0.0
-78°	0.0	0.0
-80°	0.0	0.0
-82°	0.0	0.0
-84°	0.0	0.0
-86°	0.0	0.0
-88°	0.0	0.0



REPORT NUMBER: P980929
CATALOG NUMBER: NFFLD-L-C75-7060-33

CANDELA DISTRIBUTION (continued):

	88°	90°
-90°	0.0	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Lumark

Report Number: SP1-2501-319-5

Test Date: 02/04/2025

Luminaire Tested: NFFLD-C25-7060-33

Data in this report applies to families of products including NFFLD-C25-7060-33


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2501-319-5
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 02/06/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Lumark
 Catalog Number: **NFFLD-C25-7060-33**
 Description: LUMARK NIGHT FALCON 10500LM NEMA 3

Spectral Parameters

CCT (K): 5478
 CIE u': 0.2039
 CIE v': 0.4821
 Duv: 0.0042
 CIE x: 0.3330
 CIE y: 0.3499
 CIE z: 0.3170
 Peak Wavelength (nm): 446
 Dominant Wavelength (nm): 553
 Purity: 4.951371
 Rf: 77
 Rg: 94.1

CRI (Ra):	74.6		
R1:	70.6	R9:	-37.3
R2:	79.8	R10:	54.0
R3:	88.0	R11:	74.2
R4:	75.2	R12:	55.5
R5:	73.4	R13:	72.3
R6:	73.8	R14:	93.5
R7:	81.1	R15:	62.0
R8:	54.9		

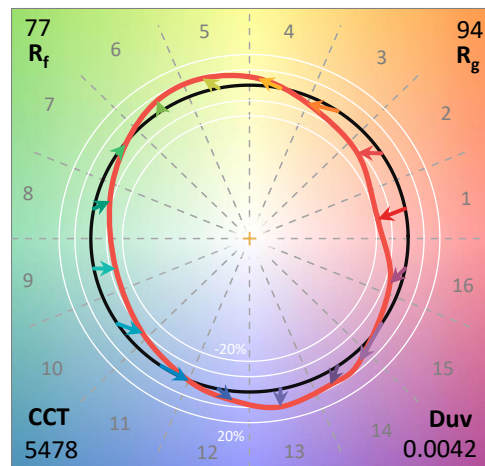

Test Conditions


Stabilization Time: 41M
 Operation Time: 1H 41M
 Sphere Temperature (°C): 24.9

REPORT NUMBER: SP1-2501-319-5


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	12/16/2024	6/16/2025
Power Meter	INXT2011004	1/21/2025	1/21/2026
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2501-319-5

CIE 1931 Chromaticity Diagram

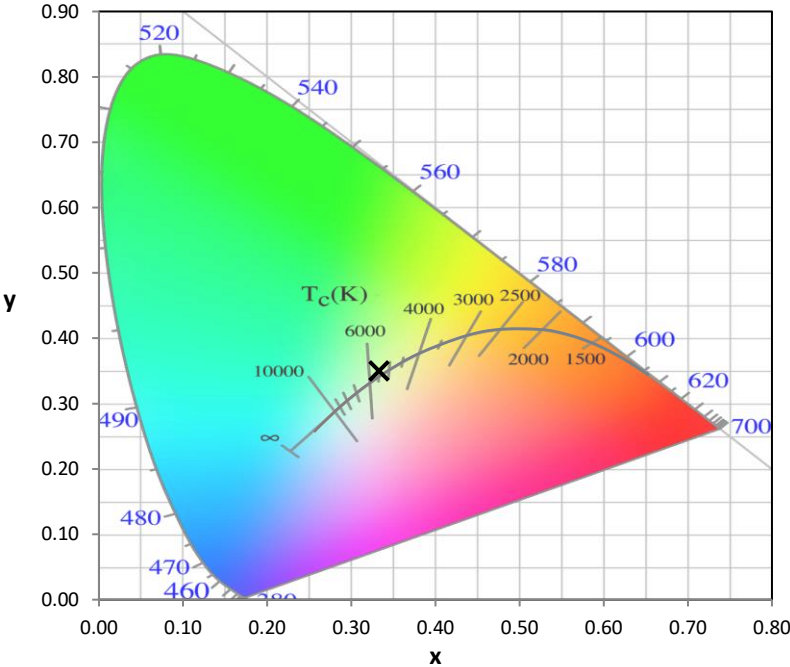


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

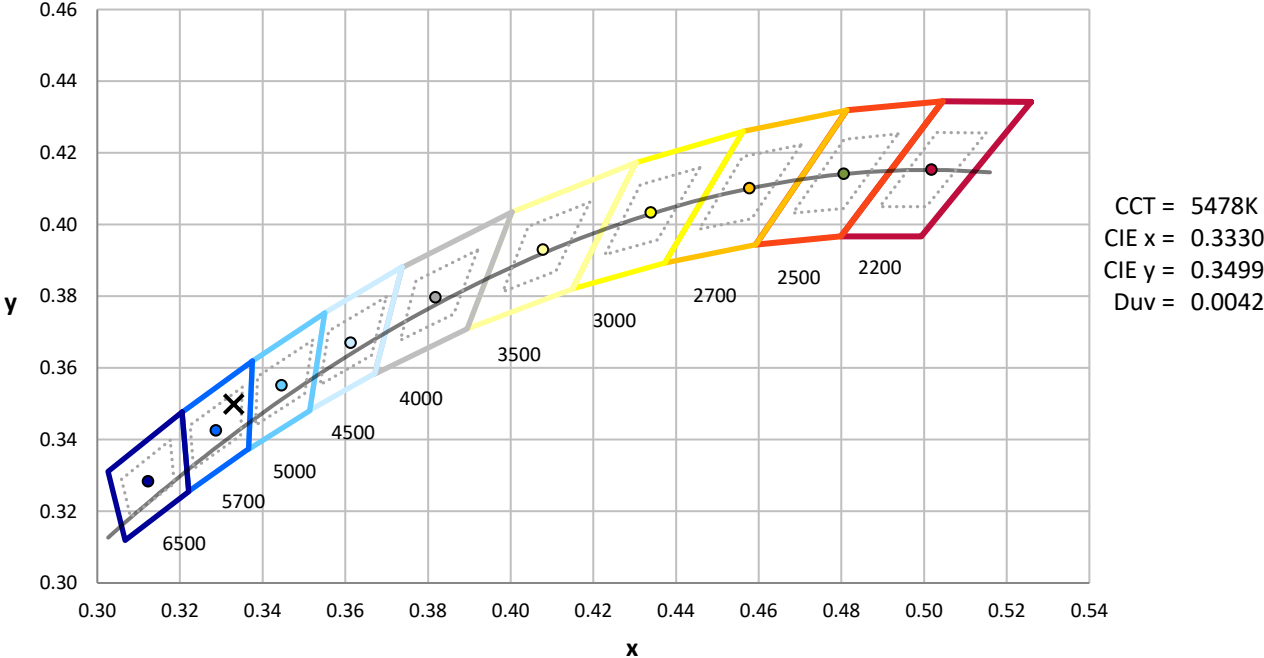

Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-2501-319-5

Photopic Flux vs. Wavelength

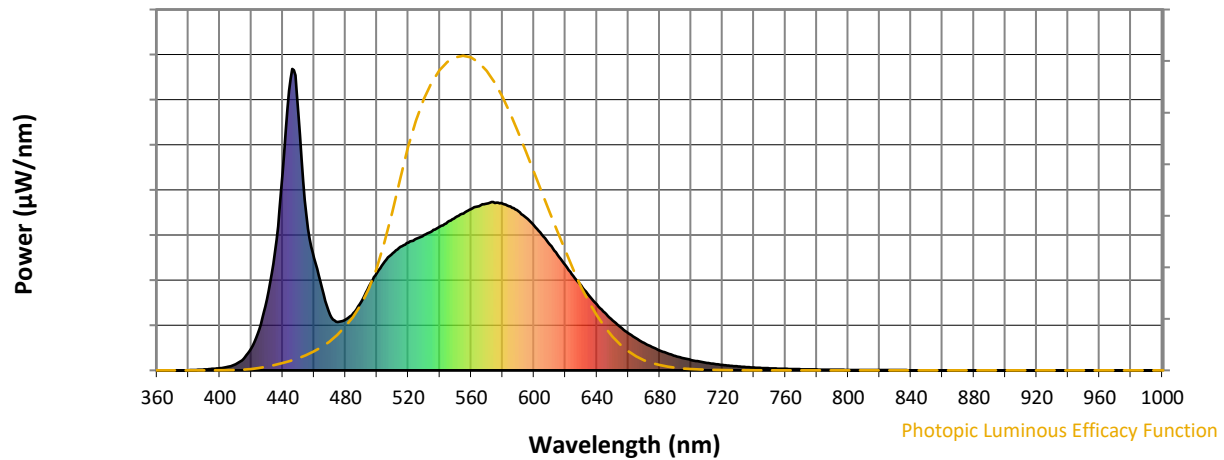


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	228	NR	620	349	NR	750	7	NR	880	0	NR
365	0	NR	495	279	NR	625	313	NR	755	6	NR	885	0	NR
370	0	NR	500	324	NR	630	281	NR	760	5	NR	890	0	NR
375	0	NR	505	361	NR	635	248	NR	765	4	NR	895	0	NR
380	0	NR	510	389	NR	640	219	NR	770	4	NR	900	0	NR
385	1	NR	515	410	NR	645	191	NR	775	3	NR	905	0	NR
390	3	NR	520	424	NR	650	166	NR	780	3	NR	910	0	NR
395	5	NR	525	437	NR	655	144	NR	785	2	NR	915	0	NR
400	7	NR	530	449	NR	660	123	NR	790	2	NR	920	0	NR
405	12	NR	535	462	NR	665	106	NR	795	2	NR	925	0	NR
410	21	NR	540	477	NR	670	91	NR	800	2	NR	930	0	NR
415	38	NR	545	492	NR	675	78	NR	805	1	NR	935	0	NR
420	73	NR	550	507	NR	680	66	NR	810	1	NR	940	0	NR
425	136	NR	555	520	NR	685	56	NR	815	1	NR	945	0	NR
430	236	NR	560	535	NR	690	48	NR	820	1	NR	950	0	NR
435	393	NR	565	545	NR	695	41	NR	825	1	NR	955	0	NR
440	657	NR	570	554	NR	700	34	NR	830	1	NR	960	0	NR
445	969	NR	575	555	NR	705	29	NR	835	1	NR	965	0	NR
450	853	NR	580	553	NR	710	25	NR	840	1	NR	970	0	NR
455	516	NR	585	543	NR	715	21	NR	845	0	NR	975	0	NR
460	372	NR	590	528	NR	720	18	NR	850	0	NR	980	0	NR
465	273	NR	595	507	NR	725	15	NR	855	0	NR	985	0	NR
470	185	NR	600	480	NR	730	13	NR	860	0	NR	990	0	NR
475	161	NR	605	451	NR	735	11	NR	865	0	NR	995	0	NR
480	169	NR	610	417	NR	740	9	NR	870	0	NR	1000	0	NR
485	190	NR	615	383	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-5

Scotopic Flux vs. Wavelength

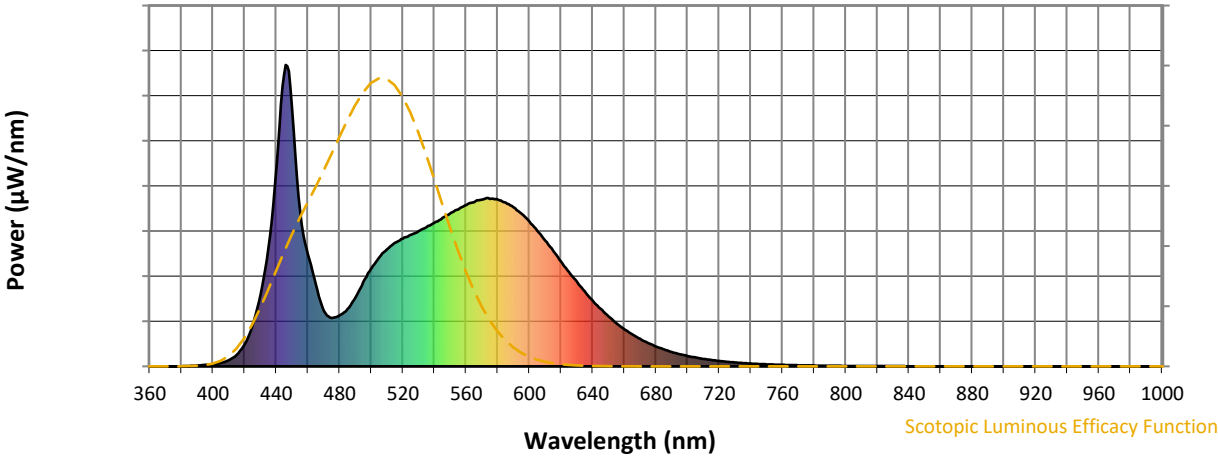


Scotopic Lumens: NR S/P: 1.94

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	228	NR	620	349	NR	750	7	NR	880	0	NR
365	0	NR	495	279	NR	625	313	NR	755	6	NR	885	0	NR
370	0	NR	500	324	NR	630	281	NR	760	5	NR	890	0	NR
375	0	NR	505	361	NR	635	248	NR	765	4	NR	895	0	NR
380	0	NR	510	389	NR	640	219	NR	770	4	NR	900	0	NR
385	1	NR	515	410	NR	645	191	NR	775	3	NR	905	0	NR
390	3	NR	520	424	NR	650	166	NR	780	3	NR	910	0	NR
395	5	NR	525	437	NR	655	144	NR	785	2	NR	915	0	NR
400	7	NR	530	449	NR	660	123	NR	790	2	NR	920	0	NR
405	12	NR	535	462	NR	665	106	NR	795	2	NR	925	0	NR
410	21	NR	540	477	NR	670	91	NR	800	2	NR	930	0	NR
415	38	NR	545	492	NR	675	78	NR	805	1	NR	935	0	NR
420	73	NR	550	507	NR	680	66	NR	810	1	NR	940	0	NR
425	136	NR	555	520	NR	685	56	NR	815	1	NR	945	0	NR
430	236	NR	560	535	NR	690	48	NR	820	1	NR	950	0	NR
435	393	NR	565	545	NR	695	41	NR	825	1	NR	955	0	NR
440	657	NR	570	554	NR	700	34	NR	830	1	NR	960	0	NR
445	969	NR	575	555	NR	705	29	NR	835	1	NR	965	0	NR
450	853	NR	580	553	NR	710	25	NR	840	1	NR	970	0	NR
455	516	NR	585	543	NR	715	21	NR	845	0	NR	975	0	NR
460	372	NR	590	528	NR	720	18	NR	850	0	NR	980	0	NR
465	273	NR	595	507	NR	725	15	NR	855	0	NR	985	0	NR
470	185	NR	600	480	NR	730	13	NR	860	0	NR	990	0	NR
475	161	NR	605	451	NR	735	11	NR	865	0	NR	995	0	NR
480	169	NR	610	417	NR	740	9	NR	870	0	NR	1000	0	NR
485	190	NR	615	383	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2501-319-5

Melanopic Flux vs. Wavelength

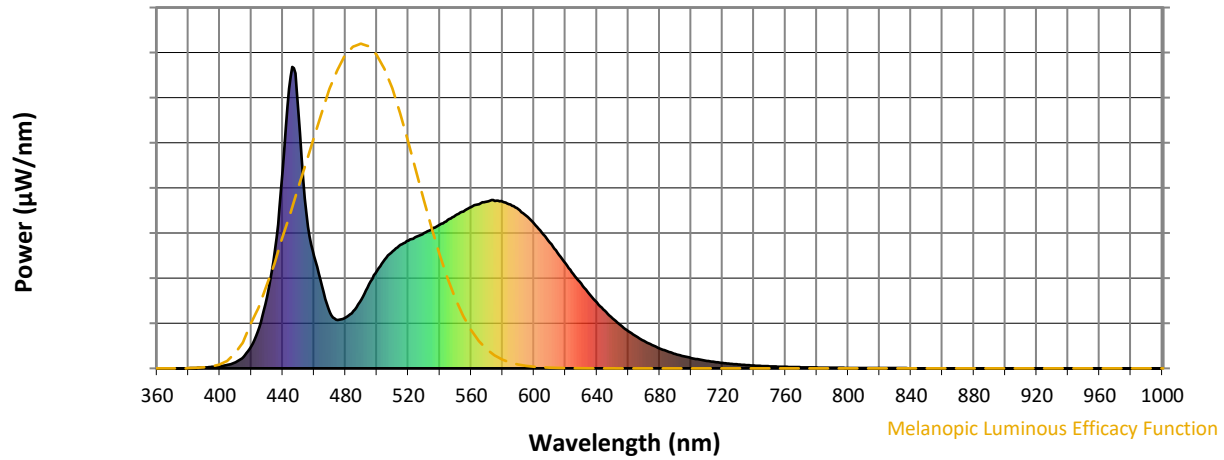


Melanopic Lumens: NR

M/P: 4.08





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	228	NR	620	349	NR	750	7	NR	880	0	NR
365	0	NR	495	279	NR	625	313	NR	755	6	NR	885	0	NR
370	0	NR	500	324	NR	630	281	NR	760	5	NR	890	0	NR
375	0	NR	505	361	NR	635	248	NR	765	4	NR	895	0	NR
380	0	NR	510	389	NR	640	219	NR	770	4	NR	900	0	NR
385	1	NR	515	410	NR	645	191	NR	775	3	NR	905	0	NR
390	3	NR	520	424	NR	650	166	NR	780	3	NR	910	0	NR
395	5	NR	525	437	NR	655	144	NR	785	2	NR	915	0	NR
400	7	NR	530	449	NR	660	123	NR	790	2	NR	920	0	NR
405	12	NR	535	462	NR	665	106	NR	795	2	NR	925	0	NR
410	21	NR	540	477	NR	670	91	NR	800	2	NR	930	0	NR
415	38	NR	545	492	NR	675	78	NR	805	1	NR	935	0	NR
420	73	NR	550	507	NR	680	66	NR	810	1	NR	940	0	NR
425	136	NR	555	520	NR	685	56	NR	815	1	NR	945	0	NR
430	236	NR	560	535	NR	690	48	NR	820	1	NR	950	0	NR
435	393	NR	565	545	NR	695	41	NR	825	1	NR	955	0	NR
440	657	NR	570	554	NR	700	34	NR	830	1	NR	960	0	NR
445	969	NR	575	555	NR	705	29	NR	835	1	NR	965	0	NR
450	853	NR	580	553	NR	710	25	NR	840	1	NR	970	0	NR
455	516	NR	585	543	NR	715	21	NR	845	0	NR	975	0	NR
460	372	NR	590	528	NR	720	18	NR	850	0	NR	980	0	NR
465	273	NR	595	507	NR	725	15	NR	855	0	NR	985	0	NR
470	185	NR	600	480	NR	730	13	NR	860	0	NR	990	0	NR
475	161	NR	605	451	NR	735	11	NR	865	0	NR	995	0	NR
480	169	NR	610	417	NR	740	9	NR	870	0	NR	1000	0	NR
485	190	NR	615	383	NR	745	8	NR	875	0	NR			

Summary

$R_f = 77$
 $R_g = 94.1$
 $CIE R_a = 74.6$
 $R_9 = -37.3$

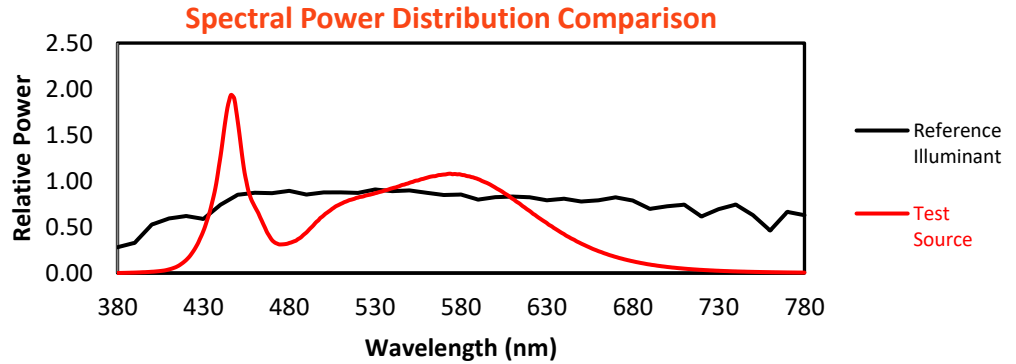


Color Vector Graphics

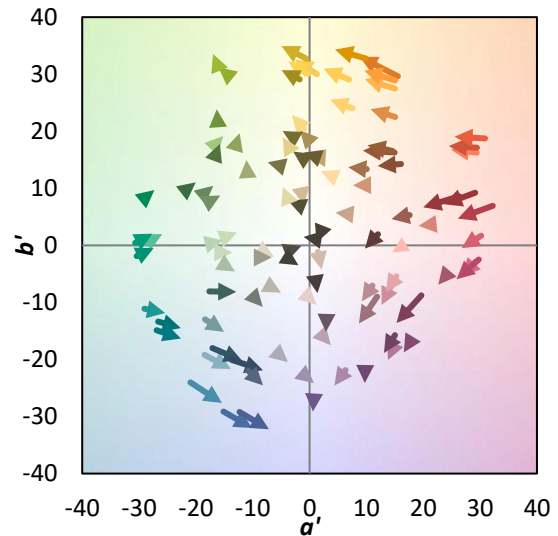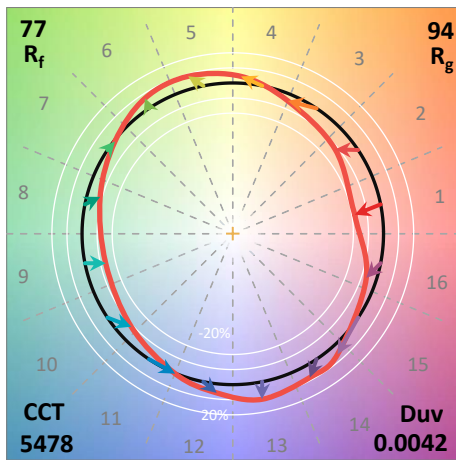
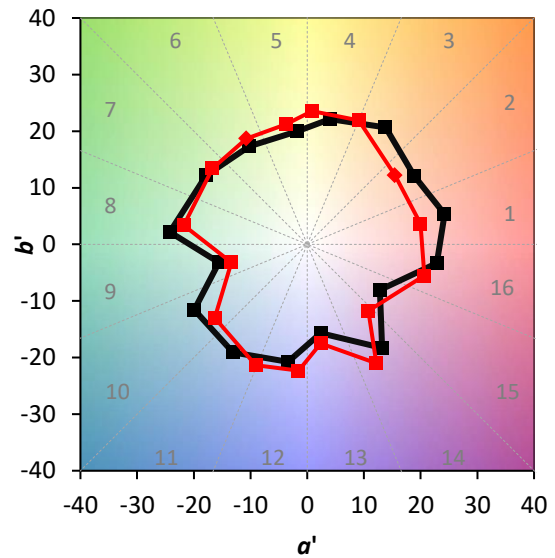
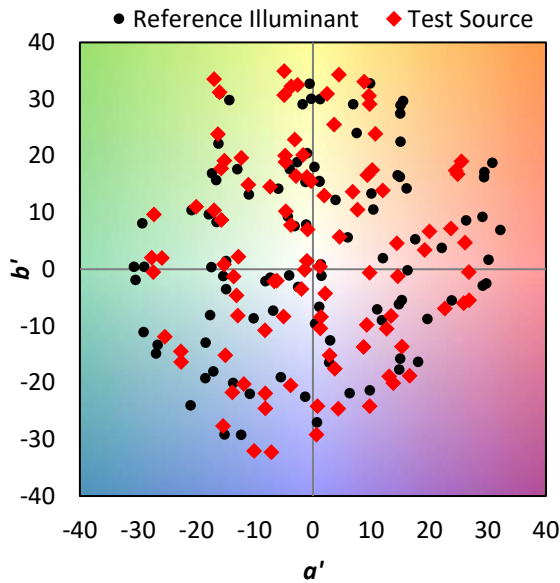


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 67	CES51 = 93	CES76 = 59
CES02 = 59	CES27 = 90	CES52 = 93	CES77 = 73
CES03 = 30	CES28 = 85	CES53 = 83	CES78 = 59
CES04 = 69	CES29 = 69	CES54 = 85	CES79 = 84
CES05 = 46	CES30 = 80	CES55 = 85	CES80 = 81
CES06 = 50	CES31 = 72	CES56 = 77	CES81 = 80
CES07 = 38	CES32 = 66	CES57 = 77	CES82 = 92
CES08 = 37	CES33 = 78	CES58 = 77	CES83 = 90
CES09 = 29	CES34 = 75	CES59 = 88	CES84 = 87
CES10 = 72	CES35 = 86	CES60 = 92	CES85 = 81
CES11 = 55	CES36 = 94	CES61 = 86	CES86 = 75
CES12 = 61	CES37 = 83	CES62 = 89	CES87 = 79
CES13 = 41	CES38 = 90	CES63 = 81	CES88 = 80
CES14 = 74	CES39 = 95	CES64 = 74	CES89 = 74
CES15 = 70	CES40 = 90	CES65 = 68	CES90 = 79
CES16 = 45	CES41 = 93	CES66 = 70	CES91 = 79
CES17 = 48	CES42 = 84	CES67 = 68	CES92 = 60
CES18 = 55	CES43 = 81	CES68 = 72	CES93 = 77
CES19 = 70	CES44 = 99	CES69 = 80	CES94 = 54
CES20 = 63	CES45 = 88	CES70 = 64	CES95 = 66
CES21 = 85	CES46 = 86	CES71 = 61	CES96 = 77
CES22 = 77	CES47 = 88	CES72 = 86	CES97 = 87
CES23 = 91	CES48 = 79	CES73 = 55	CES98 = 76
CES24 = 90	CES49 = 85	CES74 = 95	CES99 = 61
CES25 = 71	CES50 = 92	CES75 = 60	

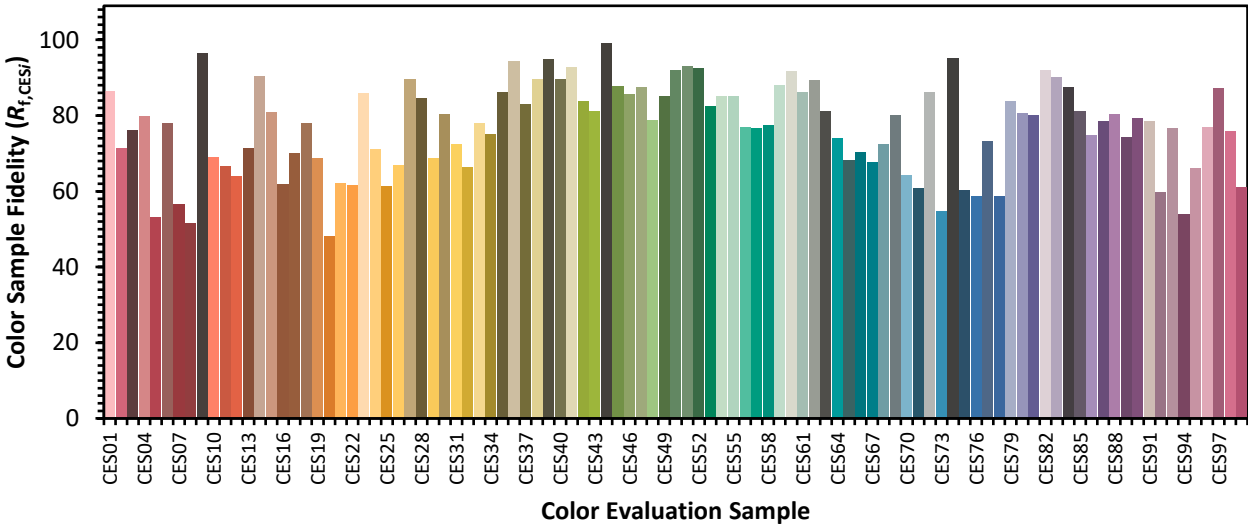

Color Rendition by Hue-Angle Bin

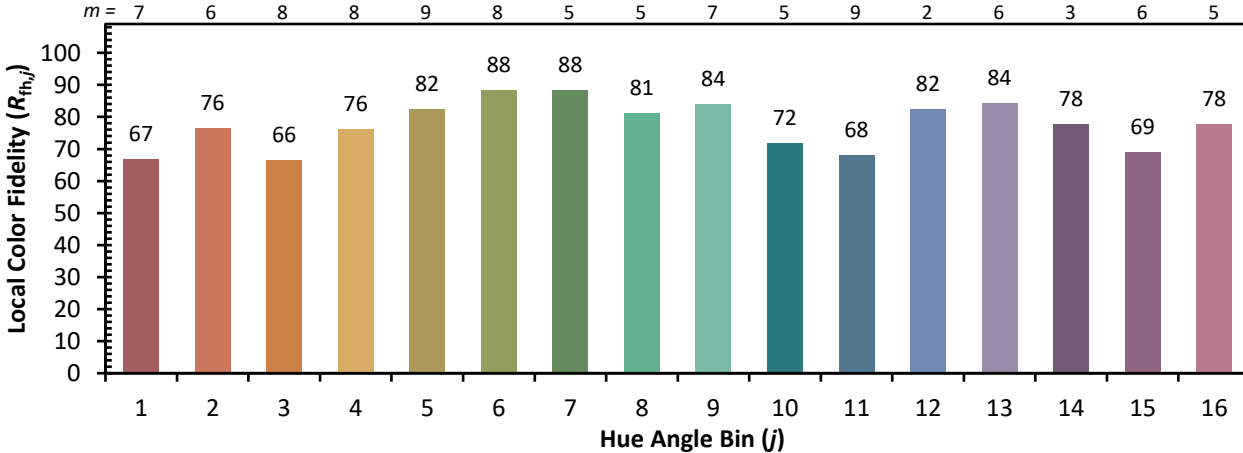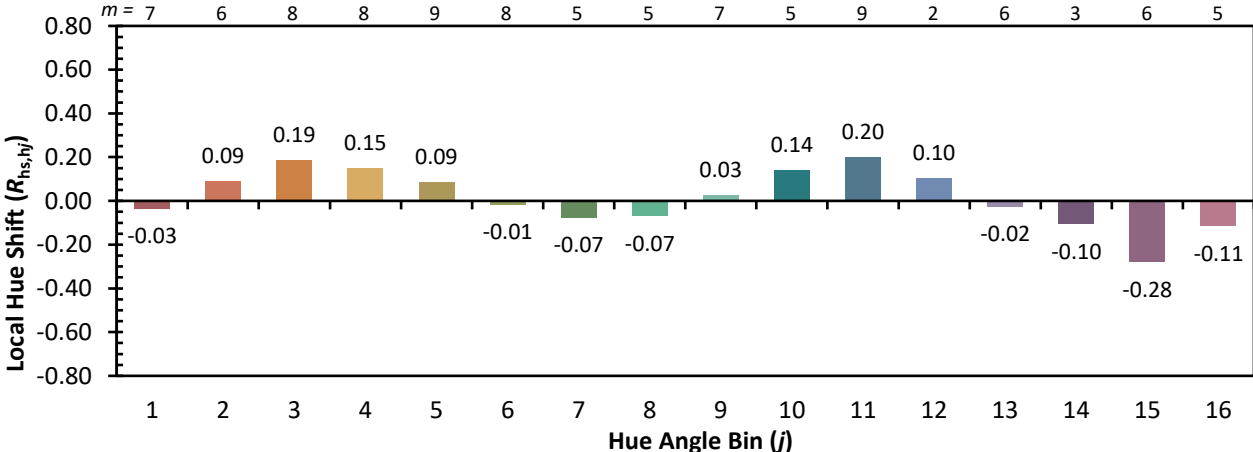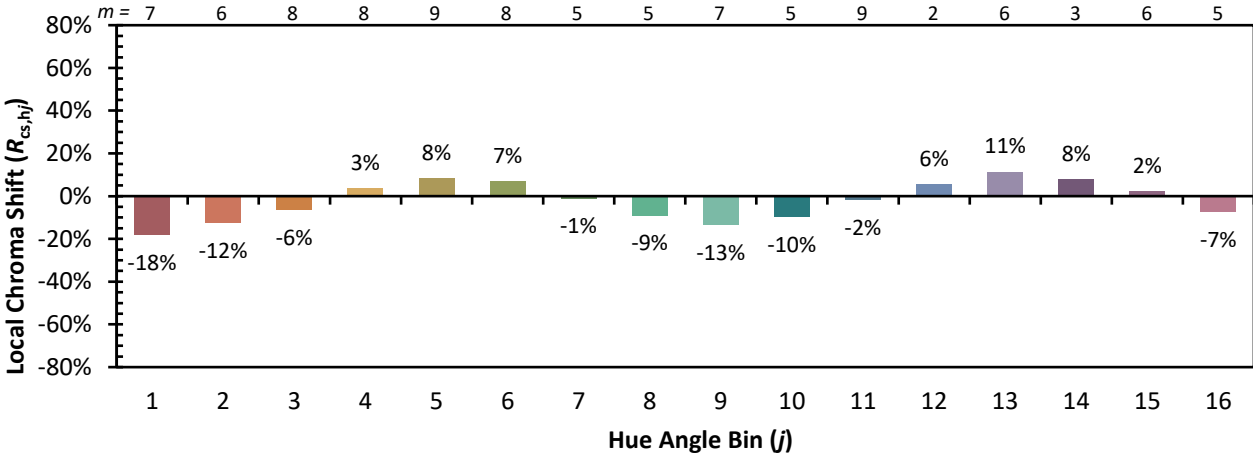

Measure Comparisons

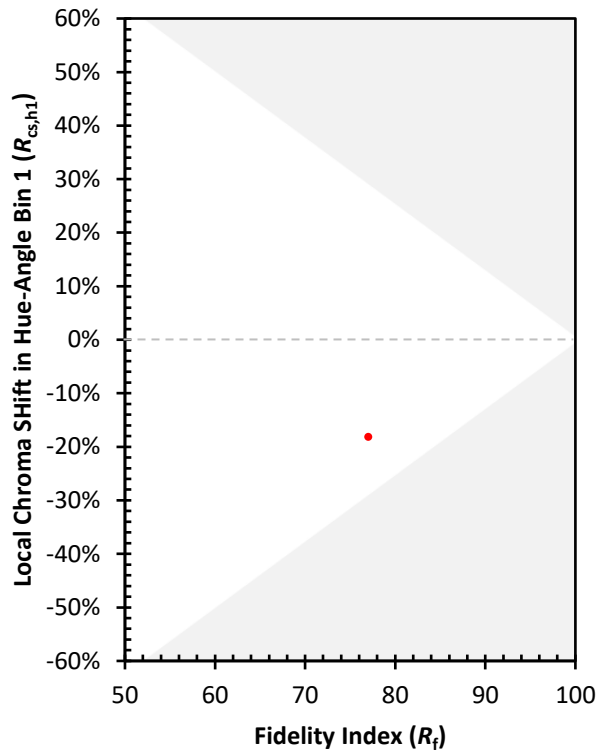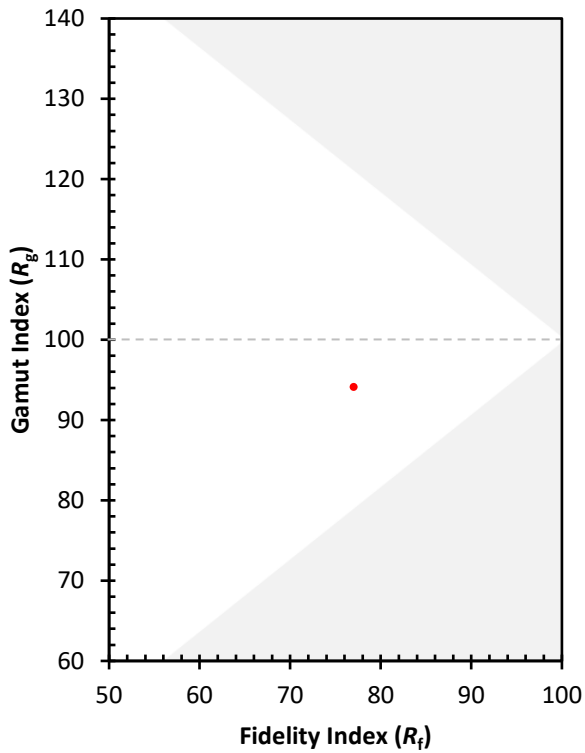

(END OF REPORT)