

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220611

Luminaire Tested: **1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220611
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29478)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV
Description: LUMIERE LANTERRA 1003 LED ACCENT/SIGN LUMINAIRE, FLUSH LENS, FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) 3000K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 684.0 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.56
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct


Input Watts (W): 9.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220611

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV

Luminous Intensity Polar Plot

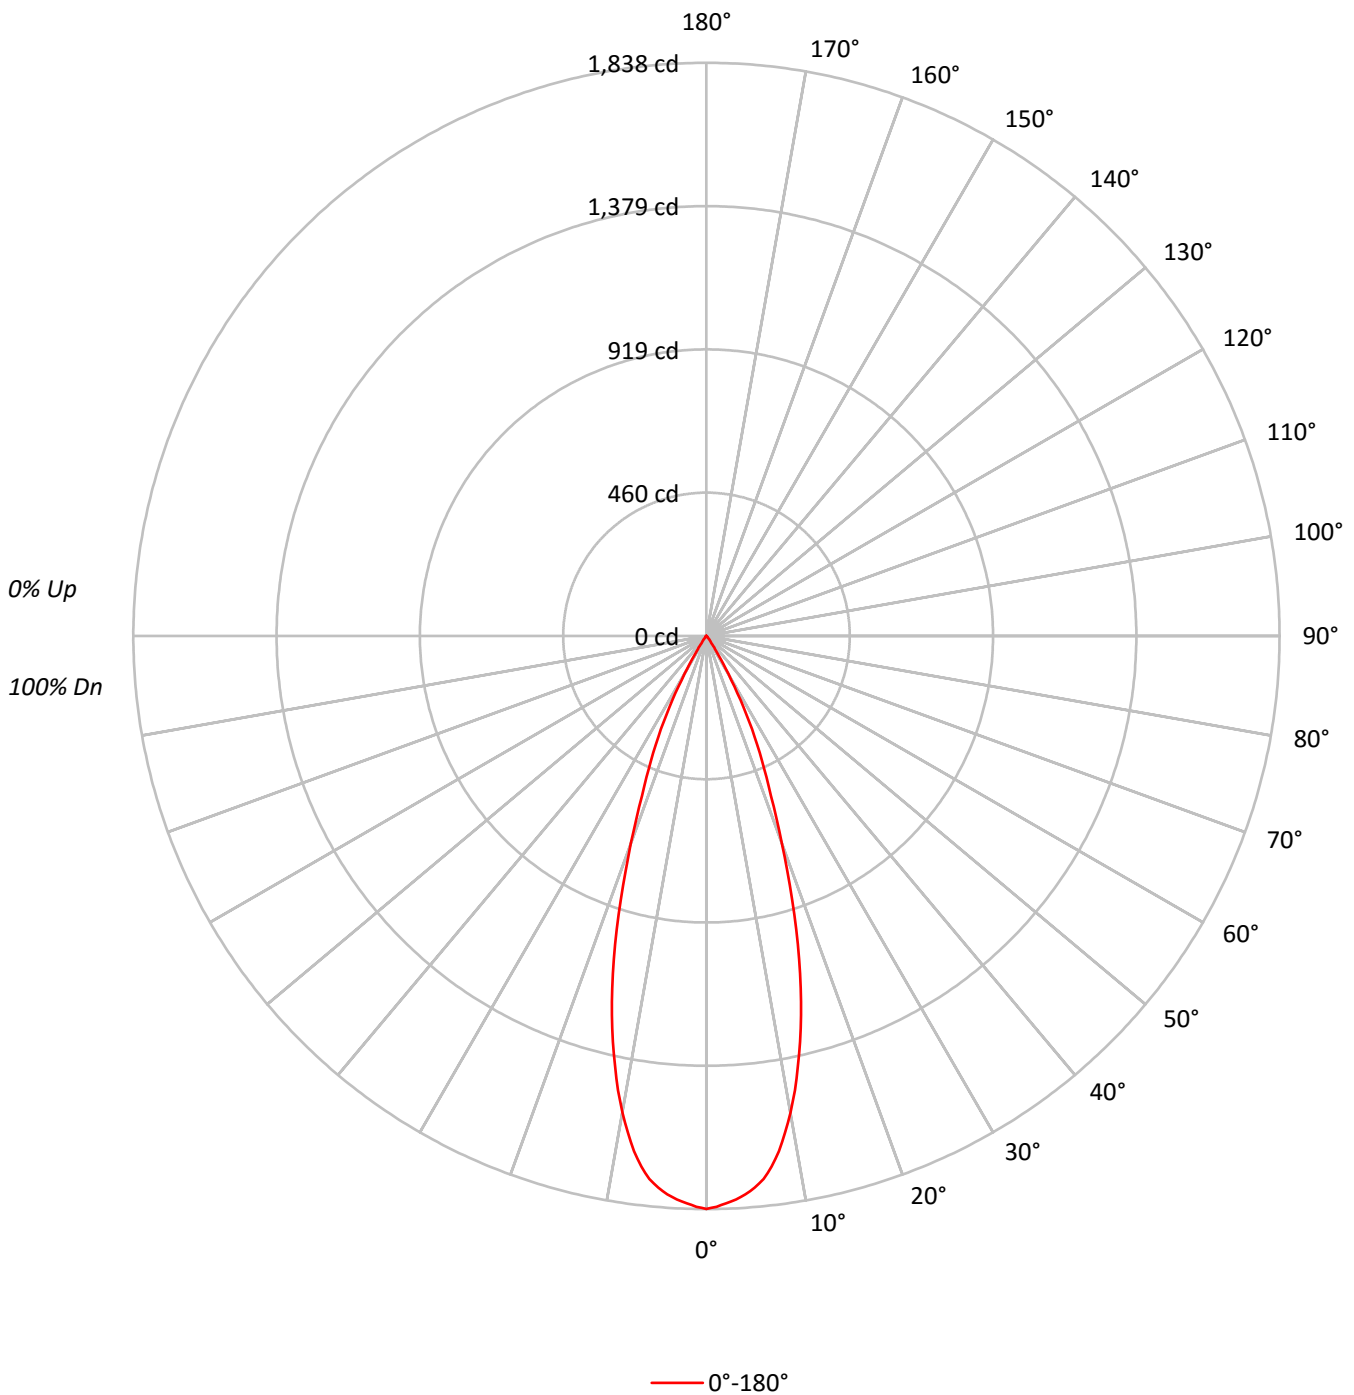



TEST NUMBER: P220611

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96
2	110	107	103	101	108	105	102	100	102	99	97	99	97	95	96	95	93	92
3	107	101	98	94	105	100	97	94	98	95	92	95	93	91	93	91	89	88
4	103	97	93	89	101	96	92	89	94	90	88	92	89	87	90	88	86	85
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	82	81
6	96	89	84	81	95	88	84	81	87	83	80	86	82	80	84	82	79	78
7	93	85	81	78	91	85	81	77	84	80	77	83	79	77	82	79	76	75
8	90	82	78	75	89	82	77	74	81	77	74	80	76	74	79	76	74	73
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70
10	84	77	72	69	83	76	72	69	75	72	69	75	71	69	74	71	69	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	402950
5°	391018
10°	345685
15°	265450
20°	165238
25°	93175
30°	35373
35°	7576
40°	2948
45°	961
50°	785
55°	573
60°	482
65°	571
70°	513
75°	678
80°	505
85°	0



TEST NUMBER: P220611

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.6	23.8
10°-20°	313.8	45.9
20°-30°	175.0	25.6
30°-40°	26.4	3.9
40°-50°	2.9	0.4
50°-60°	1.5	0.2
60°-70°	1.0	0.1
70°-80°	0.7	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	651.3	95.2
0°-40°	677.8	99.1
0°-60°	682.2	99.7
0°-90°	684.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	684.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1838	
5°	1776	163
15°	1169	314
25°	385	175
35°	28	26
45°	3	3
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P220611

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	1837.6
1°	1831.1
2°	1820.4
3°	1809.3
4°	1795.1
5°	1776.4
6°	1751.1
7°	1714.8
8°	1668.1
9°	1612.9
10°	1552.5
11°	1484.7
12°	1411.2
13°	1335.1
14°	1253.5
15°	1169.3
16°	1078.2
17°	984.1
18°	888.4
19°	796.9
20°	708.1
21°	625.8
22°	553.1
23°	491.8
24°	438.6
25°	385.1
26°	332.6
27°	281.7
28°	232.3
29°	184.9
30°	139.7
32.5°	55.9
35°	28.3
37.5°	17.6
40°	10.3
42.5°	3.8
45°	3.1
47.5°	2.3
50°	2.3
52.5°	1.9
55°	1.5
57.5°	1.5
60°	1.1
62.5°	1.1
65°	1.1



TEST NUMBER: P220611

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-F-WT-L1-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)