

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220514

Luminaire Tested: **1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220514
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29472)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV
Description: LUMIERE LANTERRA 1003 LED ACCENT/SIGN LUMINAIRE, RECESSED LENS, SPOT OPTIC, BLACK HOUSING.
Light Source: (1) 2700K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1061.7 lumens
Efficiency: N/A
Efficacy: 52.8 lumens/watt
Spacing Criteria (0/90/45): 0.27 / 0.27 / 0.27
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct


Input Watts (W): 20.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220514

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV

Luminous Intensity Polar Plot

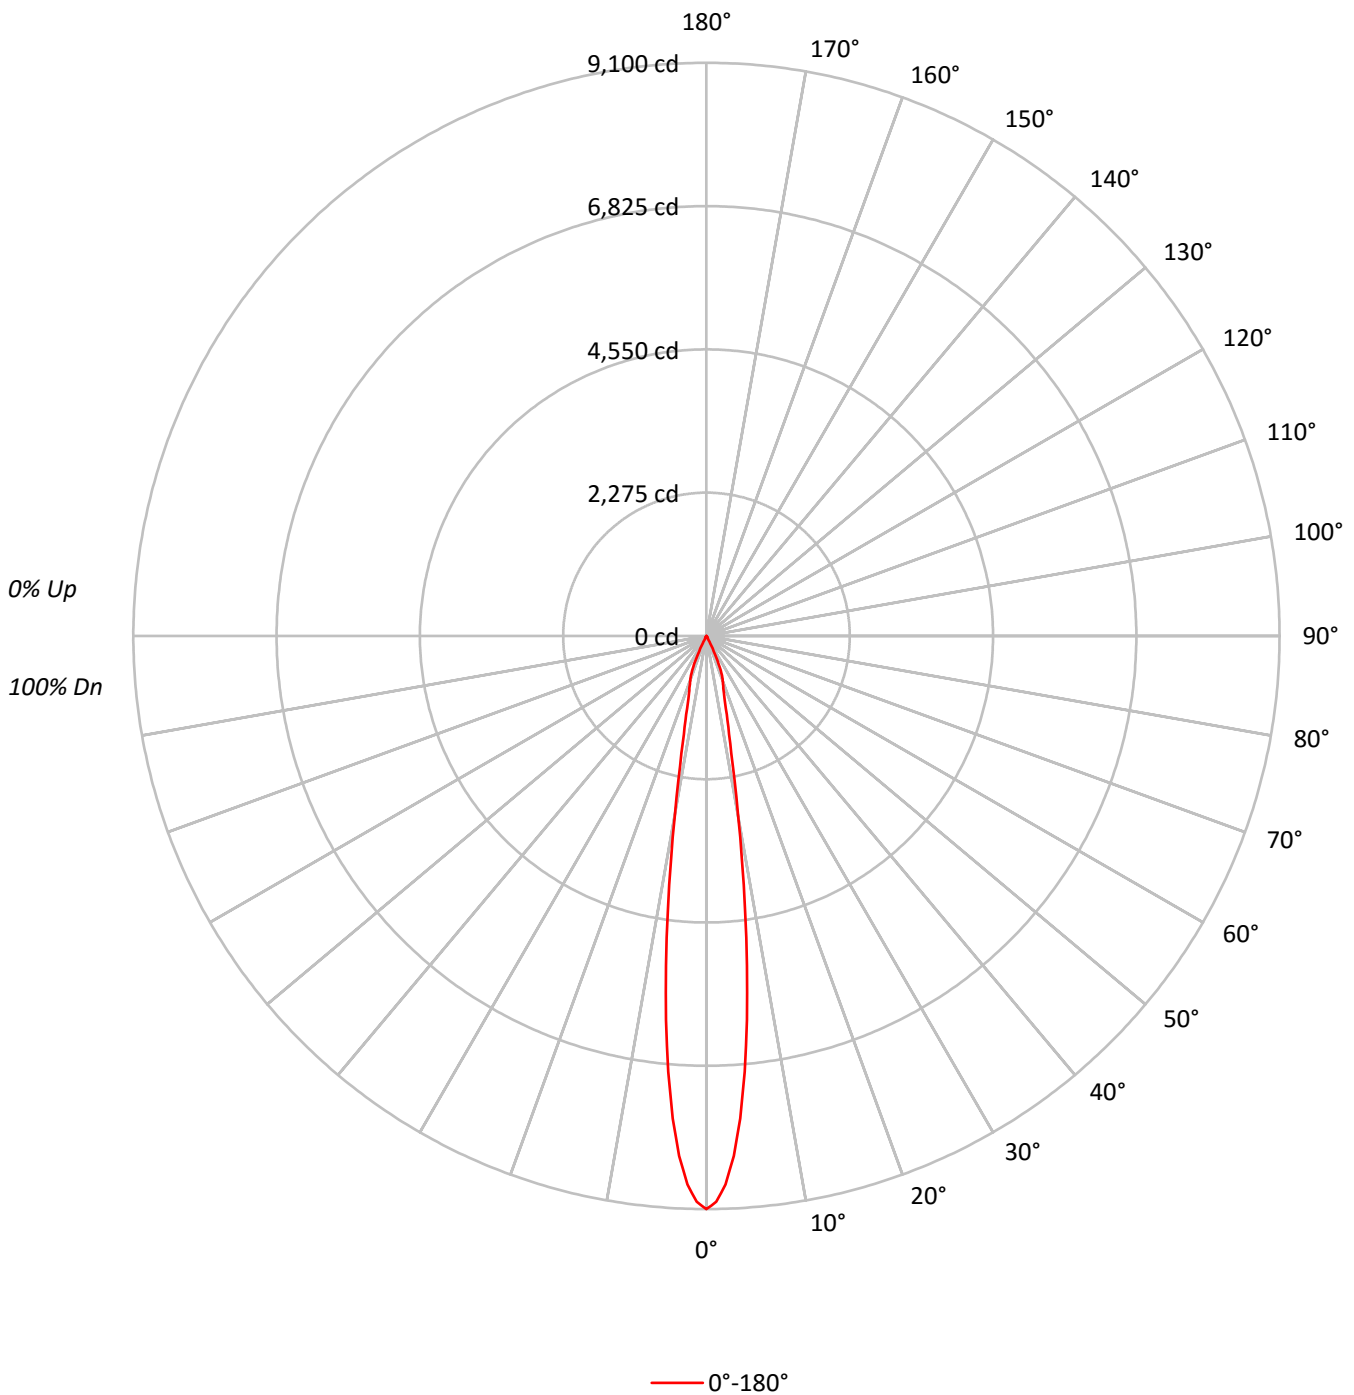



TEST NUMBER: P220514

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	102	104	102	100	101	100	98	99	97	96	95
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	97	95	94	92
4	106	101	98	95	105	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	92	102	97	94	91	96	93	91	94	92	90	93	91	89	88
6	101	95	92	89	100	95	91	89	93	90	88	92	90	88	91	89	87	86
7	99	93	89	87	98	92	89	86	91	88	86	90	88	86	89	87	85	84
8	96	91	87	84	95	90	87	84	89	86	84	88	86	84	88	85	83	82
9	94	88	85	82	94	88	85	82	87	84	82	87	84	82	86	83	82	81
10	92	87	83	81	92	86	83	81	86	83	80	85	82	80	84	82	80	79

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1995454
5°	1528700
10°	641315
15°	270649
20°	176065
25°	77158
30°	10457
35°	3935
40°	2805
45°	2171
50°	1910
55°	1873
60°	1535
65°	1090
70°	449
75°	0
80°	0
85°	0



TEST NUMBER: P220514

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	522.9	49.2
10°-20°	364.5	34.3
20°-30°	150.3	14.2
30°-40°	11.9	1.1
40°-50°	5.6	0.5
50°-60°	4.1	0.4
60°-70°	2.1	0.2
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1037.7	97.7
0°-40°	1049.5	98.9
0°-60°	1059.3	99.8
0°-90°	1061.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1061.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9100	
5°	6945	523
15°	1192	365
25°	319	150
35°	15	12
45°	7	6
55°	5	4
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220514

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	9100.0
1°	8983.9
2°	8711.9
3°	8269.3
4°	7678.4
5°	6944.9
6°	6128.9
7°	5273.7
8°	4394.1
9°	3587.8
10°	2880.2
11°	2320.1
12°	1905.4
13°	1599.9
14°	1376.8
15°	1192.2
16°	1043.3
17°	946.1
18°	871.3
19°	805.5
20°	754.5
21°	707.6
22°	636.3
23°	539.1
24°	428.6
25°	318.9
26°	221.7
27°	132.9
28°	74.1
29°	49.6
30°	41.3
32.5°	26.6
35°	14.7
37.5°	11.2
40°	9.8
42.5°	8.4
45°	7.0
47.5°	6.3
50°	5.6
52.5°	4.9
55°	4.9
57.5°	4.2
60°	3.5
62.5°	2.8
65°	2.1



TEST NUMBER: P220514

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED2797-S-BK-L2-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	1.4
70°	0.7
72.5°	0.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)