

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220633

Luminaire Tested: **1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220633  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29479)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV  
Description: LUMIERE LANTERRA 1003 LED ACCENT/SIGN LUMINAIRE, FLUSH LENS, WIDE FLOOD OPTIC, WHITE HOUSING.  
Light Source: (1) 3000K CCT, 90 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1300.5 lumens  
Efficiency: N/A  
Efficacy: 64.7 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220633

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV

### Luminous Intensity Polar Plot

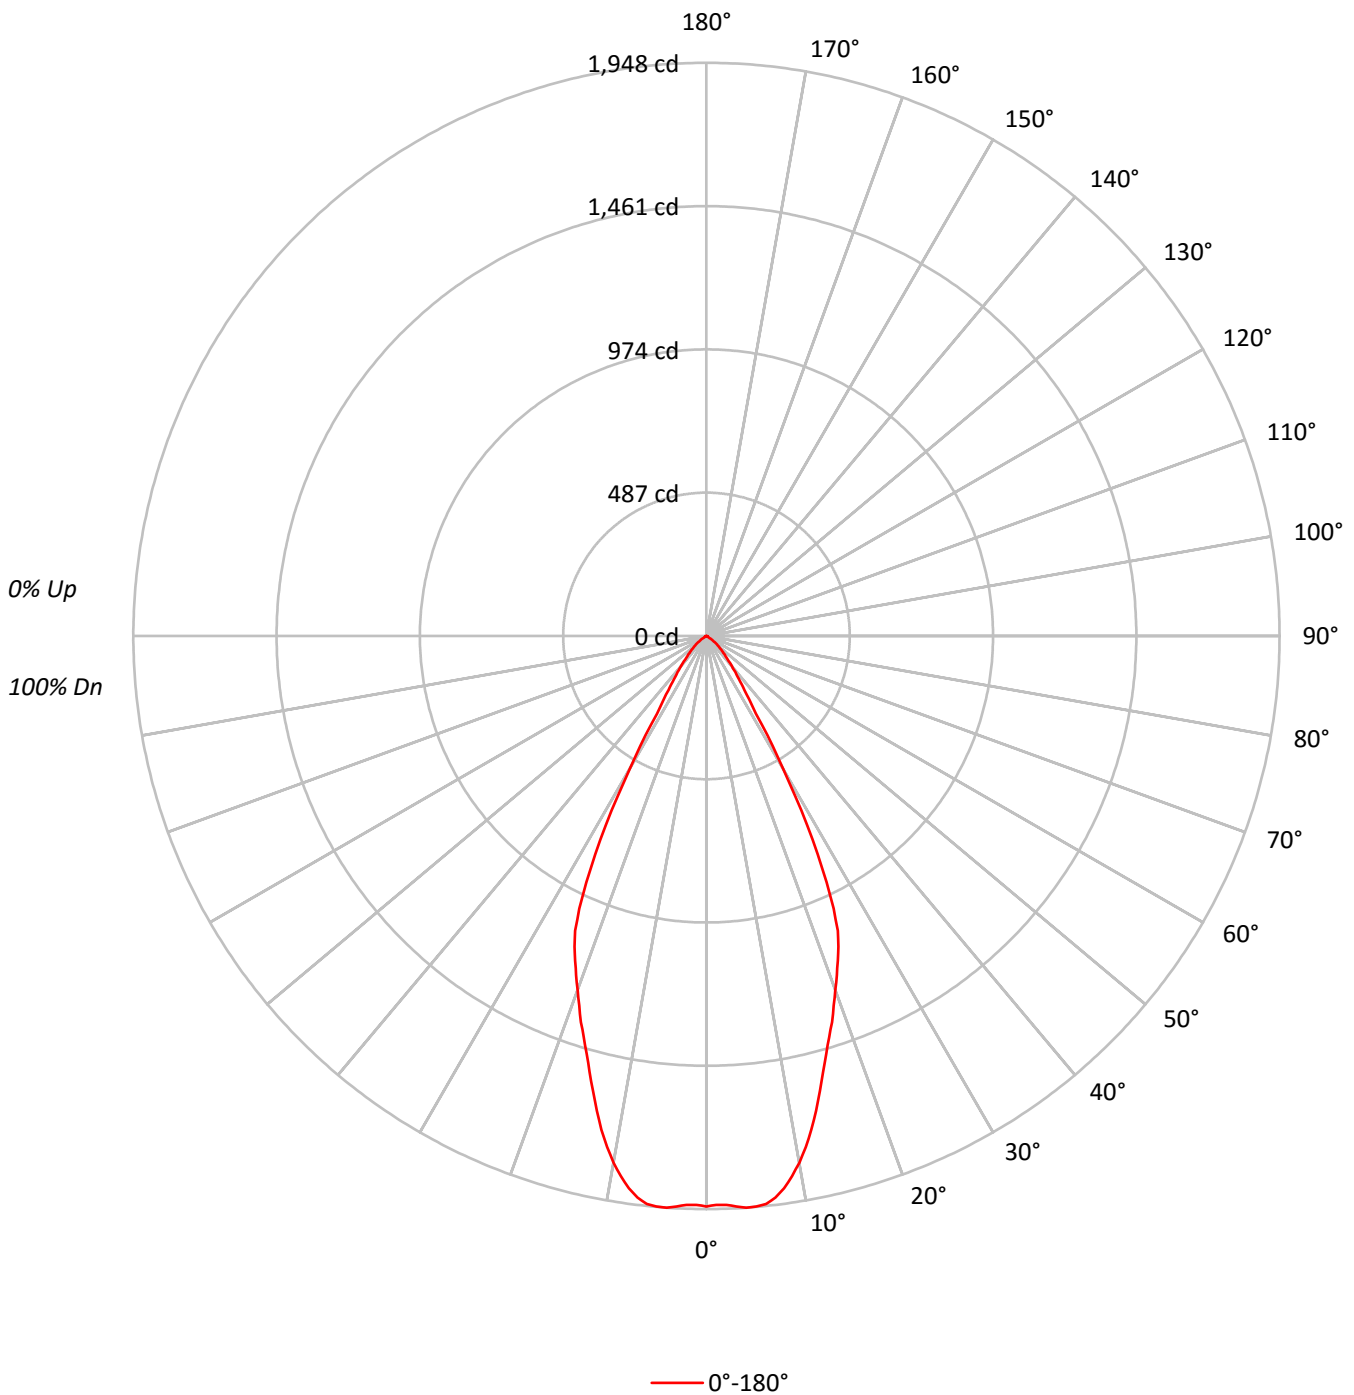



TEST NUMBER: P220633

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	86	84	83
4	99	92	87	83	97	91	86	82	88	84	81	87	83	80	85	82	79	78
5	94	86	81	77	93	86	80	77	84	79	76	82	78	75	81	77	75	73
6	90	82	76	72	89	81	76	72	79	75	71	78	74	71	77	73	70	69
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65
8	82	73	68	64	81	73	68	64	72	67	64	71	66	63	70	66	63	62
9	79	70	64	61	78	69	64	60	68	64	60	68	63	60	67	63	60	59
10	75	66	61	57	75	66	61	57	65	60	57	64	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	425251
5°	428460
10°	404802
15°	348220
20°	298903
25°	247345
30°	131944
35°	60043
40°	38386
45°	25243
50°	17705
55°	8831
60°	2105
65°	2075
70°	2052
75°	1356
80°	1010
85°	2013



TEST NUMBER: P220633

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	181.9	14.0
10°-20°	429.0	33.0
20°-30°	438.3	33.7
30°-40°	158.8	12.2
40°-50°	65.4	5.0
50°-60°	21.1	1.6
60°-70°	3.8	0.3
70°-80°	1.8	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1049.2	80.7
0°-40°	1208.0	92.9
0°-60°	1294.5	99.5
0°-90°	1300.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1300.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1939	
5°	1946	182
15°	1534	429
25°	1022	438
35°	224	159
45°	81	65
55°	23	21
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P220633

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1939.3
1°	1933.7
2°	1934.5
3°	1941.7
4°	1948.1
5°	1946.5
6°	1940.9
7°	1923.3
8°	1895.4
9°	1858.7
10°	1818.0
11°	1769.3
12°	1715.8
13°	1656.0
14°	1593.7
15°	1533.9
16°	1476.4
17°	1426.1
18°	1379.9
19°	1328.8
20°	1280.9
21°	1235.4
22°	1190.7
23°	1147.6
24°	1096.5
25°	1022.3
26°	931.3
27°	832.4
28°	727.8
29°	622.5
30°	521.1
32.5°	312.8
35°	224.3
37.5°	173.2
40°	134.1
42.5°	102.2
45°	81.4
47.5°	65.4
50°	51.9
52.5°	38.3
55°	23.1
57.5°	6.4
60°	4.8
62.5°	4.0
65°	4.0



TEST NUMBER: P220633

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3090-W-WT-L2-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	3.2
70°	3.2
72.5°	2.4
75°	1.6
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)