

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P246951

Luminaire Tested: **203-FL-8LED3010-12-BK-DIFF**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246951  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-12)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 203-FL-8LED3010-12-BK-DIFF  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 10 DEGREE SPOT OPTIC,  
FLUSH HOOD BLACK, DIFFUSED LENS  
Light Source: (1) SORAA 3000K 90 CRI LED  
SM16-07-10D-930-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 254.3 lumens  
Efficiency: N/A  
Efficacy: 31.8 lumens/watt  
Spacing Criteria (0/90/45): 0.38 / 0.38 / 0.41  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246951  
CATALOG NUMBER: 203-FL-8LED3010-12-BK-DIFF

### Luminous Intensity Polar Plot

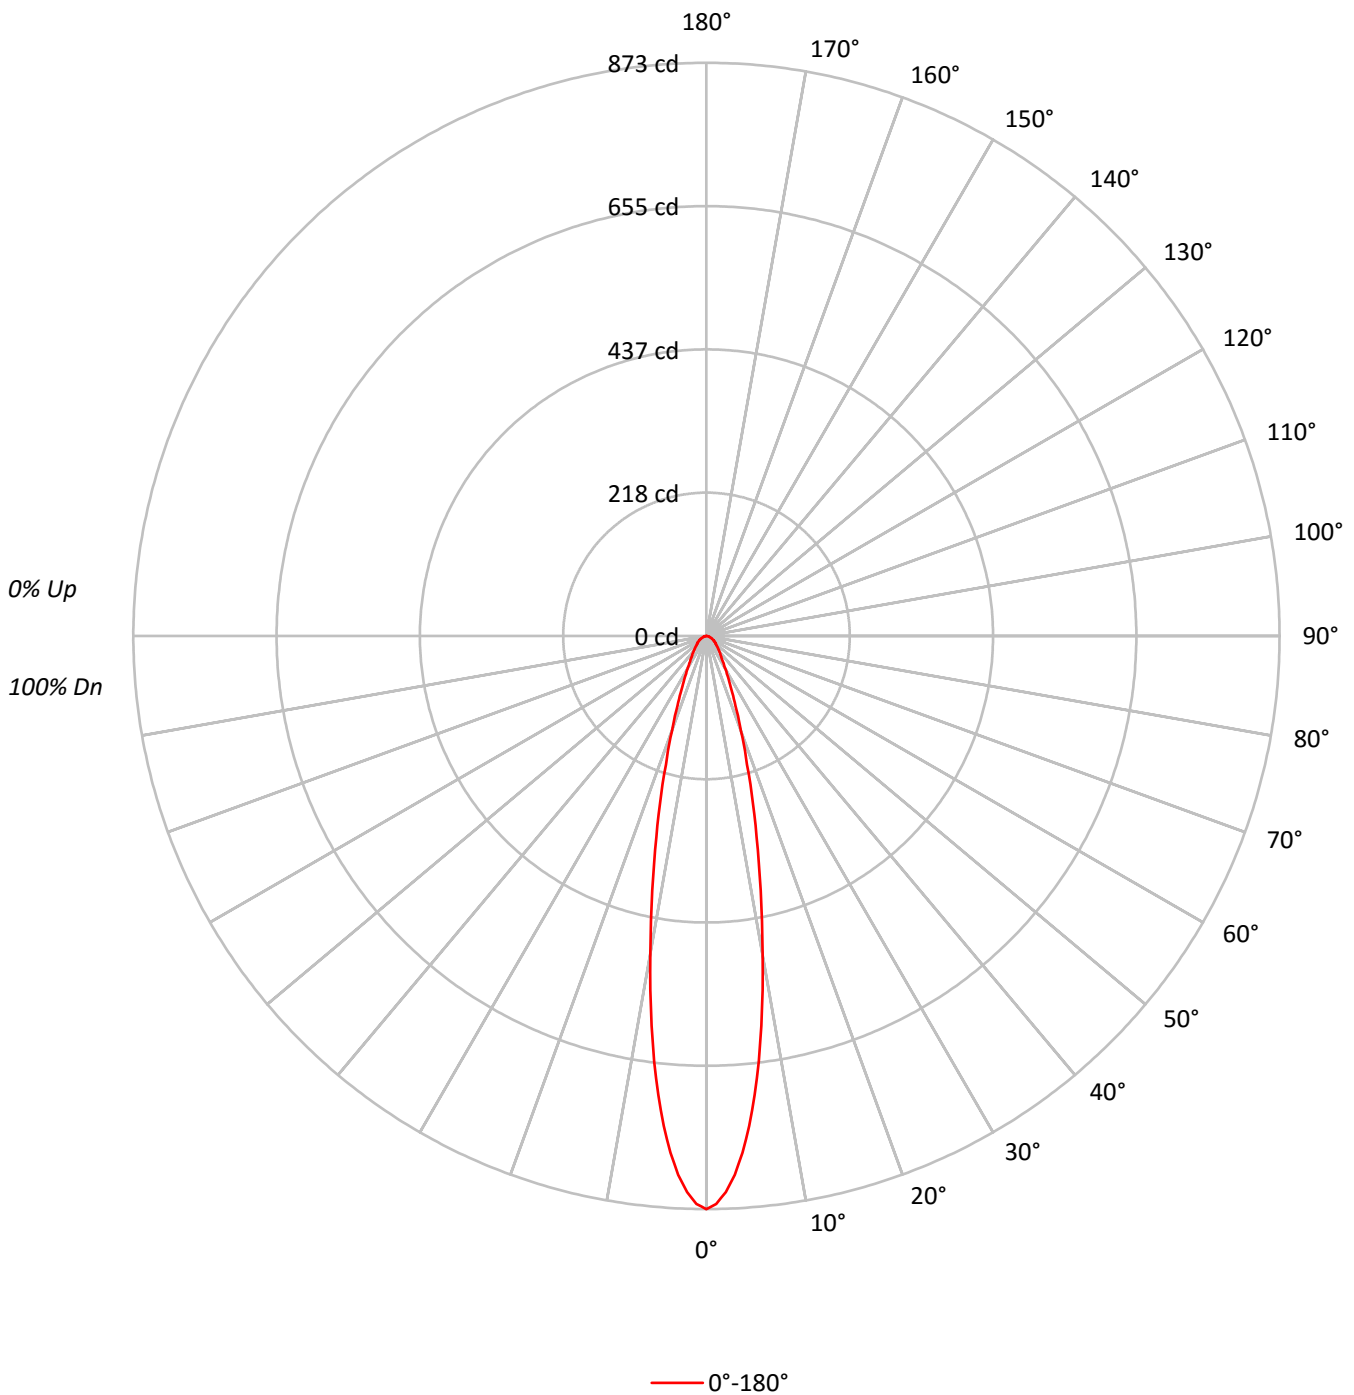



TEST NUMBER: P246951

CATALOG NUMBER: 203-FL-8LED3010-12-BK-DIFF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101	101	101	99	98	98	97	96	95	95	93
2	108	103	99	95	105	101	97	94	98	95	92	92	95	92	90	90	92	90	88	88	86
3	102	96	91	87	100	95	90	86	92	88	85	85	90	86	84	84	87	85	82	82	81
4	98	90	85	81	96	89	84	80	87	83	79	79	85	81	78	78	83	80	77	77	76
5	93	85	80	75	92	84	79	75	83	78	74	74	81	77	74	74	79	76	73	73	72
6	89	81	75	71	88	80	75	71	79	74	70	70	77	73	70	70	76	72	69	69	68
7	86	77	71	67	84	76	71	67	75	70	67	67	74	70	67	67	73	69	66	66	65
8	82	74	68	64	81	73	68	64	72	67	64	64	71	67	64	64	70	66	63	63	62
9	79	71	65	61	78	70	65	61	69	64	61	61	68	64	61	61	67	64	61	61	60
10	77	68	62	59	76	67	62	59	67	62	59	59	66	62	59	59	65	61	58	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	430819
5°	371002
10°	246938
15°	143530
20°	80542
25°	48722
30°	32302
35°	24032
40°	19386
45°	16048
50°	14277
55°	12989
60°	11348
65°	10390
70°	7645
75°	6672
80°	5114
85°	0



TEST NUMBER: P246951

CATALOG NUMBER: 203-FL-8LED3010-12-BK-DIFF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	63.0	24.8
10°-20°	78.7	30.9
20°-30°	42.8	16.8
30°-40°	25.6	10.1
40°-50°	18.1	7.1
50°-60°	13.5	5.3
60°-70°	8.4	3.3
70°-80°	3.7	1.5
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	184.5	72.5
0°-40°	210.0	82.6
0°-60°	241.6	95.0
0°-90°	254.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	254.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	873	
5°	749	63
15°	281	79
25°	90	43
35°	40	26
45°	23	18
55°	15	13
65°	9	8
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P246951

CATALOG NUMBER: 203-FL-8LED3010-12-BK-DIFF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	873.2
1°	865.2
2°	847.5
3°	821.8
4°	789.0
5°	749.1
6°	703.0
7°	653.3
8°	599.3
9°	546.1
10°	492.9
11°	442.4
12°	396.3
13°	354.6
14°	315.6
15°	281.0
17.5°	205.7
20°	153.4
22.5°	115.2
25°	89.5
27.5°	70.9
30°	56.7
32.5°	47.0
35°	39.9
37.5°	34.6
40°	30.1
42.5°	26.6
45°	23.0
47.5°	20.4
50°	18.6
52.5°	16.8
55°	15.1
57.5°	13.3
60°	11.5
62.5°	9.8
65°	8.9
67.5°	7.1
70°	5.3
72.5°	4.4
75°	3.5
77.5°	2.7
80°	1.8
82.5°	0.9
85°	0.0
87.5°	0.0



TEST NUMBER: P246951  
CATALOG NUMBER: 203-FL-8LED3010-12-BK-DIFF

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0.0}$

(END OF REPORT)