

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P247015

Luminaire Tested: **213-8LED2710-12-CS-OSL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P247015
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-39)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 213-8LED2710-12-CS-OSL
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 2700K CCT, 10 DEGREE SPOT OPTIC,
REGRESSED HOOD SILVER, OVERALL SPREAD LENS
Light Source: (1) SORAA 2700K 95 CRI 10° NSP LED
SM16-07-10D-927-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4000.0 lumens
Efficiency: N/A
Efficacy: 533.3 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247015
CATALOG NUMBER: 213-8LED2710-12-CS-OSL

Luminous Intensity Polar Plot

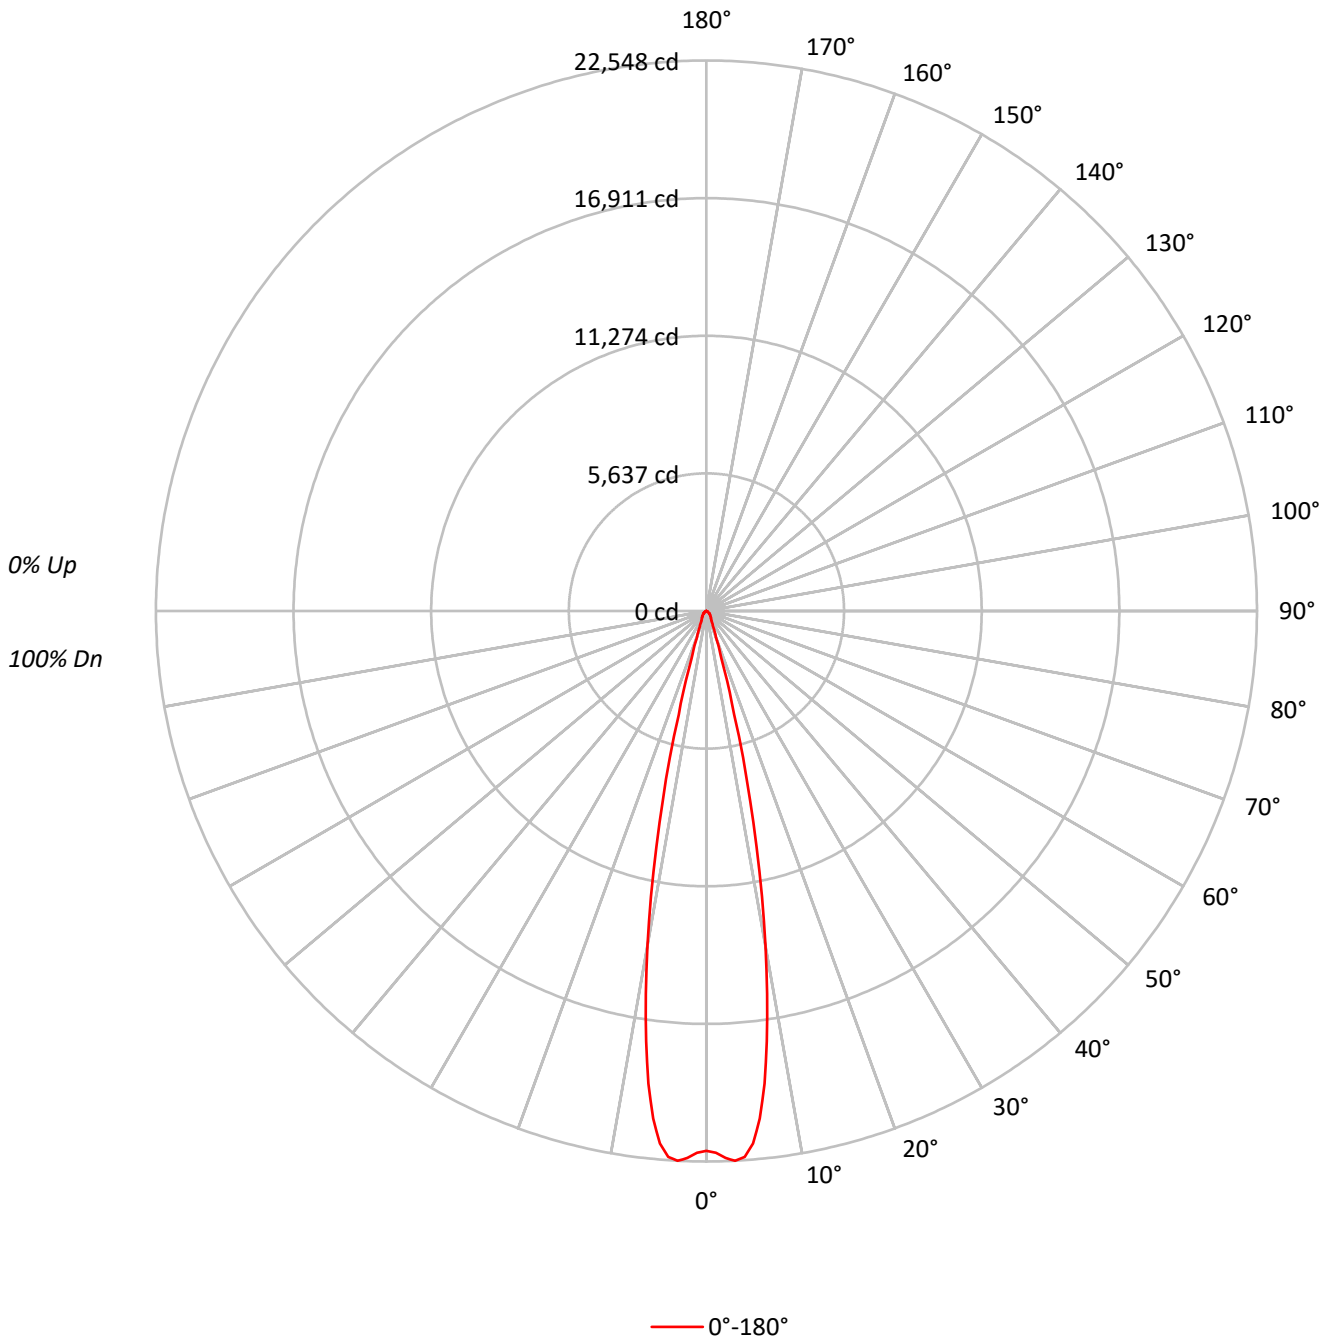



TEST NUMBER: P247015
 CATALOG NUMBER: 213-8LED2710-12-CS-OSL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	101	103	100	99	100	98	96	97	96	94	93
3	107	103	99	96	106	101	98	95	99	96	94	97	94	93	95	93	91	90
4	104	99	95	92	103	98	94	91	96	93	90	94	91	89	92	90	88	87
5	101	95	91	88	100	94	91	88	93	90	87	91	88	86	90	87	86	84
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82
7	96	89	85	82	95	89	85	82	88	84	82	87	84	81	86	83	81	80
8	93	87	83	80	92	86	83	80	86	82	80	85	82	79	84	81	79	78
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	80	78	76	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10907635
5°	10840441
10°	6980454
15°	2245713
20°	599022
25°	306434
30°	219508
35°	190389
40°	158954
45°	134455
50°	115518
55°	82835
60°	54962
65°	31638
70°	19474
75°	25735
80°	0
85°	0



TEST NUMBER: P247015
 CATALOG NUMBER: 213-8LED2710-12-CS-OSL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1818.8	45.5
10°-20°	1428.0	35.7
20°-30°	285.3	7.1
30°-40°	194.7	4.9
40°-50°	152.0	3.8
50°-60°	87.1	2.2
60°-70°	25.2	0.6
70°-80°	8.9	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3532.1	88.3
0°-40°	3726.9	93.2
0°-60°	3966.0	99.1
0°-90°	4000.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4000.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	22108	
5°	21888	###
15°	4397	1428
25°	563	285
35°	316	195
45°	193	152
55°	96	87
65°	27	25
75°	14	9
85°	0	0
90°	0	



TEST NUMBER: P247015
CATALOG NUMBER: 213-8LED2710-12-CS-OSL

CANDELA DISTRIBUTION (FULL):

	0°
0°	22108.0
1°	22190.8
2°	22410.5
3°	22547.5
4°	22410.5
5°	21888.2
6°	20899.3
7°	19498.0
8°	17794.1
9°	15870.6
10°	13933.3
12.5°	8862.5
15°	4396.6
17.5°	2033.4
20°	1140.9
22.5°	769.1
25°	562.9
27.5°	453.0
30°	385.3
32.5°	343.2
35°	316.1
37.5°	275.4
40°	246.8
42.5°	219.8
45°	192.7
47.5°	179.1
50°	150.5
52.5°	123.4
55°	96.3
57.5°	69.2
60°	55.7
62.5°	27.1
65°	27.1
67.5°	13.5
70°	13.5
72.5°	13.5
75°	13.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)