

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-30

Luminaire Tested: **213-8LED4025-12-BK-LVR**

Test Date: 04/06/18

**Test Information**

Test Method: LM-79-08  
Report Number: G2-1802-569-30  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-30)  
Test Lab: INNOVATION CENTER(G2)  
Test Date: 04/06/18  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 213-8LED4025-12-BK-LVR  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD BLACK, HEX CELL LOUVER  
Light Source: (1) SORAA 4000K 95 CRI LED  
SM16-07-25D-940-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4000.0 lumens  
Efficiency: N/A  
Efficacy: 500.0 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.3  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 8  
Input Voltage (V): 12.0  
Input Current (Ain): 0.693  
Voltage Rise (V): NR  
Power Factor: 0.991  
Total Harmonic Distortion (THDi): 27.0  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): 25.0  
Test Distance: 25 FT



TEST NUMBER: G2-1802-569-30  
CATALOG NUMBER: 213-8LED4025-12-BK-LVR

### Luminous Intensity Polar Plot

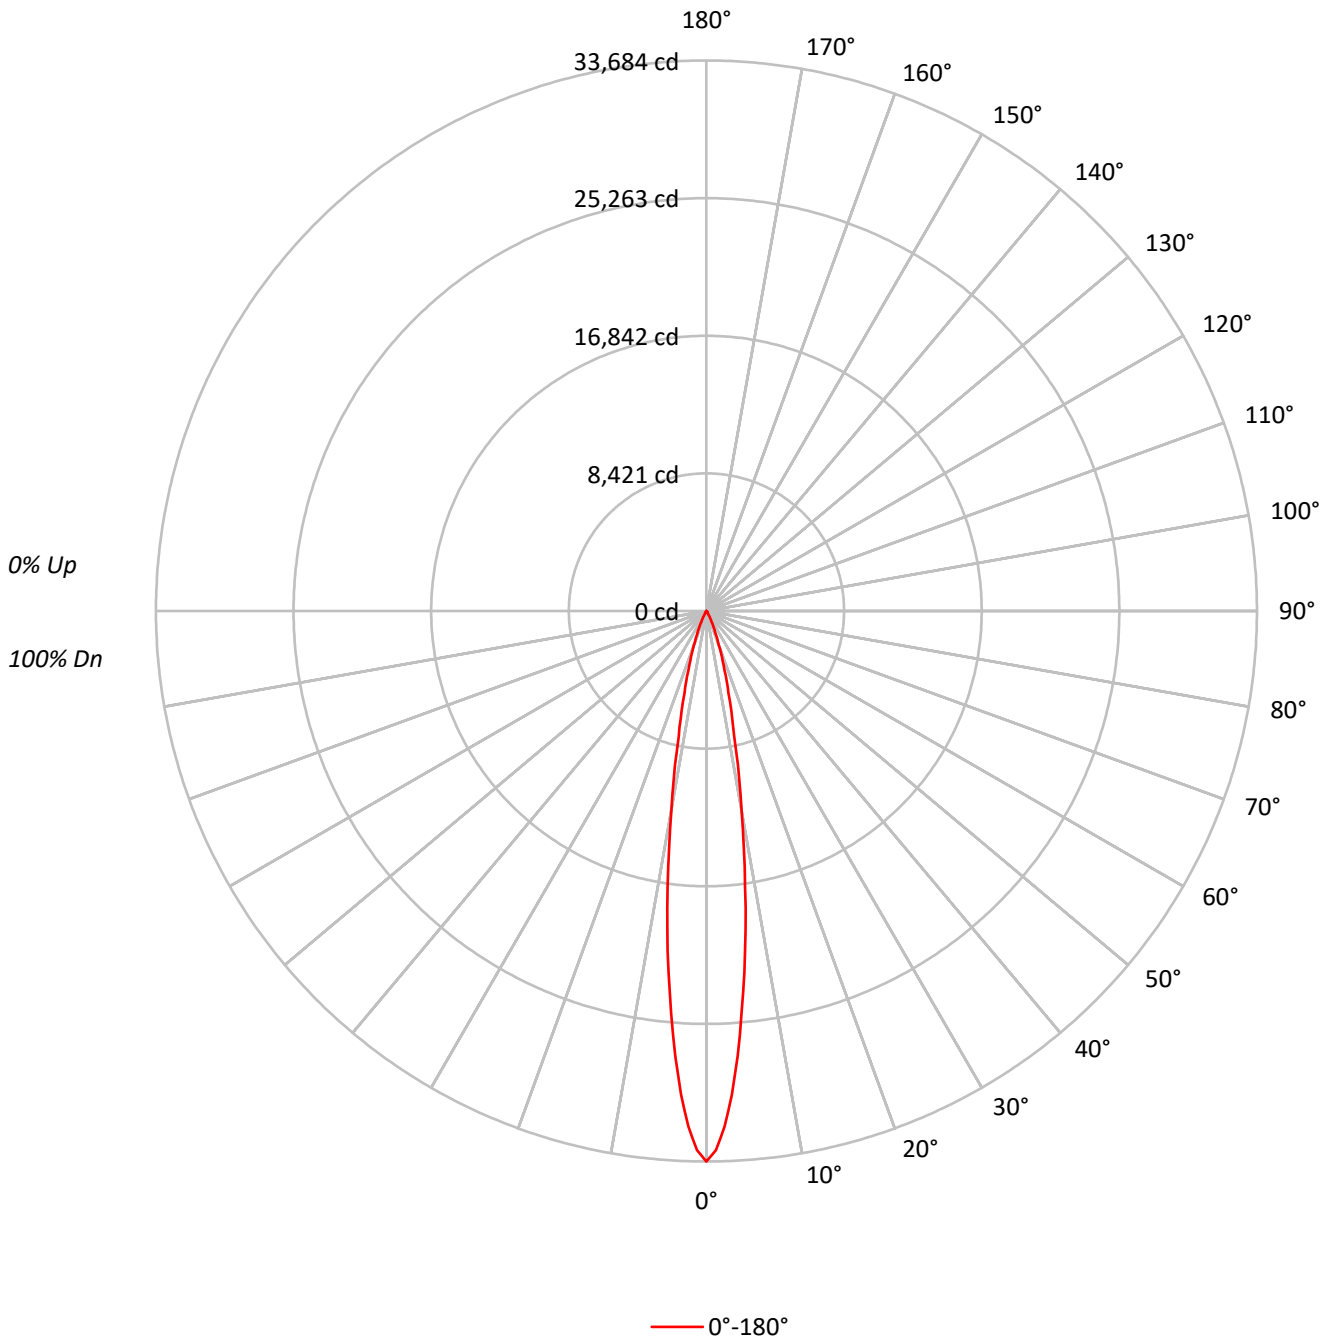



TEST NUMBER: G2-1802-569-30  
 CATALOG NUMBER: 213-8LED4025-12-BK-LVR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	98
2	112	109	106	104	110	107	105	103	104	102	101	101	100	99	99	98	97	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	96	97	95	94	93
4	106	102	98	95	105	101	97	95	99	96	94	97	95	93	95	93	92	91
5	104	99	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89
6	101	96	92	90	100	95	92	89	94	91	89	93	90	88	92	89	88	87
7	99	93	90	87	98	93	90	87	92	89	87	91	88	86	90	88	86	85
8	97	91	88	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83
9	95	89	86	83	94	89	86	83	88	85	83	87	85	83	87	84	83	82
10	93	87	84	82	92	87	84	82	86	83	81	86	83	81	85	83	81	80

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	16619243
5°	12239315
10°	6179370
15°	2647598
20°	1171845
25°	431642
30°	125506
35°	53063
40°	28403
45°	20514
50°	11283
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: G2-1802-569-30  
 CATALOG NUMBER: 213-8LED4025-12-BK-LVR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1953.8	48.8
10°-20°	1546.6	38.7
20°-30°	415.9	10.4
30°-40°	62.6	1.6
40°-50°	19.6	0.5
50°-60°	1.6	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3916.3	97.9
0°-40°	3978.8	99.5
0°-60°	4000.0	100.0
0°-90°	4000.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4000.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	33684	
5°	24713	###
15°	5183	1547
25°	793	416
35°	88	63
45°	29	20
55°	0	2
65°	0	0
75°	0	0
85°	0	0
90°	0	0



TEST NUMBER: G2-1802-569-30  
CATALOG NUMBER: 213-8LED4025-12-BK-LVR

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	33684.5
1°	32994.4
2°	31555.3
3°	29631.7
4°	27297.1
5°	24712.7
6°	22216.6
7°	19632.2
8°	17018.5
9°	14595.7
10°	12334.3
12.5°	7841.2
15°	5183.4
17.5°	3465.4
20°	2231.9
22.5°	1380.3
25°	792.9
27.5°	425.8
30°	220.3
32.5°	132.2
35°	88.1
37.5°	58.7
40°	44.1
42.5°	29.4
45°	29.4
47.5°	14.7
50°	14.7
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)