

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P247027

Luminaire Tested: **230-8LED2736-12-BK-DIFF**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247027  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-32)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 230-8LED2736-12-BK-DIFF  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 2700K CCT, 36 DEGREE WIDE OPTIC,  
REGRESSED HOOD BLACK, DIFFUSED LENS  
Light Source: (1) SORAA 2700K 95 CRI LED  
SM16-07-36D-927-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4000.0 lumens  
Efficiency: N/A  
Efficacy: 512.8 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.65  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247027  
CATALOG NUMBER: 230-8LED2736-12-BK-DIFF

### Luminous Intensity Polar Plot

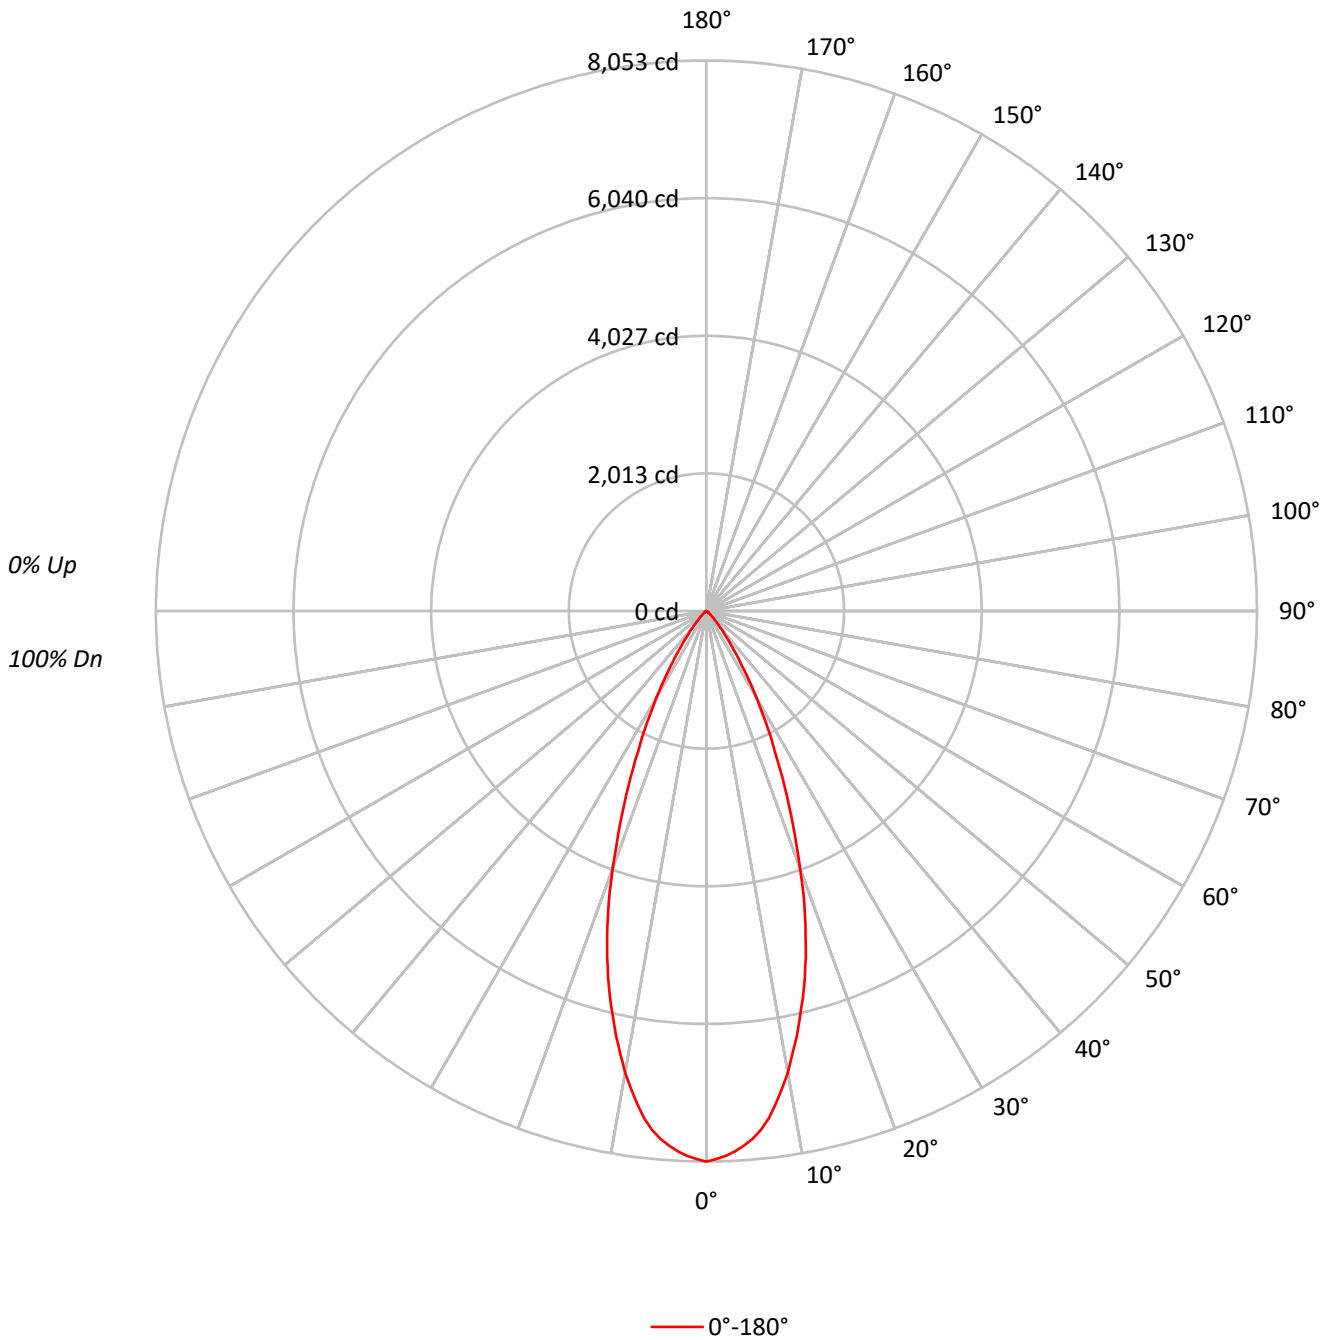



TEST NUMBER: P247027  
 CATALOG NUMBER: 230-8LED2736-12-BK-DIFF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77
6	92	85	79	76	91	84	79	76	82	78	75	81	77	75	80	77	74	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	68	74	70	67	66
9	82	74	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63
10	79	70	65	62	78	70	65	62	69	65	62	69	64	62	68	64	61	60

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3973087
5°	3838000
10°	3434642
15°	2836997
20°	2105792
25°	1384532
30°	827440
35°	419445
40°	195408
45°	84427
50°	34387
55°	12817
60°	14703
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P247027  
 CATALOG NUMBER: 230-8LED2736-12-BK-DIFF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	711.0	17.8
10°-20°	1518.7	38.0
20°-30°	1170.2	29.3
30°-40°	471.2	11.8
40°-50°	107.4	2.7
50°-60°	19.8	0.5
60°-70°	1.8	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3399.8	85.0
0°-40°	3871.0	96.8
0°-60°	3998.2	100.0
0°-90°	4000.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4000.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8053	
5°	7749	711
15°	5554	1519
25°	2543	1170
35°	696	471
45°	121	107
55°	15	20
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P247027  
CATALOG NUMBER: 230-8LED2736-12-BK-DIFF

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	8052.8
1°	8021.3
2°	7976.5
3°	7915.2
4°	7840.6
5°	7749.4
6°	7628.4
7°	7477.5
8°	7280.2
9°	7068.0
10°	6855.7
11°	6598.8
12°	6356.7
13°	6084.8
14°	5827.8
15°	5554.2
16°	5267.4
17°	4964.0
18°	4662.2
19°	4343.9
20°	4010.7
21°	3677.4
22°	3375.6
23°	3087.2
24°	2815.2
25°	2543.3
26°	2284.7
27°	2074.1
28°	1847.0
29°	1634.8
30°	1452.4
32.5°	1029.6
35°	696.4
37.5°	484.1
40°	303.4
42.5°	197.3
45°	121.0
47.5°	76.3
50°	44.8
52.5°	29.8
55°	14.9
57.5°	14.9
60°	14.9
62.5°	0.0
65°	0.0



TEST NUMBER: P247027  
CATALOG NUMBER: 230-8LED2736-12-BK-DIFF

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)