

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P246973

Luminaire Tested: **230-8LED3025-12-BK**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P246973
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 230-8LED3025-12-BK
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD BLACK
Light Source: (1) SORAA 3000K 95 CRI 25°NFL LED SM16-07-25D-930-03
Ballast/Driver: CHROMA POWER SUPPLY IN0004

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4000.1 lumens
Efficiency: N/A
Efficacy: 506.3 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.33
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246973
CATALOG NUMBER: 230-8LED3025-12-BK

Luminous Intensity Polar Plot

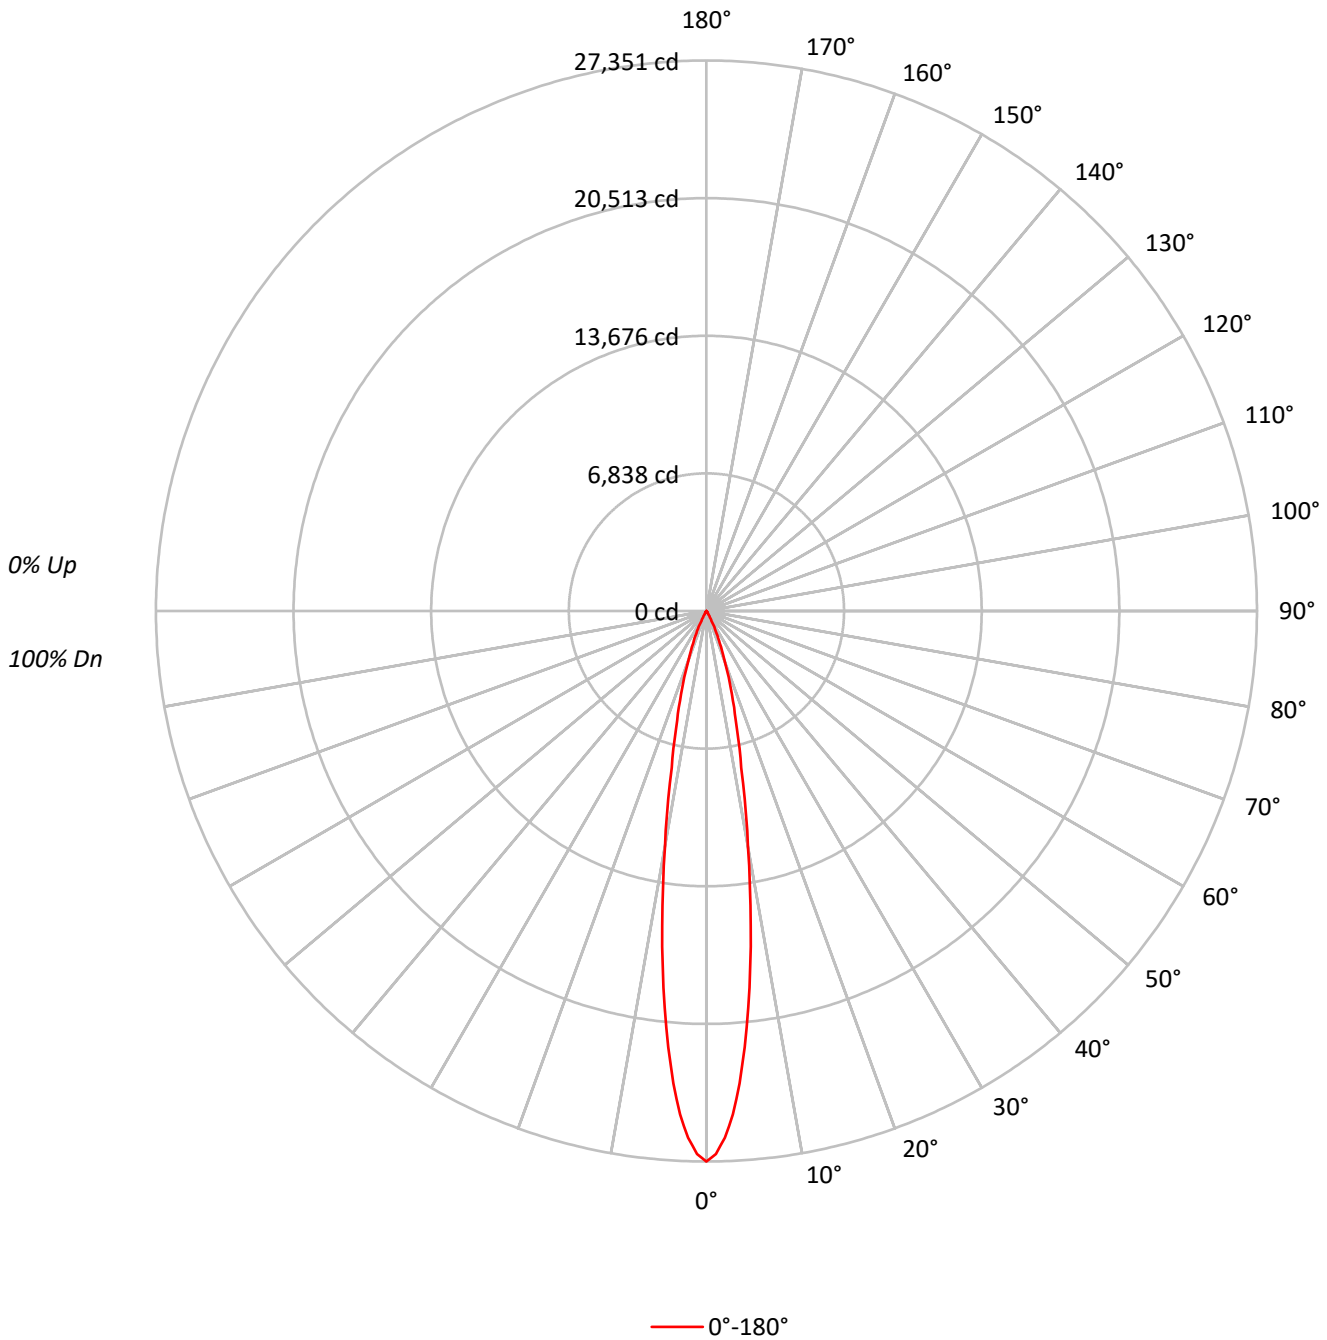



TEST NUMBER: P246973
 CATALOG NUMBER: 230-8LED3025-12-BK

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92
4	106	101	97	94	104	100	96	94	98	95	93	96	94	92	94	92	91	90
5	103	97	94	91	102	97	93	91	95	92	90	94	91	89	92	90	88	87
6	100	95	91	88	99	94	90	88	93	90	87	91	89	87	90	88	86	85
7	98	92	88	85	97	91	88	85	90	87	85	89	87	84	88	86	84	83
8	96	90	86	83	95	89	86	83	88	85	83	87	85	82	87	84	82	81
9	93	87	84	81	93	87	83	81	86	83	81	85	83	81	85	82	80	79
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	81	79	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	13494621
5°	10772442
10°	5943804
15°	2871730
20°	1408534
25°	593379
30°	133938
35°	51557
40°	27179
45°	15141
50°	8366
55°	9376
60°	10756
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P246973
 CATALOG NUMBER: 230-8LED3025-12-BK

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1747.1	43.7
10°-20°	1635.8	40.9
20°-30°	525.6	13.1
30°-40°	63.1	1.6
40°-50°	17.4	0.4
50°-60°	9.8	0.2
60°-70°	1.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3908.5	97.7
0°-40°	3971.6	99.3
0°-60°	3998.8	100.0
0°-90°	4000.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4000.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	27351	
5°	21751	###
15°	5622	1636
25°	1090	526
35°	86	63
45°	22	17
55°	11	10
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246973
CATALOG NUMBER: 230-8LED3025-12-BK

CANDELA DISTRIBUTION (FULL):

	0°
0°	27351.4
1°	26977.6
2°	26186.7
3°	25043.7
4°	23525.7
5°	21750.9
6°	19826.6
7°	17839.6
8°	15797.1
9°	13788.4
10°	11864.1
12.5°	7973.3
15°	5622.2
17.5°	3987.3
20°	2682.7
22.5°	1731.4
25°	1090.0
27.5°	545.0
30°	235.1
32.5°	138.7
35°	85.6
37.5°	53.1
40°	42.2
42.5°	32.6
45°	21.7
47.5°	10.9
50°	10.9
52.5°	10.9
55°	10.9
57.5°	10.9
60°	10.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)