

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-9

Luminaire Tested: **230-8LED4036-12-CS**

Test Date: 04/05/18

**Test Information**

Test Method: LM-79-08  
Report Number: G2-1802-569-9  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-9)  
Test Lab: INNOVATION CENTER(G2)  
Test Date: 04/05/18  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 230-8LED4036-12-CS  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 36 DEGREE WIDE OPTIC,  
REGRESSED HOOD SILVER  
Light Source: (1) SORAA 4000K 90 CRI LED  
SM16-07-36D-940-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4000.1 lumens  
Efficiency: N/A  
Efficacy: 526.3 lumens/watt  
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.54  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.6  
Input Voltage (V): 12.0  
Input Current (Ain): 0.667  
Voltage Rise (V): NR  
Power Factor: 0.9902  
Total Harmonic Distortion (THDi): 27.4%  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): 25.3  
Test Distance: 25 FT



TEST NUMBER: G2-1802-569-9  
CATALOG NUMBER: 230-8LED4036-12-CS

### Luminous Intensity Polar Plot

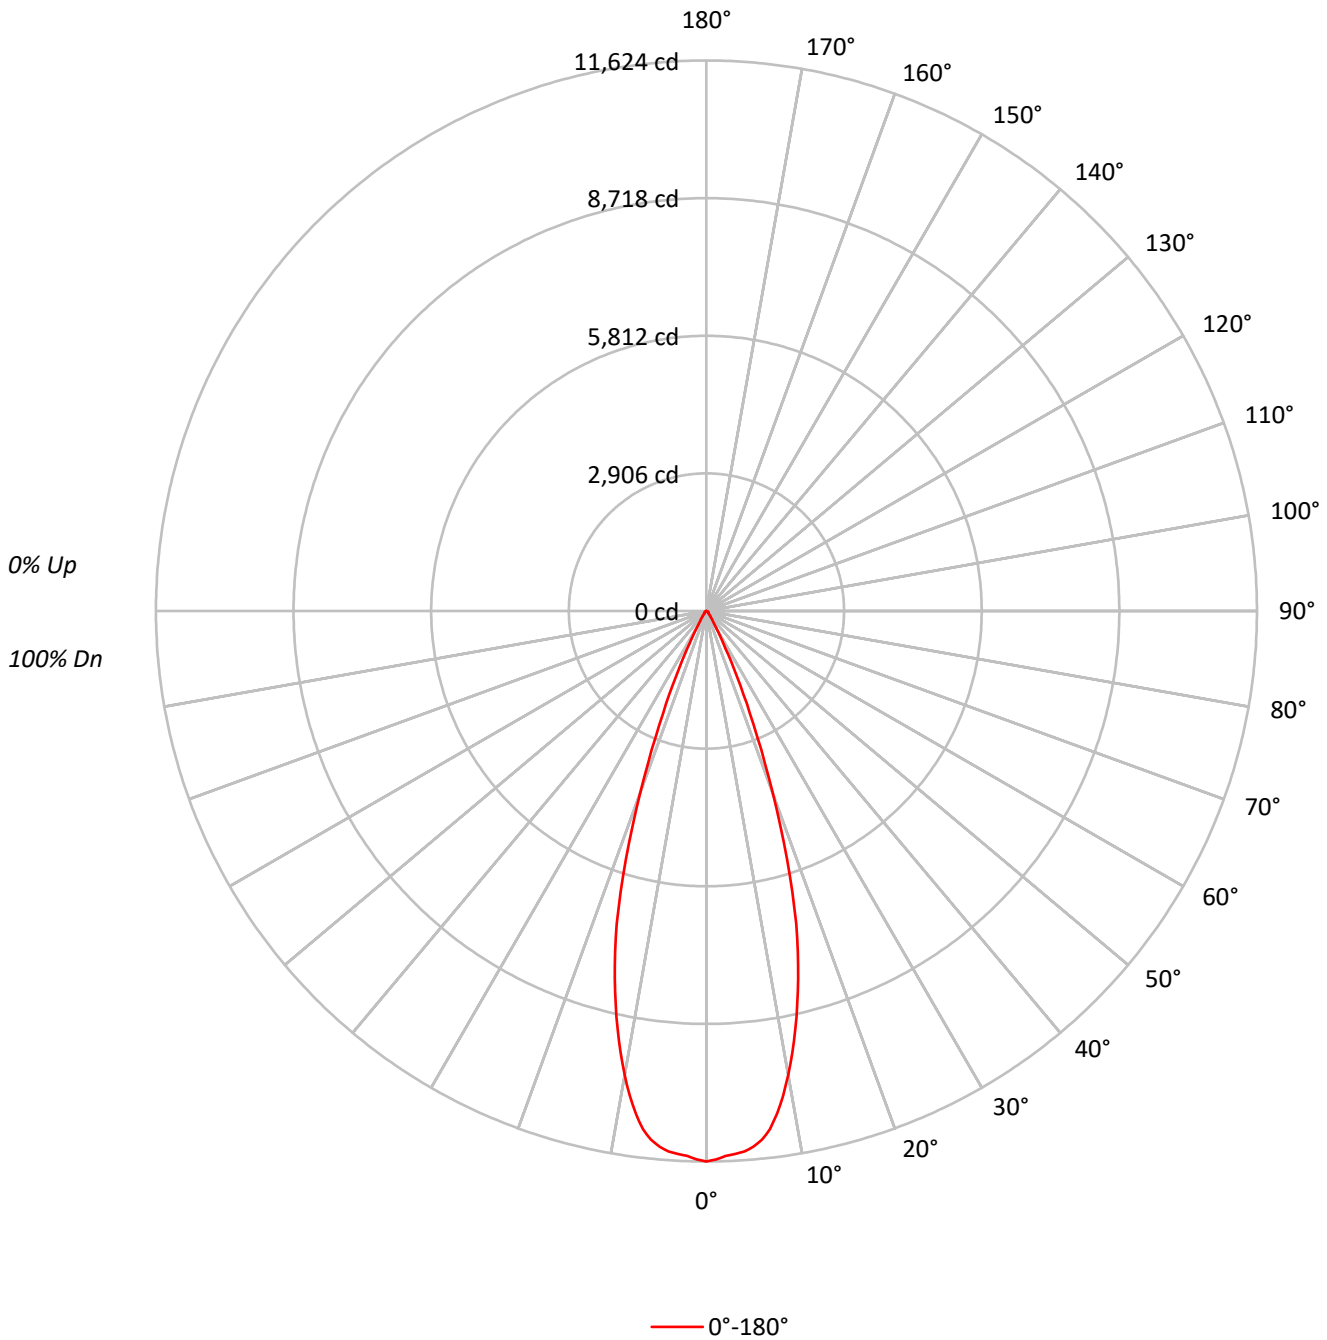



TEST NUMBER: G2-1802-569-9  
 CATALOG NUMBER: 230-8LED4036-12-CS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96
2	111	107	104	101	108	105	102	100	102	100	98	99	97	96	96	95	94	92
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88
4	103	97	93	90	101	96	92	89	94	91	88	92	90	87	91	88	86	85
5	100	93	89	86	98	92	88	85	91	87	85	89	86	84	88	85	83	82
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79
7	93	86	82	79	92	86	82	78	85	81	78	84	80	78	83	80	77	76
8	90	83	79	76	89	83	79	76	82	78	75	81	78	75	80	77	75	74
9	88	81	76	73	87	80	76	73	79	75	73	78	75	73	78	75	72	71
10	85	78	74	71	84	78	73	71	77	73	70	76	73	70	76	72	70	69

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	5734847
5°	5623477
10°	4982152
15°	3809683
20°	2152941
25°	843686
30°	226857
35°	97212
40°	55454
45°	37539
50°	33082
55°	37074
60°	21215
65°	12608
70°	15579
75°	20588
80°	0
85°	0



TEST NUMBER: G2-1802-569-9  
 CATALOG NUMBER: 230-8LED4036-12-CS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1041.1	26.0
10°-20°	1977.0	49.4
20°-30°	763.9	19.1
30°-40°	117.3	2.9
40°-50°	45.5	1.1
50°-60°	33.6	0.8
60°-70°	14.6	0.4
70°-80°	7.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3782.0	94.5
0°-40°	3899.2	97.5
0°-60°	3978.4	99.5
0°-90°	4000.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4000.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	11624	
5°	11354	###
15°	7458	1977
25°	1550	764
35°	161	117
45°	54	45
55°	43	34
65°	11	15
75°	11	7
85°	0	0
90°	0	



TEST NUMBER: G2-1802-569-9  
CATALOG NUMBER: 230-8LED4036-12-CS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	11623.6
1°	11580.5
2°	11516.0
3°	11483.7
4°	11440.6
5°	11354.5
6°	11225.4
7°	11020.9
8°	10719.5
9°	10364.4
10°	9944.6
11°	9492.6
12°	9029.8
13°	8524.0
14°	7996.6
15°	7458.5
16°	6866.5
17°	6210.0
18°	5499.7
19°	4789.4
20°	4100.5
21°	3444.0
22°	2862.8
23°	2346.2
24°	1926.5
25°	1549.8
26°	1173.1
27°	893.3
28°	678.0
29°	516.6
30°	398.2
32.5°	247.5
35°	161.4
37.5°	118.4
40°	86.1
42.5°	64.6
45°	53.8
47.5°	53.8
50°	43.1
52.5°	43.1
55°	43.1
57.5°	32.3
60°	21.5
62.5°	21.5
65°	10.8



TEST NUMBER: G2-1802-569-9  
CATALOG NUMBER: 230-8LED4036-12-CS

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	10.8
70°	10.8
72.5°	10.8
75°	10.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)