

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29421)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV
Description: LUMIERE LANTERRA 1002 LED ACCENT/PATH/SIGN LUMINAIRE, FLUSH LENS,
SPOT OPTIC, BLACK HOUSING.
Light Source: (1) 2700K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER


Summary

Lumens per Lamp:	N/A	NEMA Type:	2H x 2V
Luminaire Lumens:	346.3 lumens	Max Intensity:	4580.2 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	34.6 lumens/watt		
Luminous Opening:	Circular (Dia: 0.17' x H: 0')		
Beam Angle (50%):	14°H x 14°V	Field Angle (10%):	24.8°H x 24.8°V
Beam Lumens:	145.8 lumens	Field Lumens:	267.1 lumens
Beam Efficiency:	42.1%	Field Efficiency:	77.1%
Input Watts (W):	10		
Input Voltage (V):	120		
Input Current (Ain):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

Iso-Candela Plot

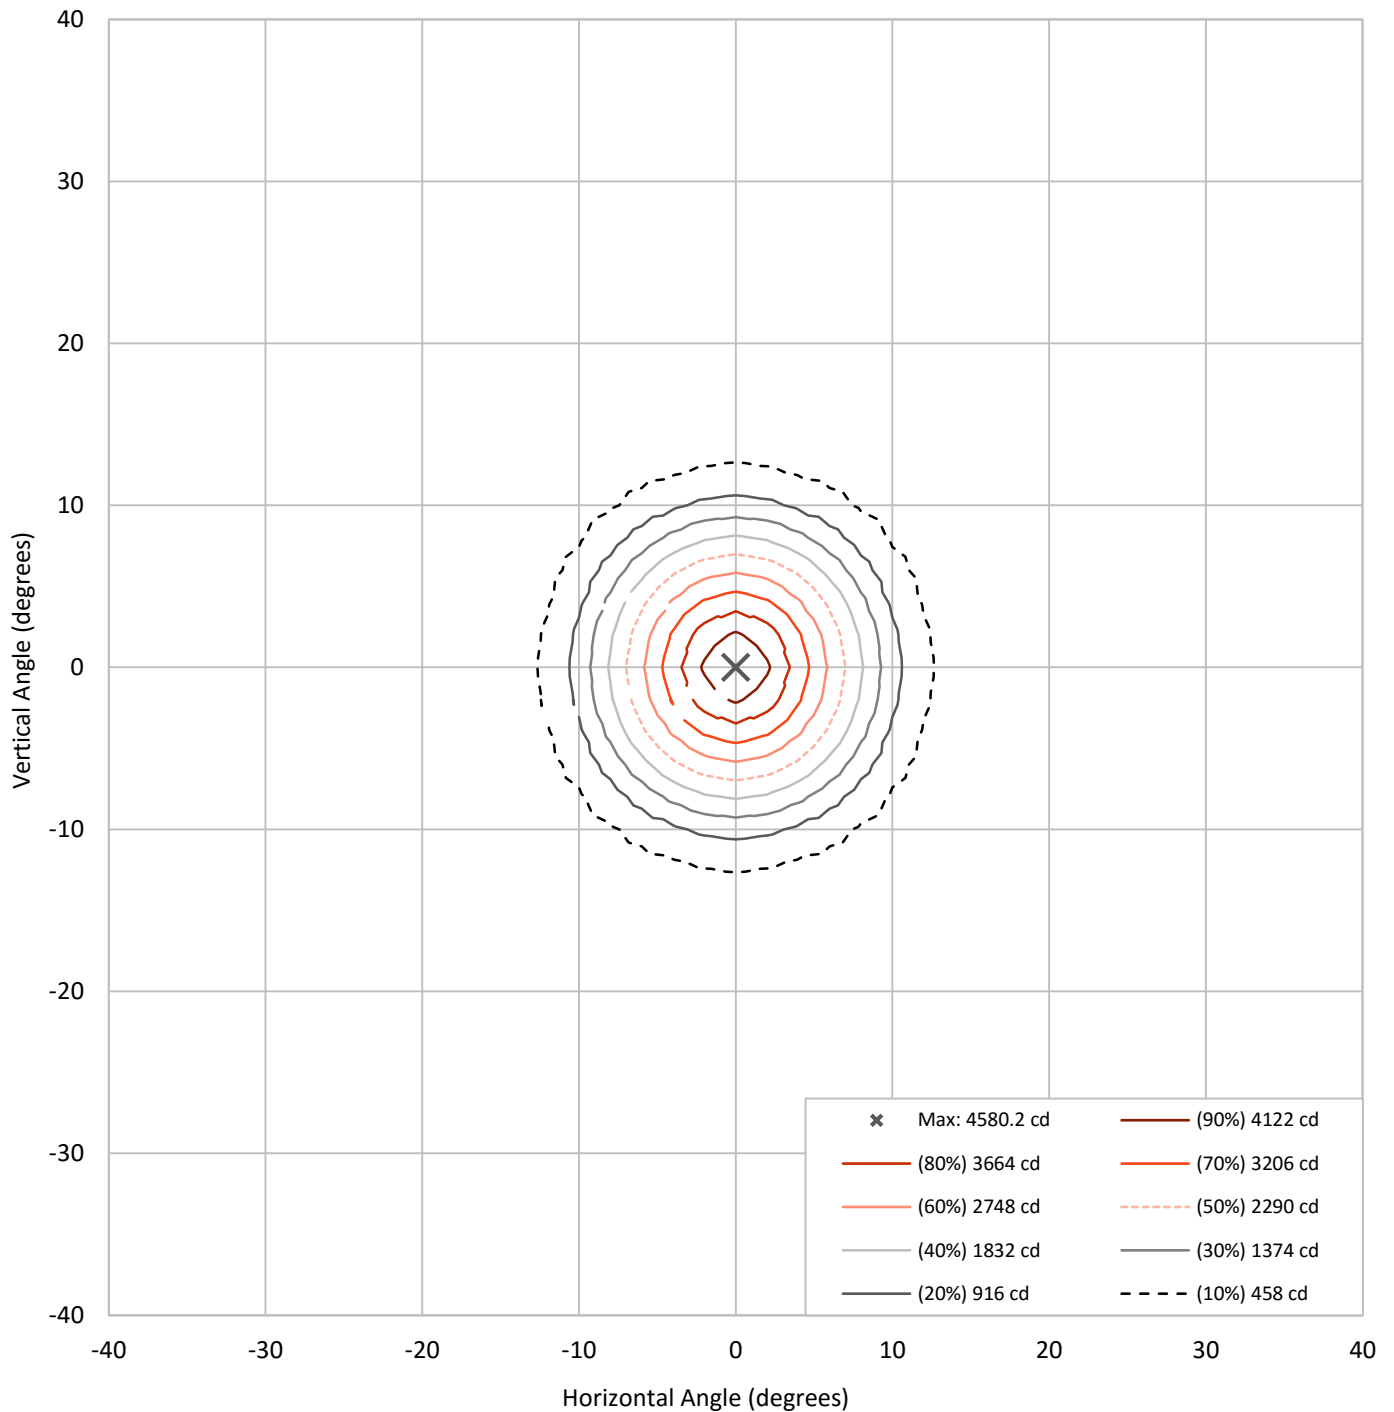

REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)


CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60		0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
50	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
40		0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.3	0.2	0.1	0.1	0.0	0.0	0.0	0.0	
30	0.0	0.0	0.0	0.1	0.1	0.2	0.7	1.4	1.4	0.7	0.2	0.1	0.1	0.0	0.0	0.0	0.0
20		0.0	0.0	0.1	0.2	0.7	2.8	7.7	7.7	2.8	0.7	0.2	0.1	0.0	0.0	0.0	
10	0.0	0.0	0.0	0.1	0.2	1.3	7.5	62.0	62.0	7.5	1.3	0.2	0.1	0.0	0.0	0.0	0.0
0		0.0	0.0	0.1	0.2	1.3	7.5	62.0	62.0	7.5	1.3	0.2	0.1	0.0	0.0	0.0	
-10	0.0	0.0	0.0	0.1	0.2	0.7	2.8	7.7	7.7	2.8	0.7	0.2	0.1	0.0	0.0	0.0	0.0
-20		0.0	0.0	0.1	0.1	0.2	0.7	1.4	1.4	0.7	0.2	0.1	0.1	0.0	0.0	0.0	
-30	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.3	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0
-40		0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

Luminous Intensity Polar Plot

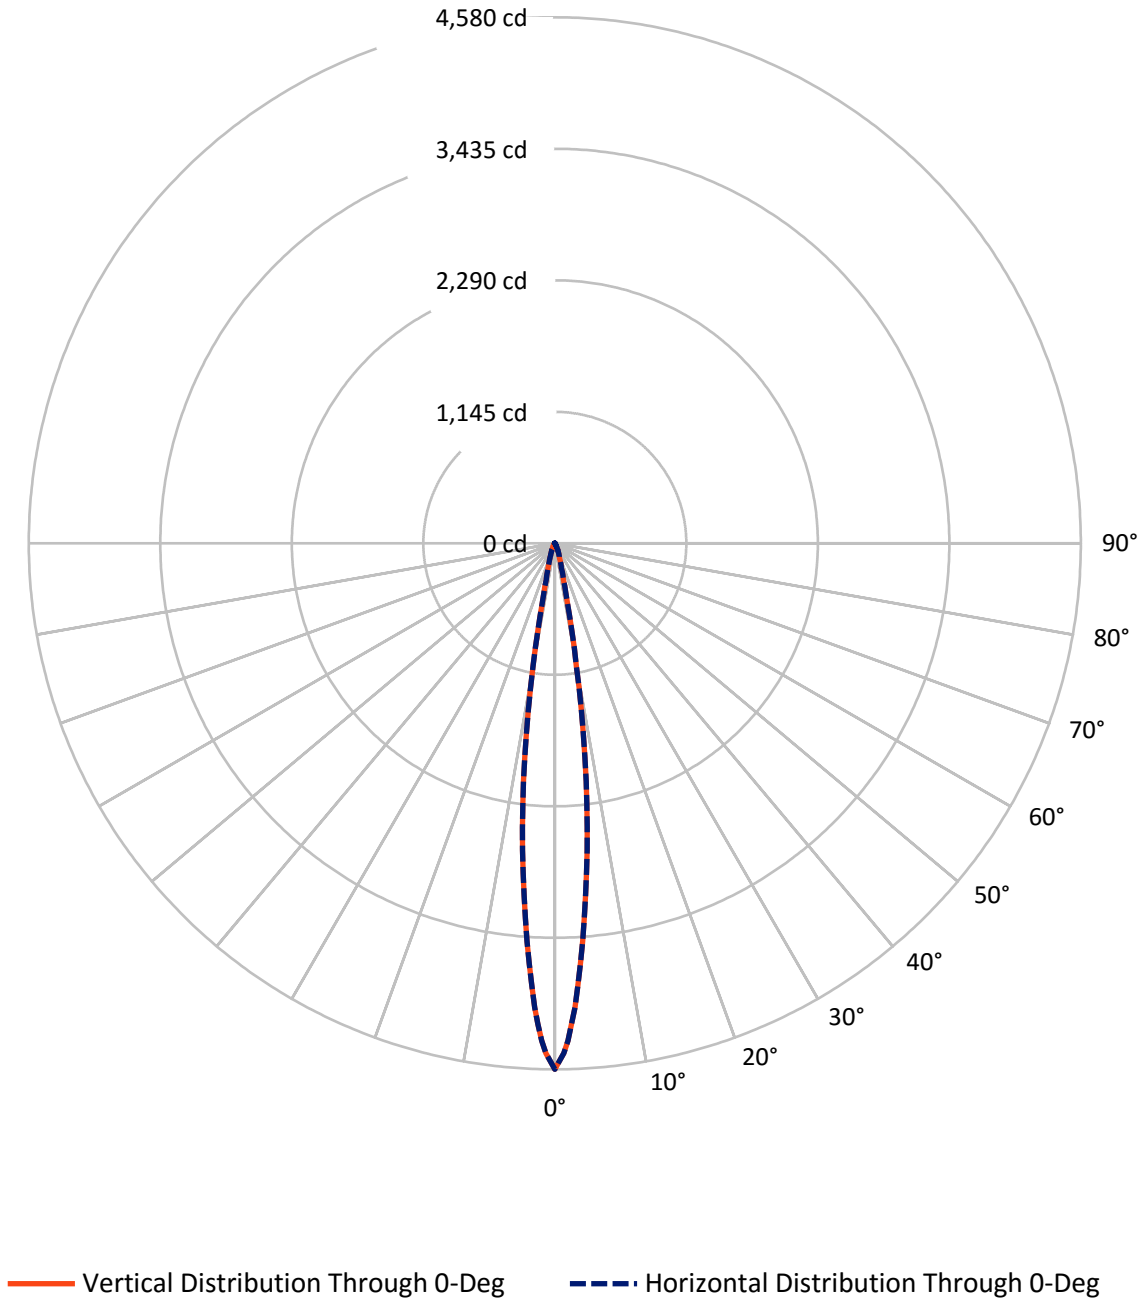

REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

Luminous Intensity Plot

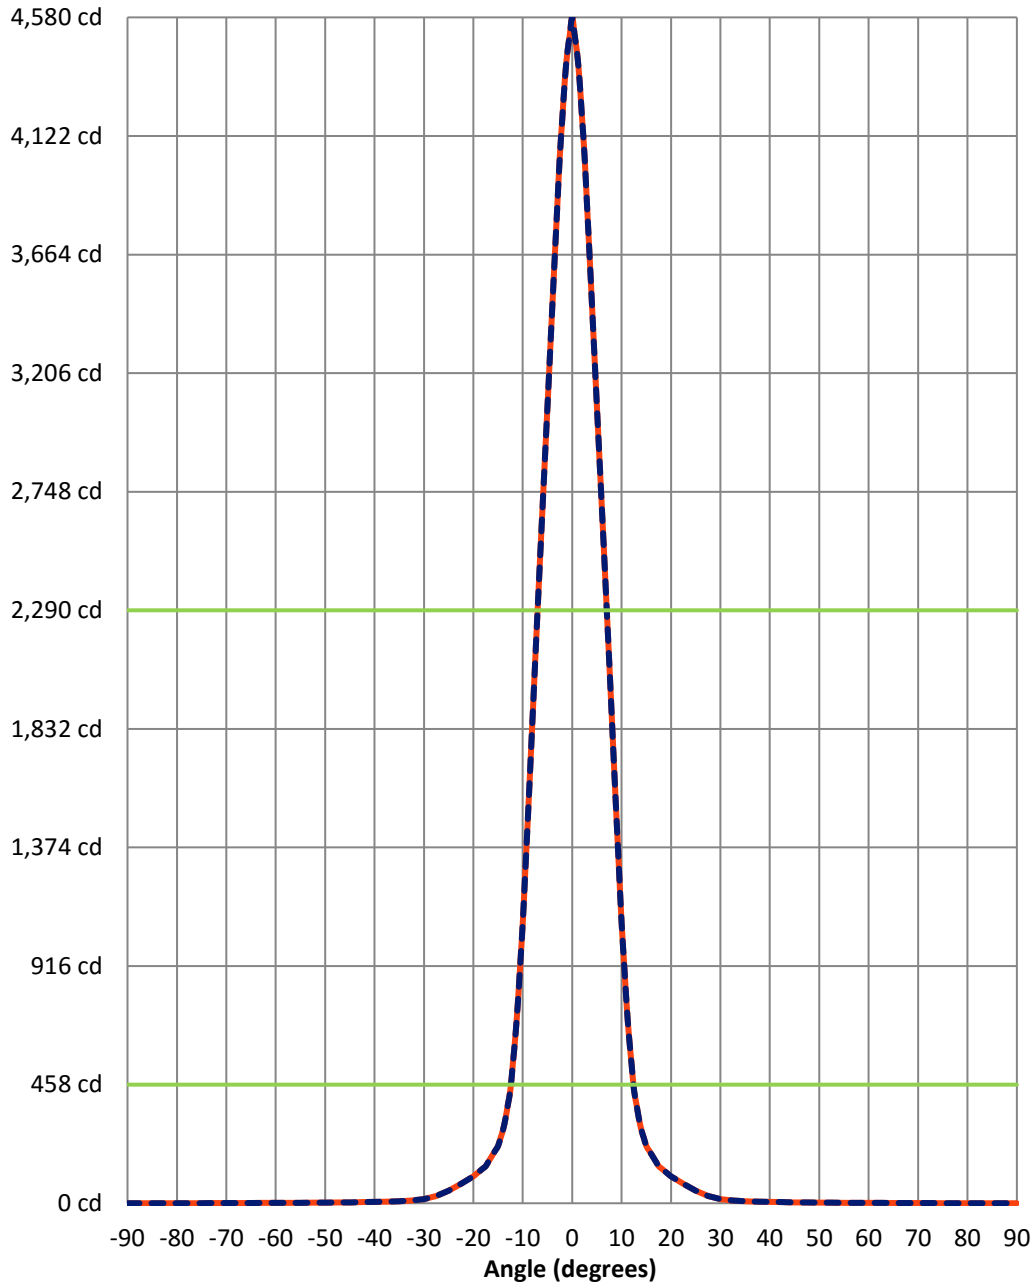

Beam:
H Angle: 14°
V Angle: 14°
Lumens: 145.8
Efficiency: 42.1%

Field:
H Angle: 24.8°
V Angle: 24.8°
Lumens: 267.1
Efficiency: 77.1%

Spill:
Lumens: 79.2
Efficiency: 22.9%

— Vertical Distribution through 0-Deg
- - Horizontal Distribution through 0-Deg



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	1
47.5°	0	0	0	0	0	0	0	0	0	1	1
46.25°	0	0	0	0	0	0	0	0	0	1	1
45°	0	0	0	0	0	0	0	0	0	1	1
43.75°	0	0	0	0	0	0	0	0	1	1	1
42.5°	0	0	0	0	0	0	0	0	1	1	1
41.25°	0	0	0	0	0	0	0	1	1	1	1
40°	0	0	0	0	0	0	0	1	1	1	1
38.75°	0	0	0	0	0	0	0	1	1	1	1
37.5°	0	0	0	0	0	0	1	1	1	1	1
36.25°	0	0	0	0	0	0	1	1	1	1	1
35°	0	0	0	0	0	0	1	1	1	1	1



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	1	1	1	1	1
32.5°	0	0	0	0	0	1	1	1	1	1	1
31.25°	0	0	0	0	0	1	1	1	1	1	1
30°	0	0	0	0	0	1	1	1	1	1	1
28.75°	0	0	0	0	0	1	1	1	1	1	1
27.5°	0	0	0	0	1	1	1	1	1	1	1
26.25°	0	0	0	0	1	1	1	1	1	1	1
25°	0	0	0	0	1	1	1	1	1	1	1
23.75°	0	0	0	0	1	1	1	1	1	1	1
22.5°	0	0	0	0	1	1	1	1	1	1	1
21.25°	0	0	0	0	1	1	1	1	1	1	1
20°	0	0	0	0	1	1	1	1	1	1	1
18.75°	0	0	0	0	1	1	1	1	1	1	1
17.5°	0	0	0	1	1	1	1	1	1	1	1
16.25°	0	0	0	1	1	1	1	1	1	1	1
15°	0	0	0	1	1	1	1	1	1	1	1
13.75°	0	0	0	1	1	1	1	1	1	1	1
12.5°	0	0	0	1	1	1	1	1	1	1	1
11.25°	0	0	0	1	1	1	1	1	1	1	1
10°	0	0	0	1	1	1	1	1	1	1	1
8.75°	0	0	0	1	1	1	1	1	1	1	1
7.5°	0	0	0	1	1	1	1	1	1	1	1
6.25°	0	0	0	1	1	1	1	1	1	1	1
5°	0	0	0	1	1	1	1	1	1	1	1
3.75°	0	0	0	1	1	1	1	1	1	1	1
2.5°	0	0	0	1	1	1	1	1	1	1	1
1.25°	0	0	0	1	1	1	1	1	1	1	1
0°	0	0	0	1	1	1	1	1	1	1	1
-1.25°	0	0	0	1	1	1	1	1	1	1	1
-2.5°	0	0	0	1	1	1	1	1	1	1	1
-3.75°	0	0	0	1	1	1	1	1	1	1	1
-5°	0	0	0	1	1	1	1	1	1	1	1
-6.25°	0	0	0	1	1	1	1	1	1	1	1
-7.5°	0	0	0	1	1	1	1	1	1	1	1
-8.75°	0	0	0	1	1	1	1	1	1	1	1
-10°	0	0	0	1	1	1	1	1	1	1	1
-11.25°	0	0	0	1	1	1	1	1	1	1	1
-12.5°	0	0	0	1	1	1	1	1	1	1	1
-13.75°	0	0	0	1	1	1	1	1	1	1	1
-15°	0	0	0	1	1	1	1	1	1	1	1
-16.25°	0	0	0	1	1	1	1	1	1	1	1
-17.5°	0	0	0	1	1	1	1	1	1	1	1
-18.75°	0	0	0	0	1	1	1	1	1	1	1
-20°	0	0	0	0	1	1	1	1	1	1	1
-21.25°	0	0	0	0	1	1	1	1	1	1	1



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	1	1	1	1	1	1	1
-23.75°	0	0	0	0	1	1	1	1	1	1	1
-25°	0	0	0	0	1	1	1	1	1	1	1
-26.25°	0	0	0	0	1	1	1	1	1	1	1
-27.5°	0	0	0	0	1	1	1	1	1	1	1
-28.75°	0	0	0	0	0	1	1	1	1	1	1
-30°	0	0	0	0	0	1	1	1	1	1	1
-31.25°	0	0	0	0	0	1	1	1	1	1	1
-32.5°	0	0	0	0	0	1	1	1	1	1	1
-33.75°	0	0	0	0	0	0	1	1	1	1	1
-35°	0	0	0	0	0	0	1	1	1	1	1
-36.25°	0	0	0	0	0	0	1	1	1	1	1
-37.5°	0	0	0	0	0	0	1	1	1	1	1
-38.75°	0	0	0	0	0	0	0	1	1	1	1
-40°	0	0	0	0	0	0	0	1	1	1	1
-41.25°	0	0	0	0	0	0	0	1	1	1	1
-42.5°	0	0	0	0	0	0	0	0	1	1	1
-43.75°	0	0	0	0	0	0	0	0	1	1	1
-45°	0	0	0	0	0	0	0	0	0	1	1
-46.25°	0	0	0	0	0	0	0	0	0	1	1
-47.5°	0	0	0	0	0	0	0	0	0	1	1
-48.75°	0	0	0	0	0	0	0	0	0	0	1
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	1	1
61.25°	0	0	0	0	0	0	0	0	1	1	1
60°	0	0	0	0	0	0	1	1	1	1	1
58.75°	0	0	0	0	0	1	1	1	1	1	1
57.5°	0	0	0	0	1	1	1	1	1	1	1
56.25°	0	0	0	1	1	1	1	1	1	1	1
55°	0	0	1	1	1	1	1	1	1	1	1
53.75°	0	0	1	1	1	1	1	1	1	1	1
52.5°	0	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	1	1	1	1	1	1	1	1	1	1	1
45°	1	1	1	1	1	1	1	1	1	1	1
43.75°	1	1	1	1	1	1	1	1	1	1	2
42.5°	1	1	1	1	1	1	1	1	1	1	2
41.25°	1	1	1	1	1	1	1	1	1	2	2
40°	1	1	1	1	1	1	1	1	2	2	2
38.75°	1	1	1	1	1	1	1	1	2	2	2
37.5°	1	1	1	1	1	1	1	2	2	2	2
36.25°	1	1	1	1	1	1	2	2	2	2	2
35°	1	1	1	1	1	1	2	2	2	2	2



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	1	1	1	1	1	2	2	2	2	2	2
32.5°	1	1	1	1	1	2	2	2	2	2	2
31.25°	1	1	1	1	1	2	2	2	2	2	2
30°	1	1	1	1	2	2	2	2	2	2	2
28.75°	1	1	1	1	2	2	2	2	2	2	2
27.5°	1	1	1	1	2	2	2	2	2	2	2
26.25°	1	1	1	2	2	2	2	2	2	2	2
25°	1	1	1	2	2	2	2	2	2	2	2
23.75°	1	1	1	2	2	2	2	2	2	2	2
22.5°	1	1	2	2	2	2	2	2	2	2	2
21.25°	1	1	2	2	2	2	2	2	2	2	2
20°	1	1	2	2	2	2	2	2	2	2	2
18.75°	1	1	2	2	2	2	2	2	2	2	2
17.5°	1	1	2	2	2	2	2	2	2	2	2
16.25°	1	2	2	2	2	2	2	2	2	2	2
15°	1	2	2	2	2	2	2	2	2	2	2
13.75°	1	2	2	2	2	2	2	2	2	2	2
12.5°	1	2	2	2	2	2	2	2	2	2	2
11.25°	1	2	2	2	2	2	2	2	2	2	2
10°	1	2	2	2	2	2	2	2	2	2	2
8.75°	1	2	2	2	2	2	2	2	2	2	2
7.5°	1	2	2	2	2	2	2	2	2	2	2
6.25°	1	2	2	2	2	2	2	2	2	2	2
5°	1	2	2	2	2	2	2	2	2	2	2
3.75°	1	2	2	2	2	2	2	2	2	2	2
2.5°	1	2	2	2	2	2	2	2	2	2	2
1.25°	1	2	2	2	2	2	2	2	2	2	2
0°	2	2	2	2	2	2	2	2	2	2	2
-1.25°	1	2	2	2	2	2	2	2	2	2	2
-2.5°	1	2	2	2	2	2	2	2	2	2	2
-3.75°	1	2	2	2	2	2	2	2	2	2	2
-5°	1	2	2	2	2	2	2	2	2	2	2
-6.25°	1	2	2	2	2	2	2	2	2	2	2
-7.5°	1	2	2	2	2	2	2	2	2	2	2
-8.75°	1	2	2	2	2	2	2	2	2	2	2
-10°	1	2	2	2	2	2	2	2	2	2	2
-11.25°	1	2	2	2	2	2	2	2	2	2	2
-12.5°	1	2	2	2	2	2	2	2	2	2	2
-13.75°	1	2	2	2	2	2	2	2	2	2	2
-15°	1	2	2	2	2	2	2	2	2	2	2
-16.25°	1	2	2	2	2	2	2	2	2	2	2
-17.5°	1	1	2	2	2	2	2	2	2	2	2
-18.75°	1	1	2	2	2	2	2	2	2	2	2
-20°	1	1	2	2	2	2	2	2	2	2	2
-21.25°	1	1	2	2	2	2	2	2	2	2	2



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	1	1	2	2	2	2	2	2	2	2	2
-23.75°	1	1	1	2	2	2	2	2	2	2	2
-25°	1	1	1	2	2	2	2	2	2	2	2
-26.25°	1	1	1	2	2	2	2	2	2	2	2
-27.5°	1	1	1	1	2	2	2	2	2	2	2
-28.75°	1	1	1	1	2	2	2	2	2	2	2
-30°	1	1	1	1	2	2	2	2	2	2	2
-31.25°	1	1	1	1	1	2	2	2	2	2	2
-32.5°	1	1	1	1	1	2	2	2	2	2	2
-33.75°	1	1	1	1	1	2	2	2	2	2	2
-35°	1	1	1	1	1	1	2	2	2	2	2
-36.25°	1	1	1	1	1	1	2	2	2	2	2
-37.5°	1	1	1	1	1	1	1	2	2	2	2
-38.75°	1	1	1	1	1	1	1	1	2	2	2
-40°	1	1	1	1	1	1	1	1	2	2	2
-41.25°	1	1	1	1	1	1	1	1	1	2	2
-42.5°	1	1	1	1	1	1	1	1	1	1	2
-43.75°	1	1	1	1	1	1	1	1	1	1	2
-45°	1	1	1	1	1	1	1	1	1	1	1
-46.25°	1	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	0	1	1	1	1	1	1	1	1	1	1
-53.75°	0	0	1	1	1	1	1	1	1	1	1
-55°	0	0	1	1	1	1	1	1	1	1	1
-56.25°	0	0	0	1	1	1	1	1	1	1	1
-57.5°	0	0	0	0	1	1	1	1	1	1	1
-58.75°	0	0	0	0	0	1	1	1	1	1	1
-60°	0	0	0	0	0	0	1	1	1	1	1
-61.25°	0	0	0	0	0	0	0	0	1	1	1
-62.5°	0	0	0	0	0	0	0	0	0	1	1
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	1	1
67.5°	0	0	0	0	0	0	1	1	1	1	1
66.25°	0	0	0	0	1	1	1	1	1	1	1
65°	0	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	2
53.75°	1	1	1	1	1	1	1	1	1	2	2
52.5°	1	1	1	1	1	1	1	2	2	2	2
51.25°	1	1	1	1	1	1	2	2	2	2	2
50°	1	1	1	1	2	2	2	2	2	2	2
48.75°	1	1	1	2	2	2	2	2	2	2	2
47.5°	1	1	2	2	2	2	2	2	2	2	2
46.25°	1	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	2	2
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	2	2	2	2	2	2	2	2	2	2	2
38.75°	2	2	2	2	2	2	2	2	2	2	2
37.5°	2	2	2	2	2	2	2	2	2	2	2
36.25°	2	2	2	2	2	2	2	2	2	2	2
35°	2	2	2	2	2	2	2	2	2	2	3



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	2	2	2	2	2	2	2	2	2	3	3
32.5°	2	2	2	2	2	2	2	2	3	3	3
31.25°	2	2	2	2	2	2	2	3	3	3	3
30°	2	2	2	2	2	2	2	3	3	3	3
28.75°	2	2	2	2	2	2	3	3	3	3	3
27.5°	2	2	2	2	2	3	3	3	3	3	3
26.25°	2	2	2	2	2	3	3	3	3	3	4
25°	2	2	2	2	3	3	3	3	3	4	4
23.75°	2	2	2	2	3	3	3	3	3	4	5
22.5°	2	2	2	3	3	3	3	3	4	4	5
21.25°	2	2	2	3	3	3	3	3	4	5	5
20°	2	2	2	3	3	3	3	4	4	5	5
18.75°	2	2	3	3	3	3	3	4	5	5	5
17.5°	2	2	3	3	3	3	3	4	5	5	5
16.25°	2	2	3	3	3	3	4	4	5	5	6
15°	2	3	3	3	3	3	4	5	5	5	6
13.75°	2	3	3	3	3	3	4	5	5	5	6
12.5°	2	3	3	3	3	4	4	5	5	6	6
11.25°	2	3	3	3	3	4	5	5	5	6	6
10°	2	3	3	3	3	4	5	5	5	6	6
8.75°	2	3	3	3	3	4	5	5	5	6	6
7.5°	3	3	3	3	3	4	5	5	6	6	6
6.25°	3	3	3	3	4	4	5	5	6	6	7
5°	3	3	3	3	4	4	5	5	6	6	7
3.75°	3	3	3	3	4	4	5	5	6	6	7
2.5°	3	3	3	3	4	4	5	5	6	6	7
1.25°	3	3	3	3	4	4	5	5	6	6	7
0°	3	3	3	3	4	5	5	5	6	6	7
-1.25°	3	3	3	3	4	4	5	5	6	6	7
-2.5°	3	3	3	3	4	4	5	5	6	6	7
-3.75°	3	3	3	3	4	4	5	5	6	6	7
-5°	3	3	3	3	4	4	5	5	6	6	7
-6.25°	3	3	3	3	4	4	5	5	6	6	7
-7.5°	3	3	3	3	3	4	5	5	6	6	6
-8.75°	2	3	3	3	3	4	5	5	5	6	6
-10°	2	3	3	3	3	4	5	5	5	6	6
-11.25°	2	3	3	3	3	4	5	5	5	6	6
-12.5°	2	3	3	3	3	4	4	5	5	6	6
-13.75°	2	3	3	3	3	3	4	5	5	5	6
-15°	2	3	3	3	3	3	4	5	5	5	6
-16.25°	2	2	3	3	3	3	4	4	5	5	6
-17.5°	2	2	3	3	3	3	3	4	5	5	5
-18.75°	2	2	3	3	3	3	3	4	5	5	5
-20°	2	2	2	3	3	3	3	4	4	5	5
-21.25°	2	2	2	3	3	3	3	3	4	5	5



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	2	2	2	3	3	3	3	3	4	4	5
-23.75°	2	2	2	2	3	3	3	3	3	4	5
-25°	2	2	2	2	3	3	3	3	3	4	4
-26.25°	2	2	2	2	2	3	3	3	3	3	4
-27.5°	2	2	2	2	2	3	3	3	3	3	3
-28.75°	2	2	2	2	2	2	3	3	3	3	3
-30°	2	2	2	2	2	2	2	3	3	3	3
-31.25°	2	2	2	2	2	2	2	3	3	3	3
-32.5°	2	2	2	2	2	2	2	2	3	3	3
-33.75°	2	2	2	2	2	2	2	2	2	3	3
-35°	2	2	2	2	2	2	2	2	2	2	3
-36.25°	2	2	2	2	2	2	2	2	2	2	2
-37.5°	2	2	2	2	2	2	2	2	2	2	2
-38.75°	2	2	2	2	2	2	2	2	2	2	2
-40°	2	2	2	2	2	2	2	2	2	2	2
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	1	2	2	2	2	2	2	2	2	2	2
-47.5°	1	1	2	2	2	2	2	2	2	2	2
-48.75°	1	1	1	2	2	2	2	2	2	2	2
-50°	1	1	1	1	2	2	2	2	2	2	2
-51.25°	1	1	1	1	1	1	2	2	2	2	2
-52.5°	1	1	1	1	1	1	1	2	2	2	2
-53.75°	1	1	1	1	1	1	1	1	1	2	2
-55°	1	1	1	1	1	1	1	1	1	1	2
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	0	1	1	1	1	1	1	1	1	1	1
-66.25°	0	0	0	0	1	1	1	1	1	1	1
-67.5°	0	0	0	0	0	0	1	1	1	1	1
-68.75°	0	0	0	0	0	0	0	0	0	1	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	1	1	1	1	1
70°	0	0	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	2
58.75°	1	1	1	1	1	1	1	2	2	2	2
57.5°	1	1	1	1	2	2	2	2	2	2	2
56.25°	1	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	3
43.75°	2	2	2	2	2	2	2	2	3	3	3
42.5°	2	2	2	2	2	2	3	3	3	3	3
41.25°	2	2	2	2	2	3	3	3	3	3	3
40°	2	2	2	3	3	3	3	3	3	3	3
38.75°	2	2	3	3	3	3	3	3	3	3	4
37.5°	2	3	3	3	3	3	3	3	4	4	4
36.25°	3	3	3	3	3	3	3	4	4	5	5
35°	3	3	3	3	3	4	4	4	5	5	5



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	3	3	3	3	4	4	5	5	5	5	5
32.5°	3	3	3	4	4	5	5	5	5	5	6
31.25°	3	3	4	4	5	5	5	5	6	6	6
30°	3	4	4	5	5	5	5	6	6	6	6
28.75°	4	4	5	5	5	5	6	6	6	7	7
27.5°	4	5	5	5	5	6	6	6	7	7	8
26.25°	4	5	5	5	6	6	6	7	7	8	9
25°	5	5	5	6	6	6	7	7	8	9	10
23.75°	5	5	5	6	6	7	7	8	9	10	11
22.5°	5	5	6	6	6	7	8	9	10	11	13
21.25°	5	6	6	6	7	7	9	10	11	13	15
20°	5	6	6	7	7	8	9	11	12	14	17
18.75°	6	6	6	7	8	9	10	12	14	16	21
17.5°	6	6	7	7	8	10	11	13	15	20	25
16.25°	6	6	7	8	9	10	12	15	18	23	28
15°	6	7	7	8	10	11	14	16	21	26	34
13.75°	6	7	8	9	10	12	15	19	24	30	39
12.5°	6	7	8	9	11	13	16	21	27	35	44
11.25°	7	7	9	10	12	14	18	24	30	39	48
10°	7	8	9	10	13	15	20	26	34	43	54
8.75°	7	8	9	11	13	16	22	28	37	47	58
7.5°	7	8	10	12	14	18	24	30	40	50	63
6.25°	7	8	10	12	15	19	25	33	43	54	66
5°	7	9	10	12	15	20	26	35	45	57	69
3.75°	7	9	10	13	15	21	27	36	46	59	72
2.5°	8	9	10	13	16	21	27	37	48	60	74
1.25°	8	9	11	13	16	22	28	38	48	61	75
0°	8	9	11	13	16	22	28	38	49	62	75
-1.25°	8	9	11	13	16	22	28	38	48	61	75
-2.5°	8	9	10	13	16	21	27	37	48	60	74
-3.75°	7	9	10	13	15	21	27	36	46	59	72
-5°	7	9	10	12	15	20	26	35	45	57	69
-6.25°	7	8	10	12	15	19	25	33	43	54	66
-7.5°	7	8	10	12	14	18	24	30	40	50	63
-8.75°	7	8	9	11	13	16	22	28	37	47	58
-10°	7	8	9	10	13	15	20	26	34	43	54
-11.25°	7	7	9	10	12	14	18	24	30	39	48
-12.5°	6	7	8	9	11	13	16	21	27	35	44
-13.75°	6	7	8	9	10	12	15	19	24	30	39
-15°	6	7	7	8	10	11	14	16	21	26	34
-16.25°	6	6	7	8	9	10	12	15	18	23	28
-17.5°	6	6	7	7	8	10	11	13	15	20	25
-18.75°	6	6	6	7	8	9	10	12	14	16	21
-20°	5	6	6	7	7	8	9	11	12	14	17
-21.25°	5	6	6	6	7	7	9	10	11	13	15



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	5	5	6	6	6	7	8	9	10	11	13
-23.75°	5	5	5	6	6	7	7	8	9	10	11
-25°	5	5	5	6	6	6	7	7	8	9	10
-26.25°	4	5	5	5	6	6	6	7	7	8	9
-27.5°	4	5	5	5	5	6	6	6	7	7	8
-28.75°	4	4	5	5	5	5	6	6	6	7	7
-30°	3	4	4	5	5	5	5	6	6	6	6
-31.25°	3	3	4	4	5	5	5	5	6	6	6
-32.5°	3	3	3	4	4	5	5	5	5	5	6
-33.75°	3	3	3	3	4	4	5	5	5	5	5
-35°	3	3	3	3	3	4	4	4	5	5	5
-36.25°	3	3	3	3	3	3	3	4	4	5	5
-37.5°	2	3	3	3	3	3	3	3	4	4	4
-38.75°	2	2	3	3	3	3	3	3	3	3	4
-40°	2	2	2	3	3	3	3	3	3	3	3
-41.25°	2	2	2	2	2	3	3	3	3	3	3
-42.5°	2	2	2	2	2	2	3	3	3	3	3
-43.75°	2	2	2	2	2	2	2	2	3	3	3
-45°	2	2	2	2	2	2	2	2	2	2	3
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	1	2	2	2	2	2	2	2	2	2	2
-57.5°	1	1	1	1	2	2	2	2	2	2	2
-58.75°	1	1	1	1	1	1	1	2	2	2	2
-60°	1	1	1	1	1	1	1	1	1	1	2
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	0	0	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	0	0	0	1	1	1	1	1
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	3	3	3	3	3	3
46.25°	2	2	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	3	3
43.75°	3	3	3	3	3	3	3	3	3	3	3
42.5°	3	3	3	3	3	3	3	4	4	4	4
41.25°	3	3	3	3	4	4	4	4	5	5	5
40°	3	4	4	4	4	5	5	5	5	5	5
38.75°	4	4	5	5	5	5	5	5	5	5	5
37.5°	5	5	5	5	5	5	5	6	6	6	6
36.25°	5	5	5	5	6	6	6	6	6	6	6
35°	5	5	6	6	6	6	6	7	7	7	7



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	6	6	6	6	6	7	7	7	7	8	8
32.5°	6	6	6	7	7	7	8	8	9	9	9
31.25°	6	7	7	7	8	8	9	9	10	10	11
30°	7	7	8	8	9	10	10	11	12	13	13
28.75°	7	8	9	10	10	11	12	13	14	15	16
27.5°	9	9	10	11	12	14	15	16	18	20	22
26.25°	10	11	12	13	15	16	19	21	24	26	28
25°	11	12	14	15	18	21	24	27	30	34	37
23.75°	13	14	16	20	23	26	30	35	39	43	47
22.5°	15	17	21	25	28	34	39	44	48	54	58
21.25°	17	21	25	30	36	42	47	54	60	66	71
20°	21	26	31	38	44	50	58	65	71	78	84
18.75°	25	31	38	45	53	61	69	76	84	90	97
17.5°	30	38	45	53	62	71	79	88	96	103	112
16.25°	36	44	53	62	72	81	90	99	109	119	129
15°	42	50	61	71	81	91	101	113	125	136	149
13.75°	47	58	69	79	90	101	114	127	140	161	182
12.5°	54	65	76	88	99	113	127	142	166	191	214
11.25°	60	71	84	96	109	125	140	166	194	221	265
10°	66	78	90	103	119	136	161	191	221	271	342
8.75°	71	84	97	112	129	149	182	214	265	342	461
7.5°	75	89	102	120	138	167	202	247	321	442	633
6.25°	80	93	108	127	147	183	219	281	387	568	841
5°	83	97	114	133	159	196	243	325	469	715	1061
3.75°	86	100	118	137	169	207	264	361	550	863	1271
2.5°	88	102	121	140	176	215	280	403	630	983	1432
1.25°	89	103	123	143	181	220	294	430	679	1058	1537
0°	89	104	124	143	182	221	299	439	695	1083	1573
-1.25°	89	103	123	143	181	220	294	430	679	1058	1537
-2.5°	88	102	121	140	176	215	280	403	630	983	1432
-3.75°	86	100	118	137	169	207	264	361	550	863	1271
-5°	83	97	114	133	159	196	243	325	469	715	1061
-6.25°	80	93	108	127	147	183	219	281	387	568	841
-7.5°	75	89	102	120	138	167	202	247	321	442	633
-8.75°	71	84	97	112	129	149	182	214	265	342	461
-10°	66	78	90	103	119	136	161	191	221	271	342
-11.25°	60	71	84	96	109	125	140	166	194	221	265
-12.5°	54	65	76	88	99	113	127	142	166	191	214
-13.75°	47	58	69	79	90	101	114	127	140	161	182
-15°	42	50	61	71	81	91	101	113	125	136	149
-16.25°	36	44	53	62	72	81	90	99	109	119	129
-17.5°	30	38	45	53	62	71	79	88	96	103	112
-18.75°	25	31	38	45	53	61	69	76	84	90	97
-20°	21	26	31	38	44	50	58	65	71	78	84
-21.25°	17	21	25	30	36	42	47	54	60	66	71



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	15	17	21	25	28	34	39	44	48	54	58
-23.75°	13	14	16	20	23	26	30	35	39	43	47
-25°	11	12	14	15	18	21	24	27	30	34	37
-26.25°	10	11	12	13	15	16	19	21	24	26	28
-27.5°	9	9	10	11	12	14	15	16	18	20	22
-28.75°	7	8	9	10	10	11	12	13	14	15	16
-30°	7	7	8	8	9	10	10	11	12	13	13
-31.25°	6	7	7	7	8	8	9	9	10	10	11
-32.5°	6	6	6	7	7	7	8	8	9	9	9
-33.75°	6	6	6	6	6	7	7	7	7	8	8
-35°	5	5	6	6	6	6	6	6	7	7	7
-36.25°	5	5	5	5	6	6	6	6	6	6	6
-37.5°	5	5	5	5	5	5	5	6	6	6	6
-38.75°	4	4	5	5	5	5	5	5	5	5	5
-40°	3	4	4	4	4	5	5	5	5	5	5
-41.25°	3	3	3	3	4	4	4	4	5	5	5
-42.5°	3	3	3	3	3	3	3	4	4	4	4
-43.75°	3	3	3	3	3	3	3	3	3	3	3
-45°	3	3	3	3	3	3	3	3	3	3	3
-46.25°	2	2	3	3	3	3	3	3	3	3	3
-47.5°	2	2	2	2	2	3	3	3	3	3	3
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	1	1	1	1	2	2	2	2	2	2	2
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	0	0	0	1	1	1	1	1	1	1	1
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	2	1	1	1	1
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	3	3	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	3	3
43.75°	3	4	4	4	4	4	4	4	4	4	4
42.5°	4	4	4	4	4	4	5	4	4	4	4
41.25°	5	5	5	5	5	5	5	5	5	5	5
40°	5	5	5	5	5	5	5	5	5	5	5
38.75°	6	6	6	6	6	6	6	6	6	6	6
37.5°	6	6	6	6	6	6	6	6	6	6	6
36.25°	6	7	7	7	7	7	7	7	7	7	7
35°	7	7	7	7	8	8	8	8	8	7	7



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	8	8	9	9	9	9	9	9	9	9	9
32.5°	10	10	10	10	10	11	11	11	10	10	10
31.25°	12	12	12	13	13	13	13	13	13	13	12
30°	14	15	15	15	16	16	16	16	16	15	15
28.75°	18	19	20	21	21	22	22	22	21	21	20
27.5°	24	25	26	27	27	28	28	28	27	27	26
26.25°	30	33	35	36	37	38	38	38	37	36	35
25°	40	43	45	46	48	48	49	48	48	46	45
23.75°	50	54	57	59	60	61	62	61	60	59	57
22.5°	63	66	69	72	74	75	75	75	74	72	69
21.25°	75	80	83	86	88	89	89	89	88	86	83
20°	89	93	97	100	102	103	104	103	102	100	97
18.75°	102	108	114	118	121	123	124	123	121	118	114
17.5°	120	127	133	137	140	143	143	143	140	137	133
16.25°	138	147	159	169	176	181	182	181	176	169	159
15°	167	183	196	207	215	220	221	220	215	207	196
13.75°	202	219	243	264	280	294	299	294	280	264	243
12.5°	247	281	325	361	403	430	439	430	403	361	325
11.25°	321	387	469	550	630	679	695	679	630	550	469
10°	442	568	715	863	983	1058	1083	1058	983	863	715
8.75°	633	841	1061	1271	1432	1537	1573	1537	1432	1271	1061
7.5°	890	1179	1467	1727	1924	2048	2090	2048	1924	1727	1467
6.25°	1179	1540	1885	2179	2402	2543	2591	2543	2402	2179	1885
5°	1467	1885	2268	2592	2849	3019	3078	3019	2849	2592	2268
3.75°	1727	2179	2592	2961	3273	3491	3571	3491	3273	2961	2592
2.5°	1924	2402	2849	3273	3657	3942	4046	3942	3657	3273	2849
1.25°	2048	2543	3019	3491	3942	4280	4406	4280	3942	3491	3019
0°	2090	2591	3078	3571	4046	4406	4580	4406	4046	3571	3078
-1.25°	2048	2543	3019	3491	3942	4280	4406	4280	3942	3491	3019
-2.5°	1924	2402	2849	3273	3657	3942	4046	3942	3657	3273	2849
-3.75°	1727	2179	2592	2961	3273	3491	3571	3491	3273	2961	2592
-5°	1467	1885	2268	2592	2849	3019	3078	3019	2849	2592	2268
-6.25°	1179	1540	1885	2179	2402	2543	2591	2543	2402	2179	1885
-7.5°	890	1179	1467	1727	1924	2048	2090	2048	1924	1727	1467
-8.75°	633	841	1061	1271	1432	1537	1573	1537	1432	1271	1061
-10°	442	568	715	863	983	1058	1083	1058	983	863	715
-11.25°	321	387	469	550	630	679	695	679	630	550	469
-12.5°	247	281	325	361	403	430	439	430	403	361	325
-13.75°	202	219	243	264	280	294	299	294	280	264	243
-15°	167	183	196	207	215	220	221	220	215	207	196
-16.25°	138	147	159	169	176	181	182	181	176	169	159
-17.5°	120	127	133	137	140	143	143	143	140	137	133
-18.75°	102	108	114	118	121	123	124	123	121	118	114
-20°	89	93	97	100	102	103	104	103	102	100	97
-21.25°	75	80	83	86	88	89	89	89	88	86	83



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	63	66	69	72	74	75	75	75	74	72	69
-23.75°	50	54	57	59	60	61	62	61	60	59	57
-25°	40	43	45	46	48	48	49	48	48	46	45
-26.25°	30	33	35	36	37	38	38	38	37	36	35
-27.5°	24	25	26	27	27	28	28	28	27	27	26
-28.75°	18	19	20	21	21	22	22	22	21	21	20
-30°	14	15	15	15	16	16	16	16	16	15	15
-31.25°	12	12	12	13	13	13	13	13	13	13	12
-32.5°	10	10	10	10	10	11	11	11	10	10	10
-33.75°	8	8	9	9	9	9	9	9	9	9	9
-35°	7	7	7	7	8	8	8	8	8	7	7
-36.25°	6	7	7	7	7	7	7	7	7	7	7
-37.5°	6	6	6	6	6	6	6	6	6	6	6
-38.75°	6	6	6	6	6	6	6	6	6	6	6
-40°	5	5	5	5	5	5	5	5	5	5	5
-41.25°	5	5	5	5	5	5	5	5	5	5	5
-42.5°	4	4	4	4	4	4	5	4	4	4	4
-43.75°	3	4	4	4	4	4	4	4	4	4	4
-45°	3	3	3	3	3	3	3	3	3	3	3
-46.25°	3	3	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	1	1	1	1	1	1	2	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	1	1	1	1	1	1	1	1	1	1	0
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	2	2	2	2	2	2	2	2	2	1	1
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	3	3	2	2	2	2	2	2	2	2	2
47.5°	3	3	3	3	3	3	3	3	2	2	2
46.25°	3	3	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	3	3
43.75°	4	3	3	3	3	3	3	3	3	3	3
42.5°	4	4	4	4	4	4	3	3	3	3	3
41.25°	5	5	5	5	5	4	4	4	4	3	3
40°	5	5	5	5	5	5	5	5	4	4	4
38.75°	6	6	5	5	5	5	5	5	5	5	5
37.5°	6	6	6	6	6	6	5	5	5	5	5
36.25°	7	6	6	6	6	6	6	6	6	5	5
35°	7	7	7	7	7	6	6	6	6	6	6



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	8	8	8	8	7	7	7	7	6	6	6
32.5°	10	10	9	9	9	8	8	7	7	7	6
31.25°	12	12	11	10	10	9	9	8	8	7	7
30°	15	14	13	13	12	11	10	10	9	8	8
28.75°	19	18	16	15	14	13	12	11	10	10	9
27.5°	25	24	22	20	18	16	15	14	12	11	10
26.25°	33	30	28	26	24	21	19	16	15	13	12
25°	43	40	37	34	30	27	24	21	18	15	14
23.75°	54	50	47	43	39	35	30	26	23	20	16
22.5°	66	63	58	54	48	44	39	34	28	25	21
21.25°	80	75	71	66	60	54	47	42	36	30	25
20°	93	89	84	78	71	65	58	50	44	38	31
18.75°	108	102	97	90	84	76	69	61	53	45	38
17.5°	127	120	112	103	96	88	79	71	62	53	45
16.25°	147	138	129	119	109	99	90	81	72	62	53
15°	183	167	149	136	125	113	101	91	81	71	61
13.75°	219	202	182	161	140	127	114	101	90	79	69
12.5°	281	247	214	191	166	142	127	113	99	88	76
11.25°	387	321	265	221	194	166	140	125	109	96	84
10°	568	442	342	271	221	191	161	136	119	103	90
8.75°	841	633	461	342	265	214	182	149	129	112	97
7.5°	1179	890	633	442	321	247	202	167	138	120	102
6.25°	1540	1179	841	568	387	281	219	183	147	127	108
5°	1885	1467	1061	715	469	325	243	196	159	133	114
3.75°	2179	1727	1271	863	550	361	264	207	169	137	118
2.5°	2402	1924	1432	983	630	403	280	215	176	140	121
1.25°	2543	2048	1537	1058	679	430	294	220	181	143	123
0°	2591	2090	1573	1083	695	439	299	221	182	143	124
-1.25°	2543	2048	1537	1058	679	430	294	220	181	143	123
-2.5°	2402	1924	1432	983	630	403	280	215	176	140	121
-3.75°	2179	1727	1271	863	550	361	264	207	169	137	118
-5°	1885	1467	1061	715	469	325	243	196	159	133	114
-6.25°	1540	1179	841	568	387	281	219	183	147	127	108
-7.5°	1179	890	633	442	321	247	202	167	138	120	102
-8.75°	841	633	461	342	265	214	182	149	129	112	97
-10°	568	442	342	271	221	191	161	136	119	103	90
-11.25°	387	321	265	221	194	166	140	125	109	96	84
-12.5°	281	247	214	191	166	142	127	113	99	88	76
-13.75°	219	202	182	161	140	127	114	101	90	79	69
-15°	183	167	149	136	125	113	101	91	81	71	61
-16.25°	147	138	129	119	109	99	90	81	72	62	53
-17.5°	127	120	112	103	96	88	79	71	62	53	45
-18.75°	108	102	97	90	84	76	69	61	53	45	38
-20°	93	89	84	78	71	65	58	50	44	38	31
-21.25°	80	75	71	66	60	54	47	42	36	30	25



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	66	63	58	54	48	44	39	34	28	25	21
-23.75°	54	50	47	43	39	35	30	26	23	20	16
-25°	43	40	37	34	30	27	24	21	18	15	14
-26.25°	33	30	28	26	24	21	19	16	15	13	12
-27.5°	25	24	22	20	18	16	15	14	12	11	10
-28.75°	19	18	16	15	14	13	12	11	10	10	9
-30°	15	14	13	13	12	11	10	10	9	8	8
-31.25°	12	12	11	10	10	9	9	8	8	7	7
-32.5°	10	10	9	9	9	8	8	7	7	7	6
-33.75°	8	8	8	8	7	7	7	7	6	6	6
-35°	7	7	7	7	7	6	6	6	6	6	6
-36.25°	7	6	6	6	6	6	6	6	6	5	5
-37.5°	6	6	6	6	6	6	5	5	5	5	5
-38.75°	6	6	5	5	5	5	5	5	5	5	5
-40°	5	5	5	5	5	5	5	5	4	4	4
-41.25°	5	5	5	5	5	4	4	4	4	3	3
-42.5°	4	4	4	4	4	4	3	3	3	3	3
-43.75°	4	3	3	3	3	3	3	3	3	3	3
-45°	3	3	3	3	3	3	3	3	3	3	3
-46.25°	3	3	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	2	2	2
-48.75°	3	3	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	1	1	1	1	1	1	1	0	0	0	0
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	2	2	2	1	1	1	1	1	1	1	1
58.75°	2	2	2	2	2	2	1	1	1	1	1
57.5°	2	2	2	2	2	2	2	2	2	1	1
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	3	3	3	2	2	2	2	2	2	2	2
43.75°	3	3	3	3	3	2	2	2	2	2	2
42.5°	3	3	3	3	3	3	3	2	2	2	2
41.25°	3	3	3	3	3	3	3	3	2	2	2
40°	4	3	3	3	3	3	3	3	3	3	2
38.75°	4	4	4	3	3	3	3	3	3	3	3
37.5°	5	5	4	4	4	3	3	3	3	3	3
36.25°	5	5	5	5	4	4	3	3	3	3	3
35°	5	5	5	5	5	4	4	4	3	3	3



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	6	6	5	5	5	5	5	4	4	3	3
32.5°	6	6	6	5	5	5	5	5	4	4	3
31.25°	7	6	6	6	6	5	5	5	5	4	4
30°	7	7	6	6	6	6	5	5	5	5	4
28.75°	8	7	7	7	6	6	6	5	5	5	5
27.5°	9	9	8	7	7	6	6	6	5	5	5
26.25°	11	10	9	8	7	7	6	6	6	5	5
25°	12	11	10	9	8	7	7	6	6	6	5
23.75°	14	13	11	10	9	8	7	7	6	6	5
22.5°	17	15	13	11	10	9	8	7	6	6	6
21.25°	21	17	15	13	11	10	9	7	7	6	6
20°	26	21	17	14	12	11	9	8	7	7	6
18.75°	31	25	21	16	14	12	10	9	8	7	6
17.5°	38	30	25	20	15	13	11	10	8	7	7
16.25°	44	36	28	23	18	15	12	10	9	8	7
15°	50	42	34	26	21	16	14	11	10	8	7
13.75°	58	47	39	30	24	19	15	12	10	9	8
12.5°	65	54	44	35	27	21	16	13	11	9	8
11.25°	71	60	48	39	30	24	18	14	12	10	9
10°	78	66	54	43	34	26	20	15	13	10	9
8.75°	84	71	58	47	37	28	22	16	13	11	9
7.5°	89	75	63	50	40	30	24	18	14	12	10
6.25°	93	80	66	54	43	33	25	19	15	12	10
5°	97	83	69	57	45	35	26	20	15	12	10
3.75°	100	86	72	59	46	36	27	21	15	13	10
2.5°	102	88	74	60	48	37	27	21	16	13	10
1.25°	103	89	75	61	48	38	28	22	16	13	11
0°	104	89	75	62	49	38	28	22	16	13	11
-1.25°	103	89	75	61	48	38	28	22	16	13	11
-2.5°	102	88	74	60	48	37	27	21	16	13	10
-3.75°	100	86	72	59	46	36	27	21	15	13	10
-5°	97	83	69	57	45	35	26	20	15	12	10
-6.25°	93	80	66	54	43	33	25	19	15	12	10
-7.5°	89	75	63	50	40	30	24	18	14	12	10
-8.75°	84	71	58	47	37	28	22	16	13	11	9
-10°	78	66	54	43	34	26	20	15	13	10	9
-11.25°	71	60	48	39	30	24	18	14	12	10	9
-12.5°	65	54	44	35	27	21	16	13	11	9	8
-13.75°	58	47	39	30	24	19	15	12	10	9	8
-15°	50	42	34	26	21	16	14	11	10	8	7
-16.25°	44	36	28	23	18	15	12	10	9	8	7
-17.5°	38	30	25	20	15	13	11	10	8	7	7
-18.75°	31	25	21	16	14	12	10	9	8	7	6
-20°	26	21	17	14	12	11	9	8	7	7	6
-21.25°	21	17	15	13	11	10	9	7	7	6	6



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	17	15	13	11	10	9	8	7	6	6	6
-23.75°	14	13	11	10	9	8	7	7	6	6	5
-25°	12	11	10	9	8	7	7	6	6	6	5
-26.25°	11	10	9	8	7	7	6	6	6	5	5
-27.5°	9	9	8	7	7	6	6	6	5	5	5
-28.75°	8	7	7	7	6	6	6	5	5	5	5
-30°	7	7	6	6	6	6	5	5	5	5	4
-31.25°	7	6	6	6	6	5	5	5	5	4	4
-32.5°	6	6	6	5	5	5	5	5	4	4	3
-33.75°	6	6	5	5	5	5	5	4	4	3	3
-35°	5	5	5	5	5	4	4	4	3	3	3
-36.25°	5	5	5	5	4	4	3	3	3	3	3
-37.5°	5	5	4	4	4	3	3	3	3	3	3
-38.75°	4	4	4	3	3	3	3	3	3	3	3
-40°	4	3	3	3	3	3	3	3	3	3	2
-41.25°	3	3	3	3	3	3	3	3	2	2	2
-42.5°	3	3	3	3	3	3	3	2	2	2	2
-43.75°	3	3	3	3	3	2	2	2	2	2	2
-45°	3	3	3	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	1	1
-58.75°	2	2	2	2	2	2	1	1	1	1	1
-60°	2	2	2	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	1	0	0	0	0	0	0	0
67.5°	1	1	1	1	1	1	1	0	0	0	0
66.25°	1	1	1	1	1	1	1	1	1	0	0
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	2	1	1	1	1	1	1	1	1	1	1
55°	2	2	2	1	1	1	1	1	1	1	1
53.75°	2	2	2	2	1	1	1	1	1	1	1
52.5°	2	2	2	2	2	2	1	1	1	1	1
51.25°	2	2	2	2	2	2	2	1	1	1	1
50°	2	2	2	2	2	2	2	2	2	1	1
48.75°	2	2	2	2	2	2	2	2	2	2	1
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	2	2
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	2	2	2	2	2	2	2	2	2	2	2
38.75°	2	2	2	2	2	2	2	2	2	2	2
37.5°	3	2	2	2	2	2	2	2	2	2	2
36.25°	3	3	2	2	2	2	2	2	2	2	2
35°	3	3	3	2	2	2	2	2	2	2	2



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	3	3	3	3	2	2	2	2	2	2	2
32.5°	3	3	3	3	3	2	2	2	2	2	2
31.25°	3	3	3	3	3	3	2	2	2	2	2
30°	4	3	3	3	3	3	2	2	2	2	2
28.75°	4	4	3	3	3	3	3	2	2	2	2
27.5°	5	4	3	3	3	3	3	3	2	2	2
26.25°	5	4	4	3	3	3	3	3	2	2	2
25°	5	5	4	4	3	3	3	3	3	2	2
23.75°	5	5	5	4	3	3	3	3	3	2	2
22.5°	5	5	5	4	4	3	3	3	3	3	2
21.25°	6	5	5	5	4	3	3	3	3	3	2
20°	6	5	5	5	4	4	3	3	3	3	2
18.75°	6	6	5	5	5	4	3	3	3	3	3
17.5°	6	6	5	5	5	4	3	3	3	3	3
16.25°	6	6	6	5	5	4	4	3	3	3	3
15°	7	6	6	5	5	5	4	3	3	3	3
13.75°	7	6	6	5	5	5	4	3	3	3	3
12.5°	7	6	6	6	5	5	4	4	3	3	3
11.25°	7	7	6	6	5	5	5	4	3	3	3
10°	8	7	6	6	5	5	5	4	3	3	3
8.75°	8	7	6	6	5	5	5	4	3	3	3
7.5°	8	7	6	6	6	5	5	4	3	3	3
6.25°	8	7	7	6	6	5	5	4	4	3	3
5°	9	7	7	6	6	5	5	4	4	3	3
3.75°	9	7	7	6	6	5	5	4	4	3	3
2.5°	9	8	7	6	6	5	5	4	4	3	3
1.25°	9	8	7	6	6	5	5	4	4	3	3
0°	9	8	7	6	6	5	5	5	4	3	3
-1.25°	9	8	7	6	6	5	5	4	4	3	3
-2.5°	9	8	7	6	6	5	5	4	4	3	3
-3.75°	9	7	7	6	6	5	5	4	4	3	3
-5°	9	7	7	6	6	5	5	4	4	3	3
-6.25°	8	7	7	6	6	5	5	4	4	3	3
-7.5°	8	7	6	6	6	5	5	4	3	3	3
-8.75°	8	7	6	6	5	5	5	4	3	3	3
-10°	8	7	6	6	5	5	5	4	3	3	3
-11.25°	7	7	6	6	5	5	5	4	3	3	3
-12.5°	7	6	6	6	5	5	4	4	3	3	3
-13.75°	7	6	6	5	5	5	4	3	3	3	3
-15°	7	6	6	5	5	5	4	3	3	3	3
-16.25°	6	6	6	5	5	4	4	3	3	3	3
-17.5°	6	6	5	5	5	4	3	3	3	3	3
-18.75°	6	6	5	5	5	4	3	3	3	3	3
-20°	6	5	5	5	4	4	3	3	3	3	2
-21.25°	6	5	5	5	4	3	3	3	3	3	2



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	5	5	5	4	4	3	3	3	3	3	2
-23.75°	5	5	5	4	3	3	3	3	3	2	2
-25°	5	5	4	4	3	3	3	3	3	2	2
-26.25°	5	4	4	3	3	3	3	3	2	2	2
-27.5°	5	4	3	3	3	3	3	3	2	2	2
-28.75°	4	4	3	3	3	3	3	2	2	2	2
-30°	4	3	3	3	3	3	2	2	2	2	2
-31.25°	3	3	3	3	3	3	2	2	2	2	2
-32.5°	3	3	3	3	3	2	2	2	2	2	2
-33.75°	3	3	3	3	2	2	2	2	2	2	2
-35°	3	3	3	2	2	2	2	2	2	2	2
-36.25°	3	3	2	2	2	2	2	2	2	2	2
-37.5°	3	2	2	2	2	2	2	2	2	2	2
-38.75°	2	2	2	2	2	2	2	2	2	2	2
-40°	2	2	2	2	2	2	2	2	2	2	2
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	1
-50°	2	2	2	2	2	2	2	2	2	1	1
-51.25°	2	2	2	2	2	2	2	1	1	1	1
-52.5°	2	2	2	2	2	2	1	1	1	1	1
-53.75°	2	2	2	2	1	1	1	1	1	1	1
-55°	2	2	2	1	1	1	1	1	1	1	1
-56.25°	2	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	0	0
-67.5°	1	1	1	1	1	1	1	0	0	0	0
-68.75°	1	1	1	1	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	1	0	0	0	0	0	0	0	0	0	0
63.75°	1	1	0	0	0	0	0	0	0	0	0
62.5°	1	1	1	1	0	0	0	0	0	0	0
61.25°	1	1	1	1	1	0	0	0	0	0	0
60°	1	1	1	1	1	1	1	0	0	0	0
58.75°	1	1	1	1	1	1	1	1	0	0	0
57.5°	1	1	1	1	1	1	1	1	1	0	0
56.25°	1	1	1	1	1	1	1	1	1	1	0
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	1
47.5°	1	1	1	1	1	1	1	1	1	1	1
46.25°	2	1	1	1	1	1	1	1	1	1	1
45°	2	2	1	1	1	1	1	1	1	1	1
43.75°	2	2	2	1	1	1	1	1	1	1	1
42.5°	2	2	2	1	1	1	1	1	1	1	1
41.25°	2	2	2	2	1	1	1	1	1	1	1
40°	2	2	2	2	2	1	1	1	1	1	1
38.75°	2	2	2	2	2	1	1	1	1	1	1
37.5°	2	2	2	2	2	2	1	1	1	1	1
36.25°	2	2	2	2	2	2	2	1	1	1	1
35°	2	2	2	2	2	2	2	1	1	1	1



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	2	2	2	2	2	2	2	2	1	1	1
32.5°	2	2	2	2	2	2	2	2	1	1	1
31.25°	2	2	2	2	2	2	2	2	1	1	1
30°	2	2	2	2	2	2	2	2	2	1	1
28.75°	2	2	2	2	2	2	2	2	2	1	1
27.5°	2	2	2	2	2	2	2	2	2	1	1
26.25°	2	2	2	2	2	2	2	2	2	2	1
25°	2	2	2	2	2	2	2	2	2	2	1
23.75°	2	2	2	2	2	2	2	2	2	2	1
22.5°	2	2	2	2	2	2	2	2	2	2	2
21.25°	2	2	2	2	2	2	2	2	2	2	2
20°	2	2	2	2	2	2	2	2	2	2	2
18.75°	2	2	2	2	2	2	2	2	2	2	2
17.5°	2	2	2	2	2	2	2	2	2	2	2
16.25°	2	2	2	2	2	2	2	2	2	2	2
15°	3	2	2	2	2	2	2	2	2	2	2
13.75°	3	2	2	2	2	2	2	2	2	2	2
12.5°	3	2	2	2	2	2	2	2	2	2	2
11.25°	3	2	2	2	2	2	2	2	2	2	2
10°	3	2	2	2	2	2	2	2	2	2	2
8.75°	3	2	2	2	2	2	2	2	2	2	2
7.5°	3	3	2	2	2	2	2	2	2	2	2
6.25°	3	3	2	2	2	2	2	2	2	2	2
5°	3	3	2	2	2	2	2	2	2	2	2
3.75°	3	3	2	2	2	2	2	2	2	2	2
2.5°	3	3	2	2	2	2	2	2	2	2	2
1.25°	3	3	2	2	2	2	2	2	2	2	2
0°	3	3	2	2	2	2	2	2	2	2	2
-1.25°	3	3	2	2	2	2	2	2	2	2	2
-2.5°	3	3	2	2	2	2	2	2	2	2	2
-3.75°	3	3	2	2	2	2	2	2	2	2	2
-5°	3	3	2	2	2	2	2	2	2	2	2
-6.25°	3	3	2	2	2	2	2	2	2	2	2
-7.5°	3	3	2	2	2	2	2	2	2	2	2
-8.75°	3	2	2	2	2	2	2	2	2	2	2
-10°	3	2	2	2	2	2	2	2	2	2	2
-11.25°	3	2	2	2	2	2	2	2	2	2	2
-12.5°	3	2	2	2	2	2	2	2	2	2	2
-13.75°	3	2	2	2	2	2	2	2	2	2	2
-15°	3	2	2	2	2	2	2	2	2	2	2
-16.25°	2	2	2	2	2	2	2	2	2	2	2
-17.5°	2	2	2	2	2	2	2	2	2	2	2
-18.75°	2	2	2	2	2	2	2	2	2	2	2
-20°	2	2	2	2	2	2	2	2	2	2	2
-21.25°	2	2	2	2	2	2	2	2	2	2	2



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	2	2	2	2	2	2	2	2	2	2	2
-23.75°	2	2	2	2	2	2	2	2	2	2	1
-25°	2	2	2	2	2	2	2	2	2	2	1
-26.25°	2	2	2	2	2	2	2	2	2	2	1
-27.5°	2	2	2	2	2	2	2	2	2	1	1
-28.75°	2	2	2	2	2	2	2	2	2	1	1
-30°	2	2	2	2	2	2	2	2	2	1	1
-31.25°	2	2	2	2	2	2	2	2	1	1	1
-32.5°	2	2	2	2	2	2	2	2	1	1	1
-33.75°	2	2	2	2	2	2	2	2	1	1	1
-35°	2	2	2	2	2	2	2	1	1	1	1
-36.25°	2	2	2	2	2	2	2	1	1	1	1
-37.5°	2	2	2	2	2	2	1	1	1	1	1
-38.75°	2	2	2	2	2	1	1	1	1	1	1
-40°	2	2	2	2	2	1	1	1	1	1	1
-41.25°	2	2	2	2	1	1	1	1	1	1	1
-42.5°	2	2	2	1	1	1	1	1	1	1	1
-43.75°	2	2	2	1	1	1	1	1	1	1	1
-45°	2	2	1	1	1	1	1	1	1	1	1
-46.25°	2	1	1	1	1	1	1	1	1	1	1
-47.5°	1	1	1	1	1	1	1	1	1	1	1
-48.75°	1	1	1	1	1	1	1	1	1	1	1
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	0
-57.5°	1	1	1	1	1	1	1	1	1	0	0
-58.75°	1	1	1	1	1	1	1	1	0	0	0
-60°	1	1	1	1	1	1	1	0	0	0	0
-61.25°	1	1	1	1	1	0	0	0	0	0	0
-62.5°	1	1	1	1	0	0	0	0	0	0	0
-63.75°	1	1	0	0	0	0	0	0	0	0	0
-65°	1	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	1	0	0	0	0	0	0	0	0	0	0
51.25°	1	1	0	0	0	0	0	0	0	0	0
50°	1	1	0	0	0	0	0	0	0	0	0
48.75°	1	1	1	0	0	0	0	0	0	0	0
47.5°	1	1	1	1	0	0	0	0	0	0	0
46.25°	1	1	1	1	0	0	0	0	0	0	0
45°	1	1	1	1	0	0	0	0	0	0	0
43.75°	1	1	1	1	1	0	0	0	0	0	0
42.5°	1	1	1	1	1	0	0	0	0	0	0
41.25°	1	1	1	1	1	1	0	0	0	0	0
40°	1	1	1	1	1	1	0	0	0	0	0
38.75°	1	1	1	1	1	1	0	0	0	0	0
37.5°	1	1	1	1	1	1	1	0	0	0	0
36.25°	1	1	1	1	1	1	1	0	0	0	0
35°	1	1	1	1	1	1	1	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	1	1	1	1	1	1	1	0	0	0	0
32.5°	1	1	1	1	1	1	1	1	0	0	0
31.25°	1	1	1	1	1	1	1	1	0	0	0
30°	1	1	1	1	1	1	1	1	0	0	0
28.75°	1	1	1	1	1	1	1	1	0	0	0
27.5°	1	1	1	1	1	1	1	1	1	0	0
26.25°	1	1	1	1	1	1	1	1	1	0	0
25°	1	1	1	1	1	1	1	1	1	0	0
23.75°	1	1	1	1	1	1	1	1	1	0	0
22.5°	1	1	1	1	1	1	1	1	1	0	0
21.25°	1	1	1	1	1	1	1	1	1	0	0
20°	1	1	1	1	1	1	1	1	1	0	0
18.75°	1	1	1	1	1	1	1	1	1	0	0
17.5°	1	1	1	1	1	1	1	1	1	1	0
16.25°	2	1	1	1	1	1	1	1	1	1	0
15°	2	1	1	1	1	1	1	1	1	1	0
13.75°	2	1	1	1	1	1	1	1	1	1	0
12.5°	2	1	1	1	1	1	1	1	1	1	0
11.25°	2	1	1	1	1	1	1	1	1	1	0
10°	2	1	1	1	1	1	1	1	1	1	0
8.75°	2	1	1	1	1	1	1	1	1	1	0
7.5°	2	1	1	1	1	1	1	1	1	1	0
6.25°	2	1	1	1	1	1	1	1	1	1	0
5°	2	1	1	1	1	1	1	1	1	1	0
3.75°	2	1	1	1	1	1	1	1	1	1	0
2.5°	2	1	1	1	1	1	1	1	1	1	0
1.25°	2	1	1	1	1	1	1	1	1	1	0
0°	2	2	1	1	1	1	1	1	1	1	0
-1.25°	2	1	1	1	1	1	1	1	1	1	0
-2.5°	2	1	1	1	1	1	1	1	1	1	0
-3.75°	2	1	1	1	1	1	1	1	1	1	0
-5°	2	1	1	1	1	1	1	1	1	1	0
-6.25°	2	1	1	1	1	1	1	1	1	1	0
-7.5°	2	1	1	1	1	1	1	1	1	1	0
-8.75°	2	1	1	1	1	1	1	1	1	1	0
-10°	2	1	1	1	1	1	1	1	1	1	0
-11.25°	2	1	1	1	1	1	1	1	1	1	0
-12.5°	2	1	1	1	1	1	1	1	1	1	0
-13.75°	2	1	1	1	1	1	1	1	1	1	0
-15°	2	1	1	1	1	1	1	1	1	1	0
-16.25°	2	1	1	1	1	1	1	1	1	1	0
-17.5°	1	1	1	1	1	1	1	1	1	1	0
-18.75°	1	1	1	1	1	1	1	1	1	0	0
-20°	1	1	1	1	1	1	1	1	1	0	0
-21.25°	1	1	1	1	1	1	1	1	1	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	1	1	1	1	1	1	1	1	1	0	0
-23.75°	1	1	1	1	1	1	1	1	1	0	0
-25°	1	1	1	1	1	1	1	1	1	0	0
-26.25°	1	1	1	1	1	1	1	1	1	0	0
-27.5°	1	1	1	1	1	1	1	1	1	0	0
-28.75°	1	1	1	1	1	1	1	1	0	0	0
-30°	1	1	1	1	1	1	1	1	0	0	0
-31.25°	1	1	1	1	1	1	1	1	0	0	0
-32.5°	1	1	1	1	1	1	1	1	0	0	0
-33.75°	1	1	1	1	1	1	1	0	0	0	0
-35°	1	1	1	1	1	1	1	0	0	0	0
-36.25°	1	1	1	1	1	1	1	0	0	0	0
-37.5°	1	1	1	1	1	1	1	0	0	0	0
-38.75°	1	1	1	1	1	1	0	0	0	0	0
-40°	1	1	1	1	1	1	0	0	0	0	0
-41.25°	1	1	1	1	1	1	0	0	0	0	0
-42.5°	1	1	1	1	1	0	0	0	0	0	0
-43.75°	1	1	1	1	1	0	0	0	0	0	0
-45°	1	1	1	1	0	0	0	0	0	0	0
-46.25°	1	1	1	1	0	0	0	0	0	0	0
-47.5°	1	1	1	1	0	0	0	0	0	0	0
-48.75°	1	1	1	0	0	0	0	0	0	0	0
-50°	1	1	0	0	0	0	0	0	0	0	0
-51.25°	1	1	0	0	0	0	0	0	0	0	0
-52.5°	1	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: P220401 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1002-[A1, P1, S1, SU1]-FL-LED2790-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)