

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29472)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV
Description: LUMIERE LANTERRA 1003 LED ACCENT/SIGN LUMINAIRE, RECESSED LENS, SPOT
OPTIC, BLACK HOUSING.
Light Source: (1) 3500K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER


Summary

Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	664.5 lumens	Max Intensity:	5704.5 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	67.8 lumens/watt		
Luminous Opening:	Circular (Dia: 0.25' x H: 0')		
Beam Angle (50%):	15.7°H x 15.7°V	Field Angle (10%):	35°H x 35°V
Beam Lumens:	236.9 lumens	Field Lumens:	509.1 lumens
Beam Efficiency:	35.6%	Field Efficiency:	76.6%
Input Watts (W):	9.8		
Input Voltage (V):	120		
Input Current (Ain):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

Iso-Candela Plot

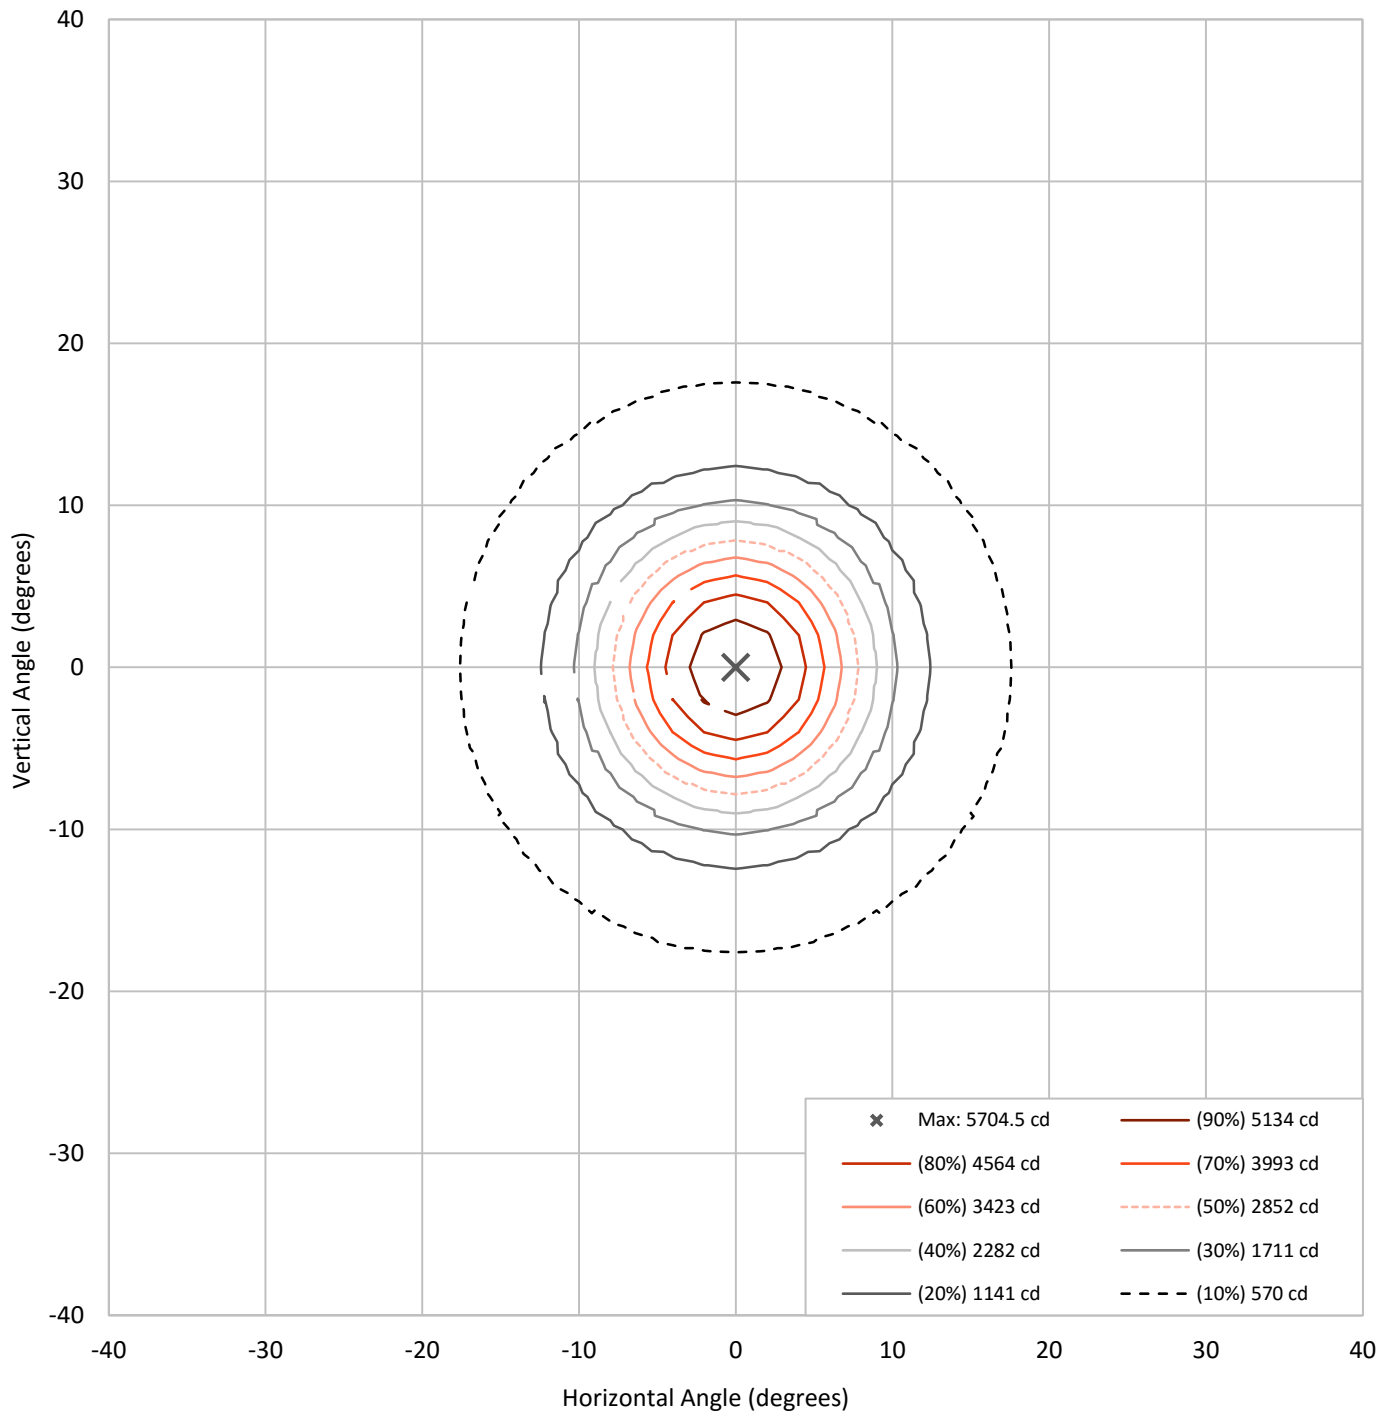




REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

Lumen Table

90	0.0															
80	0.0															
70	0.0															
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
40	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0
30	0.0	0.0	0.1	0.1	0.2	0.2	0.3	0.3	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0
20	0.0	0.0	0.1	0.1	0.3	2.1	5.8	5.8	2.1	0.3	0.1	0.1	0.0	0.0	0.0	0.0
10	0.0	0.0	0.1	0.2	1.9	12.0	22.7	22.7	12.0	1.9	0.2	0.1	0.0	0.0	0.0	0.0
0	0.0	0.1	0.1	0.3	5.4	22.1	90.8	90.8	22.1	5.4	0.3	0.1	0.1	0.0	0.0	0.0
-10	0.0	0.1	0.1	0.3	5.4	22.1	90.8	90.8	22.1	5.4	0.3	0.1	0.1	0.0	0.0	0.0
-20	0.0	0.0	0.1	0.2	1.9	12.0	22.7	22.7	12.0	1.9	0.2	0.1	0.0	0.0	0.0	0.0
-30	0.0	0.0	0.1	0.1	0.3	2.1	5.8	5.8	2.1	0.3	0.1	0.1	0.0	0.0	0.0	0.0
-40	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0															
-90	0.0															


REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

Luminous Intensity Polar Plot

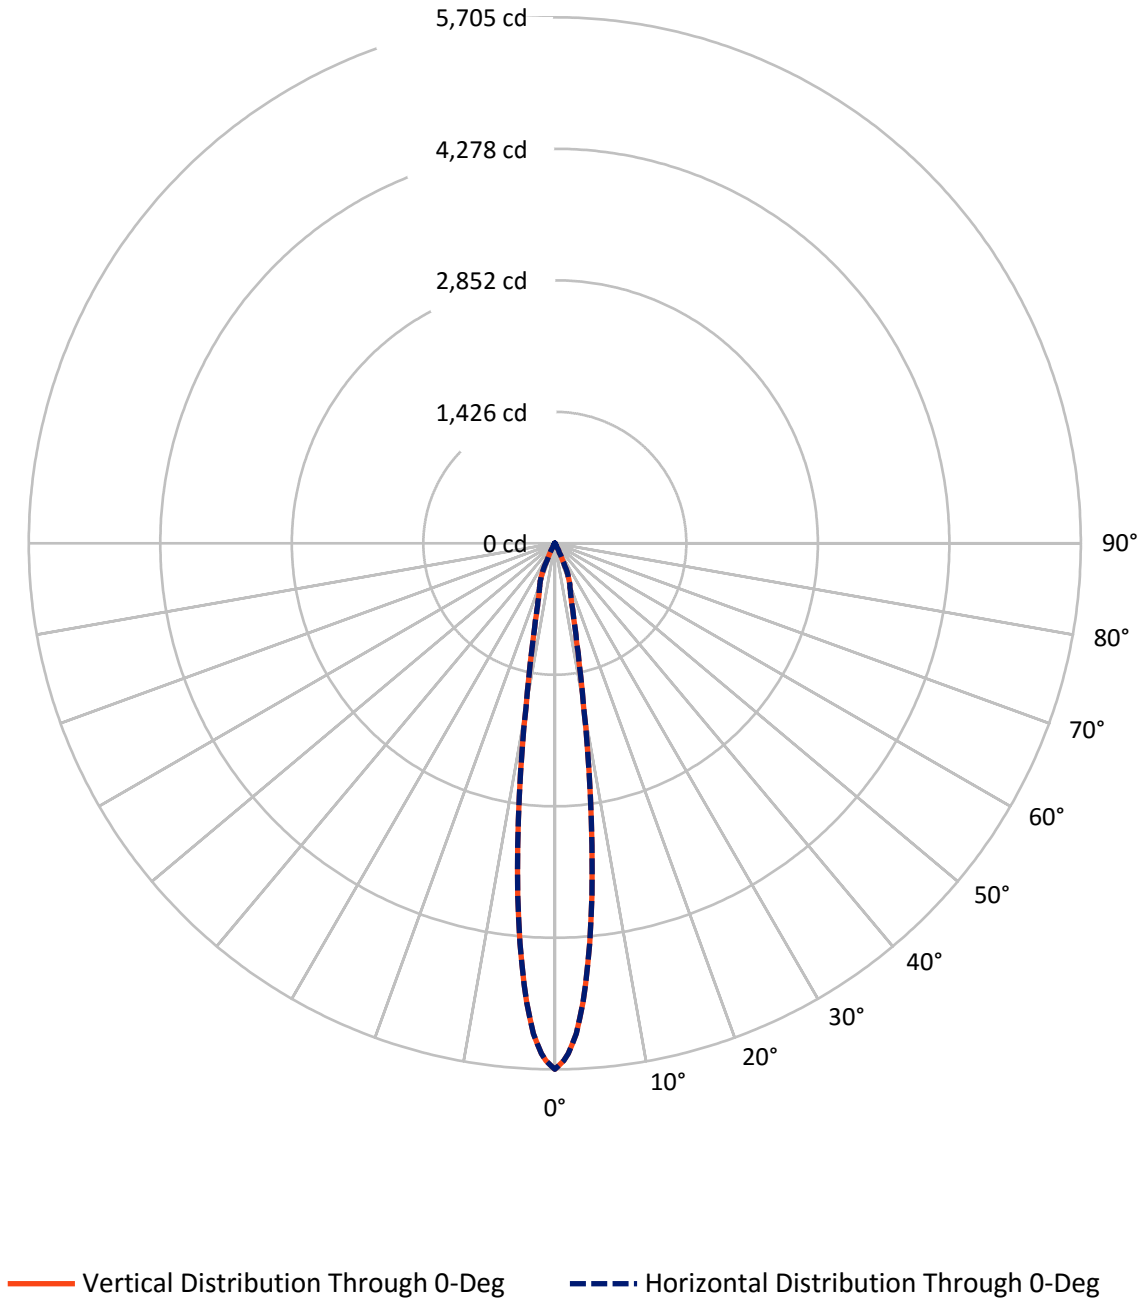

REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

Luminous Intensity Plot

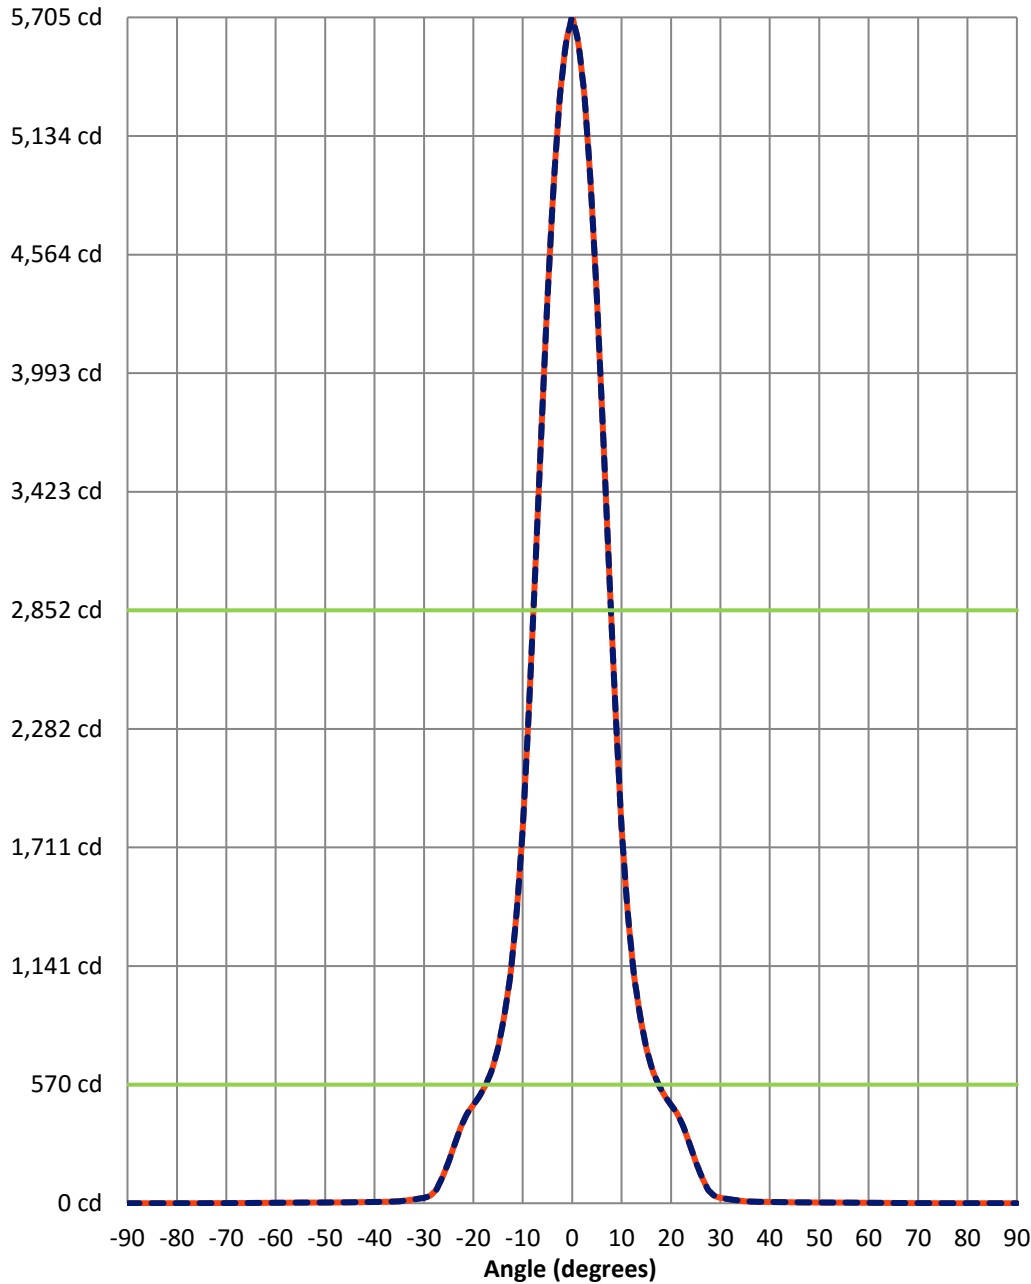

Beam:
 H Angle: 15.7°
 V Angle: 15.7°
 Lumens: 236.9
 Efficiency: 35.6%

Field:
 H Angle: 35°
 V Angle: 35°
 Lumens: 509.1
 Efficiency: 76.6%

Spill:
 Lumens: 155.5
 Efficiency: 23.4%

- Vertical Distribution through 0-Deg
- - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	1
36.25°	0	0	0	0	0	0	0	0	0	0	1
35°	0	0	0	0	0	0	0	0	0	0	1



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	0	0	0	0	0	0	0	1	1
32.5°	0	0	0	0	0	0	0	0	0	1	1
31.25°	0	0	0	0	0	0	0	0	0	1	1
30°	0	0	0	0	0	0	0	0	0	1	1
28.75°	0	0	0	0	0	0	0	0	1	1	1
27.5°	0	0	0	0	0	0	0	0	1	1	1
26.25°	0	0	0	0	0	0	0	0	1	1	1
25°	0	0	0	0	0	0	0	0	1	1	1
23.75°	0	0	0	0	0	0	0	1	1	1	1
22.5°	0	0	0	0	0	0	0	1	1	1	1
21.25°	0	0	0	0	0	0	0	1	1	1	1
20°	0	0	0	0	0	0	0	1	1	1	1
18.75°	0	0	0	0	0	0	0	1	1	1	1
17.5°	0	0	0	0	0	0	0	1	1	1	1
16.25°	0	0	0	0	0	0	0	1	1	1	1
15°	0	0	0	0	0	0	0	1	1	1	1
13.75°	0	0	0	0	0	0	1	1	1	1	1
12.5°	0	0	0	0	0	0	1	1	1	1	1
11.25°	0	0	0	0	0	0	1	1	1	1	1
10°	0	0	0	0	0	0	1	1	1	1	1
8.75°	0	0	0	0	0	0	1	1	1	1	1
7.5°	0	0	0	0	0	0	1	1	1	1	2
6.25°	0	0	0	0	0	0	1	1	1	1	2
5°	0	0	0	0	0	0	1	1	1	1	2
3.75°	0	0	0	0	0	0	1	1	1	1	2
2.5°	0	0	0	0	0	0	1	1	1	1	2
1.25°	0	0	0	0	0	0	1	1	1	1	2
0°	0	0	0	0	0	0	1	1	1	1	2
-1.25°	0	0	0	0	0	0	1	1	1	1	2
-2.5°	0	0	0	0	0	0	1	1	1	1	2
-3.75°	0	0	0	0	0	0	1	1	1	1	2
-5°	0	0	0	0	0	0	1	1	1	1	2
-6.25°	0	0	0	0	0	0	1	1	1	1	2
-7.5°	0	0	0	0	0	0	1	1	1	1	2
-8.75°	0	0	0	0	0	0	1	1	1	1	1
-10°	0	0	0	0	0	0	1	1	1	1	1
-11.25°	0	0	0	0	0	0	1	1	1	1	1
-12.5°	0	0	0	0	0	0	1	1	1	1	1
-13.75°	0	0	0	0	0	0	1	1	1	1	1
-15°	0	0	0	0	0	0	0	1	1	1	1
-16.25°	0	0	0	0	0	0	0	1	1	1	1
-17.5°	0	0	0	0	0	0	0	1	1	1	1
-18.75°	0	0	0	0	0	0	0	1	1	1	1
-20°	0	0	0	0	0	0	0	1	1	1	1
-21.25°	0	0	0	0	0	0	0	1	1	1	1



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	0	0	0	0	0	0	1	1	1	1
-23.75°	0	0	0	0	0	0	0	1	1	1	1
-25°	0	0	0	0	0	0	0	0	1	1	1
-26.25°	0	0	0	0	0	0	0	0	1	1	1
-27.5°	0	0	0	0	0	0	0	0	1	1	1
-28.75°	0	0	0	0	0	0	0	0	1	1	1
-30°	0	0	0	0	0	0	0	0	0	1	1
-31.25°	0	0	0	0	0	0	0	0	0	1	1
-32.5°	0	0	0	0	0	0	0	0	0	1	1
-33.75°	0	0	0	0	0	0	0	0	0	1	1
-35°	0	0	0	0	0	0	0	0	0	0	1
-36.25°	0	0	0	0	0	0	0	0	0	0	1
-37.5°	0	0	0	0	0	0	0	0	0	0	1
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	1
55°	0	0	0	0	0	0	0	0	1	1	1
53.75°	0	0	0	0	0	0	0	1	1	1	1
52.5°	0	0	0	0	0	0	1	1	1	1	1
51.25°	0	0	0	0	0	1	1	1	1	1	1
50°	0	0	0	0	1	1	1	1	1	1	1
48.75°	0	0	0	1	1	1	1	1	1	1	1
47.5°	0	0	1	1	1	1	1	1	1	1	1
46.25°	0	0	1	1	1	1	1	1	1	2	2
45°	0	0	1	1	1	1	1	1	2	2	2
43.75°	0	0	1	1	1	1	1	2	2	2	2
42.5°	0	1	1	1	1	1	1	2	2	2	2
41.25°	0	1	1	1	1	1	2	2	2	2	2
40°	1	1	1	1	1	2	2	2	2	2	2
38.75°	1	1	1	1	1	2	2	2	2	2	2
37.5°	1	1	1	1	2	2	2	2	2	2	2
36.25°	1	1	1	1	2	2	2	2	2	2	2
35°	1	1	1	2	2	2	2	2	2	2	2



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	1	1	1	1	2	2	2	2	2	2	3
32.5°	1	1	1	1	2	2	2	2	2	2	3
31.25°	1	1	1	2	2	2	2	2	2	3	3
30°	1	1	1	2	2	2	2	2	2	3	3
28.75°	1	1	1	2	2	2	2	2	3	3	3
27.5°	1	1	2	2	2	2	2	2	3	3	3
26.25°	1	1	2	2	2	2	2	3	3	3	3
25°	1	1	2	2	2	2	2	3	3	3	3
23.75°	1	2	2	2	2	2	2	3	3	3	3
22.5°	1	2	2	2	2	2	3	3	3	3	3
21.25°	1	2	2	2	2	2	3	3	3	3	3
20°	1	2	2	2	2	2	3	3	3	3	3
18.75°	1	2	2	2	2	2	3	3	3	3	3
17.5°	2	2	2	2	2	3	3	3	3	3	3
16.25°	2	2	2	2	2	3	3	3	3	3	3
15°	2	2	2	2	2	3	3	3	3	3	3
13.75°	2	2	2	2	2	3	3	3	3	3	3
12.5°	2	2	2	2	2	3	3	3	3	3	3
11.25°	2	2	2	2	2	3	3	3	3	3	3
10°	2	2	2	2	3	3	3	3	3	3	3
8.75°	2	2	2	2	3	3	3	3	3	3	3
7.5°	2	2	2	2	3	3	3	3	3	3	3
6.25°	2	2	2	2	3	3	3	3	3	3	3
5°	2	2	2	2	3	3	3	3	3	3	3
3.75°	2	2	2	2	3	3	3	3	3	3	3
2.5°	2	2	2	2	3	3	3	3	3	3	3
1.25°	2	2	2	2	3	3	3	3	3	3	3
0°	2	2	2	2	3	3	3	3	3	3	4
-1.25°	2	2	2	2	3	3	3	3	3	3	3
-2.5°	2	2	2	2	3	3	3	3	3	3	3
-3.75°	2	2	2	2	3	3	3	3	3	3	3
-5°	2	2	2	2	3	3	3	3	3	3	3
-6.25°	2	2	2	2	3	3	3	3	3	3	3
-7.5°	2	2	2	2	3	3	3	3	3	3	3
-8.75°	2	2	2	2	3	3	3	3	3	3	3
-10°	2	2	2	2	3	3	3	3	3	3	3
-11.25°	2	2	2	2	2	3	3	3	3	3	3
-12.5°	2	2	2	2	2	3	3	3	3	3	3
-13.75°	2	2	2	2	2	3	3	3	3	3	3
-15°	2	2	2	2	2	3	3	3	3	3	3
-16.25°	2	2	2	2	2	3	3	3	3	3	3
-17.5°	2	2	2	2	2	3	3	3	3	3	3
-18.75°	1	2	2	2	2	2	3	3	3	3	3
-20°	1	2	2	2	2	2	3	3	3	3	3
-21.25°	1	2	2	2	2	2	3	3	3	3	3



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	1	2	2	2	2	2	3	3	3	3	3
-23.75°	1	2	2	2	2	2	2	3	3	3	3
-25°	1	1	2	2	2	2	2	3	3	3	3
-26.25°	1	1	2	2	2	2	2	3	3	3	3
-27.5°	1	1	2	2	2	2	2	2	3	3	3
-28.75°	1	1	1	2	2	2	2	2	3	3	3
-30°	1	1	1	2	2	2	2	2	2	3	3
-31.25°	1	1	1	2	2	2	2	2	2	3	3
-32.5°	1	1	1	1	2	2	2	2	2	2	3
-33.75°	1	1	1	1	2	2	2	2	2	2	3
-35°	1	1	1	1	2	2	2	2	2	2	2
-36.25°	1	1	1	1	1	2	2	2	2	2	2
-37.5°	1	1	1	1	1	2	2	2	2	2	2
-38.75°	1	1	1	1	1	1	2	2	2	2	2
-40°	1	1	1	1	1	1	2	2	2	2	2
-41.25°	0	1	1	1	1	1	1	2	2	2	2
-42.5°	0	1	1	1	1	1	1	1	2	2	2
-43.75°	0	0	1	1	1	1	1	1	2	2	2
-45°	0	0	1	1	1	1	1	1	1	2	2
-46.25°	0	0	0	1	1	1	1	1	1	1	2
-47.5°	0	0	0	1	1	1	1	1	1	1	1
-48.75°	0	0	0	0	1	1	1	1	1	1	1
-50°	0	0	0	0	0	1	1	1	1	1	1
-51.25°	0	0	0	0	0	0	1	1	1	1	1
-52.5°	0	0	0	0	0	0	0	1	1	1	1
-53.75°	0	0	0	0	0	0	0	0	1	1	1
-55°	0	0	0	0	0	0	0	0	0	1	1
-56.25°	0	0	0	0	0	0	0	0	0	0	1
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	1	1
62.5°	0	0	0	0	0	0	0	1	1	1	1
61.25°	0	0	0	0	0	1	1	1	1	1	1
60°	0	0	0	1	1	1	1	1	1	1	1
58.75°	0	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	2	2
55°	1	1	1	1	1	1	1	2	2	2	2
53.75°	1	1	1	1	1	1	2	2	2	2	2
52.5°	1	1	1	1	2	2	2	2	2	2	2
51.25°	1	1	1	2	2	2	2	2	2	2	2
50°	1	1	2	2	2	2	2	2	2	2	2
48.75°	1	2	2	2	2	2	2	2	2	2	3
47.5°	2	2	2	2	2	2	2	2	2	3	3
46.25°	2	2	2	2	2	2	2	3	3	3	3
45°	2	2	2	2	2	2	3	3	3	3	3
43.75°	2	2	2	2	2	3	3	3	3	3	3
42.5°	2	2	2	2	3	3	3	3	3	3	3
41.25°	2	2	2	3	3	3	3	3	3	3	3
40°	2	2	3	3	3	3	3	3	3	3	3
38.75°	2	2	3	3	3	3	3	3	3	3	3
37.5°	2	3	3	3	3	3	3	3	3	3	3
36.25°	3	3	3	3	3	3	3	3	3	3	4
35°	3	3	3	3	3	3	3	3	3	4	4



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	3	3	3	3	3	3	3	3	4	4	4
32.5°	3	3	3	3	3	3	3	4	4	4	4
31.25°	3	3	3	3	3	3	3	4	4	4	4
30°	3	3	3	3	3	3	4	4	4	4	4
28.75°	3	3	3	3	3	4	4	4	4	4	4
27.5°	3	3	3	3	3	4	4	4	4	4	5
26.25°	3	3	3	3	4	4	4	4	4	5	5
25°	3	3	3	3	4	4	4	4	4	5	5
23.75°	3	3	3	4	4	4	4	4	5	5	5
22.5°	3	3	3	4	4	4	4	4	5	5	6
21.25°	3	3	4	4	4	4	4	5	5	5	6
20°	3	3	4	4	4	4	4	5	5	6	6
18.75°	3	3	4	4	4	4	5	5	5	6	6
17.5°	3	4	4	4	4	4	5	5	5	6	6
16.25°	3	4	4	4	4	4	5	5	6	6	6
15°	3	4	4	4	4	5	5	5	6	6	7
13.75°	3	4	4	4	4	5	5	5	6	6	7
12.5°	4	4	4	4	4	5	5	6	6	6	7
11.25°	4	4	4	4	4	5	5	6	6	6	7
10°	4	4	4	4	5	5	5	6	6	7	7
8.75°	4	4	4	4	5	5	5	6	6	7	7
7.5°	4	4	4	4	5	5	6	6	6	7	8
6.25°	4	4	4	4	5	5	6	6	6	7	8
5°	4	4	4	4	5	5	6	6	6	7	8
3.75°	4	4	4	4	5	5	6	6	6	7	8
2.5°	4	4	4	4	5	5	6	6	7	7	8
1.25°	4	4	4	4	5	5	6	6	7	7	8
0°	4	4	4	4	5	5	6	6	7	7	8
-1.25°	4	4	4	4	5	5	6	6	7	7	8
-2.5°	4	4	4	4	5	5	6	6	7	7	8
-3.75°	4	4	4	4	5	5	6	6	6	7	8
-5°	4	4	4	4	5	5	6	6	6	7	8
-6.25°	4	4	4	4	5	5	6	6	6	7	8
-7.5°	4	4	4	4	5	5	6	6	6	7	8
-8.75°	4	4	4	4	5	5	5	6	6	7	7
-10°	4	4	4	4	5	5	5	6	6	7	7
-11.25°	4	4	4	4	4	5	5	6	6	6	7
-12.5°	4	4	4	4	4	5	5	6	6	6	7
-13.75°	3	4	4	4	4	5	5	5	6	6	7
-15°	3	4	4	4	4	5	5	5	6	6	7
-16.25°	3	4	4	4	4	4	5	5	6	6	6
-17.5°	3	4	4	4	4	4	5	5	5	6	6
-18.75°	3	3	4	4	4	4	5	5	5	6	6
-20°	3	3	4	4	4	4	4	5	5	6	6
-21.25°	3	3	4	4	4	4	4	5	5	5	6



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	3	3	3	4	4	4	4	4	5	5	6
-23.75°	3	3	3	4	4	4	4	4	5	5	5
-25°	3	3	3	3	4	4	4	4	4	5	5
-26.25°	3	3	3	3	4	4	4	4	4	5	5
-27.5°	3	3	3	3	3	4	4	4	4	4	5
-28.75°	3	3	3	3	3	4	4	4	4	4	4
-30°	3	3	3	3	3	3	4	4	4	4	4
-31.25°	3	3	3	3	3	3	3	4	4	4	4
-32.5°	3	3	3	3	3	3	3	4	4	4	4
-33.75°	3	3	3	3	3	3	3	3	4	4	4
-35°	3	3	3	3	3	3	3	3	3	4	4
-36.25°	3	3	3	3	3	3	3	3	3	3	4
-37.5°	2	3	3	3	3	3	3	3	3	3	3
-38.75°	2	2	3	3	3	3	3	3	3	3	3
-40°	2	2	3	3	3	3	3	3	3	3	3
-41.25°	2	2	2	3	3	3	3	3	3	3	3
-42.5°	2	2	2	2	3	3	3	3	3	3	3
-43.75°	2	2	2	2	2	3	3	3	3	3	3
-45°	2	2	2	2	2	2	3	3	3	3	3
-46.25°	2	2	2	2	2	2	2	3	3	3	3
-47.5°	2	2	2	2	2	2	2	2	2	3	3
-48.75°	1	2	2	2	2	2	2	2	2	2	3
-50°	1	1	2	2	2	2	2	2	2	2	2
-51.25°	1	1	1	2	2	2	2	2	2	2	2
-52.5°	1	1	1	1	2	2	2	2	2	2	2
-53.75°	1	1	1	1	1	1	2	2	2	2	2
-55°	1	1	1	1	1	1	1	2	2	2	2
-56.25°	1	1	1	1	1	1	1	1	1	2	2
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	0	1	1	1	1	1	1	1	1	1	1
-60°	0	0	0	1	1	1	1	1	1	1	1
-61.25°	0	0	0	0	0	1	1	1	1	1	1
-62.5°	0	0	0	0	0	0	0	1	1	1	1
-63.75°	0	0	0	0	0	0	0	0	0	1	1
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	1	1
66.25°	0	0	0	0	0	1	1	1	1	1	1
65°	0	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	2	2
60°	1	1	1	1	1	1	2	2	2	2	2
58.75°	1	1	1	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	3
53.75°	2	2	2	2	2	2	2	3	3	3	3
52.5°	2	2	2	2	2	3	3	3	3	3	3
51.25°	2	2	2	3	3	3	3	3	3	3	3
50°	2	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	3	3	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	4	4
43.75°	3	3	3	3	3	3	3	4	4	4	4
42.5°	3	3	3	3	3	4	4	4	4	4	4
41.25°	3	3	3	3	4	4	4	4	4	4	4
40°	3	3	4	4	4	4	4	4	4	4	4
38.75°	3	4	4	4	4	4	4	4	4	5	5
37.5°	4	4	4	4	4	4	4	5	5	5	5
36.25°	4	4	4	4	4	4	5	5	5	5	6
35°	4	4	4	4	4	5	5	5	5	6	6



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	4	4	4	5	5	5	5	6	6	6	6
32.5°	4	4	5	5	5	5	6	6	6	6	7
31.25°	4	5	5	5	5	6	6	6	6	7	7
30°	4	5	5	5	6	6	6	6	7	7	8
28.75°	5	5	5	6	6	6	6	7	7	8	8
27.5°	5	5	6	6	6	6	7	7	8	9	9
26.25°	5	6	6	6	6	7	7	8	9	10	12
25°	5	6	6	6	7	7	8	9	10	12	15
23.75°	6	6	6	7	7	8	9	10	12	15	18
22.5°	6	6	7	7	8	8	9	12	15	18	21
21.25°	6	6	7	7	8	9	11	14	17	21	24
20°	6	7	7	8	9	11	14	17	20	23	27
18.75°	6	7	7	8	9	13	16	19	23	26	32
17.5°	7	7	8	9	11	14	18	21	25	30	43
16.25°	7	7	8	10	13	16	20	24	28	39	65
15°	7	8	9	11	15	18	22	26	33	52	93
13.75°	7	8	9	13	16	20	24	29	42	74	129
12.5°	8	9	10	14	18	22	26	33	55	102	165
11.25°	8	9	12	15	19	23	28	40	74	131	198
10°	8	9	13	16	20	25	30	48	94	160	233
8.75°	8	10	14	17	22	26	35	62	117	186	265
7.5°	9	11	14	18	23	28	40	75	137	211	293
6.25°	9	11	15	19	24	29	44	87	156	233	317
5°	9	12	16	20	25	30	50	101	172	252	337
3.75°	9	12	16	21	25	32	56	111	184	267	351
2.5°	9	13	16	21	26	33	61	119	193	277	360
1.25°	9	13	17	21	26	35	64	124	198	284	366
0°	9	13	17	21	26	35	65	125	200	286	368
-1.25°	9	13	17	21	26	35	64	124	198	284	366
-2.5°	9	13	16	21	26	33	61	119	193	277	360
-3.75°	9	12	16	21	25	32	56	111	184	267	351
-5°	9	12	16	20	25	30	50	101	172	252	337
-6.25°	9	11	15	19	24	29	44	87	156	233	317
-7.5°	9	11	14	18	23	28	40	75	137	211	293
-8.75°	8	10	14	17	22	26	35	62	117	186	265
-10°	8	9	13	16	20	25	30	48	94	160	233
-11.25°	8	9	12	15	19	23	28	40	74	131	198
-12.5°	8	9	10	14	18	22	26	33	55	102	165
-13.75°	7	8	9	13	16	20	24	29	42	74	129
-15°	7	8	9	11	15	18	22	26	33	52	93
-16.25°	7	7	8	10	13	16	20	24	28	39	65
-17.5°	7	7	8	9	11	14	18	21	25	30	43
-18.75°	6	7	7	8	9	13	16	19	23	26	32
-20°	6	7	7	8	9	11	14	17	20	23	27
-21.25°	6	6	7	7	8	9	11	14	17	21	24



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	6	6	7	7	8	8	9	12	15	18	21
-23.75°	6	6	6	7	7	8	9	10	12	15	18
-25°	5	6	6	6	7	7	8	9	10	12	15
-26.25°	5	6	6	6	6	7	7	8	9	10	12
-27.5°	5	5	6	6	6	6	7	7	8	9	9
-28.75°	5	5	5	6	6	6	6	7	7	8	8
-30°	4	5	5	5	6	6	6	6	7	7	8
-31.25°	4	5	5	5	5	6	6	6	6	7	7
-32.5°	4	4	5	5	5	5	6	6	6	6	7
-33.75°	4	4	4	5	5	5	5	6	6	6	6
-35°	4	4	4	4	4	5	5	5	5	6	6
-36.25°	4	4	4	4	4	4	5	5	5	5	6
-37.5°	4	4	4	4	4	4	4	5	5	5	5
-38.75°	3	4	4	4	4	4	4	4	4	5	5
-40°	3	3	4	4	4	4	4	4	4	4	4
-41.25°	3	3	3	3	4	4	4	4	4	4	4
-42.5°	3	3	3	3	3	4	4	4	4	4	4
-43.75°	3	3	3	3	3	3	3	4	4	4	4
-45°	3	3	3	3	3	3	3	3	3	4	4
-46.25°	3	3	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	2	3	3	3	3	3	3	3	3	3	3
-51.25°	2	2	2	3	3	3	3	3	3	3	3
-52.5°	2	2	2	2	2	3	3	3	3	3	3
-53.75°	2	2	2	2	2	2	2	3	3	3	3
-55°	2	2	2	2	2	2	2	2	2	2	3
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	1	1	1	2	2	2	2	2	2	2	2
-60°	1	1	1	1	1	1	2	2	2	2	2
-61.25°	1	1	1	1	1	1	1	1	1	2	2
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	0	1	1	1	1	1	1	1	1	1	1
-66.25°	0	0	0	0	0	1	1	1	1	1	1
-67.5°	0	0	0	0	0	0	0	0	0	1	1
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	2	2	2	2	2	2	2	2
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	3	3
56.25°	2	2	2	3	3	3	3	3	3	3	3
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	4	4	4	4
47.5°	3	3	3	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	4	4	4	4	4	4	4	4	4	5	5
42.5°	4	4	4	4	4	5	5	5	5	5	5
41.25°	4	4	5	5	5	5	5	5	5	5	5
40°	5	5	5	5	5	5	5	6	6	6	6
38.75°	5	5	5	5	6	6	6	6	6	6	6
37.5°	5	6	6	6	6	6	6	6	6	7	7
36.25°	6	6	6	6	6	7	7	7	7	7	7
35°	6	6	6	7	7	7	7	8	8	8	8



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	6	7	7	7	7	8	8	9	9	9	10
32.5°	7	7	7	8	8	9	9	10	12	13	14
31.25°	7	8	8	9	10	11	13	14	15	16	17
30°	8	9	9	11	13	15	16	18	19	20	22
28.75°	9	11	13	14	16	18	20	22	23	25	26
27.5°	11	14	16	18	20	22	24	26	28	30	35
26.25°	14	17	19	21	24	26	29	33	40	48	62
25°	17	20	23	25	28	33	42	55	74	94	117
23.75°	21	23	26	30	39	52	74	102	131	160	186
22.5°	24	27	32	43	65	93	129	165	198	233	265
21.25°	27	33	46	73	110	151	192	234	274	311	344
20°	33	47	78	120	166	213	261	307	348	383	410
18.75°	46	78	124	174	226	280	331	374	410	436	455
17.5°	73	120	174	231	289	344	391	426	452	471	489
16.25°	110	166	226	289	349	400	436	461	483	505	530
15°	151	213	280	344	400	440	466	491	519	548	578
13.75°	192	261	331	391	436	466	494	526	560	596	639
12.5°	234	307	374	426	461	491	526	565	608	658	727
11.25°	274	348	410	452	483	519	560	608	667	747	838
10°	311	383	436	471	505	548	596	658	747	851	967
8.75°	344	410	455	489	530	578	639	727	838	967	1127
7.5°	370	430	469	505	553	609	689	800	934	1103	1323
6.25°	392	446	482	524	575	640	740	870	1032	1253	1546
5°	408	456	493	539	594	673	792	940	1137	1410	1782
3.75°	418	463	502	552	613	705	835	997	1233	1569	2021
2.5°	426	469	509	562	627	729	867	1052	1319	1699	2206
1.25°	431	472	514	568	636	743	890	1087	1372	1778	2331
0°	432	473	515	570	639	747	898	1099	1389	1806	2375
-1.25°	431	472	514	568	636	743	890	1087	1372	1778	2331
-2.5°	426	469	509	562	627	729	867	1052	1319	1699	2206
-3.75°	418	463	502	552	613	705	835	997	1233	1569	2021
-5°	408	456	493	539	594	673	792	940	1137	1410	1782
-6.25°	392	446	482	524	575	640	740	870	1032	1253	1546
-7.5°	370	430	469	505	553	609	689	800	934	1103	1323
-8.75°	344	410	455	489	530	578	639	727	838	967	1127
-10°	311	383	436	471	505	548	596	658	747	851	967
-11.25°	274	348	410	452	483	519	560	608	667	747	838
-12.5°	234	307	374	426	461	491	526	565	608	658	727
-13.75°	192	261	331	391	436	466	494	526	560	596	639
-15°	151	213	280	344	400	440	466	491	519	548	578
-16.25°	110	166	226	289	349	400	436	461	483	505	530
-17.5°	73	120	174	231	289	344	391	426	452	471	489
-18.75°	46	78	124	174	226	280	331	374	410	436	455
-20°	33	47	78	120	166	213	261	307	348	383	410
-21.25°	27	33	46	73	110	151	192	234	274	311	344



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	24	27	32	43	65	93	129	165	198	233	265
-23.75°	21	23	26	30	39	52	74	102	131	160	186
-25°	17	20	23	25	28	33	42	55	74	94	117
-26.25°	14	17	19	21	24	26	29	33	40	48	62
-27.5°	11	14	16	18	20	22	24	26	28	30	35
-28.75°	9	11	13	14	16	18	20	22	23	25	26
-30°	8	9	9	11	13	15	16	18	19	20	22
-31.25°	7	8	8	9	10	11	13	14	15	16	17
-32.5°	7	7	7	8	8	9	9	10	12	13	14
-33.75°	6	7	7	7	7	8	8	9	9	9	10
-35°	6	6	6	7	7	7	7	8	8	8	8
-36.25°	6	6	6	6	6	7	7	7	7	7	7
-37.5°	5	6	6	6	6	6	6	6	6	7	7
-38.75°	5	5	5	5	6	6	6	6	6	6	6
-40°	5	5	5	5	5	5	5	6	6	6	6
-41.25°	4	4	5	5	5	5	5	5	5	5	5
-42.5°	4	4	4	4	4	5	5	5	5	5	5
-43.75°	4	4	4	4	4	4	4	4	4	5	5
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	3	3	3	4	4	4	4	4	4	4	4
-48.75°	3	3	3	3	3	3	3	4	4	4	4
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	2	2	2	3	3	3	3	3	3	3	3
-57.5°	2	2	2	2	2	2	2	2	2	3	3
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	1	1	1	2	2	2	2	2	2	2	2
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	0	0	0	0	0	0	1	1	1	1	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	2	2	2	2	2	2	2	2	2	2	2
62.5°	2	2	2	2	2	2	2	2	2	2	2
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	3	3	3	3	3	3	3	3	3	3	3
56.25°	3	3	3	3	3	3	3	3	3	3	3
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	4	3	3	3	3
48.75°	4	4	4	4	4	4	4	4	4	4	4
47.5°	4	4	4	4	4	4	4	4	4	4	4
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	5	5	5	5	5	5	5	5	5	5	5
42.5°	5	5	5	5	5	5	5	5	5	5	5
41.25°	6	6	6	6	6	6	6	6	6	6	6
40°	6	6	6	6	6	6	6	6	6	6	6
38.75°	6	6	6	6	7	7	7	7	7	6	6
37.5°	7	7	7	7	7	7	7	7	7	7	7
36.25°	8	8	8	8	8	8	8	8	8	8	8
35°	9	9	9	9	9	9	9	9	9	9	9



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	11	11	12	12	13	13	13	13	13	12	12
32.5°	14	15	16	16	16	17	17	17	16	16	16
31.25°	18	19	20	21	21	21	21	21	21	21	20
30°	23	24	25	25	26	26	26	26	26	25	25
28.75°	28	29	30	32	33	35	35	35	33	32	30
27.5°	40	44	50	56	61	64	65	64	61	56	50
26.25°	75	87	101	111	119	124	125	124	119	111	101
25°	137	156	172	184	193	198	200	198	193	184	172
23.75°	211	233	252	267	277	284	286	284	277	267	252
22.5°	293	317	337	351	360	366	368	366	360	351	337
21.25°	370	392	408	418	426	431	432	431	426	418	408
20°	430	446	456	463	469	472	473	472	469	463	456
18.75°	469	482	493	502	509	514	515	514	509	502	493
17.5°	505	524	539	552	562	568	570	568	562	552	539
16.25°	553	575	594	613	627	636	639	636	627	613	594
15°	609	640	673	705	729	743	747	743	729	705	673
13.75°	689	740	792	835	867	890	898	890	867	835	792
12.5°	800	870	940	997	1052	1087	1099	1087	1052	997	940
11.25°	934	1032	1137	1233	1319	1372	1389	1372	1319	1233	1137
10°	1103	1253	1410	1569	1699	1778	1806	1778	1699	1569	1410
8.75°	1323	1546	1782	2021	2206	2331	2375	2331	2206	2021	1782
7.5°	1598	1916	2246	2562	2808	2973	3030	2973	2808	2562	2246
6.25°	1916	2335	2756	3149	3451	3642	3708	3642	3451	3149	2756
5°	2246	2756	3269	3710	4052	4275	4354	4275	4052	3710	3269
3.75°	2562	3149	3710	4199	4581	4831	4906	4831	4581	4199	3710
2.5°	2808	3451	4052	4581	4986	5241	5323	5241	4986	4581	4052
1.25°	2973	3642	4275	4831	5241	5501	5589	5501	5241	4831	4275
0°	3030	3708	4354	4906	5323	5589	5705	5589	5323	4906	4354
-1.25°	2973	3642	4275	4831	5241	5501	5589	5501	5241	4831	4275
-2.5°	2808	3451	4052	4581	4986	5241	5323	5241	4986	4581	4052
-3.75°	2562	3149	3710	4199	4581	4831	4906	4831	4581	4199	3710
-5°	2246	2756	3269	3710	4052	4275	4354	4275	4052	3710	3269
-6.25°	1916	2335	2756	3149	3451	3642	3708	3642	3451	3149	2756
-7.5°	1598	1916	2246	2562	2808	2973	3030	2973	2808	2562	2246
-8.75°	1323	1546	1782	2021	2206	2331	2375	2331	2206	2021	1782
-10°	1103	1253	1410	1569	1699	1778	1806	1778	1699	1569	1410
-11.25°	934	1032	1137	1233	1319	1372	1389	1372	1319	1233	1137
-12.5°	800	870	940	997	1052	1087	1099	1087	1052	997	940
-13.75°	689	740	792	835	867	890	898	890	867	835	792
-15°	609	640	673	705	729	743	747	743	729	705	673
-16.25°	553	575	594	613	627	636	639	636	627	613	594
-17.5°	505	524	539	552	562	568	570	568	562	552	539
-18.75°	469	482	493	502	509	514	515	514	509	502	493
-20°	430	446	456	463	469	472	473	472	469	463	456
-21.25°	370	392	408	418	426	431	432	431	426	418	408



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	293	317	337	351	360	366	368	366	360	351	337
-23.75°	211	233	252	267	277	284	286	284	277	267	252
-25°	137	156	172	184	193	198	200	198	193	184	172
-26.25°	75	87	101	111	119	124	125	124	119	111	101
-27.5°	40	44	50	56	61	64	65	64	61	56	50
-28.75°	28	29	30	32	33	35	35	35	33	32	30
-30°	23	24	25	25	26	26	26	26	26	25	25
-31.25°	18	19	20	21	21	21	21	21	21	21	20
-32.5°	14	15	16	16	16	17	17	17	16	16	16
-33.75°	11	11	12	12	13	13	13	13	13	12	12
-35°	9	9	9	9	9	9	9	9	9	9	9
-36.25°	8	8	8	8	8	8	8	8	8	8	8
-37.5°	7	7	7	7	7	7	7	7	7	7	7
-38.75°	6	6	6	6	7	7	7	7	7	6	6
-40°	6	6	6	6	6	6	6	6	6	6	6
-41.25°	6	6	6	6	6	6	6	6	6	6	6
-42.5°	5	5	5	5	5	5	5	5	5	5	5
-43.75°	5	5	5	5	5	5	5	5	5	5	5
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	4
-48.75°	4	4	4	4	4	4	4	4	4	4	4
-50°	3	3	3	3	3	3	4	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	3	3	3	3	3	3	3	3	3	3	3
-57.5°	3	3	3	3	3	3	3	3	3	3	3
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	2	2	2	2	2	2	2	2	2	2	2
-63.75°	2	2	2	2	2	2	2	2	2	2	2
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	1	1	1	1	0	0	0	0
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	2	2	1	1	1	1	1	1	1	1	1
62.5°	2	2	2	2	2	2	2	2	2	2	1
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	3	3	3	3	2	2	2	2	2	2	2
56.25°	3	3	3	3	3	3	3	3	3	3	2
55°	3	3	3	3	3	3	3	3	3	3	3
53.75°	3	3	3	3	3	3	3	3	3	3	3
52.5°	3	3	3	3	3	3	3	3	3	3	3
51.25°	3	3	3	3	3	3	3	3	3	3	3
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	4	4	4	4	4	4	3	3	3	3	3
47.5°	4	4	4	4	4	4	4	4	4	4	3
46.25°	4	4	4	4	4	4	4	4	4	4	4
45°	4	4	4	4	4	4	4	4	4	4	4
43.75°	5	5	5	5	4	4	4	4	4	4	4
42.5°	5	5	5	5	5	5	5	5	4	4	4
41.25°	6	6	5	5	5	5	5	5	5	5	5
40°	6	6	6	6	6	6	5	5	5	5	5
38.75°	6	6	6	6	6	6	6	6	6	5	5
37.5°	7	7	7	7	6	6	6	6	6	6	6
36.25°	8	8	7	7	7	7	7	7	6	6	6
35°	9	9	8	8	8	8	7	7	7	7	6



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	11	11	10	9	9	9	8	8	7	7	7
32.5°	15	14	14	13	12	10	9	9	8	8	7
31.25°	19	18	17	16	15	14	13	11	10	9	8
30°	24	23	22	20	19	18	16	15	13	11	9
28.75°	29	28	26	25	23	22	20	18	16	14	13
27.5°	44	40	35	30	28	26	24	22	20	18	16
26.25°	87	75	62	48	40	33	29	26	24	21	19
25°	156	137	117	94	74	55	42	33	28	25	23
23.75°	233	211	186	160	131	102	74	52	39	30	26
22.5°	317	293	265	233	198	165	129	93	65	43	32
21.25°	392	370	344	311	274	234	192	151	110	73	46
20°	446	430	410	383	348	307	261	213	166	120	78
18.75°	482	469	455	436	410	374	331	280	226	174	124
17.5°	524	505	489	471	452	426	391	344	289	231	174
16.25°	575	553	530	505	483	461	436	400	349	289	226
15°	640	609	578	548	519	491	466	440	400	344	280
13.75°	740	689	639	596	560	526	494	466	436	391	331
12.5°	870	800	727	658	608	565	526	491	461	426	374
11.25°	1032	934	838	747	667	608	560	519	483	452	410
10°	1253	1103	967	851	747	658	596	548	505	471	436
8.75°	1546	1323	1127	967	838	727	639	578	530	489	455
7.5°	1916	1598	1323	1103	934	800	689	609	553	505	469
6.25°	2335	1916	1546	1253	1032	870	740	640	575	524	482
5°	2756	2246	1782	1410	1137	940	792	673	594	539	493
3.75°	3149	2562	2021	1569	1233	997	835	705	613	552	502
2.5°	3451	2808	2206	1699	1319	1052	867	729	627	562	509
1.25°	3642	2973	2331	1778	1372	1087	890	743	636	568	514
0°	3708	3030	2375	1806	1389	1099	898	747	639	570	515
-1.25°	3642	2973	2331	1778	1372	1087	890	743	636	568	514
-2.5°	3451	2808	2206	1699	1319	1052	867	729	627	562	509
-3.75°	3149	2562	2021	1569	1233	997	835	705	613	552	502
-5°	2756	2246	1782	1410	1137	940	792	673	594	539	493
-6.25°	2335	1916	1546	1253	1032	870	740	640	575	524	482
-7.5°	1916	1598	1323	1103	934	800	689	609	553	505	469
-8.75°	1546	1323	1127	967	838	727	639	578	530	489	455
-10°	1253	1103	967	851	747	658	596	548	505	471	436
-11.25°	1032	934	838	747	667	608	560	519	483	452	410
-12.5°	870	800	727	658	608	565	526	491	461	426	374
-13.75°	740	689	639	596	560	526	494	466	436	391	331
-15°	640	609	578	548	519	491	466	440	400	344	280
-16.25°	575	553	530	505	483	461	436	400	349	289	226
-17.5°	524	505	489	471	452	426	391	344	289	231	174
-18.75°	482	469	455	436	410	374	331	280	226	174	124
-20°	446	430	410	383	348	307	261	213	166	120	78
-21.25°	392	370	344	311	274	234	192	151	110	73	46



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	317	293	265	233	198	165	129	93	65	43	32
-23.75°	233	211	186	160	131	102	74	52	39	30	26
-25°	156	137	117	94	74	55	42	33	28	25	23
-26.25°	87	75	62	48	40	33	29	26	24	21	19
-27.5°	44	40	35	30	28	26	24	22	20	18	16
-28.75°	29	28	26	25	23	22	20	18	16	14	13
-30°	24	23	22	20	19	18	16	15	13	11	9
-31.25°	19	18	17	16	15	14	13	11	10	9	8
-32.5°	15	14	14	13	12	10	9	9	8	8	7
-33.75°	11	11	10	9	9	9	8	8	7	7	7
-35°	9	9	8	8	8	8	7	7	7	7	6
-36.25°	8	8	7	7	7	7	7	7	6	6	6
-37.5°	7	7	7	7	6	6	6	6	6	6	6
-38.75°	6	6	6	6	6	6	6	6	6	5	5
-40°	6	6	6	6	6	6	5	5	5	5	5
-41.25°	6	6	5	5	5	5	5	5	5	5	5
-42.5°	5	5	5	5	5	5	5	5	4	4	4
-43.75°	5	5	5	5	4	4	4	4	4	4	4
-45°	4	4	4	4	4	4	4	4	4	4	4
-46.25°	4	4	4	4	4	4	4	4	4	4	4
-47.5°	4	4	4	4	4	4	4	4	4	4	3
-48.75°	4	4	4	4	4	4	3	3	3	3	3
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	3
-52.5°	3	3	3	3	3	3	3	3	3	3	3
-53.75°	3	3	3	3	3	3	3	3	3	3	3
-55°	3	3	3	3	3	3	3	3	3	3	3
-56.25°	3	3	3	3	3	3	3	3	3	3	2
-57.5°	3	3	3	3	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	2	2	2	2	2	2	2	2	2	2	1
-63.75°	2	2	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	1	1	1	1	0	0	0	0	0	0	0
66.25°	1	1	1	1	1	1	1	1	0	0	0
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	2	2	2	2	1	1	1	1	1	1	1
60°	2	2	2	2	2	2	2	1	1	1	1
58.75°	2	2	2	2	2	2	2	2	2	2	1
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	3	3	3	2	2	2	2	2	2	2	2
53.75°	3	3	3	3	3	3	2	2	2	2	2
52.5°	3	3	3	3	3	3	3	3	2	2	2
51.25°	3	3	3	3	3	3	3	3	3	3	2
50°	3	3	3	3	3	3	3	3	3	3	3
48.75°	3	3	3	3	3	3	3	3	3	3	3
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	4	4	3	3	3	3	3	3	3	3	3
45°	4	4	4	4	3	3	3	3	3	3	3
43.75°	4	4	4	4	4	4	3	3	3	3	3
42.5°	4	4	4	4	4	4	4	4	3	3	3
41.25°	4	4	4	4	4	4	4	4	4	3	3
40°	5	5	4	4	4	4	4	4	4	4	4
38.75°	5	5	5	5	4	4	4	4	4	4	4
37.5°	6	5	5	5	5	5	4	4	4	4	4
36.25°	6	6	6	5	5	5	5	4	4	4	4
35°	6	6	6	6	5	5	5	5	4	4	4



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	7	6	6	6	6	6	5	5	5	5	4
32.5°	7	7	7	6	6	6	6	5	5	5	5
31.25°	8	7	7	7	6	6	6	6	5	5	5
30°	9	8	8	7	7	6	6	6	6	5	5
28.75°	11	9	8	8	7	7	6	6	6	6	5
27.5°	14	11	9	9	8	7	7	6	6	6	6
26.25°	17	14	12	10	9	8	7	7	6	6	6
25°	20	17	15	12	10	9	8	7	7	6	6
23.75°	23	21	18	15	12	10	9	8	7	7	6
22.5°	27	24	21	18	15	12	9	8	8	7	7
21.25°	33	27	24	21	17	14	11	9	8	7	7
20°	47	33	27	23	20	17	14	11	9	8	7
18.75°	78	46	32	26	23	19	16	13	9	8	7
17.5°	120	73	43	30	25	21	18	14	11	9	8
16.25°	166	110	65	39	28	24	20	16	13	10	8
15°	213	151	93	52	33	26	22	18	15	11	9
13.75°	261	192	129	74	42	29	24	20	16	13	9
12.5°	307	234	165	102	55	33	26	22	18	14	10
11.25°	348	274	198	131	74	40	28	23	19	15	12
10°	383	311	233	160	94	48	30	25	20	16	13
8.75°	410	344	265	186	117	62	35	26	22	17	14
7.5°	430	370	293	211	137	75	40	28	23	18	14
6.25°	446	392	317	233	156	87	44	29	24	19	15
5°	456	408	337	252	172	101	50	30	25	20	16
3.75°	463	418	351	267	184	111	56	32	25	21	16
2.5°	469	426	360	277	193	119	61	33	26	21	16
1.25°	472	431	366	284	198	124	64	35	26	21	17
0°	473	432	368	286	200	125	65	35	26	21	17
-1.25°	472	431	366	284	198	124	64	35	26	21	17
-2.5°	469	426	360	277	193	119	61	33	26	21	16
-3.75°	463	418	351	267	184	111	56	32	25	21	16
-5°	456	408	337	252	172	101	50	30	25	20	16
-6.25°	446	392	317	233	156	87	44	29	24	19	15
-7.5°	430	370	293	211	137	75	40	28	23	18	14
-8.75°	410	344	265	186	117	62	35	26	22	17	14
-10°	383	311	233	160	94	48	30	25	20	16	13
-11.25°	348	274	198	131	74	40	28	23	19	15	12
-12.5°	307	234	165	102	55	33	26	22	18	14	10
-13.75°	261	192	129	74	42	29	24	20	16	13	9
-15°	213	151	93	52	33	26	22	18	15	11	9
-16.25°	166	110	65	39	28	24	20	16	13	10	8
-17.5°	120	73	43	30	25	21	18	14	11	9	8
-18.75°	78	46	32	26	23	19	16	13	9	8	7
-20°	47	33	27	23	20	17	14	11	9	8	7
-21.25°	33	27	24	21	17	14	11	9	8	7	7



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	27	24	21	18	15	12	9	8	8	7	7
-23.75°	23	21	18	15	12	10	9	8	7	7	6
-25°	20	17	15	12	10	9	8	7	7	6	6
-26.25°	17	14	12	10	9	8	7	7	6	6	6
-27.5°	14	11	9	9	8	7	7	6	6	6	6
-28.75°	11	9	8	8	7	7	6	6	6	6	5
-30°	9	8	8	7	7	6	6	6	6	5	5
-31.25°	8	7	7	7	6	6	6	6	5	5	5
-32.5°	7	7	7	6	6	6	6	5	5	5	5
-33.75°	7	6	6	6	6	6	5	5	5	5	4
-35°	6	6	6	6	5	5	5	5	4	4	4
-36.25°	6	6	6	5	5	5	5	4	4	4	4
-37.5°	6	5	5	5	5	5	4	4	4	4	4
-38.75°	5	5	5	5	4	4	4	4	4	4	4
-40°	5	5	4	4	4	4	4	4	4	4	4
-41.25°	4	4	4	4	4	4	4	4	4	3	3
-42.5°	4	4	4	4	4	4	4	4	3	3	3
-43.75°	4	4	4	4	4	4	3	3	3	3	3
-45°	4	4	4	4	3	3	3	3	3	3	3
-46.25°	4	4	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	3	3	3	3	3	3	3	3	3	3	3
-50°	3	3	3	3	3	3	3	3	3	3	3
-51.25°	3	3	3	3	3	3	3	3	3	3	2
-52.5°	3	3	3	3	3	3	3	3	2	2	2
-53.75°	3	3	3	3	3	3	2	2	2	2	2
-55°	3	3	3	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	1
-60°	2	2	2	2	2	2	2	1	1	1	1
-61.25°	2	2	2	2	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	0	0	0
-67.5°	1	1	1	1	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	1	0	0	0	0	0	0	0	0	0	0
63.75°	1	1	1	1	0	0	0	0	0	0	0
62.5°	1	1	1	1	1	1	0	0	0	0	0
61.25°	1	1	1	1	1	1	1	1	0	0	0
60°	1	1	1	1	1	1	1	1	1	1	0
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	2	2	1	1	1	1	1	1	1	1	1
56.25°	2	2	2	2	1	1	1	1	1	1	1
55°	2	2	2	2	2	2	1	1	1	1	1
53.75°	2	2	2	2	2	2	2	1	1	1	1
52.5°	2	2	2	2	2	2	2	2	2	1	1
51.25°	2	2	2	2	2	2	2	2	2	2	1
50°	3	2	2	2	2	2	2	2	2	2	2
48.75°	3	3	3	2	2	2	2	2	2	2	2
47.5°	3	3	3	3	2	2	2	2	2	2	2
46.25°	3	3	3	3	3	3	2	2	2	2	2
45°	3	3	3	3	3	3	3	2	2	2	2
43.75°	3	3	3	3	3	3	3	3	2	2	2
42.5°	3	3	3	3	3	3	3	3	3	2	2
41.25°	3	3	3	3	3	3	3	3	3	3	2
40°	3	3	3	3	3	3	3	3	3	3	3
38.75°	4	3	3	3	3	3	3	3	3	3	3
37.5°	4	4	3	3	3	3	3	3	3	3	3
36.25°	4	4	4	3	3	3	3	3	3	3	3
35°	4	4	4	4	3	3	3	3	3	3	3



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	4	4	4	4	4	3	3	3	3	3	3
32.5°	4	4	4	4	4	4	3	3	3	3	3
31.25°	5	4	4	4	4	4	3	3	3	3	3
30°	5	4	4	4	4	4	4	3	3	3	3
28.75°	5	5	4	4	4	4	4	4	3	3	3
27.5°	5	5	5	4	4	4	4	4	3	3	3
26.25°	6	5	5	5	4	4	4	4	4	3	3
25°	6	5	5	5	4	4	4	4	4	3	3
23.75°	6	6	5	5	5	4	4	4	4	4	3
22.5°	6	6	6	5	5	4	4	4	4	4	3
21.25°	6	6	6	5	5	5	4	4	4	4	4
20°	7	6	6	6	5	5	4	4	4	4	4
18.75°	7	6	6	6	5	5	5	4	4	4	4
17.5°	7	7	6	6	5	5	5	4	4	4	4
16.25°	7	7	6	6	6	5	5	4	4	4	4
15°	8	7	7	6	6	5	5	5	4	4	4
13.75°	8	7	7	6	6	5	5	5	4	4	4
12.5°	9	8	7	6	6	6	5	5	4	4	4
11.25°	9	8	7	6	6	6	5	5	4	4	4
10°	9	8	7	7	6	6	5	5	5	4	4
8.75°	10	8	7	7	6	6	5	5	5	4	4
7.5°	11	9	8	7	6	6	6	5	5	4	4
6.25°	11	9	8	7	6	6	6	5	5	4	4
5°	12	9	8	7	6	6	6	5	5	4	4
3.75°	12	9	8	7	6	6	6	5	5	4	4
2.5°	13	9	8	7	7	6	6	5	5	4	4
1.25°	13	9	8	7	7	6	6	5	5	4	4
0°	13	9	8	7	7	6	6	5	5	4	4
-1.25°	13	9	8	7	7	6	6	5	5	4	4
-2.5°	13	9	8	7	7	6	6	5	5	4	4
-3.75°	12	9	8	7	6	6	6	5	5	4	4
-5°	12	9	8	7	6	6	6	5	5	4	4
-6.25°	11	9	8	7	6	6	6	5	5	4	4
-7.5°	11	9	8	7	6	6	6	5	5	4	4
-8.75°	10	8	7	7	6	6	5	5	5	4	4
-10°	9	8	7	7	6	6	5	5	5	4	4
-11.25°	9	8	7	6	6	6	5	5	4	4	4
-12.5°	9	8	7	6	6	6	5	5	4	4	4
-13.75°	8	7	7	6	6	5	5	5	4	4	4
-15°	8	7	7	6	6	5	5	5	4	4	4
-16.25°	7	7	6	6	6	5	5	4	4	4	4
-17.5°	7	7	6	6	5	5	5	4	4	4	4
-18.75°	7	6	6	6	5	5	5	4	4	4	4
-20°	7	6	6	6	5	5	4	4	4	4	4
-21.25°	6	6	6	5	5	5	4	4	4	4	4



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	6	6	6	5	5	4	4	4	4	4	3
-23.75°	6	6	5	5	5	4	4	4	4	4	3
-25°	6	5	5	5	4	4	4	4	4	3	3
-26.25°	6	5	5	5	4	4	4	4	4	3	3
-27.5°	5	5	5	4	4	4	4	4	3	3	3
-28.75°	5	5	4	4	4	4	4	4	3	3	3
-30°	5	4	4	4	4	4	4	3	3	3	3
-31.25°	5	4	4	4	4	4	3	3	3	3	3
-32.5°	4	4	4	4	4	4	3	3	3	3	3
-33.75°	4	4	4	4	4	3	3	3	3	3	3
-35°	4	4	4	4	3	3	3	3	3	3	3
-36.25°	4	4	4	3	3	3	3	3	3	3	3
-37.5°	4	4	3	3	3	3	3	3	3	3	3
-38.75°	4	3	3	3	3	3	3	3	3	3	3
-40°	3	3	3	3	3	3	3	3	3	3	3
-41.25°	3	3	3	3	3	3	3	3	3	3	2
-42.5°	3	3	3	3	3	3	3	3	3	2	2
-43.75°	3	3	3	3	3	3	3	3	2	2	2
-45°	3	3	3	3	3	3	3	2	2	2	2
-46.25°	3	3	3	3	3	3	2	2	2	2	2
-47.5°	3	3	3	3	2	2	2	2	2	2	2
-48.75°	3	3	3	2	2	2	2	2	2	2	2
-50°	3	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	1
-52.5°	2	2	2	2	2	2	2	2	2	1	1
-53.75°	2	2	2	2	2	2	2	1	1	1	1
-55°	2	2	2	2	2	2	1	1	1	1	1
-56.25°	2	2	2	2	1	1	1	1	1	1	1
-57.5°	2	2	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	0
-61.25°	1	1	1	1	1	1	1	1	0	0	0
-62.5°	1	1	1	1	1	1	0	0	0	0	0
-63.75°	1	1	1	1	0	0	0	0	0	0	0
-65°	1	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	1	0	0	0	0	0	0	0	0	0	0
57.5°	1	1	0	0	0	0	0	0	0	0	0
56.25°	1	1	1	0	0	0	0	0	0	0	0
55°	1	1	1	1	0	0	0	0	0	0	0
53.75°	1	1	1	1	1	0	0	0	0	0	0
52.5°	1	1	1	1	1	1	0	0	0	0	0
51.25°	1	1	1	1	1	1	1	0	0	0	0
50°	1	1	1	1	1	1	1	1	0	0	0
48.75°	2	1	1	1	1	1	1	1	1	0	0
47.5°	2	2	1	1	1	1	1	1	1	1	0
46.25°	2	2	2	1	1	1	1	1	1	1	0
45°	2	2	2	2	1	1	1	1	1	1	1
43.75°	2	2	2	2	2	1	1	1	1	1	1
42.5°	2	2	2	2	2	1	1	1	1	1	1
41.25°	2	2	2	2	2	2	1	1	1	1	1
40°	2	2	2	2	2	2	2	1	1	1	1
38.75°	2	2	2	2	2	2	2	1	1	1	1
37.5°	3	2	2	2	2	2	2	2	1	1	1
36.25°	3	3	2	2	2	2	2	2	1	1	1
35°	3	3	2	2	2	2	2	2	2	1	1



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	3	3	3	2	2	2	2	2	2	1	1
32.5°	3	3	3	2	2	2	2	2	2	1	1
31.25°	3	3	3	3	2	2	2	2	2	2	1
30°	3	3	3	3	2	2	2	2	2	2	1
28.75°	3	3	3	3	3	2	2	2	2	2	1
27.5°	3	3	3	3	3	2	2	2	2	2	2
26.25°	3	3	3	3	3	3	2	2	2	2	2
25°	3	3	3	3	3	3	2	2	2	2	2
23.75°	3	3	3	3	3	3	2	2	2	2	2
22.5°	3	3	3	3	3	3	3	2	2	2	2
21.25°	3	3	3	3	3	3	3	2	2	2	2
20°	3	3	3	3	3	3	3	2	2	2	2
18.75°	3	3	3	3	3	3	3	2	2	2	2
17.5°	4	3	3	3	3	3	3	3	2	2	2
16.25°	4	3	3	3	3	3	3	3	2	2	2
15°	4	3	3	3	3	3	3	3	2	2	2
13.75°	4	3	3	3	3	3	3	3	2	2	2
12.5°	4	4	3	3	3	3	3	3	2	2	2
11.25°	4	4	3	3	3	3	3	3	2	2	2
10°	4	4	3	3	3	3	3	3	3	2	2
8.75°	4	4	3	3	3	3	3	3	3	2	2
7.5°	4	4	3	3	3	3	3	3	3	2	2
6.25°	4	4	3	3	3	3	3	3	3	2	2
5°	4	4	3	3	3	3	3	3	3	2	2
3.75°	4	4	3	3	3	3	3	3	3	2	2
2.5°	4	4	3	3	3	3	3	3	3	2	2
1.25°	4	4	3	3	3	3	3	3	3	2	2
0°	4	4	4	3	3	3	3	3	3	2	2
-1.25°	4	4	3	3	3	3	3	3	3	2	2
-2.5°	4	4	3	3	3	3	3	3	3	2	2
-3.75°	4	4	3	3	3	3	3	3	3	2	2
-5°	4	4	3	3	3	3	3	3	3	2	2
-6.25°	4	4	3	3	3	3	3	3	3	2	2
-7.5°	4	4	3	3	3	3	3	3	3	2	2
-8.75°	4	4	3	3	3	3	3	3	3	2	2
-10°	4	4	3	3	3	3	3	3	3	2	2
-11.25°	4	4	3	3	3	3	3	3	2	2	2
-12.5°	4	4	3	3	3	3	3	3	2	2	2
-13.75°	4	3	3	3	3	3	3	3	2	2	2
-15°	4	3	3	3	3	3	3	3	2	2	2
-16.25°	4	3	3	3	3	3	3	3	2	2	2
-17.5°	4	3	3	3	3	3	3	3	2	2	2
-18.75°	3	3	3	3	3	3	3	2	2	2	2
-20°	3	3	3	3	3	3	3	2	2	2	2
-21.25°	3	3	3	3	3	3	3	2	2	2	2



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	3	3	3	3	3	3	3	2	2	2	2
-23.75°	3	3	3	3	3	3	2	2	2	2	2
-25°	3	3	3	3	3	3	2	2	2	2	2
-26.25°	3	3	3	3	3	3	2	2	2	2	2
-27.5°	3	3	3	3	3	2	2	2	2	2	2
-28.75°	3	3	3	3	3	2	2	2	2	2	1
-30°	3	3	3	3	2	2	2	2	2	2	1
-31.25°	3	3	3	3	2	2	2	2	2	2	1
-32.5°	3	3	3	2	2	2	2	2	2	1	1
-33.75°	3	3	3	2	2	2	2	2	2	1	1
-35°	3	3	2	2	2	2	2	2	2	1	1
-36.25°	3	3	2	2	2	2	2	2	1	1	1
-37.5°	3	2	2	2	2	2	2	2	1	1	1
-38.75°	2	2	2	2	2	2	2	1	1	1	1
-40°	2	2	2	2	2	2	2	1	1	1	1
-41.25°	2	2	2	2	2	2	1	1	1	1	1
-42.5°	2	2	2	2	2	1	1	1	1	1	1
-43.75°	2	2	2	2	2	1	1	1	1	1	1
-45°	2	2	2	2	1	1	1	1	1	1	1
-46.25°	2	2	2	1	1	1	1	1	1	1	0
-47.5°	2	2	1	1	1	1	1	1	1	1	0
-48.75°	2	1	1	1	1	1	1	1	1	0	0
-50°	1	1	1	1	1	1	1	1	0	0	0
-51.25°	1	1	1	1	1	1	1	0	0	0	0
-52.5°	1	1	1	1	1	1	0	0	0	0	0
-53.75°	1	1	1	1	1	0	0	0	0	0	0
-55°	1	1	1	1	0	0	0	0	0	0	0
-56.25°	1	1	1	0	0	0	0	0	0	0	0
-57.5°	1	1	0	0	0	0	0	0	0	0	0
-58.75°	1	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	1	0	0	0	0	0	0	0	0	0	0
41.25°	1	0	0	0	0	0	0	0	0	0	0
40°	1	1	0	0	0	0	0	0	0	0	0
38.75°	1	1	0	0	0	0	0	0	0	0	0
37.5°	1	1	1	0	0	0	0	0	0	0	0
36.25°	1	1	1	0	0	0	0	0	0	0	0
35°	1	1	1	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	1	1	1	1	0	0	0	0	0	0	0
32.5°	1	1	1	1	0	0	0	0	0	0	0
31.25°	1	1	1	1	0	0	0	0	0	0	0
30°	1	1	1	1	0	0	0	0	0	0	0
28.75°	1	1	1	1	1	0	0	0	0	0	0
27.5°	1	1	1	1	1	0	0	0	0	0	0
26.25°	1	1	1	1	1	0	0	0	0	0	0
25°	1	1	1	1	1	0	0	0	0	0	0
23.75°	2	1	1	1	1	1	0	0	0	0	0
22.5°	2	1	1	1	1	1	0	0	0	0	0
21.25°	2	1	1	1	1	1	0	0	0	0	0
20°	2	1	1	1	1	1	0	0	0	0	0
18.75°	2	1	1	1	1	1	0	0	0	0	0
17.5°	2	2	1	1	1	1	0	0	0	0	0
16.25°	2	2	1	1	1	1	0	0	0	0	0
15°	2	2	1	1	1	1	0	0	0	0	0
13.75°	2	2	1	1	1	1	1	0	0	0	0
12.5°	2	2	1	1	1	1	1	0	0	0	0
11.25°	2	2	1	1	1	1	1	0	0	0	0
10°	2	2	1	1	1	1	1	0	0	0	0
8.75°	2	2	1	1	1	1	1	0	0	0	0
7.5°	2	2	2	1	1	1	1	0	0	0	0
6.25°	2	2	2	1	1	1	1	0	0	0	0
5°	2	2	2	1	1	1	1	0	0	0	0
3.75°	2	2	2	1	1	1	1	0	0	0	0
2.5°	2	2	2	1	1	1	1	0	0	0	0
1.25°	2	2	2	1	1	1	1	0	0	0	0
0°	2	2	2	1	1	1	1	0	0	0	0
-1.25°	2	2	2	1	1	1	1	0	0	0	0
-2.5°	2	2	2	1	1	1	1	0	0	0	0
-3.75°	2	2	2	1	1	1	1	0	0	0	0
-5°	2	2	2	1	1	1	1	0	0	0	0
-6.25°	2	2	2	1	1	1	1	0	0	0	0
-7.5°	2	2	2	1	1	1	1	0	0	0	0
-8.75°	2	2	1	1	1	1	1	0	0	0	0
-10°	2	2	1	1	1	1	1	0	0	0	0
-11.25°	2	2	1	1	1	1	1	0	0	0	0
-12.5°	2	2	1	1	1	1	1	0	0	0	0
-13.75°	2	2	1	1	1	1	1	0	0	0	0
-15°	2	2	1	1	1	1	0	0	0	0	0
-16.25°	2	2	1	1	1	1	0	0	0	0	0
-17.5°	2	2	1	1	1	1	0	0	0	0	0
-18.75°	2	1	1	1	1	1	0	0	0	0	0
-20°	2	1	1	1	1	1	0	0	0	0	0
-21.25°	2	1	1	1	1	1	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	2	1	1	1	1	1	0	0	0	0	0
-23.75°	2	1	1	1	1	1	0	0	0	0	0
-25°	1	1	1	1	1	0	0	0	0	0	0
-26.25°	1	1	1	1	1	0	0	0	0	0	0
-27.5°	1	1	1	1	1	0	0	0	0	0	0
-28.75°	1	1	1	1	1	0	0	0	0	0	0
-30°	1	1	1	1	0	0	0	0	0	0	0
-31.25°	1	1	1	1	0	0	0	0	0	0	0
-32.5°	1	1	1	1	0	0	0	0	0	0	0
-33.75°	1	1	1	1	0	0	0	0	0	0	0
-35°	1	1	1	0	0	0	0	0	0	0	0
-36.25°	1	1	1	0	0	0	0	0	0	0	0
-37.5°	1	1	1	0	0	0	0	0	0	0	0
-38.75°	1	1	0	0	0	0	0	0	0	0	0
-40°	1	1	0	0	0	0	0	0	0	0	0
-41.25°	1	0	0	0	0	0	0	0	0	0	0
-42.5°	1	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: P220503 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1003-[A1, S1, SU1]-[RW, RI]-LED3590-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)