

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

Luminaire Tested: **1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29476)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV
Description: LUMIERE LANTERRA 1003 LED ACCENT/SIGN LUMINAIRE, FLUSH LENS, SPOT
OPTIC, BLACK HOUSING.
Light Source: (1) 3000K CCT, 97 CRI LED
Ballast/Driver: ELECTRONIC DRIVER


Summary

Lumens per Lamp:	N/A	NEMA Type:	3H x 3V
Luminaire Lumens:	649.7 lumens	Max Intensity:	4933.4 candela
Efficiency:	N/A	Max Intensity Angle:	0°H x 0°V
Efficacy:	66.3 lumens/watt		
Luminous Opening:	Circular (Dia: 0.25' x H: 0')		
Beam Angle (50%):	16°H x 16°V	Field Angle (10%):	36.1°H x 36.1°V
Beam Lumens:	212.1 lumens	Field Lumens:	457.4 lumens
Beam Efficiency:	32.7%	Field Efficiency:	70.4%
Input Watts (W):	9.8		
Input Voltage (V):	120		
Input Current (Ain):	NR		
Voltage Rise (V):	NR		
Power Factor:	NR		
Total Harmonic Distortion (THDi):	NR		
Frequency (hertz):	60		
Stabilization Time:	NR		
Operation Time:	NR		
Ambient Temperature (°C):	NR		
Test Distance:	25 FT		

REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

Iso-Candela Plot

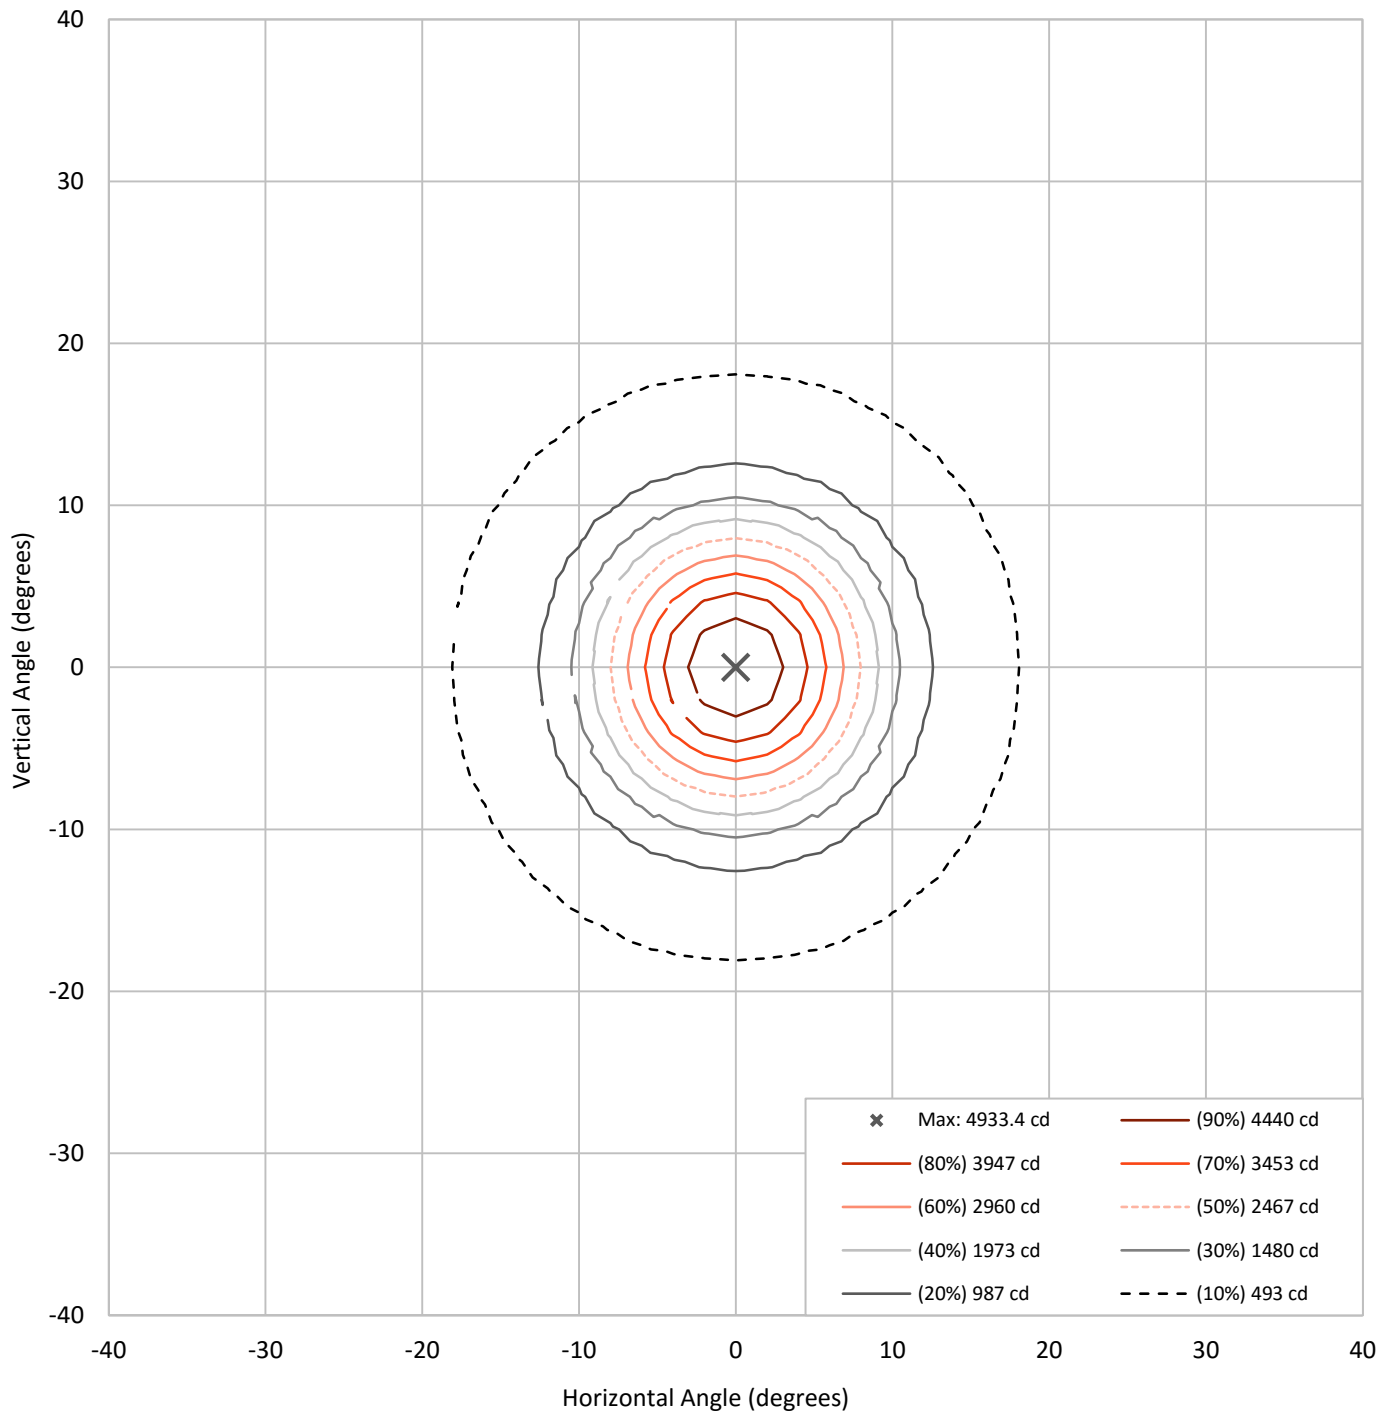




REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

Lumen Table

90	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
60		0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0					
50	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0				
40		0.0	0.0	0.0	0.1	0.2	0.4	0.8	0.8	0.4	0.2	0.1	0.0	0.0					
30	0.0	0.0	0.0	0.1	0.2	0.9	4.8	8.3	8.3	4.8	0.9	0.2	0.1	0.0	0.0				
20		0.0	0.0	0.1	0.3	4.5	12.0	20.4	20.4	12.0	4.5	0.3	0.1	0.0	0.0				
10	0.0	0.0	0.0	0.1	0.7	7.6	19.8	79.9	79.9	19.8	7.6	0.7	0.1	0.0	0.0				
0		0.0	0.0	0.1	0.7	7.6	19.8	79.9	79.9	19.8	7.6	0.7	0.1	0.0	0.0				
-10	0.0	0.0	0.0	0.1	0.3	4.5	12.0	20.4	20.4	12.0	4.5	0.3	0.1	0.0	0.0				
-20		0.0	0.0	0.1	0.2	0.9	4.8	8.3	8.3	4.8	0.9	0.2	0.1	0.0	0.0				
-30	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.8	0.8	0.4	0.2	0.1	0.0	0.0	0.0				
-40		0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0				
-50	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0				
-60		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-80		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
-90	0.0	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90


REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

Luminous Intensity Polar Plot

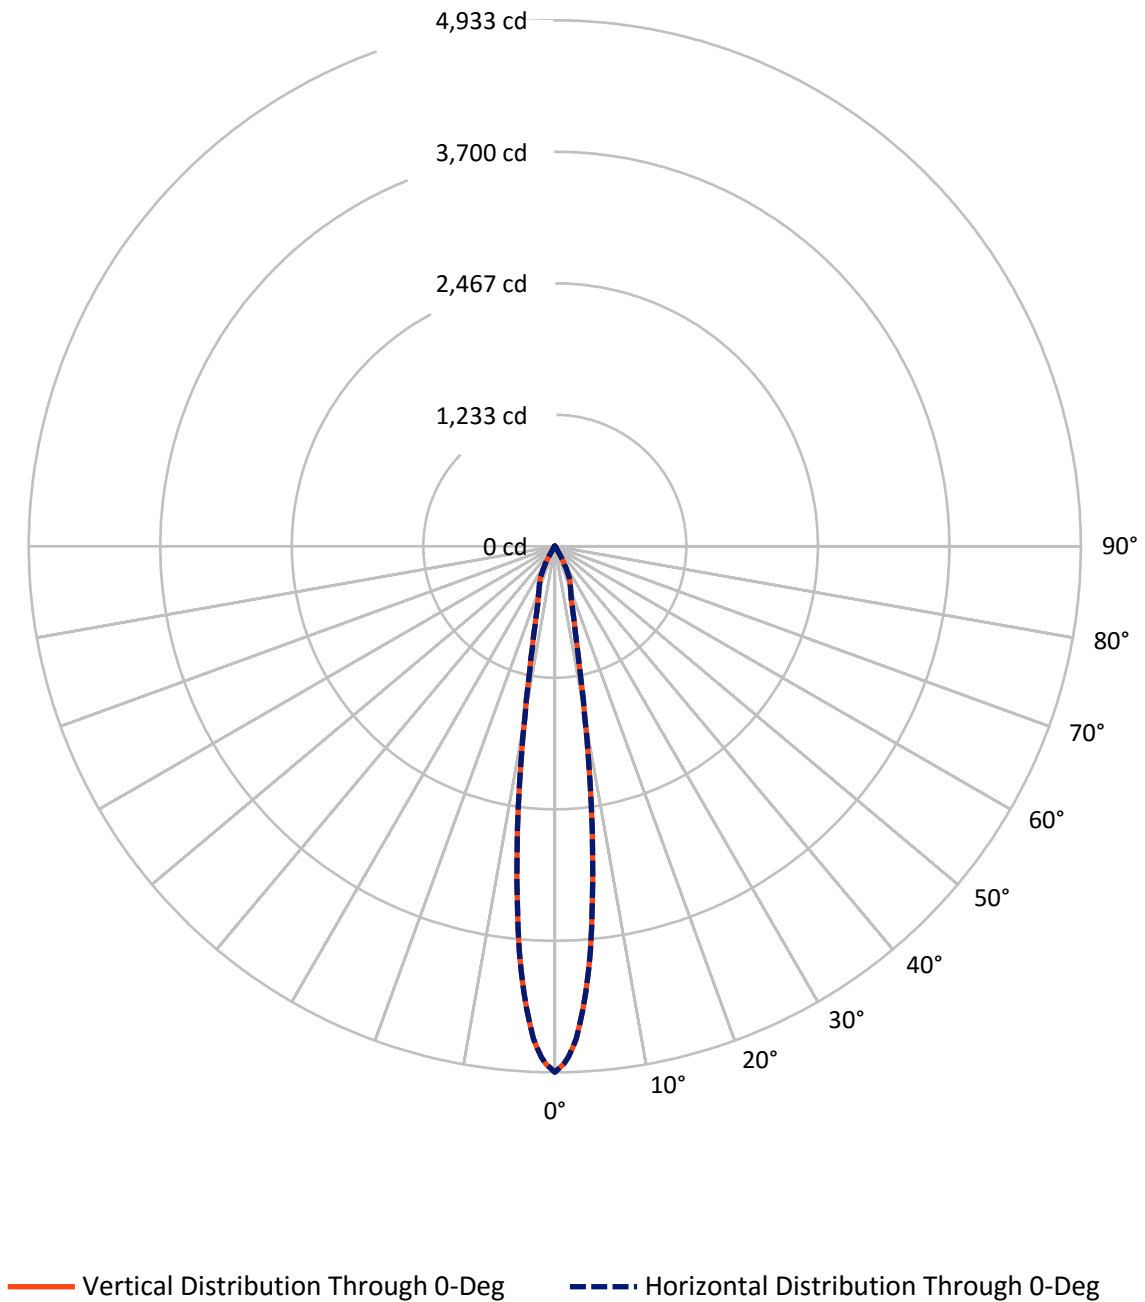

REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

Luminous Intensity Plot

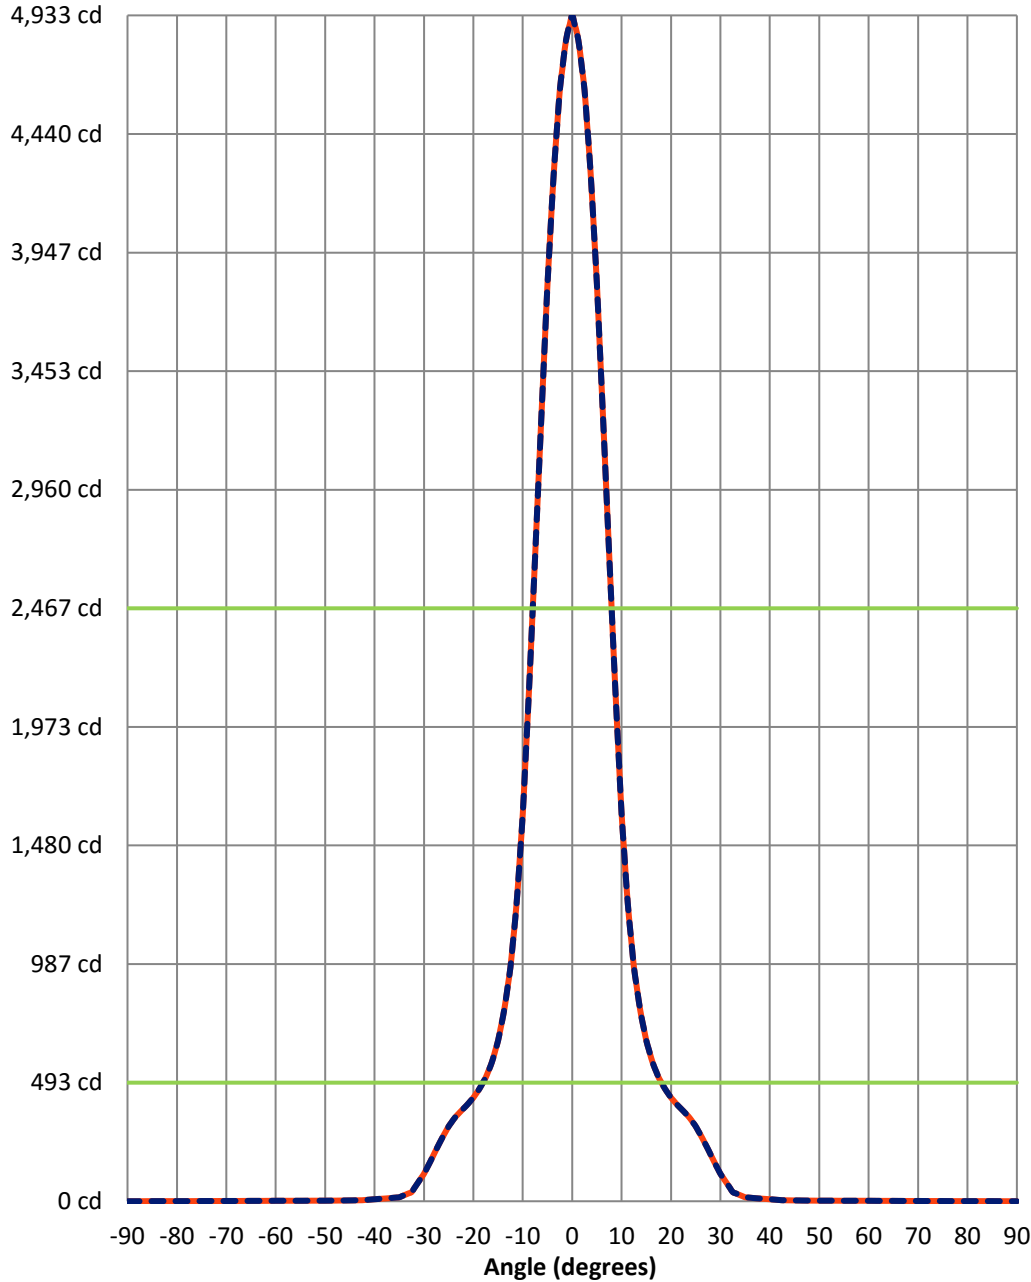

Beam:
 H Angle: 16°
 V Angle: 16°
 Lumens: 212.1
 Efficiency: 32.7%

Field:
 H Angle: 36.1°
 V Angle: 36.1°
 Lumens: 457.4
 Efficiency: 70.4%

Spill:
 Lumens: 192.2
 Efficiency: 29.6%

— Vertical Distribution through 0-Deg
 - - Horizontal Distribution through 0-Deg



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

FIELD
 BEAM

CANDELA DISTRIBUTION:

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	0	0	0	0	0	0	0	0	0	0	0
26.25°	0	0	0	0	0	0	0	0	0	0	0
25°	0	0	0	0	0	0	0	0	0	0	0
23.75°	0	0	0	0	0	0	0	0	0	0	0
22.5°	0	0	0	0	0	0	0	0	0	0	0
21.25°	0	0	0	0	0	0	0	0	0	0	0
20°	0	0	0	0	0	0	0	0	0	0	0
18.75°	0	0	0	0	0	0	0	0	0	0	0
17.5°	0	0	0	0	0	0	0	0	0	0	0
16.25°	0	0	0	0	0	0	0	0	0	0	0
15°	0	0	0	0	0	0	0	0	0	0	0
13.75°	0	0	0	0	0	0	0	0	0	0	0
12.5°	0	0	0	0	0	0	0	0	0	0	0
11.25°	0	0	0	0	0	0	0	0	0	0	0
10°	0	0	0	0	0	0	0	0	0	0	0
8.75°	0	0	0	0	0	0	0	0	0	0	0
7.5°	0	0	0	0	0	0	0	0	0	0	0
6.25°	0	0	0	0	0	0	0	0	0	0	0
5°	0	0	0	0	0	0	0	0	0	0	0
3.75°	0	0	0	0	0	0	0	0	0	0	0
2.5°	0	0	0	0	0	0	0	0	0	0	0
1.25°	0	0	0	0	0	0	0	0	0	0	0
0°	0	0	0	0	0	0	0	0	0	0	0
-1.25°	0	0	0	0	0	0	0	0	0	0	0
-2.5°	0	0	0	0	0	0	0	0	0	0	0
-3.75°	0	0	0	0	0	0	0	0	0	0	0
-5°	0	0	0	0	0	0	0	0	0	0	0
-6.25°	0	0	0	0	0	0	0	0	0	0	0
-7.5°	0	0	0	0	0	0	0	0	0	0	0
-8.75°	0	0	0	0	0	0	0	0	0	0	0
-10°	0	0	0	0	0	0	0	0	0	0	0
-11.25°	0	0	0	0	0	0	0	0	0	0	0
-12.5°	0	0	0	0	0	0	0	0	0	0	0
-13.75°	0	0	0	0	0	0	0	0	0	0	0
-15°	0	0	0	0	0	0	0	0	0	0	0
-16.25°	0	0	0	0	0	0	0	0	0	0	0
-17.5°	0	0	0	0	0	0	0	0	0	0	0
-18.75°	0	0	0	0	0	0	0	0	0	0	0
-20°	0	0	0	0	0	0	0	0	0	0	0
-21.25°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-22.5°	0	0	0	0	0	0	0	0	0	0	0
-23.75°	0	0	0	0	0	0	0	0	0	0	0
-25°	0	0	0	0	0	0	0	0	0	0	0
-26.25°	0	0	0	0	0	0	0	0	0	0	0
-27.5°	0	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-90°	-88.75°	-87.5°	-86.25°	-85°	-83.75°	-82.5°	-81.25°	-80°	-78.75°	-77.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	1
57.5°	0	0	0	0	0	0	0	0	0	0	1
56.25°	0	0	0	0	0	0	0	0	0	1	1
55°	0	0	0	0	0	0	0	0	1	1	1
53.75°	0	0	0	0	0	0	0	0	1	1	1
52.5°	0	0	0	0	0	0	0	1	1	1	1
51.25°	0	0	0	0	0	0	0	1	1	1	1
50°	0	0	0	0	0	0	1	1	1	1	1
48.75°	0	0	0	0	0	0	1	1	1	1	1
47.5°	0	0	0	0	0	1	1	1	1	1	1
46.25°	0	0	0	0	0	1	1	1	1	1	1
45°	0	0	0	0	1	1	1	1	1	1	1
43.75°	0	0	0	0	1	1	1	1	1	1	1
42.5°	0	0	0	0	1	1	1	1	1	1	1
41.25°	0	0	0	0	1	1	1	1	1	1	1
40°	0	0	0	1	1	1	1	1	1	1	1
38.75°	0	0	0	1	1	1	1	1	1	1	1
37.5°	0	0	0	1	1	1	1	1	1	1	1
36.25°	0	0	0	1	1	1	1	1	1	1	1
35°	0	0	1	1	1	1	1	1	1	1	1



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
33.75°	0	0	1	1	1	1	1	1	1	1	1
32.5°	0	0	1	1	1	1	1	1	1	1	1
31.25°	0	0	1	1	1	1	1	1	1	1	1
30°	0	0	1	1	1	1	1	1	1	1	1
28.75°	0	0	1	1	1	1	1	1	1	1	1
27.5°	0	1	1	1	1	1	1	1	1	1	1
26.25°	0	1	1	1	1	1	1	1	1	1	1
25°	0	1	1	1	1	1	1	1	1	1	1
23.75°	0	1	1	1	1	1	1	1	1	1	1
22.5°	0	1	1	1	1	1	1	1	1	1	1
21.25°	0	1	1	1	1	1	1	1	1	1	1
20°	0	1	1	1	1	1	1	1	1	1	1
18.75°	0	1	1	1	1	1	1	1	1	1	1
17.5°	0	1	1	1	1	1	1	1	1	1	1
16.25°	1	1	1	1	1	1	1	1	1	1	2
15°	1	1	1	1	1	1	1	1	1	1	2
13.75°	1	1	1	1	1	1	1	1	1	1	2
12.5°	1	1	1	1	1	1	1	1	1	1	2
11.25°	1	1	1	1	1	1	1	1	1	1	2
10°	1	1	1	1	1	1	1	1	1	1	2
8.75°	1	1	1	1	1	1	1	1	1	1	2
7.5°	1	1	1	1	1	1	1	1	1	1	2
6.25°	1	1	1	1	1	1	1	1	1	1	2
5°	1	1	1	1	1	1	1	1	1	1	2
3.75°	1	1	1	1	1	1	1	1	1	1	2
2.5°	1	1	1	1	1	1	1	1	1	1	2
1.25°	1	1	1	1	1	1	1	1	1	1	2
0°	1	1	1	1	1	1	1	1	1	2	2
-1.25°	1	1	1	1	1	1	1	1	1	1	2
-2.5°	1	1	1	1	1	1	1	1	1	1	2
-3.75°	1	1	1	1	1	1	1	1	1	1	2
-5°	1	1	1	1	1	1	1	1	1	1	2
-6.25°	1	1	1	1	1	1	1	1	1	1	2
-7.5°	1	1	1	1	1	1	1	1	1	1	2
-8.75°	1	1	1	1	1	1	1	1	1	1	2
-10°	1	1	1	1	1	1	1	1	1	1	2
-11.25°	1	1	1	1	1	1	1	1	1	1	2
-12.5°	1	1	1	1	1	1	1	1	1	1	2
-13.75°	1	1	1	1	1	1	1	1	1	1	2
-15°	1	1	1	1	1	1	1	1	1	1	2
-16.25°	1	1	1	1	1	1	1	1	1	1	2
-17.5°	0	1	1	1	1	1	1	1	1	1	1
-18.75°	0	1	1	1	1	1	1	1	1	1	1
-20°	0	1	1	1	1	1	1	1	1	1	1
-21.25°	0	1	1	1	1	1	1	1	1	1	1



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-22.5°	0	1	1	1	1	1	1	1	1	1	1
-23.75°	0	1	1	1	1	1	1	1	1	1	1
-25°	0	1	1	1	1	1	1	1	1	1	1
-26.25°	0	1	1	1	1	1	1	1	1	1	1
-27.5°	0	1	1	1	1	1	1	1	1	1	1
-28.75°	0	0	1	1	1	1	1	1	1	1	1
-30°	0	0	1	1	1	1	1	1	1	1	1
-31.25°	0	0	1	1	1	1	1	1	1	1	1
-32.5°	0	0	1	1	1	1	1	1	1	1	1
-33.75°	0	0	1	1	1	1	1	1	1	1	1
-35°	0	0	1	1	1	1	1	1	1	1	1
-36.25°	0	0	0	1	1	1	1	1	1	1	1
-37.5°	0	0	0	1	1	1	1	1	1	1	1
-38.75°	0	0	0	1	1	1	1	1	1	1	1
-40°	0	0	0	1	1	1	1	1	1	1	1
-41.25°	0	0	0	0	1	1	1	1	1	1	1
-42.5°	0	0	0	0	1	1	1	1	1	1	1
-43.75°	0	0	0	0	1	1	1	1	1	1	1
-45°	0	0	0	0	1	1	1	1	1	1	1
-46.25°	0	0	0	0	0	1	1	1	1	1	1
-47.5°	0	0	0	0	0	1	1	1	1	1	1
-48.75°	0	0	0	0	0	0	1	1	1	1	1
-50°	0	0	0	0	0	0	1	1	1	1	1
-51.25°	0	0	0	0	0	0	0	1	1	1	1
-52.5°	0	0	0	0	0	0	0	1	1	1	1
-53.75°	0	0	0	0	0	0	0	0	1	1	1
-55°	0	0	0	0	0	0	0	0	1	1	1
-56.25°	0	0	0	0	0	0	0	0	0	1	1
-57.5°	0	0	0	0	0	0	0	0	0	0	1
-58.75°	0	0	0	0	0	0	0	0	0	0	1
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-76.25°	-75°	-73.75°	-72.5°	-71.25°	-70°	-68.75°	-67.5°	-66.25°	-65°	-63.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	1
67.5°	0	0	0	0	0	0	0	0	1	1	1
66.25°	0	0	0	0	0	0	1	1	1	1	1
65°	0	0	0	0	0	1	1	1	1	1	1
63.75°	0	0	0	1	1	1	1	1	1	1	1
62.5°	0	0	1	1	1	1	1	1	1	1	1
61.25°	0	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	1	1	1	1	1	1	1	1	1	1	1
50°	1	1	1	1	1	1	1	1	1	1	1
48.75°	1	1	1	1	1	1	1	1	1	1	2
47.5°	1	1	1	1	1	1	1	1	1	2	2
46.25°	1	1	1	1	1	1	1	1	1	2	2
45°	1	1	1	1	1	1	1	1	2	2	2
43.75°	1	1	1	1	1	1	1	2	2	2	2
42.5°	1	1	1	1	1	1	2	2	2	2	2
41.25°	1	1	1	1	1	1	2	2	2	2	2
40°	1	1	1	1	1	2	2	2	2	2	2
38.75°	1	1	1	1	1	2	2	2	2	2	2
37.5°	1	1	1	1	2	2	2	2	2	2	2
36.25°	1	1	1	1	2	2	2	2	2	2	2
35°	1	1	1	2	2	2	2	2	2	2	2



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
33.75°	1	1	1	2	2	2	2	2	2	2	2
32.5°	1	1	1	2	2	2	2	2	2	2	2
31.25°	1	1	2	2	2	2	2	2	2	2	2
30°	1	1	2	2	2	2	2	2	2	2	2
28.75°	1	1	2	2	2	2	2	2	2	2	2
27.5°	1	2	2	2	2	2	2	2	2	2	2
26.25°	1	2	2	2	2	2	2	2	2	2	2
25°	1	2	2	2	2	2	2	2	2	2	2
23.75°	2	2	2	2	2	2	2	2	2	2	2
22.5°	2	2	2	2	2	2	2	2	2	2	2
21.25°	2	2	2	2	2	2	2	2	2	2	2
20°	2	2	2	2	2	2	2	2	2	2	2
18.75°	2	2	2	2	2	2	2	2	2	2	2
17.5°	2	2	2	2	2	2	2	2	2	2	2
16.25°	2	2	2	2	2	2	2	2	2	2	2
15°	2	2	2	2	2	2	2	2	2	2	2
13.75°	2	2	2	2	2	2	2	2	2	2	2
12.5°	2	2	2	2	2	2	2	2	2	2	2
11.25°	2	2	2	2	2	2	2	2	2	2	2
10°	2	2	2	2	2	2	2	2	2	2	2
8.75°	2	2	2	2	2	2	2	2	2	2	2
7.5°	2	2	2	2	2	2	2	2	2	2	2
6.25°	2	2	2	2	2	2	2	2	2	2	2
5°	2	2	2	2	2	2	2	2	2	2	2
3.75°	2	2	2	2	2	2	2	2	2	2	2
2.5°	2	2	2	2	2	2	2	2	2	2	2
1.25°	2	2	2	2	2	2	2	2	2	2	2
0°	2	2	2	2	2	2	2	2	2	2	2
-1.25°	2	2	2	2	2	2	2	2	2	2	2
-2.5°	2	2	2	2	2	2	2	2	2	2	2
-3.75°	2	2	2	2	2	2	2	2	2	2	2
-5°	2	2	2	2	2	2	2	2	2	2	2
-6.25°	2	2	2	2	2	2	2	2	2	2	2
-7.5°	2	2	2	2	2	2	2	2	2	2	2
-8.75°	2	2	2	2	2	2	2	2	2	2	2
-10°	2	2	2	2	2	2	2	2	2	2	2
-11.25°	2	2	2	2	2	2	2	2	2	2	2
-12.5°	2	2	2	2	2	2	2	2	2	2	2
-13.75°	2	2	2	2	2	2	2	2	2	2	2
-15°	2	2	2	2	2	2	2	2	2	2	2
-16.25°	2	2	2	2	2	2	2	2	2	2	2
-17.5°	2	2	2	2	2	2	2	2	2	2	2
-18.75°	2	2	2	2	2	2	2	2	2	2	2
-20°	2	2	2	2	2	2	2	2	2	2	2
-21.25°	2	2	2	2	2	2	2	2	2	2	2



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-22.5°	2	2	2	2	2	2	2	2	2	2	2
-23.75°	2	2	2	2	2	2	2	2	2	2	2
-25°	1	2	2	2	2	2	2	2	2	2	2
-26.25°	1	2	2	2	2	2	2	2	2	2	2
-27.5°	1	2	2	2	2	2	2	2	2	2	2
-28.75°	1	1	2	2	2	2	2	2	2	2	2
-30°	1	1	2	2	2	2	2	2	2	2	2
-31.25°	1	1	2	2	2	2	2	2	2	2	2
-32.5°	1	1	1	2	2	2	2	2	2	2	2
-33.75°	1	1	1	2	2	2	2	2	2	2	2
-35°	1	1	1	2	2	2	2	2	2	2	2
-36.25°	1	1	1	1	2	2	2	2	2	2	2
-37.5°	1	1	1	1	2	2	2	2	2	2	2
-38.75°	1	1	1	1	1	2	2	2	2	2	2
-40°	1	1	1	1	1	2	2	2	2	2	2
-41.25°	1	1	1	1	1	1	2	2	2	2	2
-42.5°	1	1	1	1	1	1	2	2	2	2	2
-43.75°	1	1	1	1	1	1	1	2	2	2	2
-45°	1	1	1	1	1	1	1	1	2	2	2
-46.25°	1	1	1	1	1	1	1	1	1	2	2
-47.5°	1	1	1	1	1	1	1	1	1	2	2
-48.75°	1	1	1	1	1	1	1	1	1	1	2
-50°	1	1	1	1	1	1	1	1	1	1	1
-51.25°	1	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	0	1	1	1	1	1	1	1	1	1	1
-62.5°	0	0	1	1	1	1	1	1	1	1	1
-63.75°	0	0	0	1	1	1	1	1	1	1	1
-65°	0	0	0	0	0	1	1	1	1	1	1
-66.25°	0	0	0	0	0	0	1	1	1	1	1
-67.5°	0	0	0	0	0	0	0	0	1	1	1
-68.75°	0	0	0	0	0	0	0	0	0	0	1
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-62.5°	-61.25°	-60°	-58.75°	-57.5°	-56.25°	-55°	-53.75°	-52.5°	-51.25°	-50°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	1	1	1	1
71.25°	0	0	0	1	1	1	1	1	1	1	1
70°	0	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	2	2
56.25°	1	1	1	1	1	1	1	2	2	2	2
55°	1	1	1	1	1	2	2	2	2	2	2
53.75°	1	1	1	1	2	2	2	2	2	2	2
52.5°	1	1	1	2	2	2	2	2	2	2	2
51.25°	1	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	2	2
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	2	2	2	2	2	2	2	2	2	2	2
38.75°	2	2	2	2	2	2	2	2	2	2	2
37.5°	2	2	2	2	2	2	2	2	2	2	2
36.25°	2	2	2	2	2	2	2	2	2	2	2
35°	2	2	2	2	2	2	2	2	2	2	3



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
33.75°	2	2	2	2	2	2	2	2	2	3	3
32.5°	2	2	2	2	2	2	2	2	2	3	3
31.25°	2	2	2	2	2	2	2	2	3	3	3
30°	2	2	2	2	2	2	2	3	3	3	3
28.75°	2	2	2	2	2	2	2	3	3	3	3
27.5°	2	2	2	2	2	2	3	3	3	3	4
26.25°	2	2	2	2	2	3	3	3	3	4	4
25°	2	2	2	2	2	3	3	3	3	4	4
23.75°	2	2	2	2	3	3	3	3	4	4	4
22.5°	2	2	2	2	3	3	3	3	4	4	5
21.25°	2	2	2	2	3	3	3	4	4	5	6
20°	2	2	2	3	3	3	3	4	4	5	7
18.75°	2	2	2	3	3	3	4	4	4	6	8
17.5°	2	2	3	3	3	3	4	4	5	7	9
16.25°	2	2	3	3	3	3	4	4	6	8	9
15°	2	2	3	3	3	4	4	5	7	8	10
13.75°	2	2	3	3	3	4	4	5	7	9	11
12.5°	2	3	3	3	3	4	4	6	8	9	11
11.25°	2	3	3	3	3	4	4	6	8	10	12
10°	2	3	3	3	4	4	5	7	9	10	12
8.75°	2	3	3	3	4	4	5	7	9	11	13
7.5°	2	3	3	3	4	4	5	7	9	11	13
6.25°	2	3	3	3	4	4	6	8	10	11	13
5°	2	3	3	3	4	4	6	8	10	12	14
3.75°	2	3	3	3	4	4	6	8	10	12	14
2.5°	2	3	3	3	4	4	6	8	10	12	14
1.25°	2	3	3	3	4	4	6	8	10	12	14
0°	3	3	3	3	4	4	6	8	10	12	14
-1.25°	2	3	3	3	4	4	6	8	10	12	14
-2.5°	2	3	3	3	4	4	6	8	10	12	14
-3.75°	2	3	3	3	4	4	6	8	10	12	14
-5°	2	3	3	3	4	4	6	8	10	12	14
-6.25°	2	3	3	3	4	4	6	8	10	11	13
-7.5°	2	3	3	3	4	4	5	7	9	11	13
-8.75°	2	3	3	3	4	4	5	7	9	11	13
-10°	2	3	3	3	4	4	5	7	9	10	12
-11.25°	2	3	3	3	3	4	4	6	8	10	12
-12.5°	2	3	3	3	3	4	4	6	8	9	11
-13.75°	2	2	3	3	3	4	4	5	7	9	11
-15°	2	2	3	3	3	4	4	5	7	8	10
-16.25°	2	2	3	3	3	3	4	4	6	8	9
-17.5°	2	2	3	3	3	3	4	4	5	7	9
-18.75°	2	2	2	3	3	3	4	4	4	6	8
-20°	2	2	2	3	3	3	3	4	4	5	7
-21.25°	2	2	2	2	3	3	3	4	4	5	6



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-22.5°	2	2	2	2	3	3	3	3	4	4	5
-23.75°	2	2	2	2	3	3	3	3	4	4	4
-25°	2	2	2	2	2	3	3	3	3	4	4
-26.25°	2	2	2	2	2	3	3	3	3	4	4
-27.5°	2	2	2	2	2	2	3	3	3	3	4
-28.75°	2	2	2	2	2	2	2	3	3	3	3
-30°	2	2	2	2	2	2	2	3	3	3	3
-31.25°	2	2	2	2	2	2	2	2	3	3	3
-32.5°	2	2	2	2	2	2	2	2	2	3	3
-33.75°	2	2	2	2	2	2	2	2	2	3	3
-35°	2	2	2	2	2	2	2	2	2	2	3
-36.25°	2	2	2	2	2	2	2	2	2	2	2
-37.5°	2	2	2	2	2	2	2	2	2	2	2
-38.75°	2	2	2	2	2	2	2	2	2	2	2
-40°	2	2	2	2	2	2	2	2	2	2	2
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	1	2	2	2	2	2	2	2	2	2	2
-52.5°	1	1	1	2	2	2	2	2	2	2	2
-53.75°	1	1	1	1	2	2	2	2	2	2	2
-55°	1	1	1	1	1	2	2	2	2	2	2
-56.25°	1	1	1	1	1	1	1	2	2	2	2
-57.5°	1	1	1	1	1	1	1	1	1	2	2
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	0	1	1	1	1	1	1	1	1	1	1
-71.25°	0	0	0	1	1	1	1	1	1	1	1
-72.5°	0	0	0	0	0	0	0	1	1	1	1
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-48.75°	-47.5°	-46.25°	-45°	-43.75°	-42.5°	-41.25°	-40°	-38.75°	-37.5°	-36.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	1	1	1	1	1
73.75°	1	1	1	1	1	1	1	1	1	1	1
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	2	2
61.25°	1	1	1	1	1	1	2	2	2	2	2
60°	1	1	1	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	3	3
42.5°	2	2	2	2	2	2	2	3	3	3	3
41.25°	2	2	2	2	2	2	3	3	3	3	3
40°	2	2	2	2	3	3	3	3	3	3	3
38.75°	2	2	2	3	3	3	3	3	3	4	4
37.5°	2	3	3	3	3	3	3	4	4	4	4
36.25°	3	3	3	3	3	3	4	4	4	4	5
35°	3	3	3	3	3	4	4	4	5	6	7



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
33.75°	3	3	3	3	4	4	4	5	7	8	9
32.5°	3	3	4	4	4	5	6	7	8	9	10
31.25°	3	3	4	4	5	6	7	8	10	10	11
30°	3	4	4	5	6	7	9	10	11	12	13
28.75°	4	4	5	6	7	9	10	11	12	13	15
27.5°	4	4	6	7	9	10	11	12	14	15	17
26.25°	4	5	7	8	10	11	12	14	15	18	25
25°	5	7	8	10	11	12	14	15	18	26	32
23.75°	6	8	9	10	12	13	15	18	26	33	45
22.5°	7	9	10	11	13	15	17	25	32	45	71
21.25°	8	10	11	12	14	16	23	31	42	70	97
20°	9	10	12	14	16	21	29	37	65	94	124
18.75°	10	11	13	15	17	26	35	57	87	117	154
17.5°	10	12	14	16	22	31	46	78	108	145	186
16.25°	11	13	15	18	27	36	65	97	132	174	216
15°	12	14	16	22	32	49	82	115	157	201	244
13.75°	12	14	17	26	36	65	99	137	182	227	269
12.5°	13	15	20	30	45	79	114	158	204	250	291
11.25°	14	16	23	33	58	93	132	178	226	270	311
10°	14	16	26	37	69	105	148	196	244	288	326
8.75°	15	19	29	43	79	116	163	213	260	304	340
7.5°	15	21	31	52	89	128	177	227	274	316	350
6.25°	16	23	33	59	96	139	189	240	286	327	358
5°	16	24	35	65	103	147	198	249	295	335	365
3.75°	16	26	36	70	108	154	206	256	302	341	369
2.5°	16	27	37	73	111	159	211	262	307	345	373
1.25°	16	27	38	75	113	162	215	265	311	347	374
0°	17	27	38	76	114	164	216	266	312	348	375
-1.25°	16	27	38	75	113	162	215	265	311	347	374
-2.5°	16	27	37	73	111	159	211	262	307	345	373
-3.75°	16	26	36	70	108	154	206	256	302	341	369
-5°	16	24	35	65	103	147	198	249	295	335	365
-6.25°	16	23	33	59	96	139	189	240	286	327	358
-7.5°	15	21	31	52	89	128	177	227	274	316	350
-8.75°	15	19	29	43	79	116	163	213	260	304	340
-10°	14	16	26	37	69	105	148	196	244	288	326
-11.25°	14	16	23	33	58	93	132	178	226	270	311
-12.5°	13	15	20	30	45	79	114	158	204	250	291
-13.75°	12	14	17	26	36	65	99	137	182	227	269
-15°	12	14	16	22	32	49	82	115	157	201	244
-16.25°	11	13	15	18	27	36	65	97	132	174	216
-17.5°	10	12	14	16	22	31	46	78	108	145	186
-18.75°	10	11	13	15	17	26	35	57	87	117	154
-20°	9	10	12	14	16	21	29	37	65	94	124
-21.25°	8	10	11	12	14	16	23	31	42	70	97



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-22.5°	7	9	10	11	13	15	17	25	32	45	71
-23.75°	6	8	9	10	12	13	15	18	26	33	45
-25°	5	7	8	10	11	12	14	15	18	26	32
-26.25°	4	5	7	8	10	11	12	14	15	18	25
-27.5°	4	4	6	7	9	10	11	12	14	15	17
-28.75°	4	4	5	6	7	9	10	11	12	13	15
-30°	3	4	4	5	6	7	9	10	11	12	13
-31.25°	3	3	4	4	5	6	7	8	10	10	11
-32.5°	3	3	4	4	4	5	6	7	8	9	10
-33.75°	3	3	3	3	4	4	4	5	7	8	9
-35°	3	3	3	3	3	4	4	4	5	6	7
-36.25°	3	3	3	3	3	3	4	4	4	4	5
-37.5°	2	3	3	3	3	3	3	4	4	4	4
-38.75°	2	2	2	3	3	3	3	3	3	4	4
-40°	2	2	2	2	3	3	3	3	3	3	3
-41.25°	2	2	2	2	2	2	3	3	3	3	3
-42.5°	2	2	2	2	2	2	2	3	3	3	3
-43.75°	2	2	2	2	2	2	2	2	2	3	3
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	1	1	1	2	2	2	2	2	2	2	2
-61.25°	1	1	1	1	1	1	2	2	2	2	2
-62.5°	1	1	1	1	1	1	1	1	1	2	2
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	1	1	1	1	1	1	1	1	1	1	1
-75°	0	0	0	0	0	0	1	1	1	1	1
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-35°	-33.75°	-32.5°	-31.25°	-30°	-28.75°	-27.5°	-26.25°	-25°	-23.75°	-22.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	1	1	1	1	1	1	1
75°	1	1	1	1	1	1	1	1	1	1	1
73.75°	1	1	1	1	1	1	1	1	1	1	1
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	2	2	2	2	2	2	2
62.5°	2	2	2	2	2	2	2	2	2	2	2
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	3	3	3	3
46.25°	2	2	2	3	3	3	3	3	3	3	3
45°	2	3	3	3	3	3	3	3	3	3	3
43.75°	3	3	3	3	3	3	3	3	3	4	4
42.5°	3	3	3	3	3	4	4	4	4	4	4
41.25°	3	3	4	4	4	4	4	4	4	5	5
40°	4	4	4	4	4	5	5	6	6	7	7
38.75°	4	4	4	5	6	7	7	8	8	9	9
37.5°	5	5	6	7	8	8	9	9	10	10	11
36.25°	6	7	8	9	9	10	11	11	12	12	13
35°	8	9	10	10	11	12	12	13	14	14	15



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
33.75°	10	10	11	12	13	14	14	15	16	16	19
32.5°	11	12	13	14	15	16	17	20	23	26	29
31.25°	12	14	15	16	18	22	26	30	33	37	43
30°	14	16	17	22	27	32	36	45	58	69	79
28.75°	16	21	26	31	36	49	65	79	93	105	116
27.5°	23	29	35	46	65	82	99	114	132	148	163
26.25°	31	37	57	78	97	115	137	158	178	196	213
25°	42	65	87	108	132	157	182	204	226	244	260
23.75°	70	94	117	145	174	201	227	250	270	288	304
22.5°	97	124	154	186	216	244	269	291	311	326	340
21.25°	126	159	193	226	255	282	307	327	344	356	367
20°	159	195	231	263	292	317	339	355	369	380	390
18.75°	193	231	265	296	323	346	363	377	390	403	416
17.5°	226	263	296	325	349	367	383	398	414	429	445
16.25°	255	292	323	349	369	386	403	421	440	459	480
15°	282	317	346	367	386	405	425	447	471	496	522
13.75°	307	339	363	383	403	425	449	477	507	538	577
12.5°	327	355	377	398	421	447	477	510	548	594	651
11.25°	344	369	390	414	440	471	507	548	602	668	742
10°	356	380	403	429	459	496	538	594	668	752	855
8.75°	367	390	416	445	480	522	577	651	742	855	998
7.5°	376	400	427	460	500	550	620	711	826	977	1172
6.25°	383	409	439	475	519	578	662	768	913	1110	1374
5°	389	417	448	488	536	607	704	832	1007	1250	1589
3.75°	394	423	456	499	554	633	739	883	1092	1395	1803
2.5°	398	427	462	508	566	653	766	931	1169	1513	1967
1.25°	400	430	467	513	574	664	787	962	1216	1587	2079
0°	401	431	468	515	577	668	794	973	1232	1611	2118
-1.25°	400	430	467	513	574	664	787	962	1216	1587	2079
-2.5°	398	427	462	508	566	653	766	931	1169	1513	1967
-3.75°	394	423	456	499	554	633	739	883	1092	1395	1803
-5°	389	417	448	488	536	607	704	832	1007	1250	1589
-6.25°	383	409	439	475	519	578	662	768	913	1110	1374
-7.5°	376	400	427	460	500	550	620	711	826	977	1172
-8.75°	367	390	416	445	480	522	577	651	742	855	998
-10°	356	380	403	429	459	496	538	594	668	752	855
-11.25°	344	369	390	414	440	471	507	548	602	668	742
-12.5°	327	355	377	398	421	447	477	510	548	594	651
-13.75°	307	339	363	383	403	425	449	477	507	538	577
-15°	282	317	346	367	386	405	425	447	471	496	522
-16.25°	255	292	323	349	369	386	403	421	440	459	480
-17.5°	226	263	296	325	349	367	383	398	414	429	445
-18.75°	193	231	265	296	323	346	363	377	390	403	416
-20°	159	195	231	263	292	317	339	355	369	380	390
-21.25°	126	159	193	226	255	282	307	327	344	356	367



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-22.5°	97	124	154	186	216	244	269	291	311	326	340
-23.75°	70	94	117	145	174	201	227	250	270	288	304
-25°	42	65	87	108	132	157	182	204	226	244	260
-26.25°	31	37	57	78	97	115	137	158	178	196	213
-27.5°	23	29	35	46	65	82	99	114	132	148	163
-28.75°	16	21	26	31	36	49	65	79	93	105	116
-30°	14	16	17	22	27	32	36	45	58	69	79
-31.25°	12	14	15	16	18	22	26	30	33	37	43
-32.5°	11	12	13	14	15	16	17	20	23	26	29
-33.75°	10	10	11	12	13	14	14	15	16	16	19
-35°	8	9	10	10	11	12	12	13	14	14	15
-36.25°	6	7	8	9	9	10	11	11	12	12	13
-37.5°	5	5	6	7	8	8	9	9	10	10	11
-38.75°	4	4	4	5	6	7	7	8	8	9	9
-40°	4	4	4	4	4	5	5	6	6	7	7
-41.25°	3	3	4	4	4	4	4	4	4	5	5
-42.5°	3	3	3	3	3	4	4	4	4	4	4
-43.75°	3	3	3	3	3	3	3	3	3	4	4
-45°	2	3	3	3	3	3	3	3	3	3	3
-46.25°	2	2	2	3	3	3	3	3	3	3	3
-47.5°	2	2	2	2	2	2	2	3	3	3	3
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	2	2	2	2	2	2	2	2	2	2	2
-63.75°	1	1	1	1	2	2	2	2	2	2	2
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	1	1	1	1	1	1	1	1	1	1	1
-75°	1	1	1	1	1	1	1	1	1	1	1
-76.25°	0	0	0	0	1	1	1	1	1	1	1
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-21.25°	-20°	-18.75°	-17.5°	-16.25°	-15°	-13.75°	-12.5°	-11.25°	-10°	-8.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	1	1	1	1	1	1	1	1	1	1	1
75°	1	1	1	1	1	1	1	1	1	1	1
73.75°	1	1	1	1	1	1	1	1	1	1	1
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	2	1	1	1	1
63.75°	2	2	2	2	2	2	2	2	2	2	2
62.5°	2	2	2	2	2	2	2	2	2	2	2
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	3	2	2	2	2
47.5°	3	3	3	3	3	3	3	3	3	3	3
46.25°	3	3	3	3	3	3	3	3	3	3	3
45°	3	3	3	3	3	3	3	3	3	3	3
43.75°	4	4	4	4	4	4	4	4	4	4	4
42.5°	4	4	4	4	4	4	4	4	4	4	4
41.25°	5	6	6	6	6	6	6	6	6	6	6
40°	7	8	8	8	8	8	8	8	8	8	8
38.75°	9	10	10	10	10	10	10	10	10	10	10
37.5°	11	11	12	12	12	12	12	12	12	12	12
36.25°	13	13	14	14	14	14	14	14	14	14	14
35°	15	16	16	16	16	16	17	16	16	16	16



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
33.75°	21	23	24	26	27	27	27	27	27	26	24
32.5°	31	33	35	36	37	38	38	38	37	36	35
31.25°	52	59	65	70	73	75	76	75	73	70	65
30°	89	96	103	108	111	113	114	113	111	108	103
28.75°	128	139	147	154	159	162	164	162	159	154	147
27.5°	177	189	198	206	211	215	216	215	211	206	198
26.25°	227	240	249	256	262	265	266	265	262	256	249
25°	274	286	295	302	307	311	312	311	307	302	295
23.75°	316	327	335	341	345	347	348	347	345	341	335
22.5°	350	358	365	369	373	374	375	374	373	369	365
21.25°	376	383	389	394	398	400	401	400	398	394	389
20°	400	409	417	423	427	430	431	430	427	423	417
18.75°	427	439	448	456	462	467	468	467	462	456	448
17.5°	460	475	488	499	508	513	515	513	508	499	488
16.25°	500	519	536	554	566	574	577	574	566	554	536
15°	550	578	607	633	653	664	668	664	653	633	607
13.75°	620	662	704	739	766	787	794	787	766	739	704
12.5°	711	768	832	883	931	962	973	962	931	883	832
11.25°	826	913	1007	1092	1169	1216	1232	1216	1169	1092	1007
10°	977	1110	1250	1395	1513	1587	1611	1587	1513	1395	1250
8.75°	1172	1374	1589	1803	1967	2079	2118	2079	1967	1803	1589
7.5°	1421	1709	2003	2285	2501	2638	2685	2638	2501	2285	2003
6.25°	1709	2082	2458	2783	3038	3202	3259	3202	3038	2783	2458
5°	2003	2458	2882	3260	3556	3748	3816	3748	3556	3260	2882
3.75°	2285	2783	3260	3683	4006	4215	4278	4215	4006	3683	3260
2.5°	2501	3038	3556	4006	4345	4558	4624	4558	4345	4006	3556
1.25°	2638	3202	3748	4215	4558	4767	4838	4767	4558	4215	3748
0°	2685	3259	3816	4278	4624	4838	4933	4838	4624	4278	3816
-1.25°	2638	3202	3748	4215	4558	4767	4838	4767	4558	4215	3748
-2.5°	2501	3038	3556	4006	4345	4558	4624	4558	4345	4006	3556
-3.75°	2285	2783	3260	3683	4006	4215	4278	4215	4006	3683	3260
-5°	2003	2458	2882	3260	3556	3748	3816	3748	3556	3260	2882
-6.25°	1709	2082	2458	2783	3038	3202	3259	3202	3038	2783	2458
-7.5°	1421	1709	2003	2285	2501	2638	2685	2638	2501	2285	2003
-8.75°	1172	1374	1589	1803	1967	2079	2118	2079	1967	1803	1589
-10°	977	1110	1250	1395	1513	1587	1611	1587	1513	1395	1250
-11.25°	826	913	1007	1092	1169	1216	1232	1216	1169	1092	1007
-12.5°	711	768	832	883	931	962	973	962	931	883	832
-13.75°	620	662	704	739	766	787	794	787	766	739	704
-15°	550	578	607	633	653	664	668	664	653	633	607
-16.25°	500	519	536	554	566	574	577	574	566	554	536
-17.5°	460	475	488	499	508	513	515	513	508	499	488
-18.75°	427	439	448	456	462	467	468	467	462	456	448
-20°	400	409	417	423	427	430	431	430	427	423	417
-21.25°	376	383	389	394	398	400	401	400	398	394	389



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-22.5°	350	358	365	369	373	374	375	374	373	369	365
-23.75°	316	327	335	341	345	347	348	347	345	341	335
-25°	274	286	295	302	307	311	312	311	307	302	295
-26.25°	227	240	249	256	262	265	266	265	262	256	249
-27.5°	177	189	198	206	211	215	216	215	211	206	198
-28.75°	128	139	147	154	159	162	164	162	159	154	147
-30°	89	96	103	108	111	113	114	113	111	108	103
-31.25°	52	59	65	70	73	75	76	75	73	70	65
-32.5°	31	33	35	36	37	38	38	38	37	36	35
-33.75°	21	23	24	26	27	27	27	27	27	26	24
-35°	15	16	16	16	16	16	17	16	16	16	16
-36.25°	13	13	14	14	14	14	14	14	14	14	14
-37.5°	11	11	12	12	12	12	12	12	12	12	12
-38.75°	9	10	10	10	10	10	10	10	10	10	10
-40°	7	8	8	8	8	8	8	8	8	8	8
-41.25°	5	6	6	6	6	6	6	6	6	6	6
-42.5°	4	4	4	4	4	4	4	4	4	4	4
-43.75°	4	4	4	4	4	4	4	4	4	4	4
-45°	3	3	3	3	3	3	3	3	3	3	3
-46.25°	3	3	3	3	3	3	3	3	3	3	3
-47.5°	3	3	3	3	3	3	3	3	3	3	3
-48.75°	2	2	2	2	2	2	3	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	2	2	2	2	2	2	2	2	2	2	2
-63.75°	2	2	2	2	2	2	2	2	2	2	2
-65°	1	1	1	1	1	1	2	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	1	1	1	1	1	1	1	1	1	1	1
-75°	1	1	1	1	1	1	1	1	1	1	1
-76.25°	1	1	1	1	1	1	1	1	1	1	1
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	-7.5°	-6.25°	-5°	-3.75°	-2.5°	-1.25°	0°	1.25°	2.5°	3.75°	5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	1	1	1	1	1	1	1	1	1	0	0
75°	1	1	1	1	1	1	1	1	1	1	1
73.75°	1	1	1	1	1	1	1	1	1	1	1
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	2	2	2	2	2	2	2	2	2	1	1
62.5°	2	2	2	2	2	2	2	2	2	2	2
61.25°	2	2	2	2	2	2	2	2	2	2	2
60°	2	2	2	2	2	2	2	2	2	2	2
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	3	3	3	3	3	3	2	2	2	2	2
46.25°	3	3	3	3	3	3	3	3	3	3	2
45°	3	3	3	3	3	3	3	3	3	3	3
43.75°	4	4	4	4	3	3	3	3	3	3	3
42.5°	4	4	4	4	4	4	4	4	3	3	3
41.25°	6	5	5	5	4	4	4	4	4	4	4
40°	8	7	7	7	6	6	5	5	4	4	4
38.75°	10	9	9	9	8	8	7	7	6	5	4
37.5°	11	11	11	10	10	9	9	8	8	7	6
36.25°	13	13	13	12	12	11	11	10	9	9	8
35°	16	15	15	14	14	13	12	12	11	10	10



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
33.75°	23	21	19	16	16	15	14	14	13	12	11
32.5°	33	31	29	26	23	20	17	16	15	14	13
31.25°	59	52	43	37	33	30	26	22	18	16	15
30°	96	89	79	69	58	45	36	32	27	22	17
28.75°	139	128	116	105	93	79	65	49	36	31	26
27.5°	189	177	163	148	132	114	99	82	65	46	35
26.25°	240	227	213	196	178	158	137	115	97	78	57
25°	286	274	260	244	226	204	182	157	132	108	87
23.75°	327	316	304	288	270	250	227	201	174	145	117
22.5°	358	350	340	326	311	291	269	244	216	186	154
21.25°	383	376	367	356	344	327	307	282	255	226	193
20°	409	400	390	380	369	355	339	317	292	263	231
18.75°	439	427	416	403	390	377	363	346	323	296	265
17.5°	475	460	445	429	414	398	383	367	349	325	296
16.25°	519	500	480	459	440	421	403	386	369	349	323
15°	578	550	522	496	471	447	425	405	386	367	346
13.75°	662	620	577	538	507	477	449	425	403	383	363
12.5°	768	711	651	594	548	510	477	447	421	398	377
11.25°	913	826	742	668	602	548	507	471	440	414	390
10°	1110	977	855	752	668	594	538	496	459	429	403
8.75°	1374	1172	998	855	742	651	577	522	480	445	416
7.5°	1709	1421	1172	977	826	711	620	550	500	460	427
6.25°	2082	1709	1374	1110	913	768	662	578	519	475	439
5°	2458	2003	1589	1250	1007	832	704	607	536	488	448
3.75°	2783	2285	1803	1395	1092	883	739	633	554	499	456
2.5°	3038	2501	1967	1513	1169	931	766	653	566	508	462
1.25°	3202	2638	2079	1587	1216	962	787	664	574	513	467
0°	3259	2685	2118	1611	1232	973	794	668	577	515	468
-1.25°	3202	2638	2079	1587	1216	962	787	664	574	513	467
-2.5°	3038	2501	1967	1513	1169	931	766	653	566	508	462
-3.75°	2783	2285	1803	1395	1092	883	739	633	554	499	456
-5°	2458	2003	1589	1250	1007	832	704	607	536	488	448
-6.25°	2082	1709	1374	1110	913	768	662	578	519	475	439
-7.5°	1709	1421	1172	977	826	711	620	550	500	460	427
-8.75°	1374	1172	998	855	742	651	577	522	480	445	416
-10°	1110	977	855	752	668	594	538	496	459	429	403
-11.25°	913	826	742	668	602	548	507	471	440	414	390
-12.5°	768	711	651	594	548	510	477	447	421	398	377
-13.75°	662	620	577	538	507	477	449	425	403	383	363
-15°	578	550	522	496	471	447	425	405	386	367	346
-16.25°	519	500	480	459	440	421	403	386	369	349	323
-17.5°	475	460	445	429	414	398	383	367	349	325	296
-18.75°	439	427	416	403	390	377	363	346	323	296	265
-20°	409	400	390	380	369	355	339	317	292	263	231
-21.25°	383	376	367	356	344	327	307	282	255	226	193



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-22.5°	358	350	340	326	311	291	269	244	216	186	154
-23.75°	327	316	304	288	270	250	227	201	174	145	117
-25°	286	274	260	244	226	204	182	157	132	108	87
-26.25°	240	227	213	196	178	158	137	115	97	78	57
-27.5°	189	177	163	148	132	114	99	82	65	46	35
-28.75°	139	128	116	105	93	79	65	49	36	31	26
-30°	96	89	79	69	58	45	36	32	27	22	17
-31.25°	59	52	43	37	33	30	26	22	18	16	15
-32.5°	33	31	29	26	23	20	17	16	15	14	13
-33.75°	23	21	19	16	16	15	14	14	13	12	11
-35°	16	15	15	14	14	13	12	12	11	10	10
-36.25°	13	13	13	12	12	11	11	10	9	9	8
-37.5°	11	11	11	10	10	9	9	8	8	7	6
-38.75°	10	9	9	9	8	8	7	7	6	5	4
-40°	8	7	7	7	6	6	5	5	4	4	4
-41.25°	6	5	5	5	4	4	4	4	4	4	4
-42.5°	4	4	4	4	4	4	4	4	3	3	3
-43.75°	4	4	4	4	3	3	3	3	3	3	3
-45°	3	3	3	3	3	3	3	3	3	3	3
-46.25°	3	3	3	3	3	3	3	3	3	3	2
-47.5°	3	3	3	3	3	3	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	2
-61.25°	2	2	2	2	2	2	2	2	2	2	2
-62.5°	2	2	2	2	2	2	2	2	2	2	2
-63.75°	2	2	2	2	2	2	2	2	2	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	1	1	1	1	1	1	1	1	1	1	1
-75°	1	1	1	1	1	1	1	1	1	1	1
-76.25°	1	1	1	1	1	1	1	1	1	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	6.25°	7.5°	8.75°	10°	11.25°	12.5°	13.75°	15°	16.25°	17.5°	18.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	1	1	1	1	1	1	1	0	0	0	0
73.75°	1	1	1	1	1	1	1	1	1	1	1
72.5°	1	1	1	1	1	1	1	1	1	1	1
71.25°	1	1	1	1	1	1	1	1	1	1	1
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	2	2	2	2	1	1	1	1	1	1	1
61.25°	2	2	2	2	2	2	2	1	1	1	1
60°	2	2	2	2	2	2	2	2	2	2	1
58.75°	2	2	2	2	2	2	2	2	2	2	2
57.5°	2	2	2	2	2	2	2	2	2	2	2
56.25°	2	2	2	2	2	2	2	2	2	2	2
55°	2	2	2	2	2	2	2	2	2	2	2
53.75°	2	2	2	2	2	2	2	2	2	2	2
52.5°	2	2	2	2	2	2	2	2	2	2	2
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	3	2	2	2	2	2	2	2	2	2	2
43.75°	3	3	3	3	2	2	2	2	2	2	2
42.5°	3	3	3	3	3	3	2	2	2	2	2
41.25°	3	3	3	3	3	3	3	2	2	2	2
40°	4	4	3	3	3	3	3	3	3	2	2
38.75°	4	4	4	4	3	3	3	3	3	3	2
37.5°	5	5	4	4	4	4	3	3	3	3	3
36.25°	7	6	5	4	4	4	4	3	3	3	3
35°	9	8	7	6	5	4	4	4	3	3	3



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
33.75°	10	10	9	8	7	5	4	4	4	3	3
32.5°	12	11	10	9	8	7	6	5	4	4	4
31.25°	14	12	11	10	10	8	7	6	5	4	4
30°	16	14	13	12	11	10	9	7	6	5	4
28.75°	21	16	15	13	12	11	10	9	7	6	5
27.5°	29	23	17	15	14	12	11	10	9	7	6
26.25°	37	31	25	18	15	14	12	11	10	8	7
25°	65	42	32	26	18	15	14	12	11	10	8
23.75°	94	70	45	33	26	18	15	13	12	10	9
22.5°	124	97	71	45	32	25	17	15	13	11	10
21.25°	159	126	97	70	42	31	23	16	14	12	11
20°	195	159	124	94	65	37	29	21	16	14	12
18.75°	231	193	154	117	87	57	35	26	17	15	13
17.5°	263	226	186	145	108	78	46	31	22	16	14
16.25°	292	255	216	174	132	97	65	36	27	18	15
15°	317	282	244	201	157	115	82	49	32	22	16
13.75°	339	307	269	227	182	137	99	65	36	26	17
12.5°	355	327	291	250	204	158	114	79	45	30	20
11.25°	369	344	311	270	226	178	132	93	58	33	23
10°	380	356	326	288	244	196	148	105	69	37	26
8.75°	390	367	340	304	260	213	163	116	79	43	29
7.5°	400	376	350	316	274	227	177	128	89	52	31
6.25°	409	383	358	327	286	240	189	139	96	59	33
5°	417	389	365	335	295	249	198	147	103	65	35
3.75°	423	394	369	341	302	256	206	154	108	70	36
2.5°	427	398	373	345	307	262	211	159	111	73	37
1.25°	430	400	374	347	311	265	215	162	113	75	38
0°	431	401	375	348	312	266	216	164	114	76	38
-1.25°	430	400	374	347	311	265	215	162	113	75	38
-2.5°	427	398	373	345	307	262	211	159	111	73	37
-3.75°	423	394	369	341	302	256	206	154	108	70	36
-5°	417	389	365	335	295	249	198	147	103	65	35
-6.25°	409	383	358	327	286	240	189	139	96	59	33
-7.5°	400	376	350	316	274	227	177	128	89	52	31
-8.75°	390	367	340	304	260	213	163	116	79	43	29
-10°	380	356	326	288	244	196	148	105	69	37	26
-11.25°	369	344	311	270	226	178	132	93	58	33	23
-12.5°	355	327	291	250	204	158	114	79	45	30	20
-13.75°	339	307	269	227	182	137	99	65	36	26	17
-15°	317	282	244	201	157	115	82	49	32	22	16
-16.25°	292	255	216	174	132	97	65	36	27	18	15
-17.5°	263	226	186	145	108	78	46	31	22	16	14
-18.75°	231	193	154	117	87	57	35	26	17	15	13
-20°	195	159	124	94	65	37	29	21	16	14	12
-21.25°	159	126	97	70	42	31	23	16	14	12	11



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-22.5°	124	97	71	45	32	25	17	15	13	11	10
-23.75°	94	70	45	33	26	18	15	13	12	10	9
-25°	65	42	32	26	18	15	14	12	11	10	8
-26.25°	37	31	25	18	15	14	12	11	10	8	7
-27.5°	29	23	17	15	14	12	11	10	9	7	6
-28.75°	21	16	15	13	12	11	10	9	7	6	5
-30°	16	14	13	12	11	10	9	7	6	5	4
-31.25°	14	12	11	10	10	8	7	6	5	4	4
-32.5°	12	11	10	9	8	7	6	5	4	4	4
-33.75°	10	10	9	8	7	5	4	4	4	3	3
-35°	9	8	7	6	5	4	4	4	3	3	3
-36.25°	7	6	5	4	4	4	4	3	3	3	3
-37.5°	5	5	4	4	4	4	3	3	3	3	3
-38.75°	4	4	4	4	3	3	3	3	3	3	2
-40°	4	4	3	3	3	3	3	3	3	2	2
-41.25°	3	3	3	3	3	3	3	2	2	2	2
-42.5°	3	3	3	3	3	3	2	2	2	2	2
-43.75°	3	3	3	3	2	2	2	2	2	2	2
-45°	3	2	2	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	2
-53.75°	2	2	2	2	2	2	2	2	2	2	2
-55°	2	2	2	2	2	2	2	2	2	2	2
-56.25°	2	2	2	2	2	2	2	2	2	2	2
-57.5°	2	2	2	2	2	2	2	2	2	2	2
-58.75°	2	2	2	2	2	2	2	2	2	2	2
-60°	2	2	2	2	2	2	2	2	2	2	1
-61.25°	2	2	2	2	2	2	2	1	1	1	1
-62.5°	2	2	2	2	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	1
-72.5°	1	1	1	1	1	1	1	1	1	1	1
-73.75°	1	1	1	1	1	1	1	1	1	1	1
-75°	1	1	1	1	1	1	1	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	20°	21.25°	22.5°	23.75°	25°	26.25°	27.5°	28.75°	30°	31.25°	32.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	1	1	0	0	0	0	0	0	0	0	0
72.5°	1	1	1	1	1	1	0	0	0	0	0
71.25°	1	1	1	1	1	1	1	1	1	1	0
70°	1	1	1	1	1	1	1	1	1	1	1
68.75°	1	1	1	1	1	1	1	1	1	1	1
67.5°	1	1	1	1	1	1	1	1	1	1	1
66.25°	1	1	1	1	1	1	1	1	1	1	1
65°	1	1	1	1	1	1	1	1	1	1	1
63.75°	1	1	1	1	1	1	1	1	1	1	1
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	2	2	1	1	1	1	1	1	1	1	1
57.5°	2	2	2	2	1	1	1	1	1	1	1
56.25°	2	2	2	2	2	2	1	1	1	1	1
55°	2	2	2	2	2	2	2	2	1	1	1
53.75°	2	2	2	2	2	2	2	2	2	1	1
52.5°	2	2	2	2	2	2	2	2	2	2	1
51.25°	2	2	2	2	2	2	2	2	2	2	2
50°	2	2	2	2	2	2	2	2	2	2	2
48.75°	2	2	2	2	2	2	2	2	2	2	2
47.5°	2	2	2	2	2	2	2	2	2	2	2
46.25°	2	2	2	2	2	2	2	2	2	2	2
45°	2	2	2	2	2	2	2	2	2	2	2
43.75°	2	2	2	2	2	2	2	2	2	2	2
42.5°	2	2	2	2	2	2	2	2	2	2	2
41.25°	2	2	2	2	2	2	2	2	2	2	2
40°	2	2	2	2	2	2	2	2	2	2	2
38.75°	2	2	2	2	2	2	2	2	2	2	2
37.5°	3	2	2	2	2	2	2	2	2	2	2
36.25°	3	3	2	2	2	2	2	2	2	2	2
35°	3	3	3	2	2	2	2	2	2	2	2



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
33.75°	3	3	3	3	2	2	2	2	2	2	2
32.5°	3	3	3	3	2	2	2	2	2	2	2
31.25°	3	3	3	3	3	2	2	2	2	2	2
30°	4	3	3	3	3	3	2	2	2	2	2
28.75°	4	4	3	3	3	3	2	2	2	2	2
27.5°	4	4	4	3	3	3	3	2	2	2	2
26.25°	5	4	4	4	3	3	3	3	2	2	2
25°	7	5	4	4	3	3	3	3	2	2	2
23.75°	8	6	4	4	4	3	3	3	3	2	2
22.5°	9	7	5	4	4	3	3	3	3	2	2
21.25°	10	8	6	5	4	4	3	3	3	2	2
20°	10	9	7	5	4	4	3	3	3	3	2
18.75°	11	10	8	6	4	4	4	3	3	3	2
17.5°	12	10	9	7	5	4	4	3	3	3	3
16.25°	13	11	9	8	6	4	4	3	3	3	3
15°	14	12	10	8	7	5	4	4	3	3	3
13.75°	14	12	11	9	7	5	4	4	3	3	3
12.5°	15	13	11	9	8	6	4	4	3	3	3
11.25°	16	14	12	10	8	6	4	4	3	3	3
10°	16	14	12	10	9	7	5	4	4	3	3
8.75°	19	15	13	11	9	7	5	4	4	3	3
7.5°	21	15	13	11	9	7	5	4	4	3	3
6.25°	23	16	13	11	10	8	6	4	4	3	3
5°	24	16	14	12	10	8	6	4	4	3	3
3.75°	26	16	14	12	10	8	6	4	4	3	3
2.5°	27	16	14	12	10	8	6	4	4	3	3
1.25°	27	16	14	12	10	8	6	4	4	3	3
0°	27	17	14	12	10	8	6	4	4	3	3
-1.25°	27	16	14	12	10	8	6	4	4	3	3
-2.5°	27	16	14	12	10	8	6	4	4	3	3
-3.75°	26	16	14	12	10	8	6	4	4	3	3
-5°	24	16	14	12	10	8	6	4	4	3	3
-6.25°	23	16	13	11	10	8	6	4	4	3	3
-7.5°	21	15	13	11	9	7	5	4	4	3	3
-8.75°	19	15	13	11	9	7	5	4	4	3	3
-10°	16	14	12	10	9	7	5	4	4	3	3
-11.25°	16	14	12	10	8	6	4	4	3	3	3
-12.5°	15	13	11	9	8	6	4	4	3	3	3
-13.75°	14	12	11	9	7	5	4	4	3	3	3
-15°	14	12	10	8	7	5	4	4	3	3	3
-16.25°	13	11	9	8	6	4	4	3	3	3	3
-17.5°	12	10	9	7	5	4	4	3	3	3	3
-18.75°	11	10	8	6	4	4	4	3	3	3	2
-20°	10	9	7	5	4	4	3	3	3	3	2
-21.25°	10	8	6	5	4	4	3	3	3	2	2



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-22.5°	9	7	5	4	4	3	3	3	3	2	2
-23.75°	8	6	4	4	4	3	3	3	3	2	2
-25°	7	5	4	4	3	3	3	3	2	2	2
-26.25°	5	4	4	4	3	3	3	3	2	2	2
-27.5°	4	4	4	3	3	3	3	2	2	2	2
-28.75°	4	4	3	3	3	3	2	2	2	2	2
-30°	4	3	3	3	3	3	2	2	2	2	2
-31.25°	3	3	3	3	3	2	2	2	2	2	2
-32.5°	3	3	3	3	2	2	2	2	2	2	2
-33.75°	3	3	3	3	2	2	2	2	2	2	2
-35°	3	3	3	2	2	2	2	2	2	2	2
-36.25°	3	3	2	2	2	2	2	2	2	2	2
-37.5°	3	2	2	2	2	2	2	2	2	2	2
-38.75°	2	2	2	2	2	2	2	2	2	2	2
-40°	2	2	2	2	2	2	2	2	2	2	2
-41.25°	2	2	2	2	2	2	2	2	2	2	2
-42.5°	2	2	2	2	2	2	2	2	2	2	2
-43.75°	2	2	2	2	2	2	2	2	2	2	2
-45°	2	2	2	2	2	2	2	2	2	2	2
-46.25°	2	2	2	2	2	2	2	2	2	2	2
-47.5°	2	2	2	2	2	2	2	2	2	2	2
-48.75°	2	2	2	2	2	2	2	2	2	2	2
-50°	2	2	2	2	2	2	2	2	2	2	2
-51.25°	2	2	2	2	2	2	2	2	2	2	2
-52.5°	2	2	2	2	2	2	2	2	2	2	1
-53.75°	2	2	2	2	2	2	2	2	2	1	1
-55°	2	2	2	2	2	2	2	2	1	1	1
-56.25°	2	2	2	2	2	2	1	1	1	1	1
-57.5°	2	2	2	2	1	1	1	1	1	1	1
-58.75°	2	2	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	1
-65°	1	1	1	1	1	1	1	1	1	1	1
-66.25°	1	1	1	1	1	1	1	1	1	1	1
-67.5°	1	1	1	1	1	1	1	1	1	1	1
-68.75°	1	1	1	1	1	1	1	1	1	1	1
-70°	1	1	1	1	1	1	1	1	1	1	1
-71.25°	1	1	1	1	1	1	1	1	1	1	0
-72.5°	1	1	1	1	1	1	0	0	0	0	0
-73.75°	1	1	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	33.75°	35°	36.25°	37.5°	38.75°	40°	41.25°	42.5°	43.75°	45°	46.25°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	1	0	0	0	0	0	0	0	0	0	0
68.75°	1	1	1	0	0	0	0	0	0	0	0
67.5°	1	1	1	1	1	0	0	0	0	0	0
66.25°	1	1	1	1	1	1	1	0	0	0	0
65°	1	1	1	1	1	1	1	1	0	0	0
63.75°	1	1	1	1	1	1	1	1	1	1	0
62.5°	1	1	1	1	1	1	1	1	1	1	1
61.25°	1	1	1	1	1	1	1	1	1	1	1
60°	1	1	1	1	1	1	1	1	1	1	1
58.75°	1	1	1	1	1	1	1	1	1	1	1
57.5°	1	1	1	1	1	1	1	1	1	1	1
56.25°	1	1	1	1	1	1	1	1	1	1	1
55°	1	1	1	1	1	1	1	1	1	1	1
53.75°	1	1	1	1	1	1	1	1	1	1	1
52.5°	1	1	1	1	1	1	1	1	1	1	1
51.25°	2	1	1	1	1	1	1	1	1	1	1
50°	2	2	1	1	1	1	1	1	1	1	1
48.75°	2	2	2	1	1	1	1	1	1	1	1
47.5°	2	2	2	2	1	1	1	1	1	1	1
46.25°	2	2	2	2	1	1	1	1	1	1	1
45°	2	2	2	2	2	1	1	1	1	1	1
43.75°	2	2	2	2	2	2	1	1	1	1	1
42.5°	2	2	2	2	2	2	2	1	1	1	1
41.25°	2	2	2	2	2	2	2	1	1	1	1
40°	2	2	2	2	2	2	2	2	1	1	1
38.75°	2	2	2	2	2	2	2	2	1	1	1
37.5°	2	2	2	2	2	2	2	2	2	1	1
36.25°	2	2	2	2	2	2	2	2	2	1	1
35°	2	2	2	2	2	2	2	2	2	2	1



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
33.75°	2	2	2	2	2	2	2	2	2	2	1
32.5°	2	2	2	2	2	2	2	2	2	2	1
31.25°	2	2	2	2	2	2	2	2	2	2	2
30°	2	2	2	2	2	2	2	2	2	2	2
28.75°	2	2	2	2	2	2	2	2	2	2	2
27.5°	2	2	2	2	2	2	2	2	2	2	2
26.25°	2	2	2	2	2	2	2	2	2	2	2
25°	2	2	2	2	2	2	2	2	2	2	2
23.75°	2	2	2	2	2	2	2	2	2	2	2
22.5°	2	2	2	2	2	2	2	2	2	2	2
21.25°	2	2	2	2	2	2	2	2	2	2	2
20°	2	2	2	2	2	2	2	2	2	2	2
18.75°	2	2	2	2	2	2	2	2	2	2	2
17.5°	2	2	2	2	2	2	2	2	2	2	2
16.25°	2	2	2	2	2	2	2	2	2	2	2
15°	2	2	2	2	2	2	2	2	2	2	2
13.75°	2	2	2	2	2	2	2	2	2	2	2
12.5°	3	2	2	2	2	2	2	2	2	2	2
11.25°	3	2	2	2	2	2	2	2	2	2	2
10°	3	2	2	2	2	2	2	2	2	2	2
8.75°	3	2	2	2	2	2	2	2	2	2	2
7.5°	3	2	2	2	2	2	2	2	2	2	2
6.25°	3	2	2	2	2	2	2	2	2	2	2
5°	3	2	2	2	2	2	2	2	2	2	2
3.75°	3	2	2	2	2	2	2	2	2	2	2
2.5°	3	2	2	2	2	2	2	2	2	2	2
1.25°	3	2	2	2	2	2	2	2	2	2	2
0°	3	3	2	2	2	2	2	2	2	2	2
-1.25°	3	2	2	2	2	2	2	2	2	2	2
-2.5°	3	2	2	2	2	2	2	2	2	2	2
-3.75°	3	2	2	2	2	2	2	2	2	2	2
-5°	3	2	2	2	2	2	2	2	2	2	2
-6.25°	3	2	2	2	2	2	2	2	2	2	2
-7.5°	3	2	2	2	2	2	2	2	2	2	2
-8.75°	3	2	2	2	2	2	2	2	2	2	2
-10°	3	2	2	2	2	2	2	2	2	2	2
-11.25°	3	2	2	2	2	2	2	2	2	2	2
-12.5°	3	2	2	2	2	2	2	2	2	2	2
-13.75°	2	2	2	2	2	2	2	2	2	2	2
-15°	2	2	2	2	2	2	2	2	2	2	2
-16.25°	2	2	2	2	2	2	2	2	2	2	2
-17.5°	2	2	2	2	2	2	2	2	2	2	2
-18.75°	2	2	2	2	2	2	2	2	2	2	2
-20°	2	2	2	2	2	2	2	2	2	2	2
-21.25°	2	2	2	2	2	2	2	2	2	2	2



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-22.5°	2	2	2	2	2	2	2	2	2	2	2
-23.75°	2	2	2	2	2	2	2	2	2	2	2
-25°	2	2	2	2	2	2	2	2	2	2	2
-26.25°	2	2	2	2	2	2	2	2	2	2	2
-27.5°	2	2	2	2	2	2	2	2	2	2	2
-28.75°	2	2	2	2	2	2	2	2	2	2	2
-30°	2	2	2	2	2	2	2	2	2	2	2
-31.25°	2	2	2	2	2	2	2	2	2	2	2
-32.5°	2	2	2	2	2	2	2	2	2	2	1
-33.75°	2	2	2	2	2	2	2	2	2	2	1
-35°	2	2	2	2	2	2	2	2	2	2	1
-36.25°	2	2	2	2	2	2	2	2	2	1	1
-37.5°	2	2	2	2	2	2	2	2	2	1	1
-38.75°	2	2	2	2	2	2	2	2	1	1	1
-40°	2	2	2	2	2	2	2	2	1	1	1
-41.25°	2	2	2	2	2	2	2	1	1	1	1
-42.5°	2	2	2	2	2	2	2	1	1	1	1
-43.75°	2	2	2	2	2	2	1	1	1	1	1
-45°	2	2	2	2	2	1	1	1	1	1	1
-46.25°	2	2	2	2	1	1	1	1	1	1	1
-47.5°	2	2	2	2	1	1	1	1	1	1	1
-48.75°	2	2	2	1	1	1	1	1	1	1	1
-50°	2	2	1	1	1	1	1	1	1	1	1
-51.25°	2	1	1	1	1	1	1	1	1	1	1
-52.5°	1	1	1	1	1	1	1	1	1	1	1
-53.75°	1	1	1	1	1	1	1	1	1	1	1
-55°	1	1	1	1	1	1	1	1	1	1	1
-56.25°	1	1	1	1	1	1	1	1	1	1	1
-57.5°	1	1	1	1	1	1	1	1	1	1	1
-58.75°	1	1	1	1	1	1	1	1	1	1	1
-60°	1	1	1	1	1	1	1	1	1	1	1
-61.25°	1	1	1	1	1	1	1	1	1	1	1
-62.5°	1	1	1	1	1	1	1	1	1	1	1
-63.75°	1	1	1	1	1	1	1	1	1	1	0
-65°	1	1	1	1	1	1	1	1	0	0	0
-66.25°	1	1	1	1	1	1	1	0	0	0	0
-67.5°	1	1	1	1	1	0	0	0	0	0	0
-68.75°	1	1	1	0	0	0	0	0	0	0	0
-70°	1	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	47.5°	48.75°	50°	51.25°	52.5°	53.75°	55°	56.25°	57.5°	58.75°	60°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	1	0	0	0	0	0	0	0	0	0	0
60°	1	1	0	0	0	0	0	0	0	0	0
58.75°	1	1	1	0	0	0	0	0	0	0	0
57.5°	1	1	1	0	0	0	0	0	0	0	0
56.25°	1	1	1	1	0	0	0	0	0	0	0
55°	1	1	1	1	1	0	0	0	0	0	0
53.75°	1	1	1	1	1	0	0	0	0	0	0
52.5°	1	1	1	1	1	1	0	0	0	0	0
51.25°	1	1	1	1	1	1	0	0	0	0	0
50°	1	1	1	1	1	1	1	0	0	0	0
48.75°	1	1	1	1	1	1	1	0	0	0	0
47.5°	1	1	1	1	1	1	1	1	0	0	0
46.25°	1	1	1	1	1	1	1	1	0	0	0
45°	1	1	1	1	1	1	1	1	1	0	0
43.75°	1	1	1	1	1	1	1	1	1	0	0
42.5°	1	1	1	1	1	1	1	1	1	0	0
41.25°	1	1	1	1	1	1	1	1	1	0	0
40°	1	1	1	1	1	1	1	1	1	1	0
38.75°	1	1	1	1	1	1	1	1	1	1	0
37.5°	1	1	1	1	1	1	1	1	1	1	0
36.25°	1	1	1	1	1	1	1	1	1	1	0
35°	1	1	1	1	1	1	1	1	1	1	1



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
33.75°	1	1	1	1	1	1	1	1	1	1	1
32.5°	1	1	1	1	1	1	1	1	1	1	1
31.25°	1	1	1	1	1	1	1	1	1	1	1
30°	1	1	1	1	1	1	1	1	1	1	1
28.75°	1	1	1	1	1	1	1	1	1	1	1
27.5°	2	1	1	1	1	1	1	1	1	1	1
26.25°	2	1	1	1	1	1	1	1	1	1	1
25°	2	1	1	1	1	1	1	1	1	1	1
23.75°	2	2	1	1	1	1	1	1	1	1	1
22.5°	2	2	1	1	1	1	1	1	1	1	1
21.25°	2	2	1	1	1	1	1	1	1	1	1
20°	2	2	1	1	1	1	1	1	1	1	1
18.75°	2	2	1	1	1	1	1	1	1	1	1
17.5°	2	2	1	1	1	1	1	1	1	1	1
16.25°	2	2	2	1	1	1	1	1	1	1	1
15°	2	2	2	1	1	1	1	1	1	1	1
13.75°	2	2	2	1	1	1	1	1	1	1	1
12.5°	2	2	2	1	1	1	1	1	1	1	1
11.25°	2	2	2	1	1	1	1	1	1	1	1
10°	2	2	2	1	1	1	1	1	1	1	1
8.75°	2	2	2	1	1	1	1	1	1	1	1
7.5°	2	2	2	1	1	1	1	1	1	1	1
6.25°	2	2	2	1	1	1	1	1	1	1	1
5°	2	2	2	1	1	1	1	1	1	1	1
3.75°	2	2	2	1	1	1	1	1	1	1	1
2.5°	2	2	2	1	1	1	1	1	1	1	1
1.25°	2	2	2	1	1	1	1	1	1	1	1
0°	2	2	2	2	1	1	1	1	1	1	1
-1.25°	2	2	2	1	1	1	1	1	1	1	1
-2.5°	2	2	2	1	1	1	1	1	1	1	1
-3.75°	2	2	2	1	1	1	1	1	1	1	1
-5°	2	2	2	1	1	1	1	1	1	1	1
-6.25°	2	2	2	1	1	1	1	1	1	1	1
-7.5°	2	2	2	1	1	1	1	1	1	1	1
-8.75°	2	2	2	1	1	1	1	1	1	1	1
-10°	2	2	2	1	1	1	1	1	1	1	1
-11.25°	2	2	2	1	1	1	1	1	1	1	1
-12.5°	2	2	2	1	1	1	1	1	1	1	1
-13.75°	2	2	2	1	1	1	1	1	1	1	1
-15°	2	2	2	1	1	1	1	1	1	1	1
-16.25°	2	2	2	1	1	1	1	1	1	1	1
-17.5°	2	2	1	1	1	1	1	1	1	1	1
-18.75°	2	2	1	1	1	1	1	1	1	1	1
-20°	2	2	1	1	1	1	1	1	1	1	1
-21.25°	2	2	1	1	1	1	1	1	1	1	1



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-22.5°	2	2	1	1	1	1	1	1	1	1	1
-23.75°	2	2	1	1	1	1	1	1	1	1	1
-25°	2	1	1	1	1	1	1	1	1	1	1
-26.25°	2	1	1	1	1	1	1	1	1	1	1
-27.5°	2	1	1	1	1	1	1	1	1	1	1
-28.75°	1	1	1	1	1	1	1	1	1	1	1
-30°	1	1	1	1	1	1	1	1	1	1	1
-31.25°	1	1	1	1	1	1	1	1	1	1	1
-32.5°	1	1	1	1	1	1	1	1	1	1	1
-33.75°	1	1	1	1	1	1	1	1	1	1	1
-35°	1	1	1	1	1	1	1	1	1	1	1
-36.25°	1	1	1	1	1	1	1	1	1	1	0
-37.5°	1	1	1	1	1	1	1	1	1	1	0
-38.75°	1	1	1	1	1	1	1	1	1	1	0
-40°	1	1	1	1	1	1	1	1	1	1	0
-41.25°	1	1	1	1	1	1	1	1	1	0	0
-42.5°	1	1	1	1	1	1	1	1	1	0	0
-43.75°	1	1	1	1	1	1	1	1	1	0	0
-45°	1	1	1	1	1	1	1	1	1	0	0
-46.25°	1	1	1	1	1	1	1	1	0	0	0
-47.5°	1	1	1	1	1	1	1	1	0	0	0
-48.75°	1	1	1	1	1	1	1	0	0	0	0
-50°	1	1	1	1	1	1	1	0	0	0	0
-51.25°	1	1	1	1	1	1	0	0	0	0	0
-52.5°	1	1	1	1	1	1	0	0	0	0	0
-53.75°	1	1	1	1	1	0	0	0	0	0	0
-55°	1	1	1	1	1	0	0	0	0	0	0
-56.25°	1	1	1	1	0	0	0	0	0	0	0
-57.5°	1	1	1	0	0	0	0	0	0	0	0
-58.75°	1	1	1	0	0	0	0	0	0	0	0
-60°	1	1	0	0	0	0	0	0	0	0	0
-61.25°	1	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	61.25°	62.5°	63.75°	65°	66.25°	67.5°	68.75°	70°	71.25°	72.5°	73.75°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
90°	0	0	0	0	0	0	0	0	0	0	0
88.75°	0	0	0	0	0	0	0	0	0	0	0
87.5°	0	0	0	0	0	0	0	0	0	0	0
86.25°	0	0	0	0	0	0	0	0	0	0	0
85°	0	0	0	0	0	0	0	0	0	0	0
83.75°	0	0	0	0	0	0	0	0	0	0	0
82.5°	0	0	0	0	0	0	0	0	0	0	0
81.25°	0	0	0	0	0	0	0	0	0	0	0
80°	0	0	0	0	0	0	0	0	0	0	0
78.75°	0	0	0	0	0	0	0	0	0	0	0
77.5°	0	0	0	0	0	0	0	0	0	0	0
76.25°	0	0	0	0	0	0	0	0	0	0	0
75°	0	0	0	0	0	0	0	0	0	0	0
73.75°	0	0	0	0	0	0	0	0	0	0	0
72.5°	0	0	0	0	0	0	0	0	0	0	0
71.25°	0	0	0	0	0	0	0	0	0	0	0
70°	0	0	0	0	0	0	0	0	0	0	0
68.75°	0	0	0	0	0	0	0	0	0	0	0
67.5°	0	0	0	0	0	0	0	0	0	0	0
66.25°	0	0	0	0	0	0	0	0	0	0	0
65°	0	0	0	0	0	0	0	0	0	0	0
63.75°	0	0	0	0	0	0	0	0	0	0	0
62.5°	0	0	0	0	0	0	0	0	0	0	0
61.25°	0	0	0	0	0	0	0	0	0	0	0
60°	0	0	0	0	0	0	0	0	0	0	0
58.75°	0	0	0	0	0	0	0	0	0	0	0
57.5°	0	0	0	0	0	0	0	0	0	0	0
56.25°	0	0	0	0	0	0	0	0	0	0	0
55°	0	0	0	0	0	0	0	0	0	0	0
53.75°	0	0	0	0	0	0	0	0	0	0	0
52.5°	0	0	0	0	0	0	0	0	0	0	0
51.25°	0	0	0	0	0	0	0	0	0	0	0
50°	0	0	0	0	0	0	0	0	0	0	0
48.75°	0	0	0	0	0	0	0	0	0	0	0
47.5°	0	0	0	0	0	0	0	0	0	0	0
46.25°	0	0	0	0	0	0	0	0	0	0	0
45°	0	0	0	0	0	0	0	0	0	0	0
43.75°	0	0	0	0	0	0	0	0	0	0	0
42.5°	0	0	0	0	0	0	0	0	0	0	0
41.25°	0	0	0	0	0	0	0	0	0	0	0
40°	0	0	0	0	0	0	0	0	0	0	0
38.75°	0	0	0	0	0	0	0	0	0	0	0
37.5°	0	0	0	0	0	0	0	0	0	0	0
36.25°	0	0	0	0	0	0	0	0	0	0	0
35°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
33.75°	0	0	0	0	0	0	0	0	0	0	0
32.5°	0	0	0	0	0	0	0	0	0	0	0
31.25°	0	0	0	0	0	0	0	0	0	0	0
30°	0	0	0	0	0	0	0	0	0	0	0
28.75°	0	0	0	0	0	0	0	0	0	0	0
27.5°	1	0	0	0	0	0	0	0	0	0	0
26.25°	1	0	0	0	0	0	0	0	0	0	0
25°	1	0	0	0	0	0	0	0	0	0	0
23.75°	1	0	0	0	0	0	0	0	0	0	0
22.5°	1	0	0	0	0	0	0	0	0	0	0
21.25°	1	0	0	0	0	0	0	0	0	0	0
20°	1	0	0	0	0	0	0	0	0	0	0
18.75°	1	0	0	0	0	0	0	0	0	0	0
17.5°	1	0	0	0	0	0	0	0	0	0	0
16.25°	1	1	0	0	0	0	0	0	0	0	0
15°	1	1	0	0	0	0	0	0	0	0	0
13.75°	1	1	0	0	0	0	0	0	0	0	0
12.5°	1	1	0	0	0	0	0	0	0	0	0
11.25°	1	1	0	0	0	0	0	0	0	0	0
10°	1	1	0	0	0	0	0	0	0	0	0
8.75°	1	1	0	0	0	0	0	0	0	0	0
7.5°	1	1	0	0	0	0	0	0	0	0	0
6.25°	1	1	0	0	0	0	0	0	0	0	0
5°	1	1	0	0	0	0	0	0	0	0	0
3.75°	1	1	0	0	0	0	0	0	0	0	0
2.5°	1	1	0	0	0	0	0	0	0	0	0
1.25°	1	1	0	0	0	0	0	0	0	0	0
0°	1	1	0	0	0	0	0	0	0	0	0
-1.25°	1	1	0	0	0	0	0	0	0	0	0
-2.5°	1	1	0	0	0	0	0	0	0	0	0
-3.75°	1	1	0	0	0	0	0	0	0	0	0
-5°	1	1	0	0	0	0	0	0	0	0	0
-6.25°	1	1	0	0	0	0	0	0	0	0	0
-7.5°	1	1	0	0	0	0	0	0	0	0	0
-8.75°	1	1	0	0	0	0	0	0	0	0	0
-10°	1	1	0	0	0	0	0	0	0	0	0
-11.25°	1	1	0	0	0	0	0	0	0	0	0
-12.5°	1	1	0	0	0	0	0	0	0	0	0
-13.75°	1	1	0	0	0	0	0	0	0	0	0
-15°	1	1	0	0	0	0	0	0	0	0	0
-16.25°	1	1	0	0	0	0	0	0	0	0	0
-17.5°	1	0	0	0	0	0	0	0	0	0	0
-18.75°	1	0	0	0	0	0	0	0	0	0	0
-20°	1	0	0	0	0	0	0	0	0	0	0
-21.25°	1	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-22.5°	1	0	0	0	0	0	0	0	0	0	0
-23.75°	1	0	0	0	0	0	0	0	0	0	0
-25°	1	0	0	0	0	0	0	0	0	0	0
-26.25°	1	0	0	0	0	0	0	0	0	0	0
-27.5°	1	0	0	0	0	0	0	0	0	0	0
-28.75°	0	0	0	0	0	0	0	0	0	0	0
-30°	0	0	0	0	0	0	0	0	0	0	0
-31.25°	0	0	0	0	0	0	0	0	0	0	0
-32.5°	0	0	0	0	0	0	0	0	0	0	0
-33.75°	0	0	0	0	0	0	0	0	0	0	0
-35°	0	0	0	0	0	0	0	0	0	0	0
-36.25°	0	0	0	0	0	0	0	0	0	0	0
-37.5°	0	0	0	0	0	0	0	0	0	0	0
-38.75°	0	0	0	0	0	0	0	0	0	0	0
-40°	0	0	0	0	0	0	0	0	0	0	0
-41.25°	0	0	0	0	0	0	0	0	0	0	0
-42.5°	0	0	0	0	0	0	0	0	0	0	0
-43.75°	0	0	0	0	0	0	0	0	0	0	0
-45°	0	0	0	0	0	0	0	0	0	0	0
-46.25°	0	0	0	0	0	0	0	0	0	0	0
-47.5°	0	0	0	0	0	0	0	0	0	0	0
-48.75°	0	0	0	0	0	0	0	0	0	0	0
-50°	0	0	0	0	0	0	0	0	0	0	0
-51.25°	0	0	0	0	0	0	0	0	0	0	0
-52.5°	0	0	0	0	0	0	0	0	0	0	0
-53.75°	0	0	0	0	0	0	0	0	0	0	0
-55°	0	0	0	0	0	0	0	0	0	0	0
-56.25°	0	0	0	0	0	0	0	0	0	0	0
-57.5°	0	0	0	0	0	0	0	0	0	0	0
-58.75°	0	0	0	0	0	0	0	0	0	0	0
-60°	0	0	0	0	0	0	0	0	0	0	0
-61.25°	0	0	0	0	0	0	0	0	0	0	0
-62.5°	0	0	0	0	0	0	0	0	0	0	0
-63.75°	0	0	0	0	0	0	0	0	0	0	0
-65°	0	0	0	0	0	0	0	0	0	0	0
-66.25°	0	0	0	0	0	0	0	0	0	0	0
-67.5°	0	0	0	0	0	0	0	0	0	0	0
-68.75°	0	0	0	0	0	0	0	0	0	0	0
-70°	0	0	0	0	0	0	0	0	0	0	0
-71.25°	0	0	0	0	0	0	0	0	0	0	0
-72.5°	0	0	0	0	0	0	0	0	0	0	0
-73.75°	0	0	0	0	0	0	0	0	0	0	0
-75°	0	0	0	0	0	0	0	0	0	0	0
-76.25°	0	0	0	0	0	0	0	0	0	0	0
-77.5°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	75°	76.25°	77.5°	78.75°	80°	81.25°	82.5°	83.75°	85°	86.25°	87.5°
-78.75°	0	0	0	0	0	0	0	0	0	0	0
-80°	0	0	0	0	0	0	0	0	0	0	0
-81.25°	0	0	0	0	0	0	0	0	0	0	0
-82.5°	0	0	0	0	0	0	0	0	0	0	0
-83.75°	0	0	0	0	0	0	0	0	0	0	0
-85°	0	0	0	0	0	0	0	0	0	0	0
-86.25°	0	0	0	0	0	0	0	0	0	0	0
-87.5°	0	0	0	0	0	0	0	0	0	0	0
-88.75°	0	0	0	0	0	0	0	0	0	0	0
-90°	0	0	0	0	0	0	0	0	0	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
90°	0	0
88.75°	0	0
87.5°	0	0
86.25°	0	0
85°	0	0
83.75°	0	0
82.5°	0	0
81.25°	0	0
80°	0	0
78.75°	0	0
77.5°	0	0
76.25°	0	0
75°	0	0
73.75°	0	0
72.5°	0	0
71.25°	0	0
70°	0	0
68.75°	0	0
67.5°	0	0
66.25°	0	0
65°	0	0
63.75°	0	0
62.5°	0	0
61.25°	0	0
60°	0	0
58.75°	0	0
57.5°	0	0
56.25°	0	0
55°	0	0
53.75°	0	0
52.5°	0	0
51.25°	0	0
50°	0	0
48.75°	0	0
47.5°	0	0
46.25°	0	0
45°	0	0
43.75°	0	0
42.5°	0	0
41.25°	0	0
40°	0	0
38.75°	0	0
37.5°	0	0
36.25°	0	0
35°	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
33.75°	0	0
32.5°	0	0
31.25°	0	0
30°	0	0
28.75°	0	0
27.5°	0	0
26.25°	0	0
25°	0	0
23.75°	0	0
22.5°	0	0
21.25°	0	0
20°	0	0
18.75°	0	0
17.5°	0	0
16.25°	0	0
15°	0	0
13.75°	0	0
12.5°	0	0
11.25°	0	0
10°	0	0
8.75°	0	0
7.5°	0	0
6.25°	0	0
5°	0	0
3.75°	0	0
2.5°	0	0
1.25°	0	0
0°	0	0
-1.25°	0	0
-2.5°	0	0
-3.75°	0	0
-5°	0	0
-6.25°	0	0
-7.5°	0	0
-8.75°	0	0
-10°	0	0
-11.25°	0	0
-12.5°	0	0
-13.75°	0	0
-15°	0	0
-16.25°	0	0
-17.5°	0	0
-18.75°	0	0
-20°	0	0
-21.25°	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)
 CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-22.5°	0	0
-23.75°	0	0
-25°	0	0
-26.25°	0	0
-27.5°	0	0
-28.75°	0	0
-30°	0	0
-31.25°	0	0
-32.5°	0	0
-33.75°	0	0
-35°	0	0
-36.25°	0	0
-37.5°	0	0
-38.75°	0	0
-40°	0	0
-41.25°	0	0
-42.5°	0	0
-43.75°	0	0
-45°	0	0
-46.25°	0	0
-47.5°	0	0
-48.75°	0	0
-50°	0	0
-51.25°	0	0
-52.5°	0	0
-53.75°	0	0
-55°	0	0
-56.25°	0	0
-57.5°	0	0
-58.75°	0	0
-60°	0	0
-61.25°	0	0
-62.5°	0	0
-63.75°	0	0
-65°	0	0
-66.25°	0	0
-67.5°	0	0
-68.75°	0	0
-70°	0	0
-71.25°	0	0
-72.5°	0	0
-73.75°	0	0
-75°	0	0
-76.25°	0	0
-77.5°	0	0



REPORT NUMBER: P220647 (CONVERTED FROM TYPE C PHOTOMETRY)

CATALOG NUMBER: 1003-[A1, S1, SU1]-FL-LED3097-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	88.75°	90°
-78.75°	0	0
-80°	0	0
-81.25°	0	0
-82.5°	0	0
-83.75°	0	0
-85°	0	0
-86.25°	0	0
-87.5°	0	0
-88.75°	0	0
-90°	0	0

(END OF REPORT)