

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P246953

Luminaire Tested: **203-FL-8LED3010-12-BK-LVR**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246953  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-14)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 203-FL-8LED3010-12-BK-LVR  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 10 DEGREE SPOT OPTIC, FLUSH HOOD BLACK, HEX CELL LOUVER  
Light Source: (1) SORAA 3000K 90 CRI LED  
SM16-07-10D-930-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 215.4 lumens  
Efficiency: N/A  
Efficacy: 27.3 lumens/watt  
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.18  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246953  
CATALOG NUMBER: 203-FL-8LED3010-12-BK-LVR

### Luminous Intensity Polar Plot

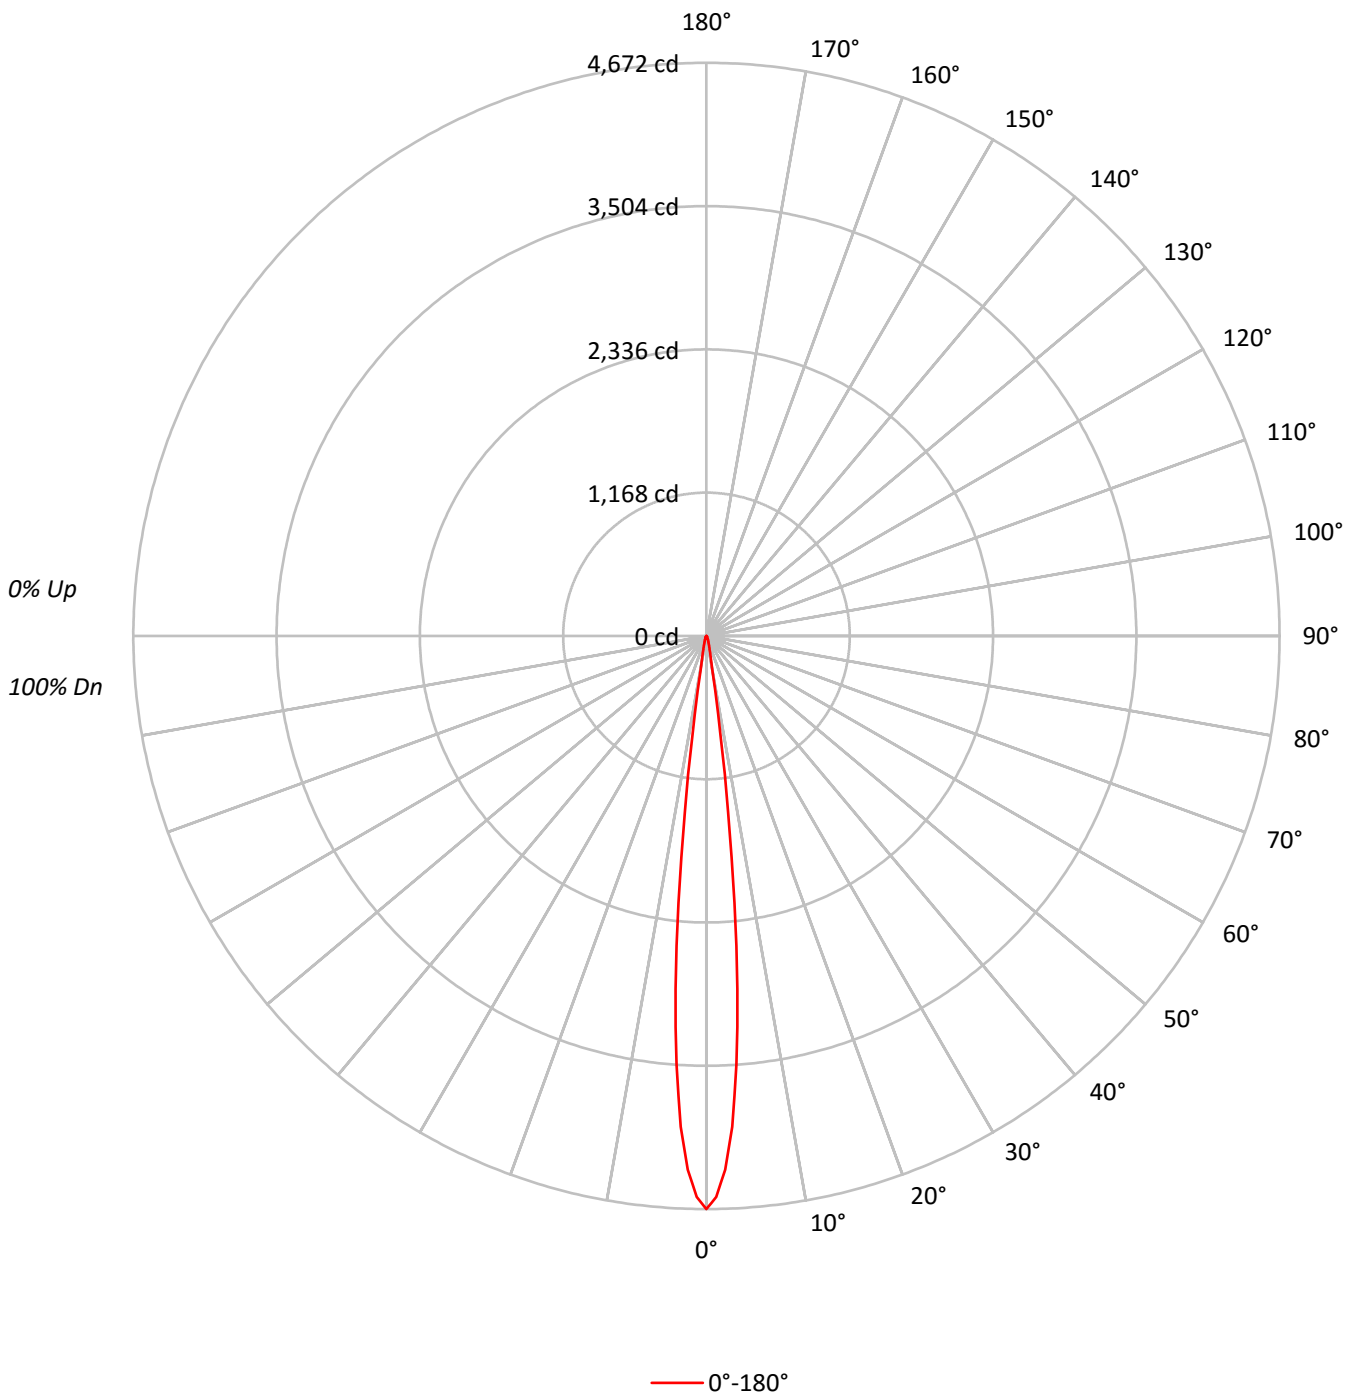



TEST NUMBER: P246953

CATALOG NUMBER: 203-FL-8LED3010-12-BK-LVR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20							
RC	80				70				50				30				10							
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10				
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100	100	100	100
1	116	114	113	112	114	112	111	110	108	107	106	106	105	104	103	103	101	101	100	100	99	99	99	99
2	113	111	108	106	112	109	107	105	106	104	103	103	103	102	101	101	101	100	99	99	98	98	98	98
3	111	108	105	103	110	106	104	102	104	102	100	100	102	100	99	99	100	99	98	98	96	96	96	96
4	109	105	102	100	108	104	102	100	102	100	98	98	101	99	97	97	99	98	96	96	95	95	95	95
5	107	103	100	98	106	102	100	98	101	99	97	97	99	98	96	96	98	97	95	95	94	94	94	94
6	106	101	98	96	105	101	98	96	100	97	95	95	98	96	95	95	97	96	94	94	94	94	94	94
7	104	100	97	95	103	99	97	95	98	96	94	94	97	95	94	94	97	95	93	93	93	93	93	93
8	103	98	96	94	102	98	95	94	97	95	93	93	97	94	93	93	96	94	93	93	92	92	92	92
9	102	97	95	93	101	97	94	93	96	94	92	92	96	94	92	92	95	93	92	92	91	91	91	91
10	101	96	94	92	100	96	94	92	95	93	92	92	95	93	91	91	94	93	91	91	91	91	91	91

**AVERAGE LUMINANCE (cd/sqm):**

0°	
0°	2304971
5°	1430868
10°	134115
15°	38922
20°	21422
25°	11105
30°	6552
35°	4818
40°	2834
45°	1884
50°	691
55°	774
60°	888
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P246953

CATALOG NUMBER: 203-FL-8LED3010-12-BK-LVR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	172.4	80.0
10°-20°	24.8	11.5
20°-30°	10.1	4.7
30°-40°	4.9	2.3
40°-50°	2.0	0.9
50°-60°	0.8	0.4
60°-70°	0.3	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	207.3	96.2
0°-40°	212.2	98.5
0°-60°	215.1	99.8
0°-90°	215.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	215.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4672	
5°	2889	172
15°	76	25
25°	20	10
35°	8	5
45°	3	2
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P246953

CATALOG NUMBER: 203-FL-8LED3010-12-BK-LVR

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4671.8
1°	4572.5
2°	4354.5
3°	4007.8
4°	3505.2
5°	2889.1
6°	2187.0
7°	1445.9
8°	835.1
9°	451.2
10°	267.7
11°	183.5
12°	140.1
13°	111.7
14°	91.3
15°	76.2
16°	64.7
17°	55.8
18°	49.6
19°	45.2
20°	40.8
22.5°	29.3
25°	20.4
26°	17.7
27°	16.0
28°	14.2
29°	13.3
30°	11.5
32.5°	9.8
35°	8.0
37.5°	6.2
40°	4.4
42.5°	3.5
45°	2.7
47.5°	1.8
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P246953

CATALOG NUMBER: 203-FL-8LED3010-12-BK-LVR

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)