

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1432566

Luminaire Tested: EHBR1-12-UNV-N-L835-UPL24

Issue Date: 3/20/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1432566  
REPORT IS A COMBINATION OF REPORTS P1431655 AND P1431635  
Test Lab: INNOVATION CENTER  
Issue Date: 3/20/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: EHBR1-12-UNV-N-L835-UPL24  
Description: Elevate Round Highbay at, 12000 lumens, 3500K 80CRI LEDs with N lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14377.3 lumens  
Efficiency: N/A  
Efficacy: 177.1 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.8  
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')  
CIE Type: Semi-Direct

Input Watts (W): 81.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1432566  
CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

### Luminous Intensity Polar Plot

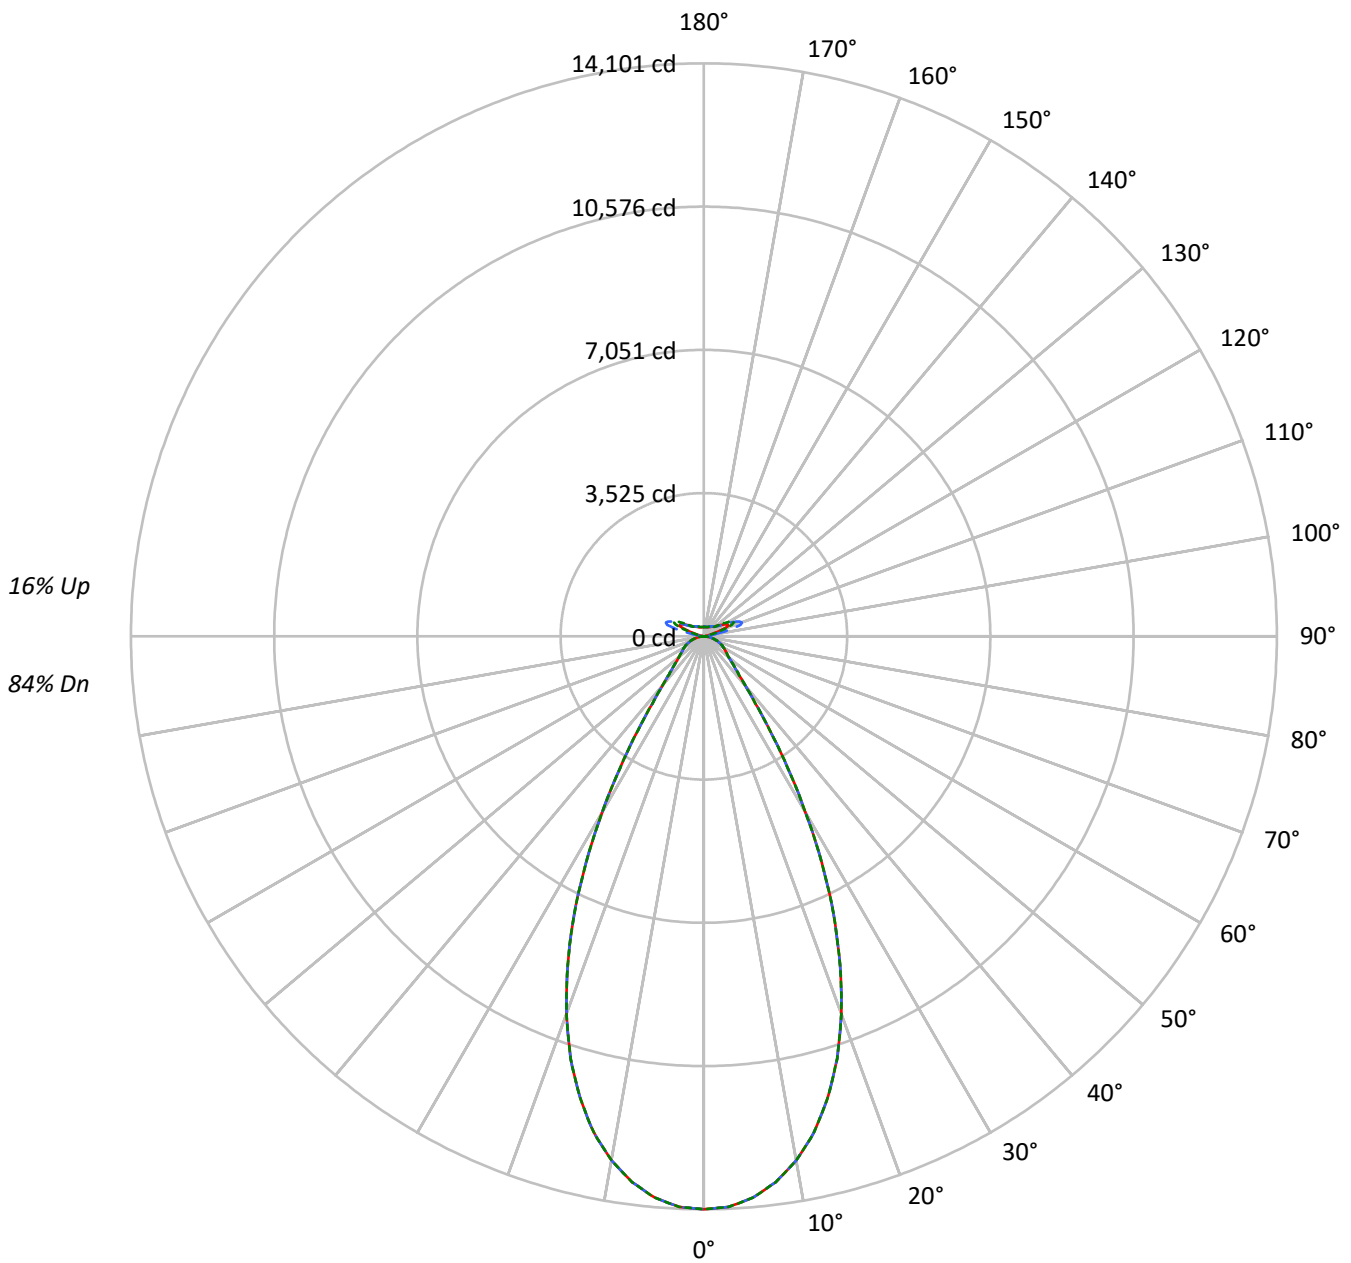

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P1432566

CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	115	115	115	115	111	111	111	111	102	102	102	95	95	95	87	87	87	87	87	87	84
1	108	105	102	99	104	101	98	96	94	92	90	88	86	85	82	81	79	79	79	79	77
2	102	96	91	87	98	93	88	85	87	83	80	81	79	76	76	74	72	72	72	72	70
3	95	88	82	77	92	85	80	76	80	76	72	76	72	69	71	69	66	66	66	66	64
4	90	81	75	70	87	79	73	69	75	70	66	71	67	64	67	64	61	61	61	61	59
5	85	75	68	64	82	73	67	63	69	64	61	66	62	59	63	59	57	57	57	57	55
6	80	70	63	58	77	68	62	58	65	60	56	62	58	54	59	56	53	53	53	53	51
7	75	65	59	54	73	64	58	53	61	56	52	58	54	51	56	52	49	49	49	49	48
8	72	61	55	50	69	60	54	50	57	52	49	55	51	47	53	49	46	46	46	46	45
9	68	58	51	47	66	56	51	46	54	49	45	52	48	45	50	46	44	44	44	44	42
10	65	54	48	44	63	53	48	44	51	46	43	50	45	42	48	44	41	41	41	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	66220	66220	66220
5°	64934	64934	64934
10°	61631	61631	61631
15°	56075	56075	56075
20°	48100	48100	48100
25°	37839	37839	37839
30°	25967	25967	25967
35°	15425	15425	15425
40°	9127	9127	9127
45°	6551	6551	6551
50°	5385	5385	5385
55°	4894	4894	4894
60°	4685	4685	4685
65°	4468	4468	4468
70°	4155	4155	4155
75°	3756	3756	3756
80°	3119	3119	3119
85°	1976	1976	1976

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6551 cd/sqm



TEST NUMBER: P1432566

CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1298.9	9.0
10°-20°	3260.5	22.7
20°-30°	3409.2	23.7
30°-40°	1847.2	12.8
40°-50°	849.8	5.9
50°-60°	598.9	4.2
60°-70°	460.9	3.2
70°-80°	279.4	1.9
80°-90°	82.8	0.6
90°-100°	65.3	0.5
100°-110°	409.1	2.8
110°-120°	731.5	5.1
120°-130°	429.2	3.0
130°-140°	263.3	1.8
140°-150°	182.6	1.3
150°-160°	118.6	0.8
160°-170°	67.6	0.5
170°-180°	22.3	0.2
0°-30°	7968.7	55.4
0°-40°	9815.9	68.3
0°-60°	11264.6	78.3
0°-90°	12087.7	84.1
90°-120°	1205.9	8.4
90°-150°	2081.0	14.5
90°-180°	2290.0	15.9
0°-180°	14377.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	14101	14101	14101	14101	14101	
5°	13864	13864	13864	13864	13864	1299
15°	11764	11764	11764	11764	11764	3261
25°	7556	7556	7556	7556	7556	3409
35°	2831	2831	2831	2831	2831	1847
45°	1060	1060	1060	1060	1060	850
55°	661	661	661	661	661	599
65°	466	466	466	466	466	461
75°	265	265	265	265	265	279
85°	68	68	68	68	68	75
90°	18	28	48	30	18	12
95°	29	48	106	52	33	28
105°	143	282	720	311	189	191
115°	658	692	851	815	810	606
125°	474	443	455	461	518	433
135°	346	336	347	326	325	271
145°	284	280	298	294	292	180
155°	249	246	258	258	258	116
165°	233	233	240	240	238	67
175°	231	231	235	235	235	22
180°	233	233	233	233	233	



TEST NUMBER: P1432566

CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	14101.0	14101.0	14101.0	14101.0	14101.0
2.5°	14051.1	14051.1	14051.1	14051.1	14051.1
5°	13864.5	13864.5	13864.5	13864.5	13864.5
7.5°	13546.1	13546.1	13546.1	13546.1	13546.1
10°	13094.3	13094.3	13094.3	13094.3	13094.3
12.5°	12510.3	12510.3	12510.3	12510.3	12510.3
15°	11764.3	11764.3	11764.3	11764.3	11764.3
17.5°	10898.9	10898.9	10898.9	10898.9	10898.9
20°	9886.0	9886.0	9886.0	9886.0	9886.0
22.5°	8758.3	8758.3	8758.3	8758.3	8758.3
25°	7556.4	7556.4	7556.4	7556.4	7556.4
27.5°	6282.1	6282.1	6282.1	6282.1	6282.1
30°	4994.7	4994.7	4994.7	4994.7	4994.7
32.5°	3833.3	3833.3	3833.3	3833.3	3833.3
35°	2831.1	2831.1	2831.1	2831.1	2831.1
37.5°	2078.7	2078.7	2078.7	2078.7	2078.7
40°	1581.9	1581.9	1581.9	1581.9	1581.9
42.5°	1268.5	1268.5	1268.5	1268.5	1268.5
45°	1060.0	1060.0	1060.0	1060.0	1060.0
47.5°	909.9	909.9	909.9	909.9	909.9
50°	802.6	802.6	802.6	802.6	802.6
52.5°	724.3	724.3	724.3	724.3	724.3
55°	661.4	661.4	661.4	661.4	661.4
57.5°	610.4	610.4	610.4	610.4	610.4
60°	563.2	563.2	563.2	563.2	563.2
62.5°	516.1	516.1	516.1	516.1	516.1
65°	466.4	466.4	466.4	466.4	466.4
67.5°	415.8	415.8	415.8	415.8	415.8
70°	364.6	364.6	364.6	364.6	364.6
72.5°	314.9	314.9	314.9	314.9	314.9
75°	264.6	264.6	264.6	264.6	264.6
77.5°	215.5	215.5	215.5	215.5	215.5
80°	164.1	164.1	164.1	164.1	164.1
82.5°	114.8	114.8	114.8	114.8	114.8
85°	67.9	67.9	67.9	67.9	67.9
87.5°	24.3	24.3	24.3	24.3	24.3
90°	17.5	27.9	47.6	30.5	17.5
92.5°	24.9	42.0	76.0	39.3	22.3
95°	28.8	48.5	106.2	52.5	32.8
97.5°	36.7	53.7	121.9	64.2	51.1
100°	48.5	62.9	190.1	78.6	68.2
102.5°	82.5	133.7	403.7	148.1	103.6
105°	142.8	281.8	719.5	310.6	188.7
107.5°	247.7	504.6	948.9	550.5	357.8
110°	462.6	669.7	994.7	756.3	572.7



TEST NUMBER: P1432566

CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	625.2	719.5	952.8	834.8	745.7
115°	657.9	692.0	850.6	815.2	810.0
117.5°	635.6	631.8	722.1	732.6	782.5
120°	588.5	562.2	602.9	639.6	706.4
122.5°	529.5	498.0	516.4	543.9	610.7
125°	474.5	443.0	454.8	461.4	517.7
127.5°	426.0	405.0	411.5	403.7	439.1
130°	393.2	374.8	384.0	365.7	382.7
132.5°	365.7	353.8	364.3	342.1	347.4
135°	346.0	335.5	347.4	326.3	325.0
137.5°	328.9	319.8	331.5	315.8	312.0
140°	313.2	305.4	318.5	306.7	304.1
142.5°	296.2	290.9	306.7	298.9	296.2
145°	284.4	280.4	297.5	293.6	292.3
147.5°	273.9	271.3	287.0	285.7	285.7
150°	264.7	262.1	277.8	276.6	277.8
152.5°	255.6	253.0	267.3	266.1	267.3
155°	249.0	246.4	258.2	258.2	258.2
157.5°	243.8	242.4	251.6	251.6	251.6
160°	239.8	238.5	246.4	246.4	245.0
162.5°	235.9	234.6	243.8	242.4	242.4
165°	233.3	233.3	239.8	239.8	238.5
167.5°	233.3	232.0	238.5	238.5	237.2
170°	232.0	232.0	237.2	235.9	234.6
172.5°	232.0	232.0	237.2	235.9	234.6
175°	230.7	230.7	234.6	234.6	234.6
177.5°	232.0	232.0	234.6	234.6	233.3
180°	233.3	233.3	233.3	233.3	233.3



TEST NUMBER: P1432566  
 CATALOG NUMBER: EHBR1-12-UNV-N-L835-UPL24

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.71	13.67	13.34	14.28	14.97	12.71	13.67	13.34	14.28	14.97
	3H	14.48	15.34	15.13	15.96	16.70	14.48	15.34	15.13	15.96	16.70
	4H	15.14	15.94	15.80	16.57	17.32	15.14	15.94	15.80	16.57	17.32
	6H	15.60	16.33	16.27	16.98	17.74	15.60	16.33	16.27	16.98	17.74
	8H	15.72	16.41	16.40	17.08	17.84	15.72	16.41	16.40	17.08	17.84
	12H	15.77	16.43	16.45	17.09	17.87	15.77	16.43	16.45	17.09	17.87
4H	2H	13.24	14.04	13.91	14.68	15.43	13.24	14.04	13.91	14.68	15.43
	3H	15.21	15.87	15.88	16.55	17.31	15.21	15.87	15.88	16.55	17.31
	4H	15.98	16.58	16.67	17.26	18.06	15.98	16.58	16.67	17.26	18.06
	6H	16.55	17.06	17.26	17.77	18.58	16.55	17.06	17.26	17.77	18.58
	8H	16.71	17.19	17.42	17.89	18.70	16.71	17.19	17.42	17.89	18.70
	12H	16.78	17.21	17.51	17.94	18.76	16.78	17.21	17.51	17.94	18.76
8H	4H	16.21	16.68	16.92	17.39	18.20	16.21	16.68	16.92	17.39	18.20
	6H	16.89	17.28	17.63	18.02	18.85	16.89	17.28	17.63	18.02	18.85
	8H	17.11	17.46	17.87	18.21	19.04	17.11	17.46	17.87	18.21	19.04
	12H	17.25	17.55	18.00	18.28	19.19	17.25	17.55	18.00	18.28	19.19
12H	4H	16.20	16.62	16.93	17.35	18.17	16.20	16.62	16.93	17.35	18.17
	6H	16.91	17.26	17.67	18.01	18.85	16.91	17.26	17.67	18.01	18.85
	8H	17.17	17.47	17.93	18.21	19.11	17.17	17.47	17.93	18.21	19.11

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-3

Test Date: 07/31/2025

Luminaire Tested: EHBR-60-L835-N

Data in this report applies to families of products including EHBR-60-L835-N

**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2506-472-3  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 08/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **EHBR-60-L835-N**  
 Description: Elevate Round Highbay at, 60000 lumens, 3500K 80CRI LEDs with N lens

**Spectral Parameters**

CCT (K): 3468  
 CIE u': 0.2375  
 CIE v': 0.5091  
 Duv: -0.0021  
 CIE x: 0.4049  
 CIE y: 0.3856  
 CIE z: 0.2095  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 581  
 Purity: 37.24544  
 Rf: 80.1  
 Rg: 101

CRI (Ra):	82.1		
R1:	82.9	R9:	27.6
R2:	85.6	R10:	63.8
R3:	85.9	R11:	81.2
R4:	82.8	R12:	57.2
R5:	81.0	R13:	82.6
R6:	79.7	R14:	91.0
R7:	86.5	R15:	79.4
R8:	72.1		



**Test Conditions**

Stabilization Time: 39M  
 Operation Time: 1H 39M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-3

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-3

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-3

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	60	NR	620	327	NR	750	7	NR	880	0	NR
365	0	NR	495	82	NR	625	322	NR	755	6	NR	885	0	NR
370	0	NR	500	114	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	152	NR	635	645	NR	765	4	NR	895	0	NR
380	0	NR	510	189	NR	640	197	NR	770	4	NR	900	0	NR
385	1	NR	515	222	NR	645	189	NR	775	3	NR	905	0	NR
390	2	NR	520	248	NR	650	163	NR	780	3	NR	910	0	NR
395	3	NR	525	268	NR	655	134	NR	785	2	NR	915	0	NR
400	4	NR	530	283	NR	660	113	NR	790	2	NR	920	0	NR
405	6	NR	535	294	NR	665	94	NR	795	2	NR	925	0	NR
410	9	NR	540	305	NR	670	87	NR	800	2	NR	930	0	NR
415	18	NR	545	314	NR	675	70	NR	805	1	NR	935	0	NR
420	34	NR	550	323	NR	680	60	NR	810	1	NR	940	0	NR
425	62	NR	555	335	NR	685	51	NR	815	1	NR	945	0	NR
430	102	NR	560	346	NR	690	44	NR	820	1	NR	950	0	NR
435	159	NR	565	356	NR	695	38	NR	825	1	NR	955	0	NR
440	241	NR	570	364	NR	700	32	NR	830	1	NR	960	0	NR
445	363	NR	575	371	NR	705	28	NR	835	1	NR	965	0	NR
450	389	NR	580	375	NR	710	24	NR	840	1	NR	970	0	NR
455	245	NR	585	375	NR	715	20	NR	845	0	NR	975	0	NR
460	158	NR	590	373	NR	720	17	NR	850	0	NR	980	0	NR
465	120	NR	595	364	NR	725	15	NR	855	0	NR	985	0	NR
470	79	NR	600	357	NR	730	13	NR	860	0	NR	990	0	NR
475	57	NR	605	349	NR	735	11	NR	865	0	NR	995	0	NR
480	51	NR	610	371	NR	740	9	NR	870	0	NR	1000	0	NR
485	51	NR	615	387	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-3

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 1.43**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	60	NR	620	327	NR	750	7	NR	880	0	NR
365	0	NR	495	82	NR	625	322	NR	755	6	NR	885	0	NR
370	0	NR	500	114	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	152	NR	635	645	NR	765	4	NR	895	0	NR
380	0	NR	510	189	NR	640	197	NR	770	4	NR	900	0	NR
385	1	NR	515	222	NR	645	189	NR	775	3	NR	905	0	NR
390	2	NR	520	248	NR	650	163	NR	780	3	NR	910	0	NR
395	3	NR	525	268	NR	655	134	NR	785	2	NR	915	0	NR
400	4	NR	530	283	NR	660	113	NR	790	2	NR	920	0	NR
405	6	NR	535	294	NR	665	94	NR	795	2	NR	925	0	NR
410	9	NR	540	305	NR	670	87	NR	800	2	NR	930	0	NR
415	18	NR	545	314	NR	675	70	NR	805	1	NR	935	0	NR
420	34	NR	550	323	NR	680	60	NR	810	1	NR	940	0	NR
425	62	NR	555	335	NR	685	51	NR	815	1	NR	945	0	NR
430	102	NR	560	346	NR	690	44	NR	820	1	NR	950	0	NR
435	159	NR	565	356	NR	695	38	NR	825	1	NR	955	0	NR
440	241	NR	570	364	NR	700	32	NR	830	1	NR	960	0	NR
445	363	NR	575	371	NR	705	28	NR	835	1	NR	965	0	NR
450	389	NR	580	375	NR	710	24	NR	840	1	NR	970	0	NR
455	245	NR	585	375	NR	715	20	NR	845	0	NR	975	0	NR
460	158	NR	590	373	NR	720	17	NR	850	0	NR	980	0	NR
465	120	NR	595	364	NR	725	15	NR	855	0	NR	985	0	NR
470	79	NR	600	357	NR	730	13	NR	860	0	NR	990	0	NR
475	57	NR	605	349	NR	735	11	NR	865	0	NR	995	0	NR
480	51	NR	610	371	NR	740	9	NR	870	0	NR	1000	0	NR
485	51	NR	615	387	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-3

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: NR**

**M/P: 2.75**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	60	NR	620	327	NR	750	7	NR	880	0	NR
365	0	NR	495	82	NR	625	322	NR	755	6	NR	885	0	NR
370	0	NR	500	114	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	152	NR	635	645	NR	765	4	NR	895	0	NR
380	0	NR	510	189	NR	640	197	NR	770	4	NR	900	0	NR
385	1	NR	515	222	NR	645	189	NR	775	3	NR	905	0	NR
390	2	NR	520	248	NR	650	163	NR	780	3	NR	910	0	NR
395	3	NR	525	268	NR	655	134	NR	785	2	NR	915	0	NR
400	4	NR	530	283	NR	660	113	NR	790	2	NR	920	0	NR
405	6	NR	535	294	NR	665	94	NR	795	2	NR	925	0	NR
410	9	NR	540	305	NR	670	87	NR	800	2	NR	930	0	NR
415	18	NR	545	314	NR	675	70	NR	805	1	NR	935	0	NR
420	34	NR	550	323	NR	680	60	NR	810	1	NR	940	0	NR
425	62	NR	555	335	NR	685	51	NR	815	1	NR	945	0	NR
430	102	NR	560	346	NR	690	44	NR	820	1	NR	950	0	NR
435	159	NR	565	356	NR	695	38	NR	825	1	NR	955	0	NR
440	241	NR	570	364	NR	700	32	NR	830	1	NR	960	0	NR
445	363	NR	575	371	NR	705	28	NR	835	1	NR	965	0	NR
450	389	NR	580	375	NR	710	24	NR	840	1	NR	970	0	NR
455	245	NR	585	375	NR	715	20	NR	845	0	NR	975	0	NR
460	158	NR	590	373	NR	720	17	NR	850	0	NR	980	0	NR
465	120	NR	595	364	NR	725	15	NR	855	0	NR	985	0	NR
470	79	NR	600	357	NR	730	13	NR	860	0	NR	990	0	NR
475	57	NR	605	349	NR	735	11	NR	865	0	NR	995	0	NR
480	51	NR	610	371	NR	740	9	NR	870	0	NR	1000	0	NR
485	51	NR	615	387	NR	745	8	NR	875	0	NR			

**Summary**

$R_f = 80.1$   
 $R_g = 101$   
 $CIE R_a = 82.1$   
 $R_9 = 27.6$



**Color Vector Graphics**



**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 86	CES26 = 68	CES51 = 90	CES76 = 59
CES02 = 62	CES27 = 89	CES52 = 90	CES77 = 78
CES03 = 31	CES28 = 84	CES53 = 81	CES78 = 61
CES04 = 70	CES29 = 66	CES54 = 91	CES79 = 86
CES05 = 49	CES30 = 77	CES55 = 90	CES80 = 82
CES06 = 51	CES31 = 69	CES56 = 80	CES81 = 79
CES07 = 42	CES32 = 62	CES57 = 79	CES82 = 92
CES08 = 41	CES33 = 74	CES58 = 81	CES83 = 89
CES09 = 29	CES34 = 72	CES59 = 92	CES84 = 89
CES10 = 75	CES35 = 85	CES60 = 94	CES85 = 82
CES11 = 58	CES36 = 97	CES61 = 90	CES86 = 78
CES12 = 64	CES37 = 79	CES62 = 92	CES87 = 82
CES13 = 43	CES38 = 85	CES63 = 78	CES88 = 86
CES14 = 74	CES39 = 94	CES64 = 79	CES89 = 76
CES15 = 71	CES40 = 89	CES65 = 76	CES90 = 85
CES16 = 47	CES41 = 89	CES66 = 73	CES91 = 83
CES17 = 49	CES42 = 77	CES67 = 70	CES92 = 73
CES18 = 56	CES43 = 74	CES68 = 76	CES93 = 84
CES19 = 72	CES44 = 99	CES69 = 81	CES94 = 65
CES20 = 66	CES45 = 83	CES70 = 68	CES95 = 79
CES21 = 86	CES46 = 82	CES71 = 64	CES96 = 85
CES22 = 78	CES47 = 81	CES72 = 88	CES97 = 85
CES23 = 92	CES48 = 80	CES73 = 60	CES98 = 82
CES24 = 91	CES49 = 80	CES74 = 97	CES99 = 81
CES25 = 72	CES50 = 89	CES75 = 64	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)