

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1444370

Luminaire Tested: EHBR1-18-UNV-TA-L840-UPL12

Issue Date: 5/1/2026

Test Information

Test Method: LM-79-2019
Report Number: P1444370
REPORT IS A COMBINATION OF REPORTS P1444301 AND P1431635
Test Lab: INNOVATION CENTER
Issue Date: 5/1/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-18-UNV-TA-L840-UPL12
Description: Elevate Round Highbay at, 18000 lumens, 4000K 80CRI LEDs with TA lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 19701.7 lumens
Efficiency: N/A
Efficacy: 193.0 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 0.77 / 0.88
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')
CIE Type: Direct

Input Watts (W): 102.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1444370
CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

Luminous Intensity Polar Plot

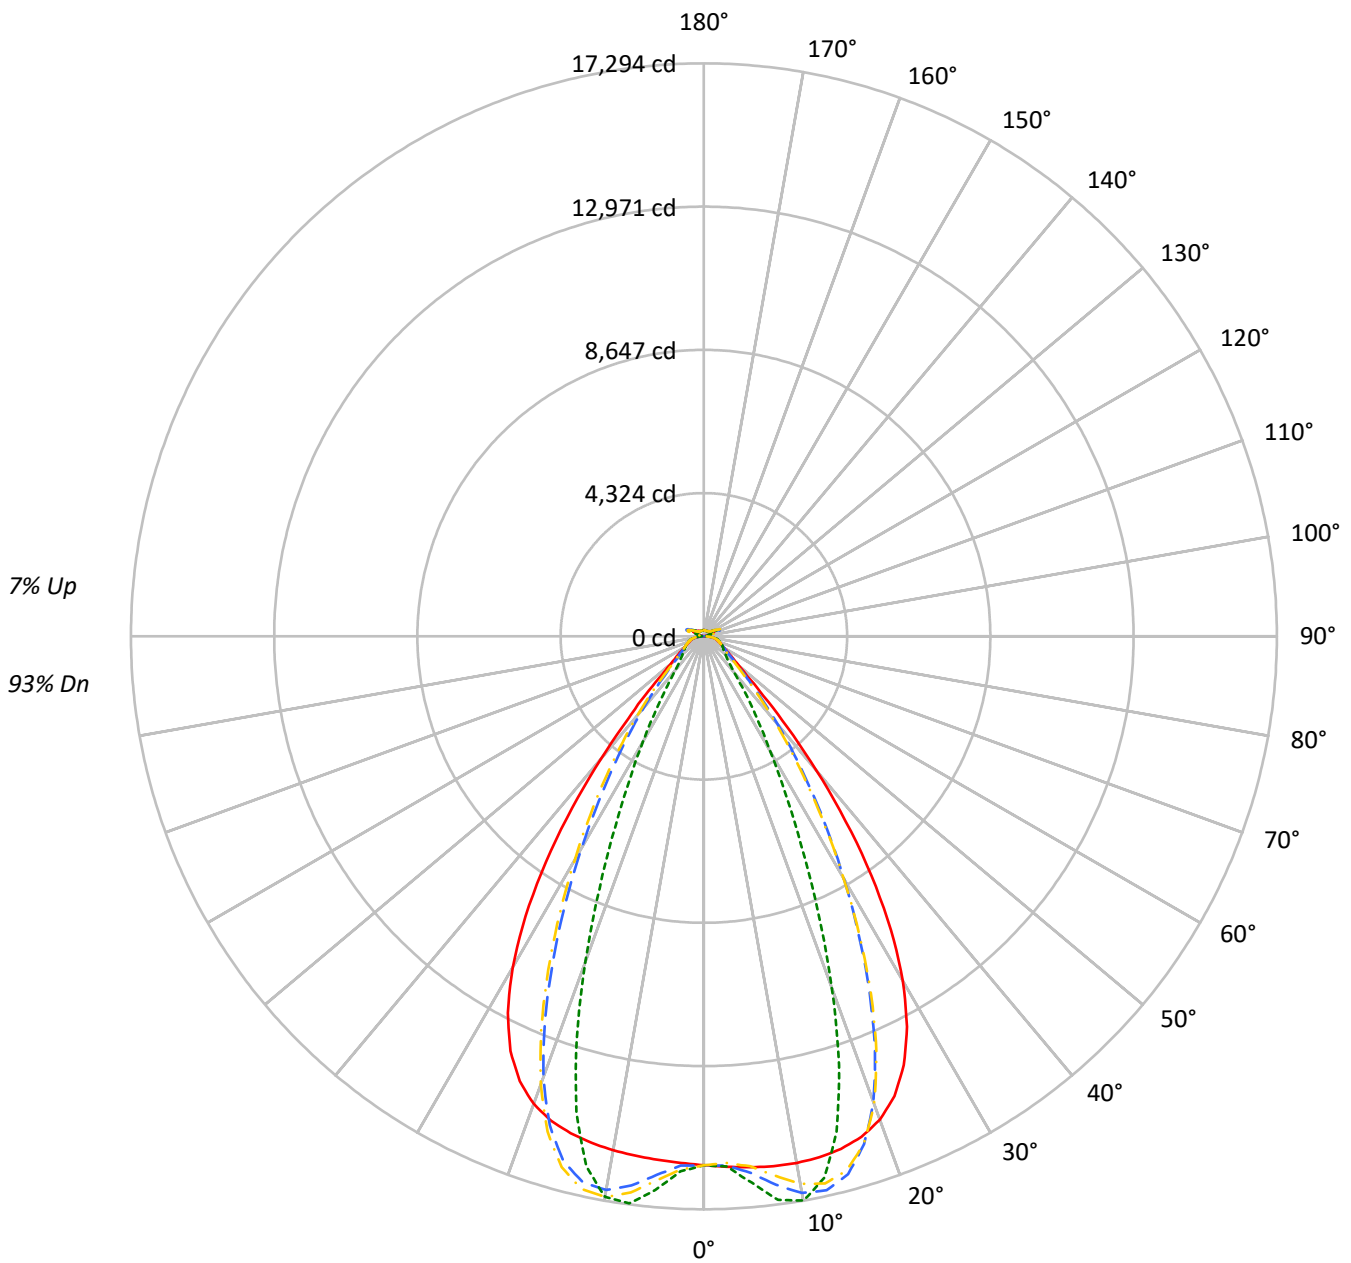

— 0°-180° - - 45°-225° - · - · 90°-270° - · - · 135°-315°



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	96	96	96	93
1	110	107	104	101	107	104	101	99	99	96	94	94	92	90	89	88	87	87	87	87	84
2	103	98	93	89	101	95	91	87	91	87	84	87	84	81	83	81	79	79	79	79	76
3	97	90	84	79	94	88	82	78	84	79	76	80	77	74	77	74	72	72	72	72	70
4	91	83	76	71	89	81	75	70	78	73	69	75	71	67	72	69	66	66	66	66	64
5	86	76	70	65	84	75	69	64	72	67	63	70	65	62	68	64	61	61	61	61	59
6	81	71	64	59	79	70	63	59	68	62	58	65	61	57	63	59	56	56	56	56	54
7	77	66	59	55	75	65	59	54	63	58	54	61	56	53	60	55	52	52	52	52	50
8	73	62	55	51	71	61	55	50	59	54	50	58	53	49	56	52	49	49	49	49	47
9	69	58	52	47	67	57	51	47	56	50	46	54	49	46	53	49	45	45	45	45	44
10	65	55	48	44	64	54	48	44	53	47	43	51	46	43	50	46	43	43	43	43	41

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	74966	74966	74966	74966
5°	75329	77525	74275	78541
10°	75958	81396	74136	80858
15°	76330	73785	74007	70814
20°	75542	54967	73069	50858
25°	71503	34764	69140	31542
30°	62463	20890	60044	19092
35°	48072	13109	45307	11612
40°	30410	8223	27822	7727
45°	15673	6406	15414	6301
50°	9189	5698	8907	5609
55°	7040	5391	6780	5342
60°	5957	5507	5703	5435
65°	5595	5751	5380	5555
70°	5467	6022	5195	5795
75°	5844	6387	5529	6104
80°	6047	7071	5484	6455
85°	5694	6823	4603	5842

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 25°
 Vertical Angle: 45°
 Luminance: 23986 cd/sqm



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1573.2	8.0
10°-20°	4425.7	22.5
20°-30°	5040.5	25.6
30°-40°	3622.9	18.4
40°-50°	1670.9	8.5
50°-60°	799.6	4.1
60°-70°	583.4	3.0
70°-80°	443.2	2.2
80°-90°	203.8	1.0
90°-100°	38.6	0.2
100°-110°	217.4	1.1
110°-120°	401.5	2.0
120°-130°	246.9	1.3
130°-140°	160.3	0.8
140°-150°	120.2	0.6
150°-160°	84.6	0.4
160°-170°	51.4	0.3
170°-180°	17.7	0.1
0°-30°	11039.5	56.0
0°-40°	14662.3	74.4
0°-60°	17132.8	87.0
0°-90°	18363.2	93.2
90°-120°	657.5	3.3
90°-150°	1184.8	6.0
90°-180°	1339.0	6.8
0°-180°	19701.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	15964	15964	15964	15964	15964	
5°	16084	16553	15859	16770	16084	1537
15°	16014	15480	15526	14856	16014	4512
25°	14279	6942	13807	6299	14279	6473
35°	8823	2406	8316	2131	8823	5415
45°	2536	1036	2494	1019	2536	2157
55°	951	728	916	722	951	878
65°	584	600	562	580	584	583
75°	412	450	390	430	412	428
85°	196	234	158	201	196	184
90°	53	67	15	19	53	33
95°	18	20	18	20	18	17
105°	79	101	53	101	79	104
115°	351	424	367	424	351	324
125°	266	277	300	277	266	242
135°	211	186	227	187	211	165
145°	190	183	202	185	190	120
155°	179	179	190	181	179	83
165°	179	179	186	180	179	51
175°	184	186	188	186	184	18
180°	187	187	187	187	187	



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16024.5	16023.2	16023.0	16021.9	16021.6	16021.6	16021.0	16019.7	16018.9	16017.1	16015.0
5°	16084.0	16083.3	16083.7	16083.8	16082.7	16080.2	16076.3	16071.5	16065.5	16059.7	16054.7
7.5°	16130.0	16131.1	16132.5	16132.2	16128.7	16122.8	16114.8	16110.4	16113.0	16121.7	16141.6
10°	16138.3	16145.2	16147.8	16147.0	16140.1	16135.0	16137.0	16153.9	16187.6	16232.5	16293.9
12.5°	16105.7	16114.0	16113.7	16111.0	16104.2	16111.1	16135.6	16185.9	16258.1	16346.7	16450.5
15°	16013.7	16024.6	16021.6	16018.0	16013.4	16036.0	16085.0	16172.4	16283.8	16408.8	16536.6
17.5°	15835.3	15848.6	15842.1	15838.1	15834.2	15876.5	15960.6	16088.6	16229.0	16370.3	16491.4
20°	15526.0	15534.8	15519.5	15512.4	15518.4	15601.3	15725.1	15888.5	16036.5	16170.1	16253.0
22.5°	15021.0	15032.0	15003.4	15000.1	15035.3	15162.4	15319.1	15502.0	15641.0	15746.9	15778.7
25°	14279.1	14289.9	14256.0	14276.2	14336.2	14509.3	14696.0	14891.5	15010.1	15088.6	15066.9
27.5°	13277.7	13287.5	13255.3	13296.8	13391.6	13619.2	13838.7	14050.8	14156.6	14211.6	14141.9
30°	12014.8	12035.2	11997.1	12054.9	12199.7	12495.2	12746.7	12984.5	13090.0	13131.8	13023.5
32.5°	10514.8	10543.8	10501.9	10587.8	10789.8	11144.7	11430.6	11696.3	11812.9	11860.7	11738.2
35°	8822.9	8864.6	8816.5	8945.6	9194.7	9589.8	9906.4	10203.1	10341.1	10408.8	10285.5
37.5°	7030.5	7070.3	7044.2	7216.5	7490.0	7899.6	8222.6	8542.7	8698.7	8800.3	8703.0
40°	5270.8	5307.1	5326.8	5523.8	5781.1	6167.1	6477.5	6794.1	6968.6	7096.1	7036.1
42.5°	3720.2	3756.8	3823.7	4013.8	4228.3	4547.9	4813.7	5098.1	5264.8	5400.8	5377.6
45°	2535.9	2578.5	2662.3	2817.9	2973.1	3202.5	3397.6	3618.8	3754.9	3879.5	3880.9
47.5°	1777.1	1806.9	1881.9	1988.1	2089.3	2376.3	2388.1	2496.8	2588.3	2681.4	2693.5
50°	1369.5	1387.6	1427.3	1486.6	1543.9	1618.3	1686.5	1765.3	1821.6	1872.7	1884.9
52.5°	1125.6	1137.1	1157.3	1189.4	1222.7	1263.2	1299.7	1343.0	1373.6	1400.9	1406.6
55°	951.4	960.9	990.9	997.1	1035.1	1042.4	1058.6	1085.0	1102.8	1119.2	1123.2
57.5°	819.9	826.8	833.1	846.8	858.6	875.5	889.2	908.1	919.4	931.2	932.2
60°	716.1	721.0	725.7	735.1	743.1	754.9	764.4	777.2	785.3	794.2	795.2
62.5°	638.9	642.4	645.5	651.7	657.5	666.5	674.0	684.7	692.3	699.1	700.6
65°	584.0	586.6	588.5	593.3	598.2	606.0	612.8	621.5	627.1	632.3	633.5
67.5°	535.4	537.9	539.8	544.2	547.6	553.4	558.0	564.5	568.7	572.9	573.0
70°	479.7	481.9	483.5	487.5	490.3	495.2	499.0	504.8	509.1	513.8	515.0
72.5°	441.0	442.4	444.5	448.2	452.0	457.3	462.2	468.4	473.5	478.4	480.5
75°	411.7	413.3	414.7	417.8	420.5	425.0	428.6	434.3	438.7	444.0	446.5
77.5°	369.4	371.2	372.3	375.5	377.8	382.1	384.8	389.9	393.5	398.3	400.6
80°	318.1	319.9	320.8	323.7	325.5	329.4	332.2	337.0	340.0	344.8	347.6
82.5°	261.4	263.0	263.6	266.4	267.4	270.6	272.5	277.6	281.3	287.5	291.7
85°	195.7	196.4	197.3	196.6	200.6	200.8	205.3	206.1	212.0	213.6	220.4
87.5°	119.7	121.5	122.4	125.1	126.2	129.0	129.8	132.7	134.3	137.6	139.1
90°	53.1	56.0	57.1	60.4	61.4	64.5	65.4	68.7	69.8	73.4	74.9
92.5°	15.5	16.5	17.5	18.7	19.7	20.9	22.1	23.2	24.2	25.5	27.4
95°	17.7	18.8	19.9	21.0	22.1	23.3	24.4	25.5	26.6	27.7	31.0
97.5°	22.0	23.0	23.9	24.9	25.9	26.8	27.8	28.9	29.8	30.8	34.7
100°	28.6	29.4	30.2	31.1	31.9	32.7	33.5	34.4	35.2	36.0	43.2
102.5°	46.8	49.7	52.7	55.6	58.5	61.4	64.5	67.3	70.2	73.2	88.6
105°	78.8	86.7	94.7	102.6	110.6	118.7	126.6	134.5	142.5	150.3	175.5
107.5°	133.9	148.5	163.4	178.1	192.8	207.7	222.4	237.0	251.8	266.5	292.0
110°	246.4	258.2	270.1	281.9	293.8	305.6	317.4	329.1	341.0	352.8	371.4



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	332.0	337.3	342.6	348.0	353.4	358.6	363.9	369.3	374.5	379.8	393.1
115°	350.7	352.5	354.5	356.2	358.1	359.9	361.7	363.4	365.4	367.0	376.0
117.5°	341.2	340.8	340.5	340.1	339.6	339.3	338.9	338.4	337.9	337.5	342.6
120°	319.2	317.5	315.9	314.1	312.4	310.6	308.9	307.1	305.3	303.4	305.5
122.5°	291.3	289.2	287.3	285.1	283.0	281.0	278.9	276.7	274.5	272.4	273.0
125°	265.6	263.4	261.5	259.3	257.2	255.1	253.0	250.7	248.5	246.3	246.6
127.5°	243.5	242.1	240.5	238.9	237.4	235.7	234.1	232.5	230.9	229.0	229.1
130°	229.5	228.2	226.8	225.4	224.0	222.5	220.9	219.4	217.8	216.2	216.3
132.5°	218.3	217.4	216.4	215.4	214.3	213.0	211.9	210.6	209.5	208.2	208.3
135°	211.3	210.3	209.5	208.5	207.5	206.2	205.1	203.9	202.7	201.5	201.7
137.5°	205.3	204.6	203.8	202.7	201.8	200.6	199.7	198.4	197.4	196.1	196.4
140°	200.0	199.3	198.5	197.6	196.7	195.7	194.6	193.6	192.5	191.4	191.7
142.5°	193.8	193.1	192.5	191.8	191.1	190.2	189.3	188.4	187.6	186.6	187.1
145°	189.9	189.4	188.9	188.2	187.5	186.8	186.1	185.1	184.4	183.6	184.1
147.5°	186.7	186.2	185.8	185.2	184.7	183.9	183.3	182.5	182.0	181.2	181.7
150°	183.7	183.2	182.9	182.4	181.8	181.2	180.6	179.9	179.4	178.6	179.1
152.5°	180.5	180.0	179.7	179.2	178.7	178.0	177.6	176.9	176.4	175.7	176.1
155°	178.9	178.5	178.0	177.6	177.1	176.6	176.0	175.5	174.9	174.3	174.7
157.5°	178.2	177.8	177.4	177.0	176.7	176.2	175.7	175.3	174.9	174.4	174.6
160°	178.4	178.0	177.6	177.2	176.8	176.3	175.9	175.5	175.1	174.6	174.8
162.5°	178.7	178.2	177.8	177.5	177.1	176.6	176.2	175.9	175.5	175.0	175.2
165°	179.4	179.2	178.9	178.6	178.3	178.0	177.7	177.4	177.1	176.7	176.9
167.5°	181.6	181.2	181.0	180.6	180.3	180.0	179.6	179.2	179.1	178.6	178.8
170°	182.8	182.5	182.3	182.1	181.9	181.7	181.5	181.2	181.0	180.8	180.9
172.5°	184.1	183.8	183.7	183.6	183.4	183.2	183.1	182.9	182.8	182.5	182.8
175°	184.4	184.2	184.1	184.0	183.9	183.8	183.7	183.6	183.6	183.4	183.5
177.5°	185.8	185.7	185.7	185.7	185.7	185.6	185.6	185.5	185.4	185.4	185.4
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16013.4	16011.5	16008.9	16005.5	16002.5	15999.2	15991.2	15988.8	15991.5	15993.3	15997.0
5°	16051.5	16052.6	16053.1	16060.4	16066.6	16082.2	16205.0	16253.9	16291.6	16315.6	16352.0
7.5°	16166.2	16203.1	16239.7	16288.8	16331.1	16388.3	16603.2	16694.7	16759.7	16806.4	16863.9
10°	16360.6	16441.3	16516.7	16605.3	16681.4	16768.5	16968.6	17057.6	17113.9	17154.8	17193.1
12.5°	16556.5	16668.2	16769.2	16867.8	16950.1	17025.7	17096.0	17127.2	17129.8	17131.1	17110.8
15°	16658.5	16765.3	16854.2	16919.4	16967.8	16989.2	16868.2	16804.6	16724.3	16658.2	16549.3
17.5°	16594.1	16658.2	16696.6	16692.8	16672.8	16605.8	16262.9	16074.2	15886.8	15718.1	15496.7
20°	16308.0	16303.0	16269.6	16174.9	16060.8	15883.3	15295.1	14955.9	14627.8	14339.7	13990.2
22.5°	15775.5	15691.8	15574.9	15370.7	15143.9	14833.7	13991.0	13491.8	13035.2	12631.8	12179.8
25°	15004.1	14831.8	14616.4	14292.1	13939.5	13487.3	12448.5	11827.8	11279.4	10803.9	10282.4
27.5°	14016.8	13757.2	13441.5	12992.8	12515.1	11935.8	10784.1	10099.0	9510.4	9000.6	8445.5
30°	12848.0	12510.4	12102.8	11545.8	10969.6	10312.5	9144.5	8450.6	7854.8	7330.3	6774.8
32.5°	11527.1	11131.7	10654.0	10029.0	9405.8	8730.2	7602.2	6930.5	6361.3	5856.7	5354.1
35°	10070.3	9646.2	9140.8	8503.2	7883.9	7227.1	6192.0	5586.4	5083.7	4637.8	4231.8
37.5°	8507.6	8091.2	7610.9	7009.9	6435.6	5840.4	4947.3	4439.8	4018.0	3647.8	3334.4
40°	6882.8	6518.4	6102.8	5583.3	5093.1	4597.4	3864.4	3461.5	3128.6	2846.3	2611.5
42.5°	5277.9	4995.6	4676.8	4266.3	3891.2	3513.7	2949.5	2651.0	2404.4	2201.2	2035.2
45°	3829.4	3640.4	3426.7	3141.2	2881.7	2618.5	2216.9	2007.1	1846.6	1715.5	1604.7
47.5°	2676.9	2567.3	2560.6	2296.9	2106.6	1945.6	1686.8	1554.4	1456.0	1376.6	1306.5
50°	1879.9	1826.9	1761.0	1666.9	1578.6	1487.6	1330.0	1249.8	1192.2	1144.1	1099.8
52.5°	1405.3	1377.9	1342.8	1292.8	1245.0	1193.7	1094.1	1043.0	1024.9	980.1	945.0
55°	1122.5	1106.7	1086.8	1057.4	1028.3	1016.7	931.2	893.3	869.4	851.7	832.7
57.5°	932.4	920.6	908.8	888.9	872.1	851.7	806.3	786.8	772.6	762.2	749.1
60°	795.3	788.3	781.7	770.0	760.9	749.9	721.0	710.1	702.7	696.4	688.0
62.5°	702.0	698.3	694.9	688.7	684.1	678.1	658.4	653.1	649.4	646.3	641.2
65°	634.6	631.9	630.1	626.0	623.7	620.1	603.2	599.6	597.3	596.2	593.3
67.5°	573.3	570.6	569.4	566.5	565.4	563.3	549.4	547.5	546.7	547.1	546.0
70°	516.1	515.0	515.5	515.1	516.4	516.8	508.4	508.3	509.2	511.0	511.2
72.5°	481.8	481.8	482.4	482.7	483.9	484.5	477.6	477.3	477.7	479.0	479.0
75°	449.1	449.6	451.4	452.0	453.4	453.7	444.6	443.5	443.6	444.8	444.4
77.5°	403.9	405.8	409.3	411.0	413.9	414.4	404.0	402.8	402.8	404.1	403.0
80°	352.6	356.4	361.7	365.5	369.8	371.6	360.9	358.4	356.1	355.7	353.6
82.5°	298.2	302.7	309.2	312.5	317.1	318.2	300.4	297.0	295.0	295.2	293.3
85°	227.6	231.1	236.9	238.8	241.7	241.5	221.1	212.4	214.7	211.1	213.9
87.5°	142.8	144.8	148.4	148.9	150.2	149.9	129.6	125.5	124.3	124.4	122.9
90°	78.7	80.7	84.5	85.1	87.7	88.0	71.9	70.5	68.6	68.9	66.5
92.5°	29.7	31.6	33.8	35.8	38.0	40.1	40.3	41.7	39.8	37.5	35.6
95°	34.3	37.6	41.0	44.2	47.5	50.9	54.2	57.5	54.4	51.4	48.2
97.5°	38.6	42.6	46.4	50.2	54.2	58.1	62.1	66.0	62.7	59.2	55.9
100°	50.6	57.8	65.1	72.3	79.7	87.0	94.3	101.6	95.2	88.7	82.3
102.5°	104.1	119.6	135.0	150.5	166.0	181.4	197.1	212.6	197.8	183.0	168.2
105°	200.6	225.7	250.8	275.8	300.8	326.0	351.2	376.3	352.7	329.1	305.6
107.5°	317.3	342.9	368.2	393.5	418.9	444.4	470.1	495.5	472.5	449.4	426.6
110°	390.0	408.5	427.0	445.7	464.1	482.7	501.6	520.1	506.3	492.4	478.6



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	406.3	419.6	432.9	446.0	459.1	472.3	486.1	499.5	492.5	485.4	478.5
115°	384.8	393.8	402.6	411.6	420.5	429.2	438.8	447.8	445.5	443.2	440.8
117.5°	347.4	352.3	357.3	362.2	367.0	372.0	377.7	382.8	383.0	383.3	383.6
120°	307.5	309.6	311.5	313.6	315.5	317.5	320.5	322.7	324.5	326.1	327.9
122.5°	273.8	274.4	275.2	275.9	276.5	277.1	279.0	279.9	281.0	282.1	283.3
125°	246.9	247.1	247.4	247.7	247.8	248.0	249.7	250.1	250.1	250.0	249.9
127.5°	229.0	228.9	228.8	228.8	228.6	228.5	230.0	230.2	229.2	228.2	227.3
130°	216.3	216.4	216.4	216.4	216.4	216.6	218.1	218.5	217.0	215.3	213.8
132.5°	208.4	208.5	208.5	208.7	208.8	208.9	210.6	211.1	209.3	207.6	205.7
135°	201.8	202.0	202.1	202.3	202.5	202.7	204.6	205.2	203.6	201.8	200.1
137.5°	196.4	196.7	196.8	197.0	197.2	197.4	199.5	200.1	198.8	197.3	195.9
140°	191.9	192.1	192.5	192.7	193.0	193.4	195.7	196.5	195.3	194.3	193.1
142.5°	187.4	187.9	188.3	188.8	189.3	189.8	192.5	193.4	192.6	191.7	190.9
145°	184.5	185.2	185.7	186.4	187.0	187.6	190.6	191.7	191.2	190.5	190.0
147.5°	182.0	182.6	183.1	183.6	184.2	184.9	188.1	189.3	188.9	188.5	188.2
150°	179.6	180.1	180.6	181.2	181.9	182.5	186.2	187.5	187.2	186.8	186.5
152.5°	176.5	177.0	177.5	178.0	178.5	179.2	183.4	184.8	184.5	184.1	184.0
155°	174.9	175.3	175.6	176.0	176.4	177.0	181.5	182.9	182.7	182.5	182.3
157.5°	174.8	175.0	175.1	175.5	175.7	176.0	180.8	182.3	182.0	181.8	181.7
160°	174.9	175.1	175.1	175.4	175.5	175.8	180.6	182.0	181.9	181.7	181.5
162.5°	175.3	175.8	175.9	176.1	176.3	176.7	181.6	183.1	182.8	182.5	182.4
165°	177.0	177.0	177.1	177.4	177.5	177.6	182.2	183.5	183.4	183.1	183.0
167.5°	178.8	179.0	179.1	179.2	179.4	179.7	183.9	185.2	185.1	184.8	184.7
170°	181.0	181.1	181.2	181.4	181.6	181.8	185.5	186.5	186.3	186.0	185.9
172.5°	182.9	183.1	183.3	183.5	183.7	183.9	187.1	188.0	187.9	187.7	187.5
175°	183.6	183.8	184.0	184.2	184.3	184.5	187.0	187.7	187.6	187.5	187.4
177.5°	185.6	185.7	185.9	186.0	186.2	186.3	187.8	188.2	188.1	188.1	188.0
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	15997.8	16003.4	16004.3	16010.8	16010.3	16018.1	16016.9	16023.2	16019.5	16024.7	16020.3
5°	16373.5	16407.7	16425.4	16458.7	16469.2	16499.0	16507.3	16534.5	16535.6	16557.2	16552.2
7.5°	16904.8	16954.9	16984.8	17025.9	17046.8	17081.0	17096.1	17121.4	17129.6	17149.7	17151.2
10°	17222.0	17246.3	17263.4	17274.9	17285.4	17290.2	17296.0	17294.5	17296.0	17293.8	17298.7
12.5°	17097.2	17061.6	17038.1	16993.5	16967.5	16918.3	16894.1	16846.7	16829.5	16788.8	16782.9
15°	16465.3	16341.2	16253.5	16125.9	16045.7	15920.3	15846.8	15733.6	15682.0	15592.0	15568.4
17.5°	15313.5	15083.1	14904.8	14676.1	14517.4	14303.6	14169.2	13992.2	13895.3	13752.6	13703.2
20°	13698.8	13357.8	13090.4	12771.8	12543.8	12259.8	12077.8	11848.5	11715.3	11540.0	11469.0
22.5°	11803.0	11378.6	11044.5	10668.2	10393.1	10076.5	9858.5	9610.4	9465.5	9275.1	9190.8
25°	9849.1	9381.0	9009.7	8613.1	8322.4	8005.1	7787.2	7543.3	7393.3	7212.6	7128.9
27.5°	7980.3	7506.6	7147.7	6779.0	6512.3	6225.9	6029.3	5816.4	5683.4	5529.0	5450.2
30°	6331.2	5913.2	5607.8	5301.9	5080.1	4847.5	4684.1	4507.7	4391.0	4258.8	4183.7
32.5°	4987.6	4664.9	4425.8	4183.0	4001.5	3807.2	3665.9	3510.2	3404.9	3286.9	3218.9
35°	3950.0	3699.4	3508.7	3308.8	3152.8	2987.3	2862.8	2728.5	2634.0	2532.4	2473.7
37.5°	3120.9	2921.7	2764.7	2598.7	2470.5	2333.4	2287.2	2133.0	2035.1	1954.0	1897.9
40°	2449.3	2290.8	2161.0	2034.0	1929.5	1825.5	1742.0	1659.7	1596.4	1538.4	1498.4
42.5°	1912.8	1797.9	1703.1	1610.1	1533.9	1458.1	1397.6	1340.9	1298.3	1260.3	1234.5
45°	1520.6	1441.6	1375.7	1310.2	1256.4	1205.8	1165.1	1128.9	1101.3	1078.6	1062.5
47.5°	1249.1	1195.1	1148.5	1104.4	1067.9	1034.7	1007.5	998.6	969.0	949.1	941.5
50°	1061.6	1029.0	993.7	961.1	936.7	912.4	894.7	877.4	866.3	857.1	854.3
52.5°	921.6	896.7	877.0	856.3	840.3	823.0	810.8	799.3	793.2	788.4	787.8
55°	817.6	800.1	787.1	773.3	763.6	753.5	747.2	741.1	738.4	736.0	736.2
57.5°	738.8	727.2	718.7	709.7	704.5	699.6	698.0	696.5	697.3	697.7	699.0
60°	681.5	673.9	668.6	663.4	661.2	659.7	660.9	662.2	665.0	667.3	669.3
62.5°	637.5	633.1	630.5	627.8	627.5	627.7	630.0	632.3	635.9	638.4	640.4
65°	592.2	589.8	589.0	587.1	588.0	588.5	591.4	593.2	596.6	598.7	601.2
67.5°	546.5	545.9	546.5	546.5	548.0	549.4	552.1	554.1	557.1	559.0	561.0
70°	512.7	513.0	514.2	514.4	516.1	517.1	519.4	520.7	523.4	525.0	527.4
72.5°	479.9	479.4	479.7	478.9	479.5	479.2	480.5	481.2	483.4	484.6	487.6
75°	444.9	443.5	443.1	441.4	441.5	440.4	440.9	440.8	442.3	443.0	445.1
77.5°	402.7	400.2	399.0	396.3	396.2	395.2	396.3	396.9	399.6	400.9	403.3
80°	352.1	348.2	346.5	343.4	343.9	343.8	346.3	348.3	351.5	352.0	355.2
82.5°	292.7	288.7	286.9	283.8	284.5	284.5	287.0	287.4	290.1	291.3	294.8
85°	209.6	211.1	206.8	207.1	206.3	208.0	209.6	211.6	213.9	217.7	220.7
87.5°	123.4	122.9	124.4	124.5	126.6	127.8	131.3	133.2	137.0	140.0	145.5
90°	66.0	63.6	64.2	63.1	64.7	63.6	65.1	63.7	65.6	65.4	68.0
92.5°	33.3	31.4	29.1	27.0	24.8	22.9	21.7	21.0	19.8	19.0	17.9
95°	45.2	42.1	39.0	35.9	32.9	29.8	28.7	27.5	26.3	25.2	24.1
97.5°	52.6	49.3	46.0	42.7	39.4	36.0	35.3	34.5	33.8	33.0	32.3
100°	75.8	69.4	63.0	56.5	50.0	43.7	43.1	42.5	41.9	41.3	40.7
102.5°	153.6	138.8	124.2	109.4	94.7	79.9	77.4	74.8	72.2	69.7	67.1
105°	282.0	258.5	234.9	211.5	188.0	164.4	157.4	150.2	143.3	136.2	129.3
107.5°	403.6	380.5	357.6	334.7	311.8	288.8	277.6	266.6	255.4	244.3	233.3
110°	464.5	450.8	437.1	423.2	409.4	395.6	385.0	374.4	363.7	353.2	342.7



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	471.5	464.5	457.6	450.5	443.7	436.7	431.5	426.3	421.3	416.0	410.8
115°	438.5	436.3	434.0	431.8	429.5	427.2	426.8	426.5	426.0	425.6	425.4
117.5°	383.9	384.1	384.3	384.7	385.1	385.4	388.1	390.8	393.5	396.3	399.2
120°	329.6	331.3	333.0	334.8	336.6	338.4	342.0	345.6	349.2	352.9	356.8
122.5°	284.4	285.5	286.7	288.0	289.1	290.3	293.8	297.4	301.0	304.6	308.5
125°	249.8	249.6	249.5	249.4	249.2	249.3	252.1	255.0	257.9	260.9	264.0
127.5°	226.3	225.3	224.3	223.4	222.3	221.5	223.0	224.7	226.3	228.0	229.9
130°	212.1	210.6	208.9	207.3	205.6	204.1	204.6	205.1	205.7	206.4	206.9
132.5°	203.8	202.1	200.2	198.3	196.5	194.6	194.4	194.2	194.0	193.9	193.9
135°	198.3	196.7	194.7	193.0	191.1	189.5	188.9	188.3	187.8	187.2	186.8
137.5°	194.5	193.2	191.7	190.4	188.8	187.5	186.6	185.9	185.1	184.5	183.8
140°	191.9	190.9	189.6	188.4	187.3	186.2	185.4	184.8	184.0	183.6	183.0
142.5°	189.9	189.0	188.2	187.2	186.4	185.5	184.7	184.1	183.6	183.0	182.5
145°	189.4	188.7	188.1	187.5	186.8	186.2	185.6	185.2	184.6	184.2	183.9
147.5°	187.7	187.3	186.8	186.5	186.0	185.5	185.1	184.8	184.3	184.1	183.7
150°	186.1	185.7	185.2	184.9	184.4	184.0	183.7	183.5	183.2	183.1	182.9
152.5°	183.5	183.2	182.8	182.5	182.1	181.7	181.5	181.4	181.1	180.9	180.7
155°	182.0	181.7	181.5	181.2	180.9	180.7	180.4	180.1	179.9	179.6	179.3
157.5°	181.4	181.2	180.9	180.7	180.4	180.1	179.9	179.7	179.4	179.2	178.9
160°	181.3	181.1	180.8	180.6	180.3	180.1	179.7	179.4	179.1	178.8	178.5
162.5°	182.0	181.7	181.4	181.2	180.8	180.5	180.2	180.0	179.7	179.5	179.2
165°	182.7	182.5	182.3	182.0	181.8	181.6	181.2	180.9	180.6	180.4	180.0
167.5°	184.4	184.3	184.0	183.8	183.5	183.3	183.0	182.8	182.5	182.1	181.8
170°	185.7	185.3	185.1	184.8	184.5	184.2	183.9	183.6	183.3	183.1	182.7
172.5°	187.3	187.1	186.8	186.7	186.4	186.2	185.9	185.7	185.5	185.2	184.9
175°	187.3	187.3	187.2	187.0	187.0	186.9	186.8	186.7	186.6	186.5	186.3
177.5°	188.0	188.0	188.0	187.9	187.8	187.8	187.6	187.5	187.5	187.3	187.2
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16024.9	16020.9	16022.8	16015.3	16017.1	16008.0	16007.2	15997.0	15996.0	15986.3	15982.7
5°	16567.5	16558.6	16568.7	16552.9	16556.1	16535.6	16533.9	16507.5	16498.5	16465.4	16451.1
7.5°	17163.8	17160.5	17166.6	17153.5	17153.1	17134.8	17127.3	17103.7	17089.0	17054.3	17032.2
10°	17294.5	17297.5	17292.5	17293.8	17286.7	17284.7	17277.4	17272.8	17260.9	17251.9	17238.7
12.5°	16752.0	16755.3	16734.6	16747.7	16737.3	16761.5	16759.6	16788.0	16792.5	16828.5	16842.2
15°	15498.2	15494.4	15454.7	15479.7	15466.3	15519.4	15531.3	15602.8	15641.0	15732.7	15789.1
17.5°	13604.3	13594.2	13538.3	13568.7	13553.2	13631.5	13657.8	13772.0	13843.4	13991.2	14096.6
20°	11346.7	11327.1	11261.7	11297.4	11281.4	11370.3	11407.9	11546.0	11638.0	11833.8	11973.1
22.5°	9061.0	9030.0	8966.0	8999.3	8984.2	9076.4	9125.2	9263.8	9369.2	9570.2	9732.8
25°	7008.5	6980.9	6918.9	6942.3	6936.7	7014.7	7058.1	7189.1	7292.6	7484.2	7639.3
27.5°	5345.6	5316.8	5260.8	5277.4	5271.7	5338.1	5379.1	5488.6	5577.7	5738.9	5875.2
30°	4091.2	4056.6	4009.2	4018.2	4014.4	4068.2	4106.4	4198.7	4275.0	4411.2	4528.7
32.5°	3135.9	3101.2	3057.6	3061.8	3056.1	3098.3	3129.8	3210.0	3276.5	3392.4	3494.6
35°	2399.4	2440.1	2346.9	2406.0	2344.5	2434.6	2402.2	2452.4	2509.6	2607.2	2692.4
37.5°	1844.6	1816.2	1792.3	1789.8	1789.7	1810.4	1835.2	1883.4	1933.8	2006.6	2081.7
40°	1461.7	1441.9	1426.3	1425.2	1426.3	1441.2	1459.4	1492.8	1529.7	1581.9	1637.1
42.5°	1212.3	1199.2	1189.8	1189.2	1192.1	1202.6	1215.3	1235.1	1259.1	1293.0	1330.9
45°	1049.4	1042.0	1036.7	1036.4	1037.9	1043.3	1050.6	1063.0	1078.2	1099.3	1123.2
47.5°	934.9	933.1	929.9	930.0	928.5	930.7	931.6	938.5	946.6	962.5	993.9
50°	851.6	851.6	849.4	849.2	847.1	847.0	845.2	848.0	851.7	861.6	871.6
52.5°	785.7	785.5	783.1	782.6	780.4	780.3	778.7	779.8	780.3	785.3	791.3
55°	734.2	732.7	729.5	728.5	727.7	728.9	728.4	728.4	727.8	729.8	731.6
57.5°	697.3	695.3	692.3	691.5	691.2	692.8	692.8	692.3	689.4	687.6	684.9
60°	668.2	666.1	662.8	662.0	662.5	664.6	664.5	662.7	658.6	654.9	650.8
62.5°	639.4	638.6	637.0	636.7	636.3	636.7	635.2	633.2	629.2	625.4	620.8
65°	601.0	601.4	600.1	600.3	598.7	598.5	596.3	594.5	590.4	586.8	582.2
67.5°	560.9	561.2	560.2	560.2	559.5	559.6	558.2	556.5	553.0	550.1	546.6
70°	528.0	528.8	528.2	528.4	527.4	527.1	525.0	523.3	519.7	517.3	514.1
72.5°	488.5	490.3	490.2	490.7	489.3	488.5	485.9	483.9	480.7	478.8	476.1
75°	445.9	448.2	448.9	449.9	447.9	446.8	444.1	442.3	439.7	438.6	436.9
77.5°	404.3	406.8	409.3	411.6	408.2	405.4	401.9	399.3	395.4	394.0	391.3
80°	357.6	362.1	367.5	372.0	366.2	360.2	354.5	350.2	345.2	343.2	339.8
82.5°	296.7	301.3	304.4	307.3	303.2	298.9	293.3	289.6	284.1	282.1	278.3
85°	225.4	231.2	233.0	234.5	231.9	229.6	224.4	217.3	213.9	208.6	205.7
87.5°	148.2	151.7	152.4	152.9	151.2	150.1	146.8	143.5	137.6	133.4	128.1
90°	67.2	68.9	66.9	67.2	65.8	66.6	63.8	63.3	59.0	57.9	54.1
92.5°	17.0	15.7	14.9	13.8	15.1	15.8	17.1	17.9	19.0	19.8	21.0
95°	23.0	21.8	20.7	19.6	20.5	21.4	22.3	23.2	24.0	24.9	25.8
97.5°	31.5	30.8	30.0	29.3	29.8	30.3	30.9	31.4	31.9	32.4	33.0
100°	40.1	39.5	38.8	38.2	38.2	38.2	38.2	38.2	38.2	38.2	38.2
102.5°	64.6	62.1	59.4	56.9	58.6	60.3	62.1	63.8	65.6	67.3	69.1
105°	122.2	115.2	108.2	101.2	108.0	114.7	121.6	128.3	135.1	142.0	148.8
107.5°	222.2	211.1	200.1	189.0	201.3	213.7	226.0	238.3	250.7	263.0	275.5
110°	332.1	321.6	311.0	300.5	313.6	326.7	339.8	352.9	366.0	379.1	392.4



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	405.6	400.6	395.4	390.3	398.8	407.1	415.6	424.2	432.6	441.1	449.6
115°	425.0	424.7	424.4	424.1	428.1	432.1	436.1	440.1	444.2	448.1	452.3
117.5°	402.0	404.7	407.6	410.5	411.8	413.0	414.4	415.7	417.0	418.3	419.8
120°	360.5	364.2	368.1	371.9	371.4	370.9	370.3	369.8	369.5	369.1	368.7
122.5°	312.1	315.8	319.7	323.5	322.4	321.3	320.1	319.0	318.1	317.1	316.1
125°	267.2	270.2	273.4	276.6	275.5	274.3	273.2	272.2	271.2	270.3	269.4
127.5°	231.8	233.7	235.5	237.4	236.9	236.4	236.0	235.6	235.2	235.0	234.7
130°	207.8	208.6	209.4	210.3	210.5	210.6	210.9	211.1	211.6	211.9	212.4
132.5°	194.0	194.0	194.2	194.3	194.9	195.5	196.4	197.1	198.0	198.8	199.8
135°	186.5	186.2	186.0	185.8	186.7	187.5	188.5	189.5	190.6	191.8	193.1
137.5°	183.3	182.8	182.4	182.0	182.9	183.8	184.8	185.9	187.0	188.2	189.6
140°	182.6	182.1	181.9	181.4	182.3	183.2	184.2	185.3	186.5	187.6	188.9
142.5°	182.1	181.6	181.3	181.1	181.8	182.6	183.6	184.5	185.6	186.6	187.9
145°	183.5	183.1	183.0	182.7	183.3	183.9	184.5	185.3	186.0	186.7	187.7
147.5°	183.5	183.2	183.1	182.9	183.3	183.8	184.2	184.7	185.4	186.0	186.7
150°	182.9	182.6	182.5	182.5	182.7	182.9	183.3	183.5	184.0	184.3	184.9
152.5°	180.7	180.4	180.4	180.3	180.5	180.8	181.1	181.3	181.7	182.0	182.4
155°	179.2	179.0	178.9	178.7	178.8	178.8	179.0	178.9	179.2	179.2	179.5
157.5°	178.8	178.6	178.4	178.2	178.2	178.0	178.1	178.0	178.0	178.0	178.1
160°	178.2	177.9	177.7	177.4	177.4	177.3	177.4	177.3	177.4	177.5	177.5
162.5°	179.0	178.8	178.6	178.4	178.3	178.0	177.9	177.7	177.6	177.5	177.4
165°	179.6	179.4	179.1	178.7	178.7	178.6	178.5	178.4	178.4	178.3	178.2
167.5°	181.6	181.2	181.1	180.7	180.5	180.2	180.1	179.8	179.6	179.4	179.4
170°	182.5	182.3	182.1	181.8	181.7	181.5	181.4	181.3	181.2	181.1	181.1
172.5°	184.7	184.5	184.3	184.1	184.0	183.8	183.8	183.7	183.6	183.6	183.5
175°	186.3	186.2	186.1	186.0	185.8	185.7	185.7	185.6	185.5	185.3	185.3
177.5°	187.0	187.0	186.9	186.8	186.7	186.7	186.7	186.7	186.7	186.6	186.6
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	15972.4	15968.1	15957.0	15951.7	15941.4	15936.2	15928.3	15923.1	15916.7	15911.9	15909.4
5°	16414.9	16394.4	16353.6	16328.3	16284.2	16255.0	16211.1	16178.9	16133.6	16100.2	16057.3
7.5°	16990.7	16959.3	16906.9	16867.2	16805.3	16758.0	16688.7	16633.2	16556.5	16492.8	16414.5
10°	17225.0	17206.8	17183.3	17157.6	17123.4	17089.8	17042.4	16994.2	16929.8	16865.7	16782.1
12.5°	16878.6	16895.8	16929.8	16945.7	16971.6	16980.5	16992.3	16986.7	16976.2	16950.1	16912.2
15°	15897.4	15969.2	16082.9	16161.5	16271.5	16348.8	16451.1	16517.0	16592.8	16638.2	16681.2
17.5°	14283.3	14422.3	14622.8	14782.7	14997.4	15171.9	15385.8	15553.8	15747.9	15896.7	16055.1
20°	12216.0	12410.6	12687.4	12922.4	13233.4	13497.2	13835.1	14118.2	14448.5	14723.7	15020.9
22.5°	9990.9	10219.9	10537.0	10820.4	11191.8	11523.7	11947.1	12321.4	12767.9	13167.8	13610.2
25°	7891.8	8116.2	8439.2	8732.7	9133.8	9499.2	9961.9	10391.2	10909.3	11392.4	11947.1
27.5°	6091.7	6291.1	6574.9	6839.2	7206.5	7565.3	8034.7	8492.7	9045.5	9564.6	10162.3
30°	4704.5	4866.2	5093.7	5306.2	5601.2	5894.6	6312.7	6736.2	7286.3	7824.3	8437.2
32.5°	3645.8	3783.7	3973.6	4146.2	4373.4	4594.7	4902.6	5240.9	5723.6	6238.8	6831.4
35°	2822.3	2940.2	3101.9	3250.5	3437.4	3613.0	3842.8	4084.3	4452.6	4886.1	5416.3
37.5°	2250.1	2298.2	2413.5	2535.3	2690.5	2834.9	3014.6	3193.2	3456.6	3798.7	4231.8
40°	1711.2	1787.5	1881.5	1977.3	2094.8	2210.6	2407.8	2502.7	2676.3	2921.8	3258.0
42.5°	1380.7	1434.4	1500.5	1567.2	1649.0	1729.7	1829.4	1931.0	2060.7	2227.0	2466.1
45°	1155.4	1190.4	1233.0	1277.4	1331.2	1386.3	1453.1	1522.8	1610.7	1712.9	1858.2
47.5°	1004.9	1024.2	1052.0	1082.4	1119.3	1157.3	1200.8	1245.2	1299.8	1360.4	1443.2
50°	887.4	903.6	925.2	945.4	970.9	1009.9	1027.2	1051.7	1084.5	1120.2	1166.4
52.5°	802.4	813.2	826.7	838.4	854.4	869.1	888.2	905.2	927.9	949.3	979.1
55°	736.2	740.1	747.8	755.2	766.4	776.4	789.5	800.5	815.1	827.9	846.8
57.5°	685.0	685.4	688.9	692.9	700.0	706.3	715.4	722.6	732.6	740.8	752.1
60°	648.3	646.4	647.1	648.4	652.4	656.6	662.3	667.0	673.4	678.0	684.3
62.5°	617.7	614.7	614.0	613.6	615.6	617.1	620.2	622.6	626.1	628.1	631.5
65°	579.1	575.4	574.0	572.4	573.0	572.5	573.7	573.7	575.6	576.0	578.0
67.5°	544.1	541.0	539.2	537.0	536.0	534.4	533.7	532.1	531.8	530.5	530.2
70°	512.1	509.1	507.6	505.5	504.5	502.4	501.1	498.4	496.9	494.5	493.1
72.5°	475.1	473.5	473.0	471.6	471.2	470.1	469.5	467.7	466.7	464.5	463.3
75°	436.5	435.2	435.0	433.6	433.5	432.1	431.8	429.7	428.7	426.7	425.8
77.5°	390.5	388.5	387.9	386.2	386.6	385.9	386.5	385.0	384.4	382.3	381.7
80°	338.6	336.0	335.0	332.8	333.4	332.4	333.4	333.3	334.1	332.4	332.1
82.5°	277.3	274.3	273.8	272.3	273.3	273.4	275.7	274.4	275.0	273.4	274.0
85°	201.7	199.6	196.7	196.3	194.3	196.4	193.7	195.4	192.7	194.6	192.0
87.5°	125.1	120.7	118.4	115.2	114.0	111.1	109.8	107.7	108.3	107.3	107.9
90°	53.8	50.6	50.6	48.3	48.9	47.1	48.1	47.1	48.5	47.5	49.1
92.5°	21.7	22.7	24.4	26.4	28.2	30.0	31.7	33.7	35.4	37.3	39.0
95°	26.7	27.6	30.1	32.5	34.9	37.3	39.7	42.1	44.5	46.9	49.3
97.5°	33.5	34.0	36.4	38.8	41.3	43.7	46.0	48.5	51.0	53.4	55.8
100°	38.2	38.3	45.2	52.1	58.9	65.9	72.6	79.5	86.5	93.3	100.2
102.5°	70.8	72.5	89.9	107.3	124.6	142.0	159.2	176.7	194.0	211.4	228.8
105°	155.6	162.4	188.9	215.3	241.8	268.3	294.6	321.2	347.7	374.2	400.7
107.5°	287.9	300.3	324.3	348.1	372.0	395.9	420.0	443.9	467.9	491.8	515.9
110°	405.5	418.6	434.7	450.7	466.8	482.8	499.0	515.0	531.1	547.2	563.3



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	458.0	466.6	475.9	485.4	494.7	504.2	513.6	523.1	532.4	541.9	551.4
115°	456.4	460.5	464.0	467.9	471.5	475.2	479.0	482.8	486.6	490.4	494.2
117.5°	421.1	422.6	423.2	423.9	424.5	425.3	426.0	426.8	427.6	428.4	429.1
120°	368.3	368.0	367.5	367.0	366.6	366.1	365.8	365.3	365.0	364.6	364.2
122.5°	315.1	314.3	313.9	313.4	313.1	312.7	312.4	312.1	311.8	311.5	311.2
125°	268.5	267.7	268.4	269.1	269.8	270.6	271.3	272.2	273.0	273.8	274.6
127.5°	234.4	234.3	235.8	237.4	239.1	240.7	242.4	244.1	245.8	247.5	249.1
130°	212.9	213.5	215.4	217.5	219.5	221.6	223.6	225.8	227.7	229.9	231.9
132.5°	200.7	201.9	203.7	205.6	207.7	209.7	211.7	213.7	215.7	217.8	219.7
135°	194.4	195.8	197.6	199.4	201.2	203.2	204.9	206.9	208.7	210.6	212.4
137.5°	190.8	192.2	193.7	195.1	196.7	198.3	199.8	201.4	202.8	204.3	205.8
140°	190.1	191.5	192.3	193.4	194.3	195.3	196.1	197.3	198.1	199.2	200.0
142.5°	188.9	190.2	190.7	191.4	192.1	192.9	193.5	194.2	194.8	195.4	196.0
145°	188.5	189.5	189.7	189.9	190.2	190.4	190.6	190.8	190.9	191.1	191.3
147.5°	187.4	188.1	188.1	188.2	188.2	188.3	188.4	188.4	188.3	188.4	188.4
150°	185.4	185.9	185.7	185.7	185.5	185.5	185.3	185.2	184.9	184.9	184.7
152.5°	182.8	183.2	182.9	182.9	182.6	182.4	182.2	182.1	181.8	181.6	181.5
155°	179.5	179.8	179.6	179.6	179.4	179.3	179.1	179.2	179.1	179.0	178.9
157.5°	178.0	178.0	177.9	177.9	177.8	177.7	177.7	177.7	177.7	177.8	177.9
160°	177.5	177.6	177.4	177.4	177.3	177.2	177.2	177.2	177.2	177.4	177.4
162.5°	177.2	177.2	177.0	177.0	176.9	176.9	176.9	177.0	177.0	177.1	177.2
165°	178.3	178.4	178.2	178.1	178.0	177.8	177.8	177.7	177.8	177.8	177.8
167.5°	179.2	179.1	179.1	179.2	179.2	179.3	179.3	179.6	179.6	179.8	179.9
170°	181.1	181.1	181.0	180.9	180.9	180.9	180.9	180.8	180.9	180.9	180.9
172.5°	183.5	183.5	183.4	183.2	183.1	183.0	182.9	182.8	182.7	182.6	182.5
175°	185.2	185.1	184.9	184.9	184.8	184.6	184.6	184.4	184.3	184.3	184.2
177.5°	186.5	186.4	186.3	186.3	186.3	186.2	186.2	186.2	186.2	186.2	186.1
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	15906.2	15906.0	15904.5	15905.2	15905.5	15906.6	15908.0	15909.4	15909.7	15910.8	15911.0
5°	16025.2	15985.9	15956.8	15924.7	15900.7	15879.0	15864.6	15853.1	15848.7	15849.8	15852.5
7.5°	16348.0	16266.8	16199.8	16123.5	16060.1	15992.8	15937.0	15884.0	15845.3	15816.5	15800.4
10°	16702.3	16603.3	16508.7	16398.4	16293.7	16182.1	16081.0	15979.2	15894.3	15820.6	15766.4
12.5°	16859.4	16789.5	16707.7	16603.6	16491.7	16362.9	16232.8	16093.3	15963.7	15843.2	15746.2
15°	16693.0	16693.1	16663.3	16613.4	16535.6	16432.7	16308.8	16163.4	16010.4	15854.2	15711.6
17.5°	16164.7	16264.4	16319.8	16354.9	16344.1	16306.2	16227.3	16115.6	15973.1	15806.8	15632.7
20°	15257.4	15492.5	15660.2	15810.9	15895.4	15951.5	15945.9	15900.4	15798.9	15657.5	15476.2
22.5°	13986.5	14381.1	14692.5	14982.8	15186.5	15352.1	15430.8	15464.3	15418.3	15319.7	15149.5
25°	12442.8	12979.4	13437.3	13881.6	14214.9	14501.3	14673.6	14794.9	14804.5	14753.0	14601.1
27.5°	10727.5	11360.8	11940.3	12530.9	12999.7	13411.5	13681.6	13879.5	13942.3	13934.0	13796.1
30°	9014.4	9679.2	10318.0	11006.7	11586.8	12112.8	12469.8	12737.3	12840.3	12860.1	12727.4
32.5°	7396.6	8052.1	8689.2	9409.1	10047.4	10650.4	11072.2	11389.8	11509.7	11537.9	11392.4
35°	5928.2	6533.1	7138.5	7836.2	8470.9	9095.2	9539.6	9872.3	9984.2	10003.0	9834.6
37.5°	4654.9	5170.3	5697.8	6323.8	6906.7	7493.0	7915.3	8227.9	8309.4	8304.4	8113.8
40°	3582.9	3983.5	4407.3	4922.7	5407.3	5903.1	6259.5	6517.9	6560.8	6529.0	6328.9
42.5°	2694.1	2983.4	3290.8	3675.5	4035.0	4406.0	4665.4	4857.2	4863.4	4813.2	4633.4
45°	2007.1	2289.4	2418.3	2650.9	2882.5	3129.2	3287.5	3406.1	3387.7	3343.6	3207.0
47.5°	1530.0	1638.6	1753.6	1897.9	2032.7	2312.7	2291.9	2482.3	2345.2	2438.7	2232.9
50°	1215.0	1275.7	1337.6	1414.2	1484.6	1557.9	1603.6	1637.7	1633.3	1618.6	1579.2
52.5°	1033.7	1052.5	1083.0	1126.5	1165.9	1205.5	1231.5	1252.7	1253.1	1247.1	1227.2
55°	863.9	887.7	909.7	938.2	986.6	994.1	1031.4	1023.8	1026.8	1016.4	1027.0
57.5°	761.7	775.5	787.9	804.9	818.9	835.3	844.8	854.1	853.2	851.2	841.1
60°	689.3	696.9	703.8	713.7	721.3	730.6	735.1	739.8	738.2	734.8	725.8
62.5°	633.5	638.3	642.1	648.6	653.2	659.0	661.3	663.3	661.3	658.0	650.0
65°	578.4	581.5	583.9	588.8	592.1	596.9	598.9	600.8	598.9	596.4	590.4
67.5°	528.7	529.0	528.7	530.7	531.7	534.7	535.6	536.9	534.8	532.6	527.4
70°	491.0	490.2	489.3	490.1	490.2	491.7	491.9	491.7	489.1	485.3	479.7
72.5°	461.5	461.1	460.4	461.0	461.0	462.3	461.9	461.3	458.2	454.5	448.9
75°	423.7	423.4	422.0	422.0	420.9	421.3	419.7	418.8	415.3	412.3	407.2
77.5°	379.4	378.7	376.6	375.8	373.5	372.6	369.7	368.3	364.8	362.2	358.0
80°	329.8	329.1	326.4	325.0	321.5	319.1	314.9	312.5	308.5	306.0	301.9
82.5°	272.6	272.9	270.3	268.5	263.3	259.5	253.8	250.7	246.2	243.9	239.6
85°	193.9	191.1	192.6	192.5	189.3	186.0	181.3	178.1	174.3	172.0	169.0
87.5°	106.3	107.1	106.2	105.6	103.3	101.6	98.1	96.2	93.3	92.0	89.7
90°	45.5	44.5	41.1	40.1	36.7	34.8	31.0	29.5	25.9	25.2	22.9
92.5°	37.0	35.0	33.0	30.9	29.0	26.9	24.8	22.8	20.8	20.0	19.5
95°	46.4	43.6	40.7	37.7	34.7	31.8	29.0	26.0	23.1	22.5	21.9
97.5°	52.5	48.9	45.5	42.1	38.5	35.1	31.8	28.3	24.8	24.4	24.0
100°	92.2	84.4	76.4	68.4	60.4	52.5	44.5	36.5	28.7	28.3	27.7
102.5°	209.5	190.1	170.9	151.6	132.3	112.9	93.7	74.4	55.1	52.3	49.5
105°	371.5	342.2	313.1	283.9	254.6	225.4	196.3	166.9	137.7	128.3	119.0
107.5°	488.5	460.9	433.6	406.1	378.6	351.2	323.7	296.2	268.7	252.2	235.8
110°	541.5	519.8	498.1	476.3	454.6	432.8	411.0	389.2	367.5	353.2	339.0



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	535.5	519.6	503.8	487.8	472.0	456.0	440.0	424.1	408.1	399.5	390.9
115°	484.7	475.2	465.7	456.2	446.6	437.0	427.5	417.8	408.2	403.8	399.3
117.5°	424.4	419.5	414.8	410.0	405.1	400.2	395.4	390.6	385.6	384.1	382.6
120°	363.0	361.7	360.2	358.8	357.5	356.1	354.6	353.2	351.6	351.9	352.2
122.5°	312.0	312.7	313.4	314.0	314.8	315.4	316.2	316.7	317.4	318.7	320.1
125°	276.3	277.8	279.5	281.0	282.5	284.0	285.7	287.1	288.7	290.0	291.4
127.5°	251.0	252.7	254.5	256.2	257.9	259.6	261.4	263.0	264.8	266.0	267.4
130°	233.5	235.0	236.6	238.1	239.7	241.3	242.8	244.4	245.8	246.9	247.9
132.5°	221.2	222.6	224.0	225.3	226.8	228.1	229.6	231.0	232.5	233.3	234.2
135°	213.5	214.5	215.7	216.7	217.9	219.0	220.1	221.2	222.4	223.1	223.7
137.5°	206.8	207.7	208.7	209.5	210.5	211.3	212.4	213.3	214.4	214.7	215.3
140°	200.9	201.8	202.8	203.8	204.7	205.6	206.8	207.9	209.0	209.4	209.9
142.5°	196.9	197.5	198.3	199.0	199.8	200.6	201.5	202.3	203.2	203.7	204.1
145°	192.1	192.9	193.9	194.7	195.5	196.5	197.6	198.6	199.6	200.0	200.4
147.5°	189.2	189.8	190.7	191.4	192.2	192.9	193.9	194.7	195.8	196.1	196.4
150°	185.6	186.3	187.1	187.8	188.7	189.5	190.5	191.5	192.5	192.9	193.3
152.5°	182.3	183.1	183.9	184.8	185.8	186.7	187.8	188.8	189.8	190.1	190.6
155°	179.8	180.5	181.4	182.3	183.2	184.1	185.2	186.1	187.1	187.6	188.0
157.5°	178.6	179.2	180.1	180.9	181.7	182.5	183.5	184.3	185.3	185.7	186.0
160°	178.1	178.8	179.5	180.2	180.9	181.7	182.5	183.3	184.0	184.4	184.7
162.5°	177.8	178.6	179.3	179.9	180.7	181.5	182.2	183.0	183.7	184.0	184.4
165°	178.4	178.9	179.5	180.0	180.5	181.0	181.6	182.1	182.8	183.1	183.5
167.5°	180.4	180.7	181.2	181.6	182.1	182.4	183.0	183.4	183.9	184.2	184.6
170°	181.3	181.7	182.0	182.4	182.9	183.2	183.6	184.0	184.5	184.8	185.1
172.5°	182.7	182.9	183.2	183.4	183.6	183.9	184.2	184.5	184.7	185.2	185.4
175°	184.4	184.4	184.6	184.7	184.7	184.9	185.2	185.3	185.5	185.7	185.9
177.5°	186.2	186.3	186.3	186.4	186.6	186.7	186.7	186.8	187.0	187.2	187.4
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	15910.5	15910.3	15909.8	15909.1	15908.4	15908.8	15909.5	15911.3	15914.6	15919.2	15925.1
5°	15854.7	15857.9	15859.8	15860.0	15858.4	15857.3	15858.9	15863.3	15872.1	15886.8	15906.9
7.5°	15796.1	15800.1	15806.3	15810.9	15811.7	15810.6	15810.9	15817.8	15834.0	15862.8	15903.3
10°	15733.5	15721.6	15728.0	15739.4	15748.6	15750.2	15751.3	15759.4	15783.2	15826.8	15891.6
12.5°	15675.8	15638.2	15630.9	15641.3	15655.1	15659.6	15658.3	15661.8	15689.6	15747.3	15837.8
15°	15599.8	15529.0	15504.8	15507.5	15524.6	15530.7	15526.3	15519.4	15546.6	15616.9	15733.9
17.5°	15477.0	15362.7	15318.2	15316.3	15336.3	15341.6	15330.6	15309.4	15336.1	15423.9	15569.2
20°	15290.0	15121.5	15037.7	15024.4	15046.1	15039.8	15017.9	14985.7	15020.8	15127.5	15300.4
22.5°	14954.0	14740.5	14597.3	14551.2	14577.1	14559.9	14527.8	14486.7	14533.4	14654.7	14847.2
25°	14405.0	14158.2	13962.3	13852.4	13873.0	13842.0	13807.2	13757.3	13813.0	13952.3	14164.1
27.5°	13598.0	13312.9	13070.2	12888.2	12894.9	12854.2	12814.1	12749.5	12819.0	12983.8	13222.8
30°	12524.9	12195.1	11899.4	11652.1	11629.9	11590.5	11549.4	11464.8	11551.7	11749.0	12028.3
32.5°	11177.3	10811.1	10469.5	10156.8	10097.8	10059.2	10022.6	9925.2	10039.1	10269.1	10590.1
35°	9601.3	9211.3	8840.9	8483.7	8386.0	8347.5	8315.5	8222.1	8364.2	8614.5	8961.1
37.5°	7871.5	7473.0	7105.2	6739.0	6600.9	6548.7	6525.4	6464.3	6628.2	6875.7	7223.7
40°	6095.6	5725.1	5395.3	5071.9	4914.4	4834.5	4822.3	4811.2	4969.7	5184.4	5500.4
42.5°	4434.4	4135.4	3881.1	3633.9	3491.2	3382.1	3382.1	3415.2	3557.8	3718.8	3962.3
45°	3067.4	2866.8	2704.7	2539.6	2583.7	2366.1	2493.9	2428.4	2498.9	2602.6	2760.9
47.5°	2108.5	1999.0	1910.0	1817.7	1750.4	1686.2	1691.8	1733.3	1799.7	1861.2	1943.6
50°	1536.7	1481.0	1435.6	1387.7	1354.3	1325.9	1327.5	1345.5	1380.4	1412.8	1455.9
52.5°	1204.1	1173.4	1148.7	1122.2	1104.7	1090.6	1091.3	1100.1	1119.0	1137.4	1162.2
55°	992.6	988.8	956.7	933.0	923.9	914.5	916.2	919.6	932.4	943.3	959.7
57.5°	831.7	817.3	807.7	795.2	789.4	782.9	784.3	785.6	794.2	801.4	813.3
60°	718.2	708.0	701.2	692.7	688.8	684.7	685.6	686.4	691.9	696.6	705.1
62.5°	642.7	633.7	627.7	621.1	618.5	615.7	616.3	616.5	619.9	623.5	629.8
65°	584.9	577.7	572.7	567.1	564.3	561.3	561.6	561.6	564.5	567.1	571.9
67.5°	523.7	518.2	515.1	510.6	508.6	505.7	505.6	504.7	506.5	507.5	510.9
70°	474.6	469.1	465.0	460.7	458.3	455.7	455.8	455.8	458.0	460.3	464.4
72.5°	444.3	439.0	435.4	431.5	429.3	427.1	426.7	426.4	428.0	429.3	432.1
75°	404.1	399.9	397.7	394.2	392.4	389.9	389.5	388.3	389.1	389.3	391.4
77.5°	355.4	351.3	349.6	346.1	344.6	341.6	341.4	340.1	340.7	340.3	342.0
80°	299.8	296.1	295.2	292.3	291.6	288.9	288.5	286.9	287.4	286.2	286.7
82.5°	237.8	234.5	233.8	231.1	231.1	228.6	228.4	226.0	226.0	224.0	220.7
85°	167.5	165.1	164.1	161.8	161.1	159.2	158.2	155.9	155.1	153.6	153.1
87.5°	88.4	86.9	85.5	84.5	82.4	79.0	78.7	76.3	76.5	74.8	74.9
90°	22.3	20.2	19.8	17.9	17.2	15.7	15.3	15.4	15.8	16.0	16.5
92.5°	18.8	18.1	17.5	16.7	16.0	15.4	14.7	15.4	16.0	16.7	17.5
95°	21.3	20.7	20.2	19.6	19.0	18.4	17.8	18.4	19.0	19.6	20.2
97.5°	23.7	23.3	22.9	22.5	22.2	21.8	21.4	21.9	22.3	22.6	23.0
100°	27.3	26.8	26.4	25.9	25.5	25.0	24.6	25.1	25.6	26.0	26.5
102.5°	46.7	43.9	41.2	38.3	35.5	32.8	30.0	32.8	35.5	38.4	41.3
105°	109.5	100.2	90.8	81.4	71.9	62.6	53.2	62.6	71.9	81.4	90.9
107.5°	219.2	202.7	186.2	169.6	153.0	136.4	119.9	136.5	153.1	169.7	186.3
110°	324.8	310.6	296.2	282.0	267.8	253.5	239.1	253.6	267.9	282.1	296.4



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	382.2	373.5	365.0	356.3	347.5	338.9	330.1	339.0	347.7	356.6	365.3
115°	394.7	390.2	385.7	381.2	376.6	372.0	367.4	372.2	376.9	381.6	386.2
117.5°	381.1	379.6	378.0	376.5	374.8	373.3	371.6	373.4	375.1	377.0	378.6
120°	352.4	352.7	353.0	353.3	353.5	353.7	353.8	353.9	353.9	353.9	353.8
122.5°	321.4	322.7	323.8	325.1	326.4	327.5	328.6	327.7	326.8	325.9	324.8
125°	292.7	294.1	295.3	296.7	298.0	299.3	300.3	299.6	298.7	297.7	296.4
127.5°	268.7	269.9	271.1	272.3	273.5	274.5	275.6	275.0	274.1	273.2	272.3
130°	248.9	250.0	250.8	251.8	252.8	253.6	254.3	253.9	253.4	253.0	252.2
132.5°	234.9	235.8	236.6	237.4	238.0	238.7	239.1	239.0	238.7	238.5	238.0
135°	224.3	225.0	225.5	226.2	226.6	227.0	227.3	227.4	227.3	227.3	227.0
137.5°	215.6	216.2	216.5	216.8	217.0	217.3	217.3	217.7	217.8	218.1	218.0
140°	210.3	210.7	211.2	211.4	211.8	212.0	212.1	212.4	212.6	212.7	212.7
142.5°	204.6	205.0	205.4	205.7	206.0	206.2	206.3	206.6	206.8	206.9	207.0
145°	200.6	201.0	201.3	201.6	201.7	201.8	201.8	202.2	202.4	202.7	202.9
147.5°	196.8	197.1	197.3	197.5	197.7	197.7	197.8	198.1	198.4	198.6	198.8
150°	193.8	194.2	194.5	194.8	195.1	195.3	195.4	195.7	195.9	195.9	196.0
152.5°	191.0	191.3	191.6	191.9	192.2	192.3	192.4	192.7	193.0	193.1	193.2
155°	188.4	188.8	189.1	189.5	189.7	190.0	190.2	190.5	190.6	190.8	190.9
157.5°	186.4	186.8	187.1	187.4	187.6	188.0	188.2	188.5	188.7	188.9	189.1
160°	185.1	185.5	185.8	186.1	186.4	186.7	186.9	187.2	187.5	187.6	187.9
162.5°	184.7	185.1	185.3	185.6	185.9	186.2	186.5	186.8	187.0	187.2	187.4
165°	183.8	184.2	184.5	184.9	185.3	185.7	186.0	186.2	186.3	186.5	186.6
167.5°	184.8	185.3	185.6	186.0	186.1	186.5	186.9	187.0	187.1	187.3	187.3
170°	185.4	185.8	186.0	186.3	186.6	186.8	187.0	187.1	187.3	187.4	187.5
172.5°	185.7	186.1	186.4	186.7	187.0	187.3	187.6	187.7	187.7	187.6	187.6
175°	186.1	186.4	186.7	186.9	187.2	187.4	187.7	187.5	187.6	187.5	187.5
177.5°	187.8	188.1	188.4	188.6	188.9	189.1	189.4	189.2	189.1	188.8	188.6
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	15933.7	15941.7	15953.9	15964.9	15981.6	15994.7	16014.4	16029.4	16051.6	16066.1	16090.2
5°	15935.1	15966.3	16007.3	16047.3	16095.4	16139.1	16193.3	16239.6	16294.0	16338.5	16394.3
7.5°	15957.6	16017.8	16089.8	16162.5	16244.6	16321.4	16407.9	16486.3	16571.8	16644.4	16723.5
10°	15974.3	16067.0	16173.2	16280.0	16392.5	16497.0	16602.5	16693.7	16778.9	16849.0	16910.9
12.5°	15951.8	16079.5	16215.7	16347.3	16472.4	16580.5	16671.3	16741.4	16789.8	16822.7	16830.3
15°	15875.1	16028.9	16177.0	16308.1	16411.8	16491.9	16533.3	16552.6	16531.9	16497.3	16421.4
17.5°	15732.0	15894.2	16026.6	16130.0	16184.8	16206.6	16172.2	16112.5	15995.9	15866.3	15679.4
20°	15469.7	15620.6	15716.8	15773.2	15758.5	15704.2	15574.6	15417.1	15184.2	14936.0	14608.4
22.5°	15009.4	15141.5	15192.6	15196.9	15107.4	14971.4	14737.8	14467.6	14100.2	13718.2	13248.4
25°	14318.6	14434.2	14442.3	14396.9	14233.1	14012.9	13669.8	13287.6	12788.4	12279.3	11690.6
27.5°	13381.7	13492.5	13465.4	13380.7	13153.2	12858.7	12419.3	11925.7	11310.1	10708.9	10057.6
30°	12204.0	12322.5	12290.6	12181.9	11911.4	11563.2	11046.2	10472.7	9789.3	9147.2	8487.2
32.5°	10794.5	10944.4	10922.4	10819.1	10536.8	10164.3	9603.3	8995.0	8295.7	7663.0	7020.9
35°	9192.5	9374.6	9384.0	9316.4	9054.4	8686.1	8132.2	7543.4	6873.6	6276.6	5683.5
37.5°	7466.5	7677.6	7721.0	7702.7	7485.6	7160.5	6655.8	6127.6	5534.3	5011.0	4503.8
40°	5731.0	5944.6	6018.8	6040.8	5880.6	5628.7	5214.5	4788.2	4304.5	3880.5	3477.7
42.5°	4148.3	4337.7	4409.3	4454.4	4354.3	4186.4	3884.3	3574.7	3220.3	2914.5	2621.3
45°	2881.1	3015.1	3069.6	3114.9	3060.4	2965.8	2775.0	2581.2	2347.3	2147.5	1958.3
47.5°	2014.3	2088.2	2124.1	2146.1	2125.1	2075.7	1971.8	1859.7	1727.6	1610.9	1498.6
50°	1493.0	1532.4	1551.2	1563.9	1548.5	1521.1	1464.9	1403.8	1331.3	1265.2	1200.5
52.5°	1183.2	1205.8	1217.0	1223.8	1214.9	1198.2	1165.5	1129.3	1085.8	1044.9	1023.4
55°	996.8	995.6	1021.4	1009.0	1021.4	993.6	987.7	948.0	911.8	886.4	858.9
57.5°	822.0	833.7	838.7	844.2	840.6	835.6	821.6	807.4	788.3	772.4	755.4
60°	711.5	721.2	726.7	732.1	731.8	729.9	721.8	713.4	701.5	691.9	681.6
62.5°	635.5	643.8	649.2	654.4	654.9	654.1	648.1	642.1	634.1	628.1	620.9
65°	575.6	581.5	585.1	589.4	589.1	587.9	582.5	577.6	570.9	566.8	561.5
67.5°	513.0	517.4	520.2	524.2	525.0	525.2	522.2	519.8	516.6	515.4	513.7
70°	468.4	473.7	478.4	483.3	486.0	487.3	486.0	484.9	483.0	482.2	480.8
72.5°	434.7	439.2	442.7	447.3	449.9	451.7	450.7	450.0	448.4	448.2	447.2
75°	392.8	395.9	397.9	401.4	402.7	404.4	403.7	404.1	403.5	404.8	404.8
77.5°	342.5	344.8	345.7	348.2	348.4	350.5	350.9	353.4	355.1	358.9	360.9
80°	285.7	287.3	287.3	289.8	290.9	294.4	296.0	300.0	301.9	305.2	305.5
82.5°	222.0	220.3	222.0	220.9	224.2	228.0	228.6	232.0	232.8	234.9	233.2
85°	151.8	151.7	150.2	150.5	149.5	149.9	149.4	150.0	149.4	149.5	147.9
87.5°	72.7	73.4	71.7	72.3	70.7	71.4	70.1	71.1	69.6	69.8	67.4
90°	16.7	17.2	17.6	18.0	18.6	19.8	21.1	22.3	23.8	24.9	26.3
92.5°	18.1	18.9	19.6	20.2	20.9	22.9	24.9	27.0	29.1	31.1	33.1
95°	20.7	21.3	21.9	22.6	23.2	26.1	29.1	32.0	34.9	37.9	40.9
97.5°	23.5	23.9	24.2	24.6	25.0	28.5	32.0	35.4	38.8	42.4	45.8
100°	27.0	27.5	27.9	28.5	28.9	36.8	44.8	52.8	60.7	68.8	76.8
102.5°	44.0	46.8	49.6	52.6	55.4	74.8	94.1	113.4	132.6	152.0	171.3
105°	100.3	109.7	119.3	128.6	138.0	167.3	196.7	225.9	255.1	284.3	313.6
107.5°	202.9	219.5	236.1	252.7	269.2	296.7	324.3	351.7	379.3	406.8	434.3
110°	310.9	325.1	339.4	353.8	368.1	389.9	411.8	433.6	455.4	477.3	499.1



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	374.0	382.7	391.5	400.1	408.8	424.9	440.9	457.0	473.0	488.9	504.9
115°	390.9	395.3	400.1	404.6	409.3	418.9	428.5	438.2	447.8	457.4	467.1
117.5°	380.3	382.0	383.6	385.1	386.7	391.7	396.7	401.6	406.5	411.5	416.4
120°	353.8	353.6	353.5	353.3	353.0	354.5	356.1	357.6	359.2	360.6	362.0
122.5°	323.8	322.6	321.5	320.3	319.1	318.4	317.9	317.2	316.7	316.1	315.5
125°	295.4	294.2	293.0	291.8	290.5	289.1	287.7	286.2	284.6	283.2	281.7
127.5°	271.4	270.3	269.3	268.1	267.0	265.3	263.7	261.9	260.3	258.7	257.0
130°	251.6	250.8	250.0	249.0	248.3	246.8	245.4	243.9	242.4	240.9	239.4
132.5°	237.6	237.0	236.5	235.7	235.1	233.7	232.5	231.1	229.7	228.3	227.1
135°	226.8	226.4	226.2	225.7	225.2	224.1	223.2	222.1	221.1	220.1	219.1
137.5°	218.1	217.9	217.8	217.5	217.4	216.4	215.6	214.7	213.9	213.0	212.2
140°	212.7	212.6	212.5	212.3	212.1	211.2	210.3	209.3	208.5	207.6	206.6
142.5°	206.9	206.9	206.8	206.6	206.4	205.6	205.1	204.3	203.6	202.9	202.2
145°	202.9	202.9	203.0	202.8	202.9	202.0	201.3	200.3	199.7	198.8	198.1
147.5°	199.0	199.0	199.1	199.1	199.2	198.4	197.9	197.1	196.6	195.7	195.2
150°	196.1	196.1	196.0	196.0	195.9	195.3	194.7	193.9	193.4	192.6	192.1
152.5°	193.3	193.4	193.4	193.4	193.5	192.9	192.2	191.5	190.8	190.1	189.5
155°	191.0	191.1	191.1	191.1	191.1	190.5	189.9	189.3	188.7	188.0	187.4
157.5°	189.2	189.3	189.4	189.5	189.5	189.0	188.5	187.9	187.4	186.9	186.4
160°	188.0	188.2	188.3	188.3	188.5	188.1	187.7	187.2	186.8	186.3	185.7
162.5°	187.6	187.8	187.9	187.9	188.1	187.7	187.3	186.9	186.4	185.9	185.4
165°	186.7	186.7	186.8	186.8	186.8	186.5	186.3	186.0	185.7	185.4	185.1
167.5°	187.4	187.4	187.5	187.5	187.5	187.3	187.3	186.9	186.7	186.5	186.3
170°	187.6	187.6	187.6	187.7	187.7	187.5	187.2	187.0	187.0	186.5	186.3
172.5°	187.5	187.5	187.4	187.4	187.3	187.2	187.0	186.9	186.8	186.7	186.5
175°	187.4	187.3	187.2	187.2	187.0	187.0	187.0	187.0	186.9	186.9	186.8
177.5°	188.5	188.4	188.1	187.9	187.8	187.7	187.7	187.7	187.7	187.6	187.5
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16105.3	16005.8	15992.6	15999.6	16016.3	16022.4	16040.3	16045.2	16063.3	16067.7	16085.1
5°	16437.5	16306.0	16312.6	16344.3	16392.1	16420.7	16467.7	16492.3	16537.2	16557.6	16598.2
7.5°	16787.9	16684.7	16716.9	16770.2	16835.7	16881.0	16937.5	16974.3	17022.9	17053.2	17092.2
10°	16960.0	16931.7	16967.1	17009.1	17046.4	17075.7	17099.6	17118.8	17131.3	17143.1	17148.3
12.5°	16829.1	16872.9	16878.9	16874.8	16850.1	16831.2	16788.8	16760.0	16708.8	16677.7	16616.7
15°	16343.7	16439.9	16386.7	16305.9	16187.9	16089.4	15950.4	15846.8	15702.1	15603.9	15458.6
17.5°	15491.9	15613.4	15474.5	15287.8	15050.2	14847.0	14594.0	14393.1	14141.5	13958.5	13723.7
20°	14292.7	14406.2	14158.5	13849.0	13481.6	13172.3	12807.6	12516.6	12177.7	11925.7	11621.5
22.5°	12799.7	12880.5	12531.5	12114.3	11646.1	11259.7	10823.7	10474.8	10088.2	9799.9	9475.5
25°	11147.8	11169.6	10751.0	10270.2	9748.5	9314.3	8848.8	8482.1	8087.6	7795.5	7477.2
27.5°	9480.6	9448.6	8996.1	8486.4	7937.5	7486.2	7032.2	6688.6	6343.1	6079.9	5805.7
30°	7907.0	7829.4	7359.6	6835.8	6302.9	5898.5	5521.6	5245.6	4970.7	4762.0	4541.9
32.5°	6464.0	6354.6	5897.3	5406.4	4957.5	4645.3	4365.8	4157.0	3935.1	3758.8	3574.0
35°	5185.8	5069.3	4664.2	4248.0	3908.3	3678.1	3458.4	3287.1	3098.7	2950.0	2789.5
37.5°	4088.9	3993.3	3654.0	3326.6	3069.6	2891.2	2711.3	2571.2	2415.5	2350.1	2178.6
40°	3156.6	3089.9	2824.5	2583.1	2390.1	2306.4	2123.6	1992.9	1876.4	1780.5	1687.6
42.5°	2462.2	2438.6	2180.3	1992.1	1856.2	1750.6	1648.8	1566.2	1485.7	1419.6	1357.1
45°	1806.9	1788.1	1673.5	1564.9	1472.2	1398.5	1329.7	1272.9	1220.2	1176.6	1136.9
47.5°	1407.1	1401.0	1335.0	1267.6	1209.3	1161.9	1117.3	1079.5	1044.6	1015.5	1006.0
50°	1144.4	1143.6	1104.9	1063.3	1021.7	994.4	965.8	943.5	921.1	903.7	885.2
52.5°	972.4	968.1	942.0	916.3	891.7	873.7	855.4	841.2	826.4	815.6	804.1
55°	837.1	841.5	826.4	811.0	795.6	784.4	771.7	762.3	752.1	745.2	738.4
57.5°	743.1	749.0	741.1	732.3	722.9	715.6	706.8	700.3	693.5	689.1	685.2
60°	674.8	681.2	678.0	673.6	667.9	663.4	657.9	654.2	649.8	647.4	645.2
62.5°	616.8	624.8	623.7	621.6	617.9	615.5	612.4	610.7	607.9	606.8	605.8
65°	559.0	568.0	567.8	566.8	564.7	564.0	562.1	561.7	560.3	560.9	560.7
67.5°	513.5	521.2	523.0	524.3	524.2	524.7	524.5	525.3	525.3	526.4	527.1
70°	480.7	486.0	487.3	488.7	489.1	490.1	490.1	490.8	490.6	491.5	491.7
72.5°	447.5	454.7	455.9	457.0	457.0	458.0	457.5	457.3	455.9	455.6	454.6
75°	406.1	415.3	417.3	418.6	418.8	419.7	418.4	417.7	415.3	414.4	412.7
77.5°	363.0	372.5	373.9	374.4	373.6	373.8	371.2	369.5	366.5	365.3	363.6
80°	306.8	320.9	322.1	321.2	318.9	318.5	316.0	314.4	310.8	309.6	308.1
82.5°	233.5	249.9	252.2	253.3	251.5	251.9	249.5	248.5	245.2	244.7	242.5
85°	147.4	163.9	166.6	166.2	164.4	164.0	162.5	163.1	162.8	163.7	164.2
87.5°	67.7	83.6	87.5	86.3	86.1	85.0	82.4	83.3	84.9	85.9	86.0
90°	27.6	33.8	34.9	34.2	32.0	31.1	29.0	28.5	26.6	25.9	24.1
92.5°	35.2	37.2	39.3	37.4	35.6	33.8	32.0	30.1	28.4	26.4	24.7
95°	43.8	46.6	49.5	47.1	44.7	42.3	39.9	37.5	35.1	32.7	30.3
97.5°	49.2	52.7	56.0	53.6	51.2	48.6	46.2	43.9	41.5	39.0	36.6
100°	84.8	92.4	100.4	93.5	86.6	79.7	72.8	66.0	59.1	52.3	45.4
102.5°	190.5	209.7	228.9	211.6	194.2	176.9	159.5	142.2	124.8	107.4	90.1
105°	342.8	371.8	401.0	374.3	347.9	321.4	294.9	268.5	242.0	215.4	189.0
107.5°	461.7	488.8	516.1	492.1	468.2	444.2	420.1	396.2	372.3	348.2	324.4
110°	520.8	542.0	563.7	547.5	531.4	515.3	499.3	483.0	467.0	450.9	434.9



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	520.8	536.1	551.8	542.2	532.8	523.4	513.9	504.4	495.0	485.6	476.2
115°	476.6	485.3	494.7	490.8	487.0	483.2	479.4	475.6	471.8	468.1	464.4
117.5°	421.3	425.1	429.7	428.9	428.1	427.3	426.5	425.7	425.0	424.3	423.6
120°	363.5	363.8	365.0	365.3	365.7	366.0	366.4	366.7	367.1	367.5	368.0
122.5°	314.8	313.0	312.0	312.2	312.6	312.8	313.1	313.4	313.8	314.1	314.5
125°	280.2	277.4	275.5	274.6	273.8	273.0	272.2	271.3	270.6	269.9	269.2
127.5°	255.3	252.2	250.1	248.5	246.9	245.1	243.5	241.8	240.1	238.3	236.8
130°	238.0	234.9	233.1	231.0	229.0	226.8	224.8	222.9	220.8	218.7	216.6
132.5°	225.7	222.7	221.0	219.1	217.1	215.1	213.2	211.1	209.1	207.0	205.1
135°	217.9	215.2	213.8	211.9	210.3	208.4	206.4	204.7	202.9	200.9	199.3
137.5°	211.2	208.6	207.2	205.7	204.4	202.9	201.5	200.0	198.5	196.9	195.5
140°	205.6	202.8	201.5	200.7	199.9	198.9	198.0	197.2	196.3	195.3	194.3
142.5°	201.5	198.8	197.7	197.1	196.6	195.8	195.4	194.8	194.2	193.4	192.8
145°	197.2	194.1	192.9	192.7	192.7	192.5	192.4	192.2	192.1	191.9	191.8
147.5°	194.4	191.4	190.1	190.1	190.1	190.1	190.2	190.1	190.2	190.2	190.2
150°	191.2	187.8	186.4	186.6	186.7	186.9	187.0	187.2	187.4	187.5	187.7
152.5°	188.7	184.4	182.8	183.0	183.3	183.4	183.7	183.9	184.2	184.4	184.7
155°	186.6	182.0	180.3	180.3	180.3	180.5	180.5	180.7	180.8	181.0	181.2
157.5°	185.6	180.8	179.2	179.1	179.0	179.1	179.1	179.1	179.2	179.3	179.4
160°	185.2	180.4	178.8	178.7	178.6	178.6	178.6	178.5	178.6	178.7	178.8
162.5°	184.7	180.1	178.6	178.4	178.2	178.2	178.3	178.1	178.2	178.2	178.3
165°	184.6	180.6	179.1	179.0	179.1	179.0	179.1	179.1	179.2	179.3	179.5
167.5°	185.9	182.2	181.1	181.0	180.8	180.6	180.6	180.4	180.4	180.3	180.3
170°	186.1	183.0	182.1	182.1	182.2	182.0	182.0	182.1	182.1	182.0	182.1
172.5°	186.3	184.1	183.4	183.5	183.7	183.7	183.9	183.9	184.1	184.2	184.4
175°	186.7	185.5	185.2	185.1	185.1	185.2	185.3	185.3	185.4	185.5	185.7
177.5°	187.5	187.1	186.9	186.9	186.9	186.9	186.9	186.9	186.9	187.0	187.0
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16088.3	16107.1	16105.7	16123.1	16122.3	16138.8	16135.4	16149.8	16146.4	16158.6	16151.5
5°	16616.0	16651.7	16663.5	16695.6	16702.4	16731.1	16731.7	16754.6	16751.9	16769.8	16760.3
7.5°	17115.3	17148.6	17164.4	17189.4	17201.8	17222.6	17230.7	17247.7	17251.8	17261.9	17261.6
10°	17157.3	17157.2	17165.1	17161.6	17168.5	17164.5	17173.1	17170.0	17182.6	17179.3	17188.8
12.5°	16590.5	16534.2	16513.7	16463.1	16452.0	16408.8	16411.8	16384.0	16397.5	16380.3	16409.5
15°	15372.1	15241.7	15177.2	15063.7	15028.0	14938.3	14931.1	14871.6	14887.6	14856.4	14902.0
17.5°	13571.8	13366.3	13253.5	13087.8	13022.1	12895.2	12869.7	12793.0	12804.9	12766.3	12821.4
20°	11425.2	11176.9	11034.7	10843.0	10757.6	10606.3	10566.2	10480.5	10491.2	10452.7	10515.0
22.5°	9254.1	8994.2	8833.7	8632.8	8523.7	8381.5	8338.8	8252.6	8257.6	8221.4	8281.3
25°	7259.0	7009.9	6854.0	6671.6	6576.9	6446.5	6401.6	6324.3	6328.6	6298.9	6352.6
27.5°	5615.4	5411.0	5280.6	5127.6	5042.8	4935.5	4891.8	4826.8	4826.6	4804.8	4849.7
30°	4388.1	4217.5	4100.5	3967.3	3887.5	3790.8	3748.5	3690.3	3687.8	3672.3	3708.0
32.5°	3435.8	3284.1	3177.2	3060.1	2988.5	2905.5	2865.5	2818.6	2814.4	2800.4	2829.7
35°	2670.9	2543.1	2451.3	2352.6	2359.8	2237.5	2257.7	2162.6	2136.9	2131.2	2153.0
37.5°	2064.3	1965.3	1890.8	1816.8	1766.8	1715.0	1687.1	1662.1	1659.3	1656.9	1672.1
40°	1615.8	1546.5	1492.3	1441.6	1407.2	1375.6	1358.1	1344.4	1341.1	1339.2	1348.5
42.5°	1307.8	1260.9	1226.0	1195.1	1174.2	1157.0	1147.4	1139.8	1137.2	1137.2	1142.7
45°	1104.9	1076.5	1054.0	1034.7	1021.4	1027.3	1010.0	1019.0	1007.1	1019.4	1011.2
47.5°	973.0	948.9	934.9	921.3	913.1	906.7	906.9	907.0	909.6	910.0	912.6
50°	871.3	857.2	847.6	838.9	834.6	831.2	832.4	833.3	835.8	836.0	837.9
52.5°	795.9	786.7	780.9	775.5	773.6	771.7	772.5	772.1	773.3	772.7	774.3
55°	734.7	730.3	728.5	726.5	726.8	726.2	726.6	724.7	723.5	721.9	723.4
57.5°	684.3	683.7	685.0	685.8	688.1	688.9	689.4	687.2	685.1	683.2	684.3
60°	645.6	646.6	649.6	652.1	655.4	657.0	657.9	656.6	655.0	653.4	654.4
62.5°	607.3	608.8	612.5	615.3	619.3	621.3	623.7	623.8	624.4	623.8	624.5
65°	563.0	564.8	568.2	570.5	574.2	576.0	578.4	578.8	580.1	579.8	580.9
67.5°	529.2	530.9	533.7	535.9	539.2	541.1	543.1	543.2	543.8	543.6	544.8
70°	493.3	494.1	496.6	498.4	501.8	503.7	506.1	506.8	508.2	508.5	509.6
72.5°	455.0	454.7	456.1	456.9	459.4	460.9	463.9	465.7	468.1	468.8	469.6
75°	413.2	412.9	414.6	415.3	417.4	419.0	422.4	424.6	428.4	430.0	429.5
77.5°	364.9	365.7	369.0	370.8	373.6	375.7	380.0	383.5	390.5	393.6	390.5
80°	310.8	311.7	315.1	316.8	320.6	322.9	327.8	331.9	338.2	339.6	337.8
82.5°	244.4	244.6	247.6	248.9	253.8	257.3	263.6	266.8	270.7	270.1	269.6
85°	166.6	168.8	172.7	176.6	182.4	188.2	194.0	198.9	195.4	200.8	194.7
87.5°	89.0	88.8	94.0	93.2	101.5	106.2	111.4	113.8	116.5	115.9	116.0
90°	23.7	22.4	22.4	21.1	21.5	20.0	20.8	19.5	20.6	18.9	21.5
92.5°	22.8	21.9	20.9	20.0	18.9	18.1	17.0	15.9	15.0	14.0	15.0
95°	27.8	26.9	26.0	25.0	24.1	23.3	22.4	21.5	20.6	19.7	20.8
97.5°	34.2	33.7	33.2	32.6	32.1	31.6	31.1	30.5	29.9	29.4	30.1
100°	38.5	38.5	38.5	38.5	38.4	38.4	38.4	38.4	38.4	38.4	39.0
102.5°	72.6	70.9	69.2	67.5	65.8	64.0	62.3	60.5	58.8	57.1	59.6
105°	162.5	155.8	148.9	142.1	135.3	128.5	121.8	114.9	108.2	101.4	108.4
107.5°	300.5	288.1	275.7	263.3	250.9	238.5	226.2	213.9	201.5	189.2	200.3
110°	418.8	405.6	392.5	379.4	366.2	353.2	340.0	326.9	313.8	300.7	311.2



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	466.9	458.2	449.7	441.2	432.7	424.3	415.8	407.3	399.0	390.5	395.6
115°	460.7	456.6	452.5	448.4	444.5	440.3	436.3	432.3	428.3	424.3	424.6
117.5°	422.9	421.5	420.0	418.6	417.2	416.0	414.6	413.3	412.0	410.8	407.9
120°	368.5	368.7	369.0	369.5	369.9	370.3	370.6	371.2	371.7	372.2	368.4
122.5°	314.8	315.7	316.5	317.5	318.5	319.6	320.5	321.7	322.8	323.9	320.1
125°	268.4	269.2	270.0	271.0	271.8	272.8	273.8	275.1	276.1	277.3	274.0
127.5°	235.2	235.4	235.5	235.8	236.1	236.4	236.8	237.4	237.9	238.4	236.4
130°	214.6	214.0	213.5	213.0	212.6	212.3	212.0	211.7	211.6	211.4	210.5
132.5°	203.1	202.1	201.1	200.2	199.3	198.5	197.7	197.1	196.4	195.8	195.5
135°	197.4	196.0	194.7	193.4	192.2	191.2	190.1	189.2	188.3	187.4	187.7
137.5°	193.9	192.7	191.3	190.1	188.9	187.9	186.7	185.8	184.8	183.9	184.3
140°	193.5	192.1	190.8	189.6	188.5	187.4	186.4	185.5	184.3	183.6	183.9
142.5°	192.2	191.2	190.0	188.8	187.7	186.8	185.9	184.9	184.0	183.4	183.6
145°	191.5	190.7	189.8	188.9	188.2	187.6	186.8	186.2	185.6	185.2	185.4
147.5°	190.2	189.6	188.8	188.3	187.6	187.2	186.6	186.2	185.7	185.5	185.5
150°	187.8	187.5	187.0	186.7	186.2	185.9	185.6	185.3	184.9	184.8	184.7
152.5°	184.9	184.6	184.2	183.9	183.5	183.3	183.0	182.8	182.6	182.4	182.4
155°	181.4	181.2	181.1	180.9	180.8	180.8	180.7	180.7	180.7	180.6	180.7
157.5°	179.5	179.5	179.5	179.6	179.6	179.7	179.6	179.8	179.8	180.0	180.1
160°	179.0	179.0	178.9	178.9	178.9	178.9	178.8	178.9	178.9	179.0	179.2
162.5°	178.4	178.6	178.6	178.7	178.9	179.0	179.2	179.5	179.6	179.8	180.0
165°	179.6	179.5	179.5	179.5	179.6	179.6	179.6	179.9	179.9	180.0	180.3
167.5°	180.2	180.4	180.4	180.5	180.6	180.8	181.0	181.2	181.4	181.7	181.9
170°	182.1	182.1	182.1	182.1	182.1	182.2	182.3	182.3	182.4	182.5	182.7
172.5°	184.5	184.5	184.4	184.5	184.4	184.5	184.5	184.5	184.5	184.6	184.7
175°	185.6	185.9	186.0	186.0	186.1	186.2	186.3	186.3	186.4	186.5	186.5
177.5°	187.0	187.0	187.0	187.0	187.0	187.1	187.1	187.1	187.1	187.0	187.1
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16163.4	16155.3	16163.6	16155.2	16163.6	16153.5	16160.3	16149.4	16152.2	16140.9	16143.8
5°	16774.5	16761.6	16768.5	16751.7	16753.5	16731.1	16730.7	16704.7	16697.8	16668.2	16655.2
7.5°	17268.7	17264.5	17266.9	17256.1	17254.9	17239.6	17232.3	17210.8	17197.3	17170.0	17151.4
10°	17190.5	17203.1	17206.4	17219.2	17221.8	17234.6	17237.3	17250.0	17252.6	17262.1	17262.2
12.5°	16408.1	16450.8	16461.1	16513.9	16536.2	16596.6	16629.0	16695.6	16735.3	16801.7	16842.5
15°	14900.7	14974.8	15004.2	15107.5	15164.6	15285.0	15360.6	15498.9	15596.6	15743.5	15848.3
17.5°	12826.2	12929.6	12976.2	13116.2	13207.5	13385.3	13513.4	13724.3	13885.8	14120.1	14306.0
20°	10525.7	10640.6	10704.0	10863.6	10971.4	11179.0	11339.0	11598.3	11814.3	12111.3	12365.3
22.5°	8300.0	8409.4	8479.8	8642.2	8763.5	8980.1	9158.9	9432.5	9674.7	10009.4	10313.8
25°	6372.8	6473.1	6536.7	6683.6	6797.5	6996.6	7167.3	7430.4	7667.4	8003.1	8315.4
27.5°	4872.0	4955.9	5017.3	5142.5	5243.0	5411.8	5558.5	5775.9	5980.0	6270.5	6548.5
30°	3729.9	3804.3	3864.0	3973.0	4066.2	4212.6	4341.5	4524.2	4693.2	4924.2	5145.4
32.5°	2850.3	2914.4	2967.5	3063.0	3147.5	3279.2	3395.5	3555.5	3700.6	3896.6	4078.6
35°	2173.2	2299.3	2290.3	2422.1	2443.3	2537.8	2641.5	2781.5	2910.0	3076.5	3231.4
37.5°	1686.7	1722.3	1760.2	1818.4	1879.6	1965.6	2053.2	2224.2	2287.0	2412.9	2541.2
40°	1360.2	1384.1	1409.3	1448.6	1491.4	1552.0	1615.8	1697.4	1781.0	1883.2	1987.4
42.5°	1150.0	1163.5	1179.4	1202.6	1229.0	1267.4	1310.1	1365.4	1423.6	1495.4	1568.8
45°	1027.5	1021.0	1025.7	1038.2	1054.0	1077.4	1104.4	1138.6	1176.5	1223.0	1272.6
47.5°	913.1	915.8	917.2	923.9	932.4	948.2	964.5	987.7	1032.6	1046.3	1073.4
50°	837.8	839.0	838.6	842.0	846.3	856.5	867.1	882.9	898.5	919.4	939.3
52.5°	774.5	776.3	776.0	778.2	780.6	787.0	793.7	804.9	815.2	828.4	839.8
55°	724.6	727.0	727.9	729.8	730.9	734.4	737.0	742.3	746.7	754.2	761.1
57.5°	686.1	689.4	691.1	691.7	690.4	690.2	689.2	690.4	691.3	695.3	699.1
60°	656.0	658.6	659.0	658.6	656.2	654.3	651.5	650.6	650.1	652.1	654.2
62.5°	624.3	625.3	624.6	623.8	620.9	619.2	616.3	615.2	614.2	615.6	616.7
65°	580.5	581.3	580.5	580.1	577.5	576.1	573.6	572.8	571.4	571.7	571.5
67.5°	545.0	545.8	545.2	544.5	542.7	541.8	540.0	538.8	537.1	536.5	535.3
70°	509.5	510.2	509.1	508.5	506.5	505.7	504.0	503.7	502.3	502.0	500.7
72.5°	468.8	468.8	467.4	467.0	465.5	465.5	464.7	465.4	465.4	466.1	465.8
75°	427.0	426.4	424.7	424.4	423.3	423.8	423.0	424.0	424.2	425.7	425.9
77.5°	385.2	383.1	379.7	378.1	375.9	375.5	374.2	375.1	374.8	376.7	377.4
80°	332.5	329.8	325.5	323.5	320.8	320.4	319.1	320.4	319.8	321.9	323.3
82.5°	265.5	263.1	258.7	257.0	254.0	254.3	253.0	254.3	254.1	257.1	258.9
85°	196.4	194.8	190.2	186.2	181.6	178.9	176.3	175.9	175.1	176.3	177.4
87.5°	113.4	112.0	108.4	106.0	98.1	98.4	95.2	95.0	94.3	93.6	95.2
90°	21.2	23.4	23.2	25.3	25.3	27.6	27.9	30.2	30.1	32.4	32.6
92.5°	15.9	17.0	18.0	18.9	19.9	20.9	21.8	22.8	24.9	26.9	29.2
95°	21.9	23.1	24.2	25.3	26.4	27.6	28.8	29.9	33.0	36.0	39.1
97.5°	31.0	31.6	32.4	33.1	33.9	34.6	35.4	36.1	39.6	42.9	46.2
100°	39.7	40.3	40.9	41.5	42.1	42.7	43.3	43.9	50.3	56.8	63.2
102.5°	62.3	64.8	67.3	69.9	72.4	75.0	77.6	80.1	94.9	109.6	124.3
105°	115.4	122.4	129.5	136.4	143.5	150.4	157.6	164.6	188.1	211.6	235.1
107.5°	211.3	222.4	233.5	244.6	255.7	266.8	277.8	289.0	311.9	335.0	357.8
110°	321.8	332.3	342.9	353.5	364.0	374.5	385.2	395.8	409.7	423.5	437.3



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	400.8	405.8	411.1	416.2	421.5	426.6	431.9	437.1	444.1	450.9	458.0
115°	425.0	425.3	425.7	425.9	426.3	426.7	427.2	427.7	429.9	432.2	434.5
117.5°	405.1	402.3	399.5	396.7	393.9	391.3	388.6	386.0	385.6	385.2	385.0
120°	364.8	361.0	357.3	353.4	349.8	346.1	342.6	339.0	337.3	335.5	333.8
122.5°	316.4	312.7	309.0	305.2	301.7	298.1	294.6	291.2	290.0	288.9	287.7
125°	270.9	267.9	264.9	261.7	258.9	256.0	253.2	250.3	250.4	250.5	250.7
127.5°	234.6	232.8	231.0	229.1	227.5	225.9	224.3	222.7	223.7	224.8	225.7
130°	209.8	209.1	208.4	207.7	207.2	206.6	206.1	205.6	207.3	208.9	210.6
132.5°	195.5	195.5	195.5	195.6	195.7	195.9	196.3	196.4	198.3	200.1	201.9
135°	187.9	188.2	188.7	189.1	189.7	190.2	190.8	191.4	193.2	194.9	196.8
137.5°	184.8	185.4	185.9	186.6	187.3	187.9	188.8	189.5	190.9	192.3	193.7
140°	184.3	184.6	185.2	185.8	186.3	186.9	187.6	188.2	189.5	190.5	191.7
142.5°	184.1	184.3	184.8	185.4	186.0	186.5	187.1	187.6	188.5	189.3	190.4
145°	185.6	185.9	186.3	186.6	187.0	187.5	187.9	188.3	188.9	189.5	190.2
147.5°	185.7	185.9	186.2	186.5	186.9	187.2	187.4	187.7	188.2	188.6	189.0
150°	184.8	185.1	185.3	185.3	185.6	185.9	186.1	186.3	186.7	187.0	187.3
152.5°	182.6	182.7	182.8	182.9	183.1	183.3	183.4	183.6	184.0	184.3	184.6
155°	180.9	181.1	181.3	181.5	181.8	181.9	182.2	182.4	182.7	182.9	183.2
157.5°	180.3	180.4	180.7	180.9	181.1	181.3	181.6	181.7	182.0	182.2	182.4
160°	179.5	179.8	180.0	180.4	180.7	180.9	181.2	181.6	181.8	182.0	182.2
162.5°	180.2	180.4	180.7	180.9	181.1	181.3	181.5	181.7	182.1	182.3	182.6
165°	180.6	180.8	181.2	181.4	181.8	182.1	182.3	182.7	182.8	183.1	183.3
167.5°	182.2	182.4	182.8	183.0	183.3	183.6	183.8	184.1	184.3	184.4	184.7
170°	183.0	183.2	183.4	183.7	184.0	184.1	184.4	184.7	185.1	185.3	185.5
172.5°	184.9	185.1	185.3	185.5	185.7	185.9	186.1	186.3	186.6	186.8	186.9
175°	186.5	186.5	186.6	186.6	186.7	186.7	186.8	186.9	186.9	187.0	187.0
177.5°	187.2	187.2	187.3	187.4	187.5	187.5	187.6	187.7	187.7	187.7	187.7
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16132.5	16133.2	16120.2	16119.5	16107.3	16105.8	16093.9	16090.2	16080.6	16077.1	16067.3
5°	16622.0	16606.1	16569.5	16547.9	16511.8	16487.8	16448.6	16423.1	16385.3	16356.7	16318.7
7.5°	17117.0	17092.4	17051.2	17017.9	16967.7	16927.6	16868.9	16820.6	16757.1	16702.0	16635.1
10°	17262.2	17258.3	17247.8	17232.6	17209.3	17183.0	17143.0	17101.2	17045.5	16984.9	16910.6
12.5°	16904.9	16943.5	16996.1	17027.3	17065.2	17081.9	17097.4	17093.5	17083.3	17052.6	17009.6
15°	16000.0	16108.4	16252.0	16363.2	16491.1	16584.1	16686.8	16750.9	16814.7	16844.1	16862.2
17.5°	14560.6	14765.8	15023.1	15236.4	15482.5	15680.2	15896.8	16060.0	16227.6	16347.8	16456.5
20°	12711.5	13008.8	13372.9	13694.5	14068.3	14393.2	14749.3	15041.6	15343.1	15578.8	15801.8
22.5°	10706.0	11059.1	11499.2	11906.8	12388.8	12822.0	13310.7	13736.1	14180.3	14551.3	14910.1
25°	8733.8	9121.2	9602.2	10057.1	10603.0	11106.9	11686.4	12216.7	12790.7	13289.0	13781.4
27.5°	6932.9	7313.2	7804.4	8288.6	8865.9	9402.8	10023.8	10607.9	11261.5	11864.2	12480.8
30°	5452.8	5775.3	6215.8	6684.7	7254.1	7800.5	8428.2	9028.9	9708.9	10367.1	11061.6
32.5°	4320.1	4565.8	4912.1	5308.7	5833.9	6354.0	6951.8	7531.7	8201.4	8866.1	9588.4
35°	3431.0	3622.6	3886.7	4196.0	4640.9	5089.2	5618.0	6145.3	6770.1	7400.9	8103.0
37.5°	2705.5	2861.0	3067.8	3300.2	3657.0	4025.0	4458.5	4895.7	5438.5	5997.7	6634.1
40°	2112.7	2238.6	2399.6	2573.0	2842.4	3125.9	3461.2	3800.2	4236.3	4693.4	5220.0
42.5°	1659.7	1752.5	1866.2	1993.0	2244.3	2394.9	2622.2	2867.5	3188.0	3519.8	3915.7
45°	1332.9	1396.3	1475.1	1560.0	1676.8	1804.4	1960.1	2123.4	2428.0	2577.4	2818.1
47.5°	1113.1	1155.6	1205.8	1259.3	1328.1	1402.4	1494.7	1589.2	1711.3	1837.8	1986.2
50°	965.1	1008.3	1025.5	1053.3	1093.0	1135.5	1187.6	1239.7	1305.1	1371.5	1447.9
52.5°	855.2	869.3	888.0	905.7	930.3	978.6	994.3	1021.4	1058.1	1094.1	1134.2
55°	771.3	780.5	792.7	803.3	818.2	832.5	853.1	871.2	895.7	917.3	943.9
57.5°	706.0	711.8	720.3	727.3	737.0	744.9	757.1	766.8	781.0	793.2	809.3
60°	658.6	662.4	668.2	672.7	678.9	683.0	689.0	693.6	701.1	707.3	716.3
62.5°	619.8	621.8	625.5	628.2	632.1	634.3	637.4	639.4	643.5	646.7	651.7
65°	573.3	573.7	576.2	577.3	580.5	581.6	584.2	585.1	588.4	590.8	595.2
67.5°	535.2	534.2	534.2	533.3	533.7	532.9	533.1	532.1	533.5	534.2	537.6
70°	500.4	499.0	498.4	496.8	496.3	494.7	494.2	492.8	492.6	492.1	493.3
72.5°	466.5	466.1	466.2	465.0	464.9	463.8	463.9	463.2	463.9	464.3	465.9
75°	427.5	427.6	428.4	427.4	427.7	426.7	427.1	426.2	426.7	426.5	428.0
77.5°	380.1	381.2	383.2	382.8	383.5	382.4	382.9	381.7	382.0	381.2	381.8
80°	326.7	329.0	331.9	331.8	332.9	332.2	333.2	332.1	332.5	331.1	330.8
82.5°	263.3	265.4	268.3	268.4	271.0	271.5	274.3	274.2	276.1	275.0	274.1
85°	180.0	181.4	184.0	185.5	188.1	189.7	192.5	193.6	191.6	195.3	192.4
87.5°	94.0	97.5	95.6	100.1	99.1	103.6	102.6	107.0	106.0	109.8	109.3
90°	35.5	36.1	39.1	39.8	43.5	44.5	46.2	44.9	46.4	45.2	46.7
92.5°	31.2	33.4	35.5	37.6	39.8	42.0	40.0	37.9	36.0	34.1	32.1
95°	42.2	45.3	48.3	51.5	54.5	57.6	54.3	51.1	47.7	44.4	41.2
97.5°	49.5	52.8	56.1	59.4	62.8	66.1	62.2	58.2	54.3	50.4	46.6
100°	69.6	76.0	82.4	88.8	95.4	101.7	94.5	87.2	79.9	72.5	65.3
102.5°	139.0	153.8	168.5	183.2	197.9	212.7	197.2	181.7	166.3	150.8	135.3
105°	258.7	282.3	305.8	329.3	352.8	376.6	351.5	326.4	301.3	276.3	251.1
107.5°	380.8	403.8	426.9	449.7	472.7	495.8	470.4	445.0	419.6	394.1	368.8
110°	451.2	464.9	478.9	492.7	506.6	520.5	502.0	483.5	464.9	446.4	427.7



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	464.8	471.9	478.8	485.9	492.9	500.0	486.6	473.5	460.2	447.0	433.8
115°	436.8	439.0	441.3	443.8	446.1	448.3	439.5	430.5	421.7	412.9	403.8
117.5°	384.7	384.6	384.2	384.1	383.7	383.5	378.6	373.7	368.7	363.7	358.8
120°	332.1	330.4	328.7	327.0	325.3	323.5	321.6	319.6	317.5	315.5	313.3
122.5°	286.6	285.5	284.3	283.2	282.0	280.8	280.2	279.5	278.8	278.0	277.3
125°	250.8	250.9	251.0	251.1	251.2	251.3	251.0	250.7	250.4	250.1	249.7
127.5°	226.7	227.7	228.7	229.6	230.6	231.5	231.5	231.5	231.6	231.6	231.6
130°	212.1	213.8	215.4	216.8	218.3	220.0	219.9	219.8	219.7	219.6	219.5
132.5°	203.8	205.5	207.3	209.3	210.9	212.6	212.5	212.4	212.1	212.0	211.8
135°	198.5	200.2	201.8	203.6	205.2	206.8	206.5	206.3	206.1	205.9	205.6
137.5°	195.1	196.5	197.8	199.2	200.5	201.8	201.5	201.4	201.0	200.8	200.6
140°	192.8	193.9	194.9	196.1	197.1	198.2	197.9	197.5	197.2	196.8	196.4
142.5°	191.1	192.0	192.7	193.7	194.4	195.3	194.6	194.1	193.6	193.0	192.4
145°	190.7	191.4	191.9	192.5	192.9	193.5	192.8	192.1	191.4	190.8	190.0
147.5°	189.4	189.8	190.1	190.5	190.7	191.1	190.4	189.7	189.1	188.4	187.6
150°	187.6	188.1	188.3	188.6	188.9	189.2	188.5	187.7	187.0	186.2	185.5
152.5°	184.9	185.4	185.6	185.8	186.1	186.4	185.6	185.1	184.1	183.4	182.7
155°	183.3	183.6	183.7	184.0	184.0	184.2	183.5	183.1	182.4	181.8	181.2
157.5°	182.6	182.8	183.0	183.1	183.3	183.4	183.0	182.5	182.0	181.6	181.0
160°	182.4	182.5	182.7	182.8	183.0	183.1	182.6	182.4	182.0	181.6	181.1
162.5°	182.9	183.2	183.4	183.5	183.8	184.0	183.6	183.2	182.7	182.2	181.7
165°	183.4	183.6	183.8	184.0	184.0	184.2	183.8	183.6	183.3	183.0	182.6
167.5°	184.8	185.1	185.2	185.4	185.5	185.6	185.2	185.1	184.6	184.3	184.0
170°	185.7	185.9	186.2	186.3	186.5	186.6	186.4	186.2	185.9	185.7	185.4
172.5°	187.1	187.3	187.4	187.5	187.6	187.9	187.6	187.3	187.1	186.8	186.5
175°	187.0	187.1	187.2	187.2	187.2	187.3	187.1	186.9	186.6	186.4	186.2
177.5°	187.7	187.7	187.7	187.7	187.7	187.7	187.6	187.4	187.3	187.1	186.9
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5	15963.5
2.5°	16063.8	16056.8	16052.4	16046.6	16043.1	16038.7	16035.4	16032.6	16030.4	16028.3	16026.8
5°	16289.7	16253.8	16225.9	16195.8	16170.9	16146.2	16127.1	16111.4	16100.5	16092.3	16087.5
7.5°	16577.3	16511.6	16453.1	16391.6	16336.4	16282.1	16235.4	16195.2	16164.9	16145.3	16133.4
10°	16834.2	16746.2	16659.1	16567.5	16480.7	16396.5	16318.7	16250.2	16196.2	16160.1	16139.2
12.5°	16949.3	16874.3	16785.4	16685.9	16579.5	16471.8	16366.9	16272.2	16192.8	16139.5	16108.7
15°	16847.9	16817.1	16756.8	16679.6	16578.6	16467.3	16344.0	16228.2	16121.6	16052.5	16012.4
17.5°	16518.0	16560.9	16556.4	16526.8	16454.3	16360.5	16234.9	16104.9	15971.6	15879.1	15828.7
20°	15961.4	16096.4	16164.9	16200.1	16171.5	16110.8	15997.1	15865.0	15709.6	15589.0	15515.5
22.5°	15179.2	15417.6	15566.1	15674.8	15697.9	15677.1	15576.7	15451.2	15278.0	15133.1	15024.4
25°	14172.2	14521.5	14756.2	14940.3	15011.8	15030.3	14944.8	14819.9	14626.9	14458.1	14308.7
27.5°	12986.2	13440.0	13753.5	14000.8	14112.4	14160.8	14082.1	13954.7	13726.3	13524.7	13329.8
30°	11651.0	12189.3	12566.8	12863.2	12999.4	13063.3	12979.8	12837.5	12571.8	12329.2	12083.6
32.5°	10221.9	10811.0	11222.2	11544.3	11679.1	11739.2	11629.9	11470.2	11163.1	10877.3	10590.9
35°	8725.5	9320.2	9734.9	10048.4	10161.3	10197.7	10057.9	9873.3	9532.9	9219.3	8906.9
37.5°	7198.8	7752.0	8129.0	8410.3	8480.2	8486.5	8318.1	8114.2	7756.5	7447.2	7136.3
40°	5685.2	6151.8	6456.1	6681.3	6705.6	6683.9	6500.9	6295.7	5961.0	5683.9	5411.0
42.5°	4259.5	4611.7	4828.9	4983.1	4974.0	4931.2	4763.4	4586.9	4310.9	4099.9	3885.1
45°	3038.1	3270.4	3397.3	3487.6	3458.5	3417.8	3287.2	3163.5	2975.9	2839.6	2695.2
47.5°	2110.6	2387.9	2339.7	2516.1	2364.1	2464.6	2255.3	2140.0	2040.5	1968.1	1886.4
50°	1511.0	1574.5	1605.2	1626.2	1615.1	1599.7	1562.0	1528.4	1482.9	1449.8	1411.2
52.5°	1166.9	1198.7	1216.0	1228.7	1226.2	1220.6	1204.2	1189.2	1167.9	1153.9	1136.9
55°	988.4	988.9	1020.9	1007.2	1027.5	1003.7	1013.0	986.7	990.9	968.3	953.2
57.5°	821.3	834.3	840.2	845.9	844.3	843.3	837.0	833.7	826.6	824.5	819.3
60°	722.5	729.3	730.7	733.3	731.1	730.3	725.4	723.6	718.8	717.9	714.5
62.5°	654.7	658.2	658.2	658.2	655.3	652.6	647.1	644.2	640.1	639.3	637.3
65°	598.1	601.8	602.4	603.1	601.1	598.9	594.1	590.9	586.7	585.1	582.9
67.5°	539.7	543.5	544.9	546.9	545.7	545.3	541.9	540.7	537.9	537.3	535.2
70°	493.9	495.5	495.4	495.3	492.7	490.4	486.5	484.7	481.8	481.2	479.4
72.5°	466.7	467.8	467.1	466.1	462.6	459.2	454.8	451.4	447.6	445.3	442.5
75°	428.2	429.7	428.7	428.1	425.1	422.9	419.2	417.4	414.7	414.0	412.2
77.5°	381.1	381.8	380.2	380.1	377.8	376.4	373.6	373.1	371.2	371.2	369.5
80°	328.6	328.1	325.7	325.2	322.9	322.3	320.2	320.4	318.7	319.4	318.1
82.5°	270.4	268.9	265.7	264.7	262.0	261.8	260.4	261.5	260.6	262.0	261.2
85°	193.7	194.1	192.7	192.7	192.0	192.2	192.1	193.0	193.1	194.4	194.3
87.5°	108.1	109.6	109.3	110.7	110.6	112.2	112.8	115.1	115.4	117.6	117.6
90°	45.6	47.2	46.0	47.9	47.4	49.6	49.5	51.8	51.5	53.3	52.5
92.5°	30.1	28.2	26.2	24.2	23.2	22.2	21.4	20.2	19.4	18.3	17.3
95°	37.8	34.5	31.2	27.8	26.7	25.5	24.4	23.3	22.1	21.0	19.9
97.5°	42.7	38.7	34.8	30.9	29.9	29.0	27.8	26.8	25.9	24.9	23.9
100°	57.9	50.7	43.4	36.0	35.2	34.4	33.5	32.7	31.9	31.1	30.2
102.5°	119.9	104.4	88.9	73.4	70.4	67.5	64.6	61.5	58.5	55.6	52.7
105°	226.1	200.9	175.8	150.6	142.7	134.7	126.7	118.8	110.7	102.7	94.7
107.5°	343.3	317.7	292.3	266.8	252.1	237.3	222.6	207.8	193.0	178.2	163.5
110°	409.3	390.6	372.0	353.4	341.5	329.6	317.7	305.8	294.1	282.1	270.2



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	420.6	407.2	393.9	380.5	375.1	369.8	364.5	359.0	353.8	348.2	342.9
115°	394.9	386.0	377.0	367.9	366.2	364.2	362.4	360.5	358.6	356.7	354.8
117.5°	353.9	348.8	343.8	338.7	339.0	339.4	339.8	340.1	340.3	340.5	340.9
120°	311.2	309.2	307.1	304.9	306.7	308.4	310.1	311.7	313.3	314.8	316.4
122.5°	276.5	275.7	275.0	274.1	276.3	278.3	280.3	282.3	284.1	286.0	287.8
125°	249.4	249.1	248.8	248.3	250.5	252.6	254.6	256.6	258.4	260.2	262.1
127.5°	231.6	231.6	231.6	231.5	233.1	234.5	236.0	237.3	238.8	240.0	241.3
130°	219.4	219.1	219.1	219.0	220.3	221.7	223.1	224.3	225.5	226.6	227.7
132.5°	211.7	211.4	211.3	211.1	212.2	213.2	214.1	214.9	215.9	216.6	217.2
135°	205.4	205.1	204.9	204.5	205.6	206.5	207.5	208.3	209.1	209.7	210.4
137.5°	200.4	200.0	199.8	199.5	200.4	201.2	202.1	202.7	203.4	204.0	204.6
140°	195.9	195.5	195.2	194.8	195.5	196.4	197.1	197.8	198.4	198.9	199.4
142.5°	191.8	191.2	190.8	190.1	190.7	191.2	191.7	192.2	192.7	193.1	193.4
145°	189.3	188.6	187.9	187.1	187.6	188.0	188.5	188.9	189.1	189.3	189.7
147.5°	187.0	186.2	185.5	184.7	185.3	185.5	185.8	186.0	186.4	186.5	186.7
150°	184.6	183.8	183.0	182.2	182.5	182.7	183.0	183.2	183.4	183.5	183.7
152.5°	182.0	181.1	180.4	179.6	179.8	179.9	180.1	180.2	180.4	180.4	180.6
155°	180.6	179.9	179.3	178.5	178.7	178.8	178.8	179.0	179.0	179.1	179.0
157.5°	180.5	179.9	179.4	178.8	178.8	178.9	178.8	178.7	178.7	178.7	178.5
160°	180.7	180.2	179.8	179.2	179.2	179.2	179.1	179.0	179.0	178.8	178.7
162.5°	181.2	180.6	180.1	179.5	179.5	179.5	179.4	179.3	179.3	179.1	178.9
165°	182.2	181.9	181.5	181.0	180.9	180.8	180.7	180.5	180.4	180.1	180.0
167.5°	183.6	183.2	182.8	182.3	182.3	182.3	182.3	182.2	182.1	181.9	181.9
170°	185.1	184.6	184.3	183.9	183.8	183.8	183.6	183.5	183.4	183.2	183.1
172.5°	186.1	185.8	185.5	184.9	184.9	184.9	184.8	184.7	184.5	184.4	184.4
175°	185.9	185.6	185.3	185.1	184.9	184.9	184.8	184.8	184.7	184.6	184.5
177.5°	186.7	186.6	186.3	186.2	186.2	186.2	186.1	186.0	186.0	186.0	185.9
180°	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	15963.5	15963.5
2.5°	16025.3	16024.5
5°	16085.0	16084.0
7.5°	16130.3	16130.0
10°	16135.6	16138.3
12.5°	16103.4	16105.7
15°	16009.4	16013.7
17.5°	15829.6	15835.3
20°	15520.0	15526.0
22.5°	15018.6	15021.0
25°	14289.5	14279.1
27.5°	13295.5	13277.7
30°	12032.0	12014.8
32.5°	10525.5	10514.8
35°	8829.8	8822.9
37.5°	7044.4	7030.5
40°	5311.2	5270.8
42.5°	3791.0	3720.2
45°	2619.9	2535.9
47.5°	1828.9	1777.1
50°	1386.3	1369.5
52.5°	1129.6	1125.6
55°	953.1	951.4
57.5°	820.5	819.9
60°	716.3	716.1
62.5°	638.6	638.9
65°	583.9	584.0
67.5°	535.7	535.4
70°	480.1	479.7
72.5°	441.7	441.0
75°	412.2	411.7
77.5°	370.0	369.4
80°	319.0	318.1
82.5°	262.3	261.4
85°	195.7	195.7
87.5°	119.8	119.7
90°	54.2	53.1
92.5°	16.4	15.5
95°	18.8	17.7
97.5°	23.0	22.0
100°	29.4	28.6
102.5°	49.7	46.8
105°	86.8	78.8
107.5°	148.6	133.9
110°	258.3	246.4



TEST NUMBER: P1444370
CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	337.4	332.0
115°	352.6	350.7
117.5°	341.0	341.2
120°	317.7	319.2
122.5°	289.5	291.3
125°	263.9	265.6
127.5°	242.4	243.5
130°	228.5	229.5
132.5°	217.8	218.3
135°	210.8	211.3
137.5°	205.0	205.3
140°	199.7	200.0
142.5°	193.6	193.8
145°	189.8	189.9
147.5°	186.5	186.7
150°	183.6	183.7
152.5°	180.4	180.5
155°	179.0	178.9
157.5°	178.3	178.2
160°	178.5	178.4
162.5°	178.7	178.7
165°	179.7	179.4
167.5°	181.6	181.6
170°	182.9	182.8
172.5°	184.2	184.1
175°	184.4	184.4
177.5°	185.9	185.8
180°	186.8	186.8



TEST NUMBER: P1444370
 CATALOG NUMBER: EHBR1-18-UNV-TA-L840-UPL12

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.47	15.55	14.96	16.00	16.49	12.85	13.93	13.34	14.38	14.87
	3H	16.02	16.98	16.52	17.45	17.98	15.28	16.24	15.78	16.71	17.24
	4H	16.81	17.71	17.34	18.20	18.75	16.39	17.29	16.92	17.78	18.33
	6H	17.58	18.41	18.12	18.91	19.47	17.44	18.26	17.97	18.77	19.33
	8H	17.90	18.67	18.45	19.20	19.77	17.88	18.65	18.43	19.18	19.75
	12H	18.14	18.89	18.69	19.40	19.99	18.23	18.97	18.78	19.49	20.08
4H	2H	14.85	15.74	15.37	16.23	16.78	13.56	14.46	14.09	14.94	15.49
	3H	16.72	17.46	17.26	18.00	18.57	16.19	16.93	16.72	17.46	18.03
	4H	17.73	18.39	18.28	18.94	19.54	17.44	18.11	17.99	18.65	19.26
	6H	18.68	19.26	19.26	19.83	20.45	18.62	19.20	19.20	19.77	20.39
	8H	19.07	19.60	19.65	20.17	20.80	19.12	19.66	19.71	20.23	20.86
	12H	19.38	19.85	19.98	20.45	21.08	19.54	20.01	20.14	20.61	21.24
8H	4H	18.10	18.64	18.69	19.21	19.84	17.86	18.39	18.44	18.96	19.59
	6H	19.26	19.70	19.87	20.31	20.95	19.21	19.64	19.82	20.26	20.90
	8H	19.77	20.16	20.40	20.79	21.43	19.81	20.20	20.44	20.83	21.48
	12H	20.20	20.54	20.82	21.15	21.87	20.34	20.68	20.96	21.29	22.01
12H	4H	18.15	18.62	18.75	19.22	19.85	17.91	18.39	18.51	18.99	19.62
	6H	19.37	19.76	20.00	20.39	21.04	19.32	19.71	19.95	20.34	20.99
	8H	19.96	20.30	20.59	20.91	21.63	19.99	20.33	20.62	20.94	21.66

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-1

Test Date: 07/30/2025

Luminaire Tested: EHBR-60-L840-N

Data in this report applies to families of products including EHBR-60-L840-N

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-472-1
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/05/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Metalux
 Catalog Number: **EHBR-60-L840-N**
 Description: Elevate Round Highbay at, 60000 lumens, 4000K 80CRI LEDs with N lens

Spectral Parameters

CCT (K): 3898
 CIE u': 0.2263
 CIE v': 0.5052
 Duv: 0.0013
 CIE x: 0.3861
 CIE y: 0.3831
 CIE z: 0.2308
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 578
 Purity: 30.85729
 Rf: 80.7
 Rg: 102.1

CRI (Ra):	82.1		
R1:	84.4	R9:	38.5
R2:	83.5	R10:	58.9
R3:	80.8	R11:	83.6
R4:	83.9	R12:	54.2
R5:	82.1	R13:	82.8
R6:	77.3	R14:	88.2
R7:	86.4	R15:	81.2
R8:	78.3		



Test Conditions
 Stabilization Time: 42M
 Operation Time: 1H 42M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-1

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-1

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



CCT = 3898K
 CIE x = 0.3861
 CIE y = 0.3831
 Duv = 0.0013

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-1

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	60	NR	620	277	NR	750	6	NR	880	0	NR
365	0	NR	495	87	NR	625	278	NR	755	5	NR	885	0	NR
370	0	NR	500	124	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	168	NR	635	623	NR	765	4	NR	895	0	NR
380	1	NR	510	209	NR	640	162	NR	770	3	NR	900	0	NR
385	1	NR	515	246	NR	645	158	NR	775	3	NR	905	0	NR
390	2	NR	520	273	NR	650	134	NR	780	2	NR	910	0	NR
395	4	NR	525	292	NR	655	109	NR	785	2	NR	915	0	NR
400	5	NR	530	305	NR	660	91	NR	790	2	NR	920	0	NR
405	7	NR	535	313	NR	665	75	NR	795	2	NR	925	0	NR
410	11	NR	540	319	NR	670	70	NR	800	1	NR	930	0	NR
415	21	NR	545	323	NR	675	56	NR	805	1	NR	935	0	NR
420	42	NR	550	326	NR	680	47	NR	810	1	NR	940	0	NR
425	76	NR	555	330	NR	685	41	NR	815	1	NR	945	0	NR
430	125	NR	560	333	NR	690	35	NR	820	1	NR	950	0	NR
435	193	NR	565	336	NR	695	30	NR	825	1	NR	955	0	NR
440	302	NR	570	336	NR	700	26	NR	830	1	NR	960	0	NR
445	432	NR	575	335	NR	705	22	NR	835	1	NR	965	0	NR
450	380	NR	580	332	NR	710	19	NR	840	0	NR	970	0	NR
455	213	NR	585	326	NR	715	16	NR	845	0	NR	975	0	NR
460	147	NR	590	319	NR	720	14	NR	850	0	NR	980	0	NR
465	104	NR	595	307	NR	725	12	NR	855	0	NR	985	0	NR
470	65	NR	600	299	NR	730	10	NR	860	0	NR	990	0	NR
475	50	NR	605	291	NR	735	9	NR	865	0	NR	995	0	NR
480	46	NR	610	317	NR	740	8	NR	870	0	NR	1000	0	NR
485	47	NR	615	336	NR	745	7	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-1

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.55

λ (nm)	Power W^{\wedge}/nm	Lumens (ϕ/nm)	λ (nm)	Power W^{\wedge}/nm	Lumens (ϕ/nm)	λ (nm)	Power W^{\wedge}/nm	Lumens (ϕ/nm)	λ (nm)	Power W^{\wedge}/nm	Lumens (ϕ/nm)	λ (nm)	Power W^{\wedge}/nm	Lumens (ϕ/nm)
360	0	NR	490	60	NR	620	277	NR	750	6	NR	880	0	NR
365	0	NR	495	87	NR	625	278	NR	755	5	NR	885	0	NR
370	0	NR	500	124	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	168	NR	635	623	NR	765	4	NR	895	0	NR
380	1	NR	510	209	NR	640	162	NR	770	3	NR	900	0	NR
385	1	NR	515	246	NR	645	158	NR	775	3	NR	905	0	NR
390	2	NR	520	273	NR	650	134	NR	780	2	NR	910	0	NR
395	4	NR	525	292	NR	655	109	NR	785	2	NR	915	0	NR
400	5	NR	530	305	NR	660	91	NR	790	2	NR	920	0	NR
405	7	NR	535	313	NR	665	75	NR	795	2	NR	925	0	NR
410	11	NR	540	319	NR	670	70	NR	800	1	NR	930	0	NR
415	21	NR	545	323	NR	675	56	NR	805	1	NR	935	0	NR
420	42	NR	550	326	NR	680	47	NR	810	1	NR	940	0	NR
425	76	NR	555	330	NR	685	41	NR	815	1	NR	945	0	NR
430	125	NR	560	333	NR	690	35	NR	820	1	NR	950	0	NR
435	193	NR	565	336	NR	695	30	NR	825	1	NR	955	0	NR
440	302	NR	570	336	NR	700	26	NR	830	1	NR	960	0	NR
445	432	NR	575	335	NR	705	22	NR	835	1	NR	965	0	NR
450	380	NR	580	332	NR	710	19	NR	840	0	NR	970	0	NR
455	213	NR	585	326	NR	715	16	NR	845	0	NR	975	0	NR
460	147	NR	590	319	NR	720	14	NR	850	0	NR	980	0	NR
465	104	NR	595	307	NR	725	12	NR	855	0	NR	985	0	NR
470	65	NR	600	299	NR	730	10	NR	860	0	NR	990	0	NR
475	50	NR	605	291	NR	735	9	NR	865	0	NR	995	0	NR
480	46	NR	610	317	NR	740	8	NR	870	0	NR	1000	0	NR
485	47	NR	615	336	NR	745	7	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-1

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.99

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	60	NR	620	277	NR	750	6	NR	880	0	NR
365	0	NR	495	87	NR	625	278	NR	755	5	NR	885	0	NR
370	0	NR	500	124	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	168	NR	635	623	NR	765	4	NR	895	0	NR
380	1	NR	510	209	NR	640	162	NR	770	3	NR	900	0	NR
385	1	NR	515	246	NR	645	158	NR	775	3	NR	905	0	NR
390	2	NR	520	273	NR	650	134	NR	780	2	NR	910	0	NR
395	4	NR	525	292	NR	655	109	NR	785	2	NR	915	0	NR
400	5	NR	530	305	NR	660	91	NR	790	2	NR	920	0	NR
405	7	NR	535	313	NR	665	75	NR	795	2	NR	925	0	NR
410	11	NR	540	319	NR	670	70	NR	800	1	NR	930	0	NR
415	21	NR	545	323	NR	675	56	NR	805	1	NR	935	0	NR
420	42	NR	550	326	NR	680	47	NR	810	1	NR	940	0	NR
425	76	NR	555	330	NR	685	41	NR	815	1	NR	945	0	NR
430	125	NR	560	333	NR	690	35	NR	820	1	NR	950	0	NR
435	193	NR	565	336	NR	695	30	NR	825	1	NR	955	0	NR
440	302	NR	570	336	NR	700	26	NR	830	1	NR	960	0	NR
445	432	NR	575	335	NR	705	22	NR	835	1	NR	965	0	NR
450	380	NR	580	332	NR	710	19	NR	840	0	NR	970	0	NR
455	213	NR	585	326	NR	715	16	NR	845	0	NR	975	0	NR
460	147	NR	590	319	NR	720	14	NR	850	0	NR	980	0	NR
465	104	NR	595	307	NR	725	12	NR	855	0	NR	985	0	NR
470	65	NR	600	299	NR	730	10	NR	860	0	NR	990	0	NR
475	50	NR	605	291	NR	735	9	NR	865	0	NR	995	0	NR
480	46	NR	610	317	NR	740	8	NR	870	0	NR	1000	0	NR
485	47	NR	615	336	NR	745	7	NR	875	0	NR			

Summary

$R_f = 80.7$
 $R_g = 102.1$
 CIE $R_a = 82.1$
 $R_9 = 38.5$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 69	CES51 = 90	CES76 = 58
CES02 = 61	CES27 = 89	CES52 = 90	CES77 = 76
CES03 = 31	CES28 = 83	CES53 = 80	CES78 = 60
CES04 = 69	CES29 = 66	CES54 = 91	CES79 = 85
CES05 = 48	CES30 = 76	CES55 = 89	CES80 = 79
CES06 = 50	CES31 = 69	CES56 = 79	CES81 = 81
CES07 = 41	CES32 = 62	CES57 = 77	CES82 = 91
CES08 = 40	CES33 = 74	CES58 = 79	CES83 = 88
CES09 = 29	CES34 = 72	CES59 = 93	CES84 = 89
CES10 = 74	CES35 = 84	CES60 = 95	CES85 = 84
CES11 = 57	CES36 = 98	CES61 = 92	CES86 = 82
CES12 = 63	CES37 = 77	CES62 = 89	CES87 = 81
CES13 = 43	CES38 = 83	CES63 = 80	CES88 = 86
CES14 = 74	CES39 = 94	CES64 = 80	CES89 = 79
CES15 = 71	CES40 = 88	CES65 = 77	CES90 = 85
CES16 = 47	CES41 = 89	CES66 = 74	CES91 = 83
CES17 = 49	CES42 = 74	CES67 = 72	CES92 = 77
CES18 = 56	CES43 = 73	CES68 = 78	CES93 = 86
CES19 = 71	CES44 = 98	CES69 = 83	CES94 = 69
CES20 = 65	CES45 = 82	CES70 = 69	CES95 = 80
CES21 = 86	CES46 = 82	CES71 = 64	CES96 = 86
CES22 = 78	CES47 = 80	CES72 = 88	CES97 = 83
CES23 = 91	CES48 = 79	CES73 = 60	CES98 = 81
CES24 = 90	CES49 = 80	CES74 = 98	CES99 = 83
CES25 = 71	CES50 = 89	CES75 = 62	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)