

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number:

Luminaire Tested: EHBR1-54-UNV-TASM-L840-UPL36

Issue Date: 3/20/2026

Test Information

Test Method: LM-79-2019
Report Number: REPORT IS A COMBINATION OF REPORTS P1431873 AND P1431635
Test Lab: INNOVATION CENTER
Issue Date: 3/20/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-54-UNV-TASM-L840-UPL36
Description: Elevate Round Highbay at, 54000 lumens, 4000K 80CRI LEDs with TASM lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 57423.0 lumens
Efficiency: N/A
Efficacy: 177.0 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.84 / 0.9
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')
CIE Type: Direct

Input Watts (W): 324.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER:
CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

Luminous Intensity Polar Plot

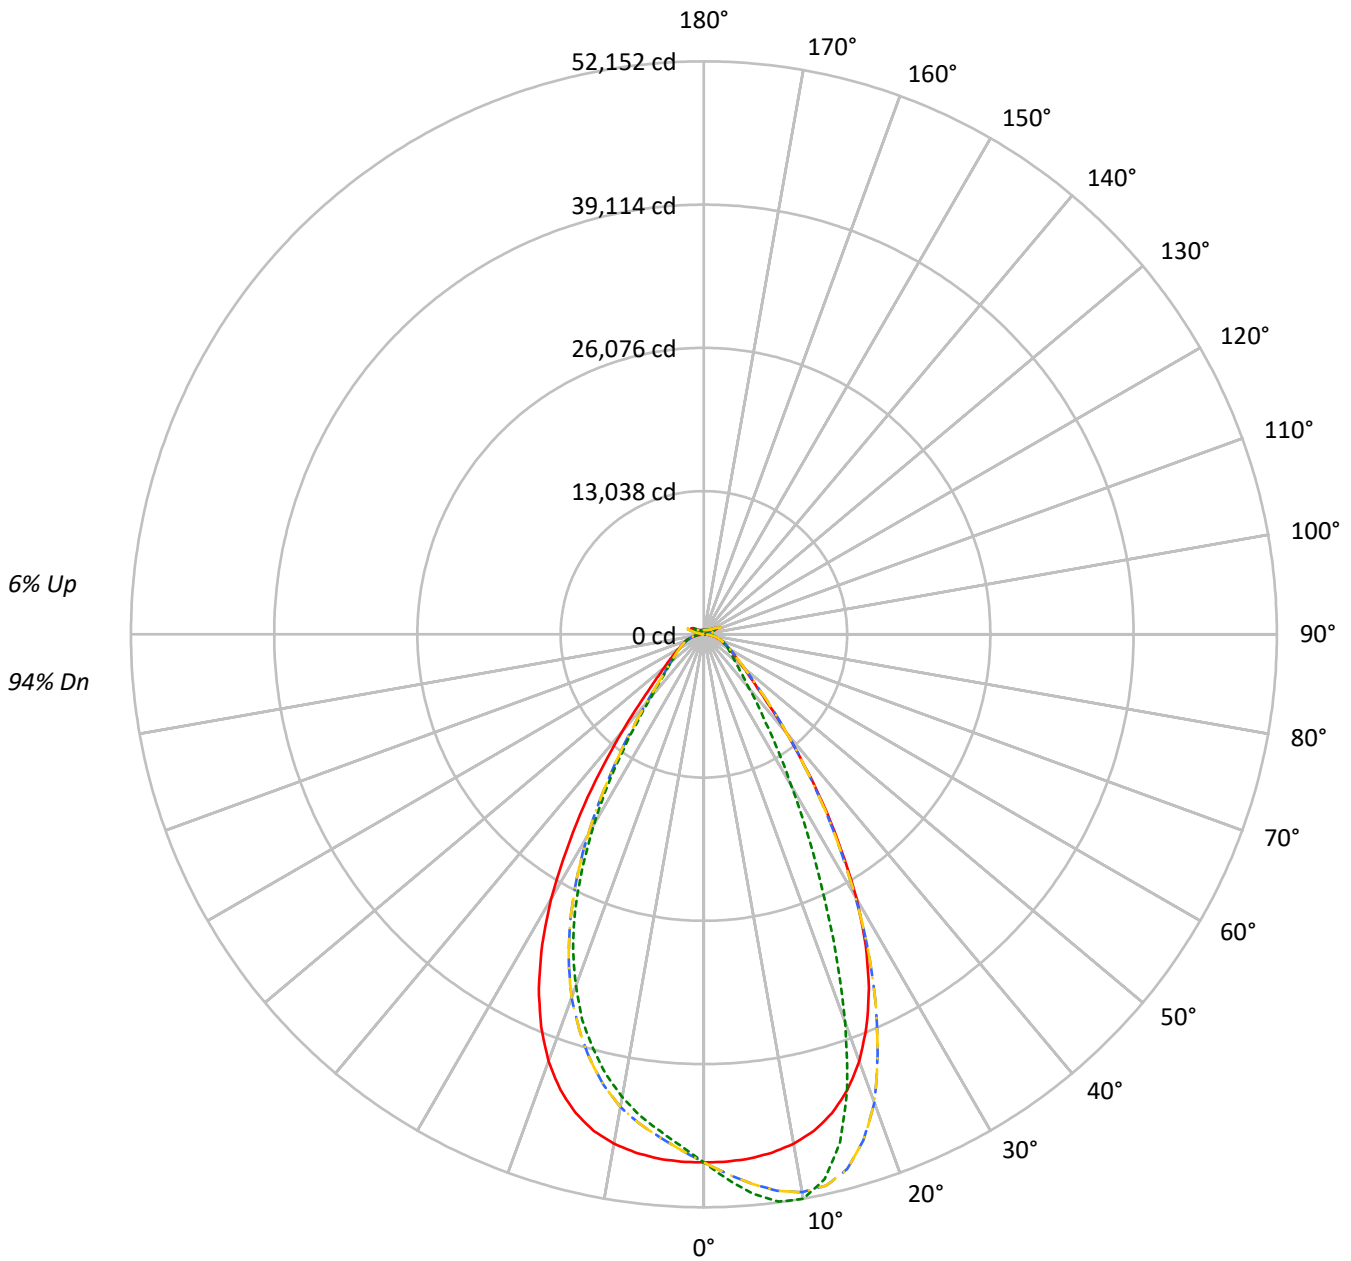

— 0°-180° - - 45°-225° - - - 90°-270° - · - 135°-315°



TEST NUMBER:

CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	96	96	96	96	96	96	94
1	110	107	104	101	107	104	101	99	99	96	94	94	92	90	89	88	87	87	87	87	84
2	103	97	92	88	100	95	90	87	91	87	84	87	84	81	83	80	78	78	78	78	76
3	97	89	83	78	94	87	82	77	84	79	75	80	76	73	77	74	71	71	71	71	69
4	91	82	75	70	89	80	74	70	77	72	68	74	70	67	72	68	65	65	65	65	63
5	86	76	69	64	83	74	68	63	72	66	62	69	65	61	67	63	60	60	60	60	58
6	81	70	63	58	79	69	63	58	67	61	57	65	60	56	63	59	55	55	55	55	54
7	76	66	59	54	74	64	58	53	63	57	53	61	56	52	59	55	51	51	51	51	50
8	72	61	54	50	70	60	54	50	59	53	49	57	52	48	56	51	48	48	48	48	46
9	68	57	51	46	67	57	50	46	55	50	46	54	49	45	52	48	45	45	45	45	43
10	65	54	48	43	63	53	47	43	52	46	43	51	46	42	50	45	42	42	42	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	225705	225705	225705	225705
5°	224331	239320	224331	212690
10°	221574	245464	221574	201293
15°	215032	228112	215032	185940
20°	201109	182915	201109	165621
25°	177997	126734	177997	138797
30°	144527	82450	144527	103848
35°	103659	53396	103659	69134
40°	67019	36804	67019	43600
45°	42523	28509	42523	31065
50°	31579	24225	31579	25876
55°	25782	22068	25782	22842
60°	22326	21021	22326	21149
65°	20351	20274	20351	20187
70°	19289	19864	19289	19608
75°	18040	19217	18040	18640
80°	15846	18142	15846	16960
85°	10253	12953	10253	12351

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 59785 cd/sqm



TEST NUMBER:

CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	4570.0	8.0
10°-20°	12433.0	21.7
20°-30°	14581.3	25.4
30°-40°	10140.4	17.7
40°-50°	5039.3	8.8
50°-60°	3014.0	5.2
60°-70°	2121.4	3.7
70°-80°	1366.5	2.4
80°-90°	440.6	0.8
90°-100°	99.4	0.2
100°-110°	644.8	1.1
110°-120°	1190.5	2.1
120°-130°	708.2	1.2
130°-140°	429.2	0.7
140°-150°	297.9	0.5
150°-160°	195.4	0.3
160°-170°	113.2	0.2
170°-180°	37.8	0.1
0°-30°	31584.3	55.0
0°-40°	41724.6	72.7
0°-60°	49778.0	86.7
0°-90°	53706.5	93.5
90°-120°	1934.7	3.4
90°-150°	3370.1	5.9
90°-180°	3716.0	6.5
0°-180°	57423.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	48062	48062	48062	48062	48062	
5°	47898	51099	47898	45413	47898	4546
15°	45113	47857	45113	39009	45113	12607
25°	35546	25309	35546	27718	35546	16093
35°	19025	9800	19025	12689	19025	11877
45°	6880	4613	6880	5026	6880	5630
55°	3484	2982	3484	3087	3484	3186
65°	2124	2116	2124	2107	2124	2133
75°	1271	1354	1271	1313	1271	1334
85°	352	445	352	424	352	392
90°	28	34	28	28	28	29
95°	53	52	53	46	53	56
105°	296	153	296	225	296	399
115°	1267	1084	1267	1029	1267	1155
125°	812	852	812	743	812	747
135°	514	595	514	544	514	408
145°	467	488	467	454	467	293
155°	417	436	417	406	417	195
165°	397	410	397	389	397	113
175°	398	407	398	391	398	38
180°	397	397	397	397	397	



TEST NUMBER:
 CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3
2.5°	48034.4	48655.3	49158.2	49489.9	49653.9	49489.9	49158.2	48655.3	48034.4	47417.0	46992.5
5°	47898.3	49142.0	50195.6	50885.0	51098.6	50885.0	50195.6	49142.0	47898.3	46723.1	45943.5
7.5°	47572.9	49510.6	51076.1	51880.9	52077.4	51880.9	51076.1	49510.6	47572.9	45909.3	44924.2
10°	47076.4	49743.1	51551.9	52128.7	52152.2	52128.7	51551.9	49743.1	47076.4	44835.0	43673.3
12.5°	46284.2	49660.2	51392.4	51203.2	50773.3	51203.2	51392.4	49660.2	46284.2	43522.8	42057.3
15°	45112.6	49169.0	50382.1	48841.9	47856.8	48841.9	50382.1	49169.0	45112.6	41750.9	40051.2
17.5°	43461.5	48249.8	48273.2	45226.1	43367.8	45226.1	48273.2	48249.8	43461.5	39584.3	37712.5
20°	41333.7	46775.3	45369.4	39796.1	37594.4	39796.1	45369.4	46775.3	41333.7	37023.0	35186.3
22.5°	38666.0	44787.2	41325.5	34333.7	31329.9	34333.7	41325.5	44787.2	38666.0	34044.4	32132.9
25°	35545.9	42351.2	36975.2	28381.9	25308.7	28381.9	36975.2	42351.2	35545.9	30495.3	28766.7
27.5°	31876.0	39263.5	32342.9	23192.6	20357.2	23192.6	32342.9	39263.5	31876.0	26830.9	25065.3
30°	27799.7	35305.2	27522.1	18470.0	15859.2	18470.0	27522.1	35305.2	27799.7	22714.0	21133.2
32.5°	23235.8	31425.4	22892.4	14799.3	12587.6	14799.3	22892.4	31425.4	23235.8	18785.5	17133.5
35°	19025.2	26571.3	18717.9	11628.7	9800.1	11628.7	18717.9	26571.3	19025.2	15076.9	13454.6
37.5°	14930.9	21984.9	14921.0	9363.9	7949.0	9363.9	14921.0	21984.9	14930.9	11721.6	10404.8
40°	11616.1	17190.3	11690.9	7474.9	6379.0	7474.9	11690.9	17190.3	11616.1	8918.7	8076.0
42.5°	8801.5	13144.6	9189.1	6134.8	5418.3	6134.8	9189.1	13144.6	8801.5	7027.0	6396.1
45°	6880.1	9673.0	7175.7	5175.8	4612.6	5175.8	7175.7	9673.0	6880.1	5658.9	5235.3
47.5°	5603.0	7475.8	5815.7	4439.5	4044.8	4439.5	5815.7	7475.8	5603.0	4786.5	4469.3
50°	4706.3	5736.4	4828.9	3875.3	3610.4	3875.3	4828.9	5736.4	4706.3	4098.8	3887.1
52.5°	4043.0	4678.3	4112.4	3453.6	3275.1	3453.6	4112.4	4678.3	4043.0	3586.0	3454.5
55°	3484.2	3933.0	3576.1	3105.7	2982.2	3105.7	3576.1	3933.0	3484.2	3191.3	3094.0
57.5°	3059.7	3336.4	3105.7	2809.2	2727.2	2809.2	3105.7	3336.4	3059.7	2839.8	2787.5
60°	2683.9	2889.4	2740.7	2550.5	2527.1	2550.5	2740.7	2889.4	2683.9	2555.0	2520.8
62.5°	2394.6	2524.4	2423.4	2318.0	2297.3	2318.0	2423.4	2524.4	2394.6	2295.5	2301.8
65°	2124.2	2245.0	2165.7	2108.9	2116.1	2108.9	2165.7	2245.0	2124.2	2078.3	2088.2
67.5°	1915.1	1978.2	1944.0	1911.5	1919.6	1911.5	1944.0	1978.2	1915.1	1870.1	1885.4
70°	1692.5	1760.1	1725.0	1729.5	1743.0	1729.5	1725.0	1760.1	1692.5	1679.0	1690.7
72.5°	1479.8	1532.1	1520.4	1531.2	1545.6	1531.2	1520.4	1532.1	1479.8	1478.0	1478.9
75°	1270.8	1310.4	1315.8	1331.1	1353.7	1331.1	1315.8	1310.4	1270.8	1257.2	1273.5
77.5°	1042.7	1087.8	1104.9	1125.7	1159.0	1125.7	1104.9	1087.8	1042.7	1051.7	1059.9
80°	833.6	854.4	892.2	907.6	954.4	907.6	892.2	854.4	833.6	818.3	830.0
82.5°	610.1	629.1	661.5	690.4	717.4	690.4	661.5	629.1	610.1	602.9	603.8
85°	352.4	381.2	402.9	437.1	445.2	437.1	402.9	381.2	352.4	360.5	352.4
87.5°	123.5	132.5	151.4	164.9	165.8	164.9	151.4	132.5	123.5	126.2	114.5
90°	27.5	46.8	80.4	46.3	33.8	46.3	80.4	46.8	27.5	47.9	74.5
92.5°	35.7	63.2	113.2	60.6	44.0	60.6	113.2	63.2	35.7	62.3	119.5
95°	52.9	77.5	143.8	66.8	52.2	66.8	143.8	77.5	52.9	82.7	166.6
97.5°	81.6	95.9	162.2	70.9	62.4	70.9	162.2	95.9	81.6	101.1	191.1
100°	108.2	108.2	295.2	81.1	70.6	81.1	295.2	108.2	108.2	124.5	297.5
102.5°	163.4	211.3	682.7	159.7	84.9	159.7	682.7	211.3	163.4	232.9	630.9
105°	296.3	481.3	1200.2	407.2	153.3	407.2	1200.2	481.3	296.3	486.6	1123.8
107.5°	560.2	896.5	1545.8	799.9	351.7	799.9	1545.8	896.5	560.2	860.9	1482.7
110°	895.6	1252.4	1687.0	1094.5	707.6	1094.5	1687.0	1252.4	895.6	1182.0	1554.3



TEST NUMBER:

CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	1165.6	1395.6	1648.1	1213.1	977.6	1213.1	1648.1	1395.6	1165.6	1304.7	1488.8
115°	1266.8	1375.2	1472.2	1209.0	1084.0	1209.0	1472.2	1375.2	1266.8	1274.0	1329.3
117.5°	1223.8	1258.6	1271.7	1135.4	1090.1	1135.4	1271.7	1258.6	1223.8	1146.1	1128.8
120°	1105.2	1090.9	1072.2	1027.0	1028.8	1027.0	1072.2	1090.9	1105.2	1000.9	942.7
122.5°	956.8	926.1	906.5	917.4	944.9	917.4	906.5	926.1	956.8	852.4	808.6
125°	811.5	780.9	790.8	823.3	851.7	823.3	790.8	780.9	811.5	724.5	713.4
127.5°	689.7	675.4	707.0	743.5	767.8	743.5	707.0	675.4	689.7	634.5	645.9
130°	602.7	605.8	647.7	679.0	694.2	679.0	647.7	605.8	602.7	576.1	603.8
132.5°	548.3	563.8	603.6	630.8	639.9	630.8	603.6	563.8	548.3	541.0	574.9
135°	514.5	537.2	573.8	591.0	594.9	591.0	573.8	537.2	514.5	517.4	548.3
137.5°	494.9	517.6	545.1	559.2	556.0	559.2	545.1	517.6	494.9	501.9	525.6
140°	483.5	506.3	518.5	534.7	532.4	534.7	518.5	506.3	483.5	487.6	506.0
142.5°	472.2	492.9	499.0	511.0	507.8	511.0	499.0	492.9	472.2	476.3	488.5
145°	466.9	482.4	477.4	492.6	488.3	492.6	477.4	482.4	466.9	468.1	475.1
147.5°	456.7	468.1	461.9	475.1	470.8	475.1	461.9	468.1	456.7	456.7	459.6
150°	445.3	453.5	444.4	459.6	459.4	459.6	444.4	453.5	445.3	443.3	446.2
152.5°	429.9	438.0	429.9	447.1	446.0	447.1	429.9	438.0	429.9	427.8	430.8
155°	417.3	421.4	417.3	434.6	435.5	434.6	417.3	421.4	417.3	416.4	418.2
157.5°	408.9	411.9	409.8	425.0	425.9	425.0	409.8	411.9	408.9	408.9	409.8
160°	402.3	406.4	405.2	418.4	419.3	418.4	405.2	406.4	402.3	403.4	404.3
162.5°	400.0	400.0	399.8	412.9	414.7	412.9	399.8	400.0	400.0	400.0	402.0
165°	396.6	398.6	396.3	406.3	410.1	406.3	396.3	398.6	396.6	397.7	397.7
167.5°	396.3	394.3	396.1	404.9	408.8	404.9	396.1	394.3	396.3	397.5	397.5
170°	393.1	394.0	393.8	402.6	406.5	402.6	393.8	394.0	393.1	395.2	396.3
172.5°	395.8	395.8	394.4	401.2	407.2	401.2	394.4	395.8	395.8	397.0	399.0
175°	397.6	396.5	396.2	401.1	407.0	401.1	396.2	396.5	397.6	396.7	396.7
177.5°	395.6	397.4	399.2	404.0	412.0	404.0	399.2	397.4	395.6	396.7	396.7
180°	397.4	397.4	397.4	397.4	397.4	397.4	397.4	397.4	397.4	397.4	397.4



TEST NUMBER:

CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	48062.3	48062.3	48062.3	48062.3	48062.3	48062.3
2.5°	46666.3	46635.7	46666.3	46992.5	47417.0	48034.4
5°	45582.1	45412.7	45582.1	45943.5	46723.1	47898.3
7.5°	44319.5	44221.2	44319.5	44924.2	45909.3	47572.9
10°	42990.1	42767.5	42990.1	43673.3	44835.0	47076.4
12.5°	41351.7	41057.0	41351.7	42057.3	43522.8	46284.2
15°	39268.0	39009.3	39268.0	40051.2	41750.9	45112.6
17.5°	37032.0	36797.7	37032.0	37712.5	39584.3	43461.5
20°	34223.8	34039.9	34223.8	35186.3	37023.0	41333.7
22.5°	31277.6	31105.5	31277.6	32132.9	34044.4	38666.0
25°	27811.4	27717.7	27811.4	28766.7	30495.3	35545.9
27.5°	24065.9	23906.3	24065.9	25065.3	26830.9	31876.0
30°	20239.2	19975.1	20239.2	21133.2	22714.0	27799.7
32.5°	16496.3	16306.2	16496.3	17133.5	18785.5	23235.8
35°	12878.7	12688.6	12878.7	13454.6	15076.9	19025.2
37.5°	10035.3	9699.2	10035.3	10404.8	11721.6	14930.9
40°	7611.0	7556.9	7611.0	8076.0	8918.7	11616.1
42.5°	6196.0	6049.1	6196.0	6396.1	7027.0	8801.5
45°	5083.9	5026.2	5083.9	5235.3	5658.9	6880.1
47.5°	4371.9	4397.2	4371.9	4469.3	4786.5	5603.0
50°	3841.1	3856.4	3841.1	3887.1	4098.8	4706.3
52.5°	3450.0	3436.4	3450.0	3454.5	3586.0	4043.0
55°	3103.9	3086.8	3103.9	3094.0	3191.3	3484.2
57.5°	2801.1	2813.7	2801.1	2787.5	2839.8	3059.7
60°	2530.7	2542.4	2530.7	2520.8	2555.0	2683.9
62.5°	2302.7	2309.9	2302.7	2301.8	2295.5	2394.6
65°	2099.0	2107.1	2099.0	2088.2	2078.3	2124.2
67.5°	1904.3	1904.3	1904.3	1885.4	1870.1	1915.1
70°	1721.4	1720.5	1721.4	1690.7	1679.0	1692.5
72.5°	1501.5	1523.1	1501.5	1478.9	1478.0	1479.8
75°	1287.9	1313.1	1287.9	1273.5	1257.2	1270.8
77.5°	1071.6	1110.3	1071.6	1059.9	1051.7	1042.7
80°	849.9	892.2	849.9	830.0	818.3	833.6
82.5°	628.2	659.7	628.2	603.8	602.9	610.1
85°	374.0	424.5	374.0	352.4	360.5	352.4
87.5°	119.9	153.2	119.9	114.5	126.2	123.5
90°	43.9	27.5	43.9	74.5	47.9	27.5
92.5°	66.4	39.8	66.4	119.5	62.3	35.7
95°	76.6	45.9	76.6	166.6	82.7	52.9
97.5°	84.8	59.1	84.8	191.1	101.1	81.6
100°	99.1	77.5	99.1	297.5	124.5	108.2
102.5°	209.5	130.7	209.5	630.9	232.9	163.4
105°	440.7	224.7	440.7	1123.8	486.6	296.3
107.5°	788.4	388.4	788.4	1482.7	860.9	560.2
110°	1046.1	723.8	1046.1	1554.3	1182.0	895.6



TEST NUMBER:

CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	1123.8	977.5	1123.8	1488.8	1304.7	1165.6
115°	1080.9	1028.6	1080.9	1329.3	1274.0	1266.8
117.5°	986.8	993.8	986.8	1128.8	1146.1	1223.8
120°	878.4	920.2	878.4	942.7	1000.9	1105.2
122.5°	779.1	828.1	779.1	808.6	852.4	956.8
125°	693.1	743.1	693.1	713.4	724.5	811.5
127.5°	633.8	667.5	633.8	645.9	634.5	689.7
130°	587.7	616.3	587.7	603.8	576.1	602.7
132.5°	555.9	574.3	555.9	574.9	541.0	548.3
135°	528.1	543.6	528.1	548.3	517.4	514.5
137.5°	504.5	517.9	504.5	525.6	501.9	494.9
140°	483.8	495.2	483.8	506.0	487.6	483.5
142.5°	462.2	470.4	462.2	488.5	476.3	472.2
145°	447.6	453.8	447.6	475.1	468.1	466.9
147.5°	435.1	439.2	435.1	459.6	456.7	456.7
150°	422.6	426.7	422.6	446.2	443.3	445.3
152.5°	409.2	414.2	409.2	430.8	427.8	429.9
155°	400.7	405.7	400.7	418.2	416.4	417.3
157.5°	396.4	400.2	396.4	409.8	408.9	408.9
160°	393.0	395.9	393.0	404.3	403.4	402.3
162.5°	388.6	391.6	388.6	402.0	400.0	400.0
165°	388.4	389.3	388.4	397.7	397.7	396.6
167.5°	387.2	389.3	387.2	397.5	397.5	396.3
170°	388.1	389.0	388.1	396.3	395.2	393.1
172.5°	389.9	390.8	389.9	399.0	397.0	395.8
175°	389.7	390.6	389.7	396.7	396.7	397.6
177.5°	392.6	393.5	392.6	396.7	396.7	395.6
180°	397.4	397.4	397.4	397.4	397.4	397.4



TEST NUMBER: CATALOG
 CATALOG NUMBER: EHBR1-54-UNV-TASM-L840-UPL36

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.48	20.59	19.96	21.04	21.52	18.80	19.91	19.28	20.36	20.84
	3H	21.03	22.02	21.53	22.48	23.01	20.65	21.64	21.14	22.10	22.63
	4H	21.67	22.59	22.18	23.07	23.61	21.43	22.35	21.95	22.83	23.38
	6H	22.15	22.99	22.68	23.49	24.04	22.07	22.92	22.60	23.42	23.97
	8H	22.30	23.10	22.84	23.62	24.18	22.30	23.10	22.84	23.61	24.17
	12H	22.37	23.14	22.92	23.64	24.23	22.42	23.19	22.97	23.70	24.28
4H	2H	19.90	20.82	20.42	21.30	21.84	19.38	20.30	19.89	20.78	21.32
	3H	21.70	22.46	22.22	22.98	23.54	21.43	22.19	21.96	22.72	23.28
	4H	22.47	23.15	23.02	23.69	24.29	22.34	23.03	22.89	23.56	24.16
	6H	23.08	23.67	23.66	24.24	24.85	23.11	23.70	23.69	24.27	24.88
	8H	23.28	23.83	23.86	24.39	25.01	23.38	23.93	23.96	24.50	25.12
	12H	23.39	23.87	23.98	24.47	25.09	23.55	24.04	24.15	24.63	25.26
8H	4H	22.72	23.27	23.30	23.83	24.45	22.62	23.17	23.20	23.73	24.36
	6H	23.46	23.91	24.07	24.52	25.15	23.53	23.97	24.13	24.58	25.21
	8H	23.73	24.13	24.36	24.75	25.39	23.88	24.28	24.51	24.90	25.54
	12H	23.90	24.25	24.53	24.86	25.57	24.13	24.48	24.75	25.08	25.80
12H	4H	22.73	23.21	23.32	23.81	24.43	22.63	23.12	23.23	23.71	24.34
	6H	23.50	23.90	24.13	24.53	25.17	23.57	23.97	24.20	24.59	25.23
	8H	23.82	24.17	24.44	24.77	25.49	23.97	24.32	24.60	24.93	25.64