

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1432910

Luminaire Tested: EHBR1-24-UNV-ASM-L850-UPL24

Issue Date: 3/20/2026

Test Information

Test Method: LM-79-2019
Report Number: P1432910
REPORT IS A COMBINATION OF REPORTS P1431711 AND P1431635
Test Lab: INNOVATION CENTER
Issue Date: 3/20/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-24-UNV-ASM-L850-UPL24
Description: Elevate Round Highbay at, 24000 lumens, 5000K 80CRI LEDs with ASM lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 26726.4 lumens
Efficiency: N/A
Efficacy: 184.6 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.99 / 0.92
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')
CIE Type: Direct

Input Watts (W): 144.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1432910
CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

Luminous Intensity Polar Plot

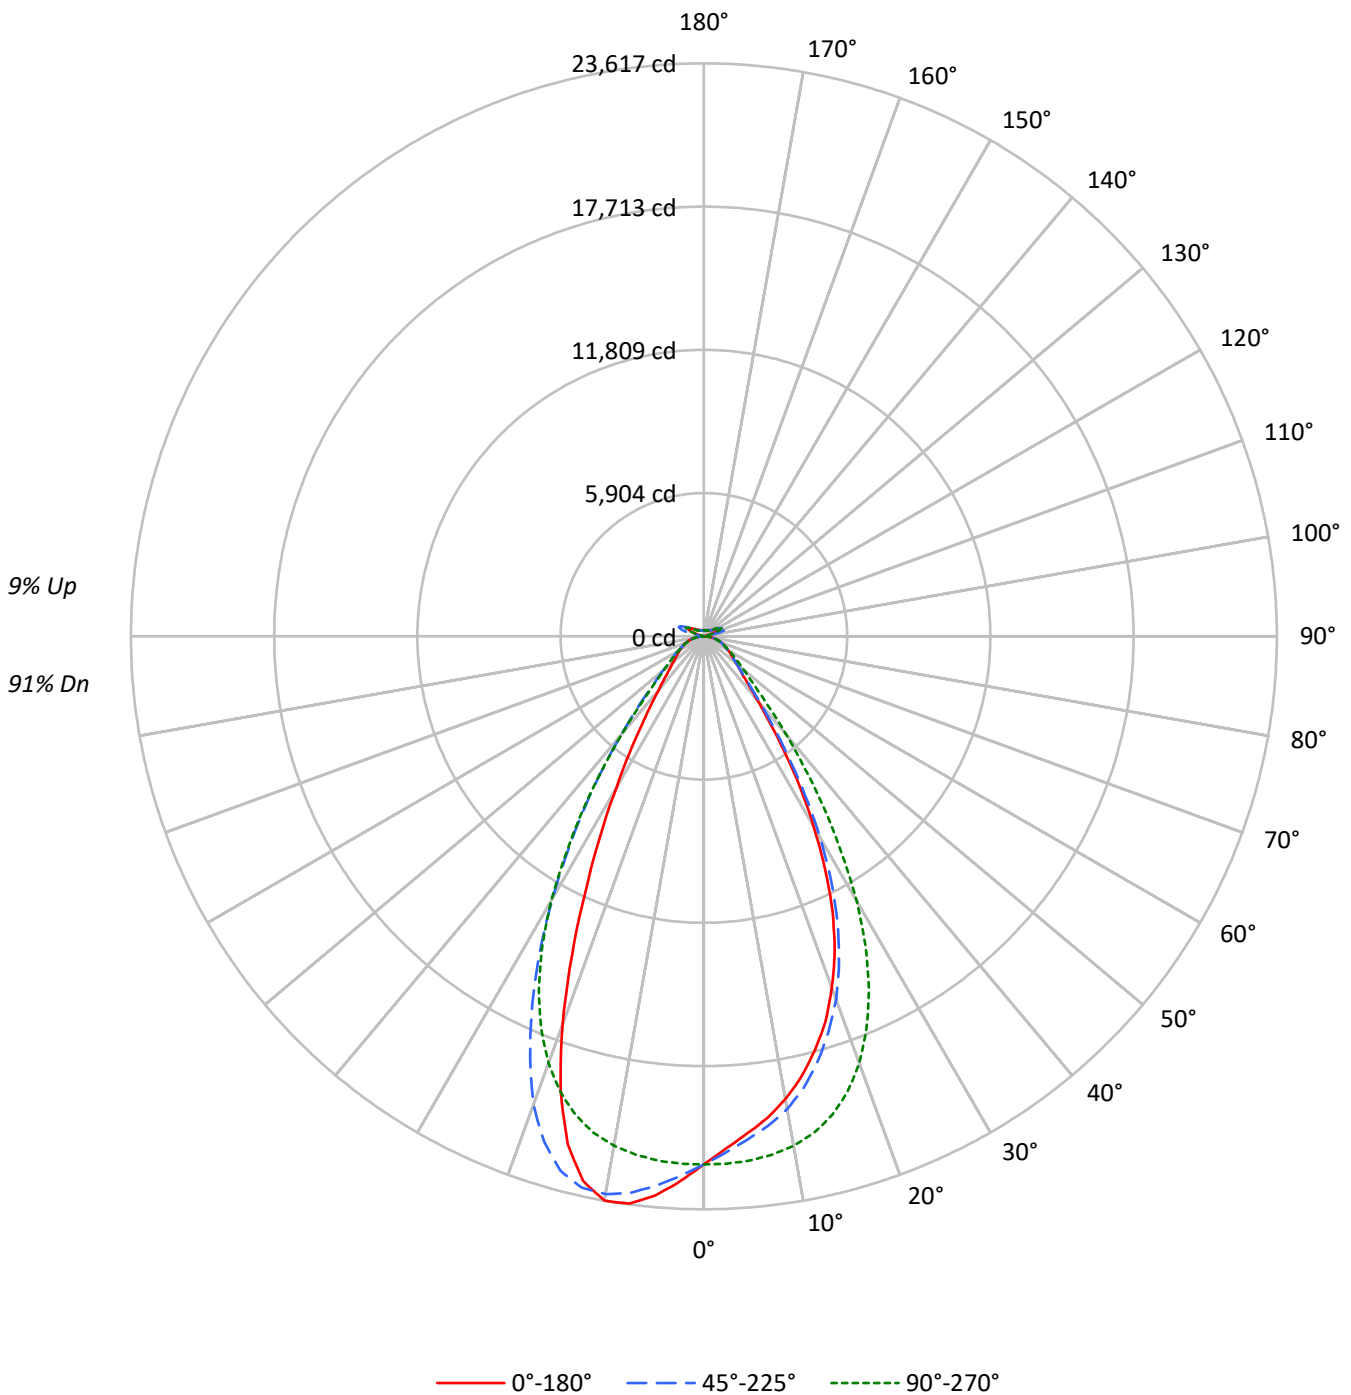



TEST NUMBER: P1432910

CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	113	113	113	113	106	106	106	100	100	100	94	94	94	94	94	94	91
1	110	106	103	100	106	103	100	98	97	95	93	92	90	89	87	86	85	85	85	85	82
2	103	97	92	87	99	94	90	86	89	86	83	85	82	79	81	79	76	76	76	76	74
3	96	88	82	78	93	86	81	76	82	78	74	79	75	72	75	72	69	69	69	69	67
4	90	81	75	70	88	79	73	69	76	71	67	73	69	65	70	66	63	63	63	63	61
5	85	75	68	63	82	74	67	62	71	65	61	68	63	60	65	61	58	58	58	58	56
6	80	70	63	58	78	68	62	57	66	60	56	63	59	55	61	57	54	54	54	54	52
7	75	65	58	53	73	64	57	53	61	56	52	59	55	51	58	53	50	50	50	50	48
8	71	61	54	49	69	60	53	49	58	52	48	56	51	47	54	50	47	47	47	47	45
9	68	57	50	46	66	56	50	45	54	49	45	53	48	44	51	47	43	43	43	43	42
10	64	53	47	43	63	53	46	42	51	46	42	50	45	41	48	44	41	41	41	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	102210	102210	102210	102210	102210
5°	96316	97442	101588	106460	108375
10°	91155	93086	100339	109878	111157
15°	84203	86452	97377	108751	103300
20°	75001	77527	91071	99963	82833
25°	62854	65233	80606	83847	57391
30°	47027	49754	65449	64795	37337
35°	31307	33197	46942	46184	24180
40°	19744	21100	30349	30545	16666
45°	14068	14653	19257	20083	12910
50°	11717	11811	14300	14672	10970
55°	10343	10368	11675	11983	9993
60°	9578	9495	10110	10324	9520
65°	9142	9060	9217	9396	9180
70°	8879	8725	8736	8902	8995
75°	8442	8187	8168	8459	8702
80°	7680	7145	7176	7680	8216
85°	5592	4644	4644	5307	5866

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 112.5°
 Vertical Angle: 45°
 Luminance: 27074 cd/sqm



TEST NUMBER: P1432910
 CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2069.5	7.7
10°-20°	5630.2	21.1
20°-30°	6603.1	24.7
30°-40°	4592.1	17.2
40°-50°	2282.0	8.5
50°-60°	1364.9	5.1
60°-70°	960.7	3.6
70°-80°	618.8	2.3
80°-90°	200.8	0.8
90°-100°	64.0	0.2
100°-110°	418.0	1.6
110°-120°	772.1	2.9
120°-130°	458.9	1.7
130°-140°	277.6	1.0
140°-150°	192.1	0.7
150°-160°	125.5	0.5
160°-170°	72.1	0.3
170°-180°	24.0	0.1
0°-30°	14302.9	53.5
0°-40°	18894.9	70.7
0°-60°	22541.8	84.3
0°-90°	24322.1	91.0
90°-120°	1254.1	4.7
90°-150°	2182.7	8.2
90°-180°	2404.0	9.0
0°-180°	26726.4	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	21765	21765	21765	21765	21765	
5°	20565	20805	21691	22731	23140	1929
15°	17665	18137	20429	22815	21672	4926
25°	12552	13027	16097	16744	11461	5663
35°	5746	6093	8616	8476	4438	3660
45°	2276	2371	3116	3249	2089	1840
55°	1398	1401	1578	1619	1350	1268
65°	954	946	962	981	958	948
75°	595	577	575	596	613	628
85°	192	160	160	182	202	198
90°	18	48	18	52	20	18
95°	30	108	34	93	32	29
105°	146	729	192	778	98	195
115°	667	862	822	955	702	615
125°	482	462	526	512	551	439
135°	352	355	332	371	384	276
145°	293	306	301	308	315	185
155°	260	269	268	268	280	121
165°	248	254	253	252	260	71
175°	248	252	252	250	257	24
180°	252	252	252	252	252	



TEST NUMBER: P1432910
 CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	21764.9	21764.9	21764.9	21764.9	21764.9	21764.9	21764.9	21764.9	21764.9
2.5°	21118.9	21132.7	21280.4	21472.7	21752.2	22033.5	22261.2	22411.4	22485.6
5°	20565.0	20641.8	20805.4	21158.4	21690.7	22253.8	22730.9	23043.2	23139.8
7.5°	20025.5	20070.0	20343.8	20789.9	21543.3	22420.8	23129.6	23494.2	23583.1
10°	19367.1	19468.0	19777.3	20303.5	21318.5	22526.1	23345.1	23606.3	23616.9
12.5°	18592.6	18726.0	19045.6	19709.2	20959.6	22488.5	23272.9	23187.2	22992.5
15°	17665.3	17782.4	18137.1	18906.8	20429.1	22266.1	22815.4	22118.0	21671.9
17.5°	16663.7	16769.8	17078.0	17925.7	19681.5	21849.8	21860.4	20480.6	19639.0
20°	15414.8	15498.1	15934.0	16765.8	18717.8	21182.1	20545.4	18021.6	17024.5
22.5°	14086.0	14164.0	14551.3	15416.9	17509.8	20281.7	18714.2	15547.9	14187.7
25°	12551.9	12594.4	13027.0	13809.8	16096.9	19178.6	16744.2	12852.7	11461.0
27.5°	10825.9	10898.1	11350.8	12150.3	14435.0	17780.4	14646.4	10502.7	9218.7
30°	9045.7	9165.3	9570.2	10286.0	12589.1	15987.9	12463.3	8364.1	7181.8
32.5°	7384.2	7470.3	7758.9	8506.9	10522.3	14230.9	10366.8	6701.8	5700.3
35°	5746.0	5832.1	6092.9	6827.6	8615.6	12032.8	8476.4	5266.0	4437.9
37.5°	4392.3	4544.5	4711.8	5308.1	6761.4	9955.8	6756.9	4240.4	3599.6
40°	3422.1	3446.6	3657.2	4038.8	5260.3	7784.5	5294.2	3385.0	2888.7
42.5°	2739.3	2805.8	2896.5	3182.2	3985.8	5952.5	4161.2	2778.1	2453.7
45°	2276.1	2302.2	2370.8	2562.6	3115.7	4380.4	3249.4	2343.9	2088.8
47.5°	1991.2	1979.8	2023.9	2167.5	2537.3	3385.4	2633.6	2010.5	1831.7
50°	1746.3	1739.5	1760.3	1856.2	2131.2	2597.7	2186.7	1755.0	1634.9
52.5°	1556.2	1562.3	1564.3	1623.9	1830.8	2118.6	1862.2	1563.9	1483.2
55°	1397.8	1405.6	1401.1	1445.2	1577.8	1781.1	1619.4	1406.4	1350.5
57.5°	1274.1	1268.4	1262.4	1286.0	1385.6	1510.9	1406.4	1272.1	1234.9
60°	1151.4	1146.0	1141.5	1157.1	1215.4	1308.4	1241.1	1155.0	1144.4
62.5°	1046.1	1042.7	1042.3	1039.5	1084.4	1143.2	1097.4	1049.7	1040.4
65°	954.2	950.6	945.7	941.1	962.0	1016.7	980.7	955.0	958.2
67.5°	862.4	862.4	853.8	846.8	867.3	895.9	880.3	865.6	869.3
70°	779.1	779.6	765.6	760.3	766.5	797.0	781.1	783.2	789.3
72.5°	689.8	679.9	669.7	669.3	670.1	693.8	688.5	693.4	699.9
75°	594.7	583.2	576.7	569.3	575.4	593.4	595.9	602.8	613.0
77.5°	502.8	485.3	480.0	476.3	472.2	492.6	500.4	509.7	524.8
80°	404.0	384.9	375.9	370.6	377.5	386.9	404.0	411.0	432.2
82.5°	298.7	284.5	273.5	273.1	276.3	284.9	299.6	312.7	324.8
85°	192.2	169.3	159.6	163.3	159.6	172.6	182.4	197.9	201.6
87.5°	69.4	54.3	51.9	57.2	55.9	60.0	68.6	74.7	75.0
90°	17.7	28.3	48.2	30.9	17.7	30.0	51.7	29.0	20.5
92.5°	25.6	42.9	77.4	40.2	23.0	40.6	72.9	38.3	27.1
95°	29.6	49.5	108.0	53.5	34.0	49.9	92.8	42.2	32.4
97.5°	37.9	54.8	123.9	65.4	52.6	61.9	104.7	45.0	39.1
100°	49.9	64.1	192.9	80.5	69.8	69.8	191.1	51.6	44.4
102.5°	84.4	135.9	409.3	150.8	105.7	136.6	442.4	102.5	53.7
105°	145.5	285.8	729.3	315.4	191.9	311.9	778.4	263.1	97.9
107.5°	251.7	511.6	962.0	558.4	363.3	581.3	1002.7	518.0	226.7
110°	469.4	678.8	1008.4	766.9	580.9	812.4	1094.3	709.1	457.7



TEST NUMBER: P1432910
 CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
112.5°	634.1	729.3	966.0	846.4	756.2	905.3	1069.1	786.1	632.9
115°	667.3	701.4	862.5	826.6	821.7	892.0	954.9	783.5	702.0
117.5°	644.7	640.4	732.3	743.3	793.8	816.4	824.8	735.7	706.0
120°	596.9	569.9	611.5	649.1	716.8	707.5	695.1	665.3	666.1
122.5°	537.1	505.3	524.3	552.6	620.3	600.5	587.5	594.0	611.7
125°	481.8	449.5	462.4	469.4	526.1	506.2	512.3	533.0	551.1
127.5°	432.7	411.0	418.6	411.0	446.8	437.5	457.9	481.2	496.7
130°	399.5	380.8	391.1	372.9	390.2	392.4	419.3	439.1	448.9
132.5°	372.1	360.1	371.9	349.8	354.7	364.9	390.6	407.8	413.5
135°	352.2	341.9	354.7	334.2	332.5	347.6	371.0	382.0	384.2
137.5°	335.3	326.4	339.5	324.1	319.6	334.8	352.4	361.3	359.0
140°	320.1	312.6	326.7	314.8	312.2	327.2	335.2	345.4	343.4
142.5°	303.7	298.3	315.2	307.3	304.6	318.3	322.3	329.8	327.5
145°	292.6	288.6	306.3	302.0	301.0	311.2	308.1	317.9	314.6
147.5°	282.8	280.2	296.1	294.3	294.3	302.0	297.9	306.3	303.1
150°	274.3	271.6	287.1	285.5	286.7	292.0	286.3	296.1	295.5
152.5°	265.9	262.8	276.9	275.2	276.5	281.8	276.5	287.5	286.6
155°	260.0	257.0	268.6	267.7	268.1	270.7	268.1	279.2	279.6
157.5°	255.9	253.7	262.7	262.3	262.3	264.0	262.7	272.4	272.8
160°	252.7	251.1	258.5	258.1	257.2	259.8	259.0	267.4	267.8
162.5°	249.6	247.8	256.8	255.4	255.4	255.4	254.9	263.3	264.0
165°	247.7	247.3	253.5	253.5	252.6	253.9	252.1	258.2	260.4
167.5°	247.7	246.4	253.0	253.0	252.1	250.8	251.7	256.8	259.0
170°	247.2	246.8	252.1	251.3	249.9	250.3	249.8	255.0	257.2
172.5°	248.0	247.6	253.3	252.1	251.1	251.1	249.7	253.5	257.0
175°	247.5	247.1	251.5	251.5	251.9	251.1	250.5	253.0	256.6
177.5°	249.2	248.8	251.5	251.5	250.6	251.5	252.3	254.8	259.6
180°	251.5	251.5	251.5	251.5	251.5	251.5	251.5	251.5	251.5



TEST NUMBER: P1432910
 CATALOG NUMBER: EHBR1-24-UNV-ASM-L850-UPL24

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.85	16.92	16.37	17.42	17.96	16.62	17.69	17.14	18.19	18.73
	3H	17.66	18.62	18.20	19.13	19.71	18.17	19.13	18.71	19.64	20.22
	4H	18.40	19.29	18.96	19.82	20.42	18.82	19.71	19.38	20.24	20.84
	6H	18.97	19.79	19.54	20.33	20.94	19.31	20.14	19.88	20.68	21.29
	8H	19.15	19.93	19.73	20.49	21.10	19.47	20.25	20.05	20.81	21.42
	12H	19.25	19.99	19.83	20.54	21.18	19.55	20.29	20.13	20.84	21.48
4H	2H	16.36	17.26	16.92	17.78	18.38	16.99	17.89	17.55	18.41	19.01
	3H	18.40	19.14	18.97	19.71	20.33	18.80	19.54	19.37	20.11	20.72
	4H	19.26	19.93	19.85	20.51	21.16	19.58	20.25	20.17	20.83	21.48
	6H	19.96	20.53	20.57	21.14	21.81	20.22	20.79	20.83	21.40	22.07
	8H	20.18	20.72	20.80	21.32	22.00	20.42	20.96	21.04	21.56	22.24
	12H	20.32	20.79	20.95	21.42	22.10	20.54	21.01	21.17	21.64	22.32
8H	4H	19.52	20.06	20.14	20.66	21.34	19.83	20.36	20.44	20.96	21.64
	6H	20.34	20.77	20.99	21.42	22.11	20.59	21.02	21.24	21.68	22.36
	8H	20.64	21.03	21.31	21.69	22.38	20.87	21.26	21.54	21.92	22.61
	12H	20.84	21.18	21.50	21.82	22.59	21.06	21.39	21.71	22.04	22.80
12H	4H	19.53	20.00	20.16	20.63	21.31	19.83	20.31	20.47	20.94	21.62
	6H	20.38	20.77	21.04	21.43	22.12	20.63	21.02	21.30	21.68	22.38
	8H	20.72	21.06	21.38	21.70	22.47	20.96	21.30	21.62	21.94	22.71

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-4

Test Date: 07/31/2025

Luminaire Tested: EHBR-60-L850-N

Data in this report applies to families of products including EHBR-60-L850-N

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-472-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/05/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Metalux
 Catalog Number: **EHBR-60-L850-N**
 Description: Elevate Round Highbay at, 60000 lumens, 5000K 80CRI LEDs with N lens

Spectral Parameters

CCT (K): 4875
 CIE u': 0.2124
 CIE v': 0.4871
 Duv: 0.0005
 CIE x: 0.3488
 CIE y: 0.3555
 CIE z: 0.2957
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 573
 Purity: 11.33556
 Rf: 80
 Rg: 102.3

CRI (Ra):	82.3		
R1:	85.0	R9:	43.9
R2:	83.1	R10:	57.4
R3:	78.8	R11:	83.1
R4:	84.0	R12:	51.0
R5:	83.0	R13:	83.4
R6:	76.3	R14:	87.4
R7:	86.8	R15:	83.4
R8:	81.7		



Test Conditions

Stabilization Time: 39M
 Operation Time: 1H 39M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-4

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-4

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	89	NR	620	280	NR	750	6	NR	880	0	NR
365	0	NR	495	121	NR	625	280	NR	755	5	NR	885	0	NR
370	0	NR	500	168	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	224	NR	635	626	NR	765	4	NR	895	0	NR
380	1	NR	510	275	NR	640	163	NR	770	4	NR	900	0	NR
385	2	NR	515	321	NR	645	160	NR	775	3	NR	905	0	NR
390	3	NR	520	354	NR	650	136	NR	780	3	NR	910	0	NR
395	5	NR	525	375	NR	655	111	NR	785	2	NR	915	0	NR
400	7	NR	530	388	NR	660	93	NR	790	2	NR	920	0	NR
405	10	NR	535	395	NR	665	76	NR	795	2	NR	925	0	NR
410	15	NR	540	397	NR	670	72	NR	800	2	NR	930	0	NR
415	28	NR	545	398	NR	675	57	NR	805	1	NR	935	0	NR
420	53	NR	550	396	NR	680	49	NR	810	1	NR	940	0	NR
425	97	NR	555	395	NR	685	42	NR	815	1	NR	945	0	NR
430	163	NR	560	392	NR	690	37	NR	820	1	NR	950	0	NR
435	261	NR	565	388	NR	695	32	NR	825	1	NR	955	0	NR
440	409	NR	570	381	NR	700	27	NR	830	1	NR	960	0	NR
445	637	NR	575	374	NR	705	23	NR	835	1	NR	965	0	NR
450	699	NR	580	365	NR	710	20	NR	840	1	NR	970	0	NR
455	436	NR	585	354	NR	715	17	NR	845	0	NR	975	0	NR
460	274	NR	590	342	NR	720	15	NR	850	0	NR	980	0	NR
465	205	NR	595	325	NR	725	13	NR	855	0	NR	985	0	NR
470	130	NR	600	313	NR	730	11	NR	860	0	NR	990	0	NR
475	90	NR	605	301	NR	735	10	NR	865	0	NR	995	0	NR
480	78	NR	610	323	NR	740	8	NR	870	0	NR	1000	0	NR
485	77	NR	615	340	NR	745	7	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-4

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.82

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	89	NR	620	280	NR	750	6	NR	880	0	NR
365	0	NR	495	121	NR	625	280	NR	755	5	NR	885	0	NR
370	0	NR	500	168	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	224	NR	635	626	NR	765	4	NR	895	0	NR
380	1	NR	510	275	NR	640	163	NR	770	4	NR	900	0	NR
385	2	NR	515	321	NR	645	160	NR	775	3	NR	905	0	NR
390	3	NR	520	354	NR	650	136	NR	780	3	NR	910	0	NR
395	5	NR	525	375	NR	655	111	NR	785	2	NR	915	0	NR
400	7	NR	530	388	NR	660	93	NR	790	2	NR	920	0	NR
405	10	NR	535	395	NR	665	76	NR	795	2	NR	925	0	NR
410	15	NR	540	397	NR	670	72	NR	800	2	NR	930	0	NR
415	28	NR	545	398	NR	675	57	NR	805	1	NR	935	0	NR
420	53	NR	550	396	NR	680	49	NR	810	1	NR	940	0	NR
425	97	NR	555	395	NR	685	42	NR	815	1	NR	945	0	NR
430	163	NR	560	392	NR	690	37	NR	820	1	NR	950	0	NR
435	261	NR	565	388	NR	695	32	NR	825	1	NR	955	0	NR
440	409	NR	570	381	NR	700	27	NR	830	1	NR	960	0	NR
445	637	NR	575	374	NR	705	23	NR	835	1	NR	965	0	NR
450	699	NR	580	365	NR	710	20	NR	840	1	NR	970	0	NR
455	436	NR	585	354	NR	715	17	NR	845	0	NR	975	0	NR
460	274	NR	590	342	NR	720	15	NR	850	0	NR	980	0	NR
465	205	NR	595	325	NR	725	13	NR	855	0	NR	985	0	NR
470	130	NR	600	313	NR	730	11	NR	860	0	NR	990	0	NR
475	90	NR	605	301	NR	735	10	NR	865	0	NR	995	0	NR
480	78	NR	610	323	NR	740	8	NR	870	0	NR	1000	0	NR
485	77	NR	615	340	NR	745	7	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-4

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.71

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	89	NR	620	280	NR	750	6	NR	880	0	NR
365	0	NR	495	121	NR	625	280	NR	755	5	NR	885	0	NR
370	0	NR	500	168	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	224	NR	635	626	NR	765	4	NR	895	0	NR
380	1	NR	510	275	NR	640	163	NR	770	4	NR	900	0	NR
385	2	NR	515	321	NR	645	160	NR	775	3	NR	905	0	NR
390	3	NR	520	354	NR	650	136	NR	780	3	NR	910	0	NR
395	5	NR	525	375	NR	655	111	NR	785	2	NR	915	0	NR
400	7	NR	530	388	NR	660	93	NR	790	2	NR	920	0	NR
405	10	NR	535	395	NR	665	76	NR	795	2	NR	925	0	NR
410	15	NR	540	397	NR	670	72	NR	800	2	NR	930	0	NR
415	28	NR	545	398	NR	675	57	NR	805	1	NR	935	0	NR
420	53	NR	550	396	NR	680	49	NR	810	1	NR	940	0	NR
425	97	NR	555	395	NR	685	42	NR	815	1	NR	945	0	NR
430	163	NR	560	392	NR	690	37	NR	820	1	NR	950	0	NR
435	261	NR	565	388	NR	695	32	NR	825	1	NR	955	0	NR
440	409	NR	570	381	NR	700	27	NR	830	1	NR	960	0	NR
445	637	NR	575	374	NR	705	23	NR	835	1	NR	965	0	NR
450	699	NR	580	365	NR	710	20	NR	840	1	NR	970	0	NR
455	436	NR	585	354	NR	715	17	NR	845	0	NR	975	0	NR
460	274	NR	590	342	NR	720	15	NR	850	0	NR	980	0	NR
465	205	NR	595	325	NR	725	13	NR	855	0	NR	985	0	NR
470	130	NR	600	313	NR	730	11	NR	860	0	NR	990	0	NR
475	90	NR	605	301	NR	735	10	NR	865	0	NR	995	0	NR
480	78	NR	610	323	NR	740	8	NR	870	0	NR	1000	0	NR
485	77	NR	615	340	NR	745	7	NR	875	0	NR			

Summary

$R_f = 80$
 $R_g = 102.3$
 $CIE R_a = 82.3$
 $R_9 = 43.9$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 67	CES51 = 92	CES76 = 54
CES02 = 60	CES27 = 88	CES52 = 91	CES77 = 71
CES03 = 31	CES28 = 81	CES53 = 82	CES78 = 55
CES04 = 69	CES29 = 66	CES54 = 92	CES79 = 81
CES05 = 47	CES30 = 80	CES55 = 90	CES80 = 75
CES06 = 50	CES31 = 69	CES56 = 81	CES81 = 79
CES07 = 40	CES32 = 61	CES57 = 80	CES82 = 90
CES08 = 39	CES33 = 76	CES58 = 81	CES83 = 87
CES09 = 29	CES34 = 68	CES59 = 93	CES84 = 87
CES10 = 73	CES35 = 82	CES60 = 94	CES85 = 82
CES11 = 56	CES36 = 95	CES61 = 91	CES86 = 83
CES12 = 62	CES37 = 75	CES62 = 89	CES87 = 78
CES13 = 42	CES38 = 87	CES63 = 80	CES88 = 85
CES14 = 74	CES39 = 94	CES64 = 79	CES89 = 81
CES15 = 71	CES40 = 87	CES65 = 75	CES90 = 86
CES16 = 46	CES41 = 91	CES66 = 72	CES91 = 80
CES17 = 48	CES42 = 71	CES67 = 69	CES92 = 77
CES18 = 56	CES43 = 72	CES68 = 75	CES93 = 86
CES19 = 70	CES44 = 99	CES69 = 80	CES94 = 71
CES20 = 65	CES45 = 81	CES70 = 66	CES95 = 79
CES21 = 85	CES46 = 83	CES71 = 59	CES96 = 86
CES22 = 77	CES47 = 83	CES72 = 87	CES97 = 85
CES23 = 91	CES48 = 83	CES73 = 56	CES98 = 82
CES24 = 90	CES49 = 82	CES74 = 95	CES99 = 84
CES25 = 71	CES50 = 91	CES75 = 58	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)