

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1433225

Luminaire Tested: EHBR1-36-UNV-ASM-L930

Issue Date: 3/13/2026

Test Information

Test Method: LM-79-2019
Report Number: P1433225
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2601-654-4)
Test Lab: INNOVATION CENTER
Issue Date: 3/13/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-36-UNV-ASM-L930
Description: Elevate Round Highbay at, 36000 lumens, 3000K 90CRI LEDs with ASM lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 32144.2 lumens
Efficiency: N/A
Efficacy: 167.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.99 / 0.92
Luminous Opening: Circular (Dia: 1.71' x H: 0')
CIE Type: Direct

Input Watts (W): 191.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1433225
CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

Luminous Intensity Polar Plot

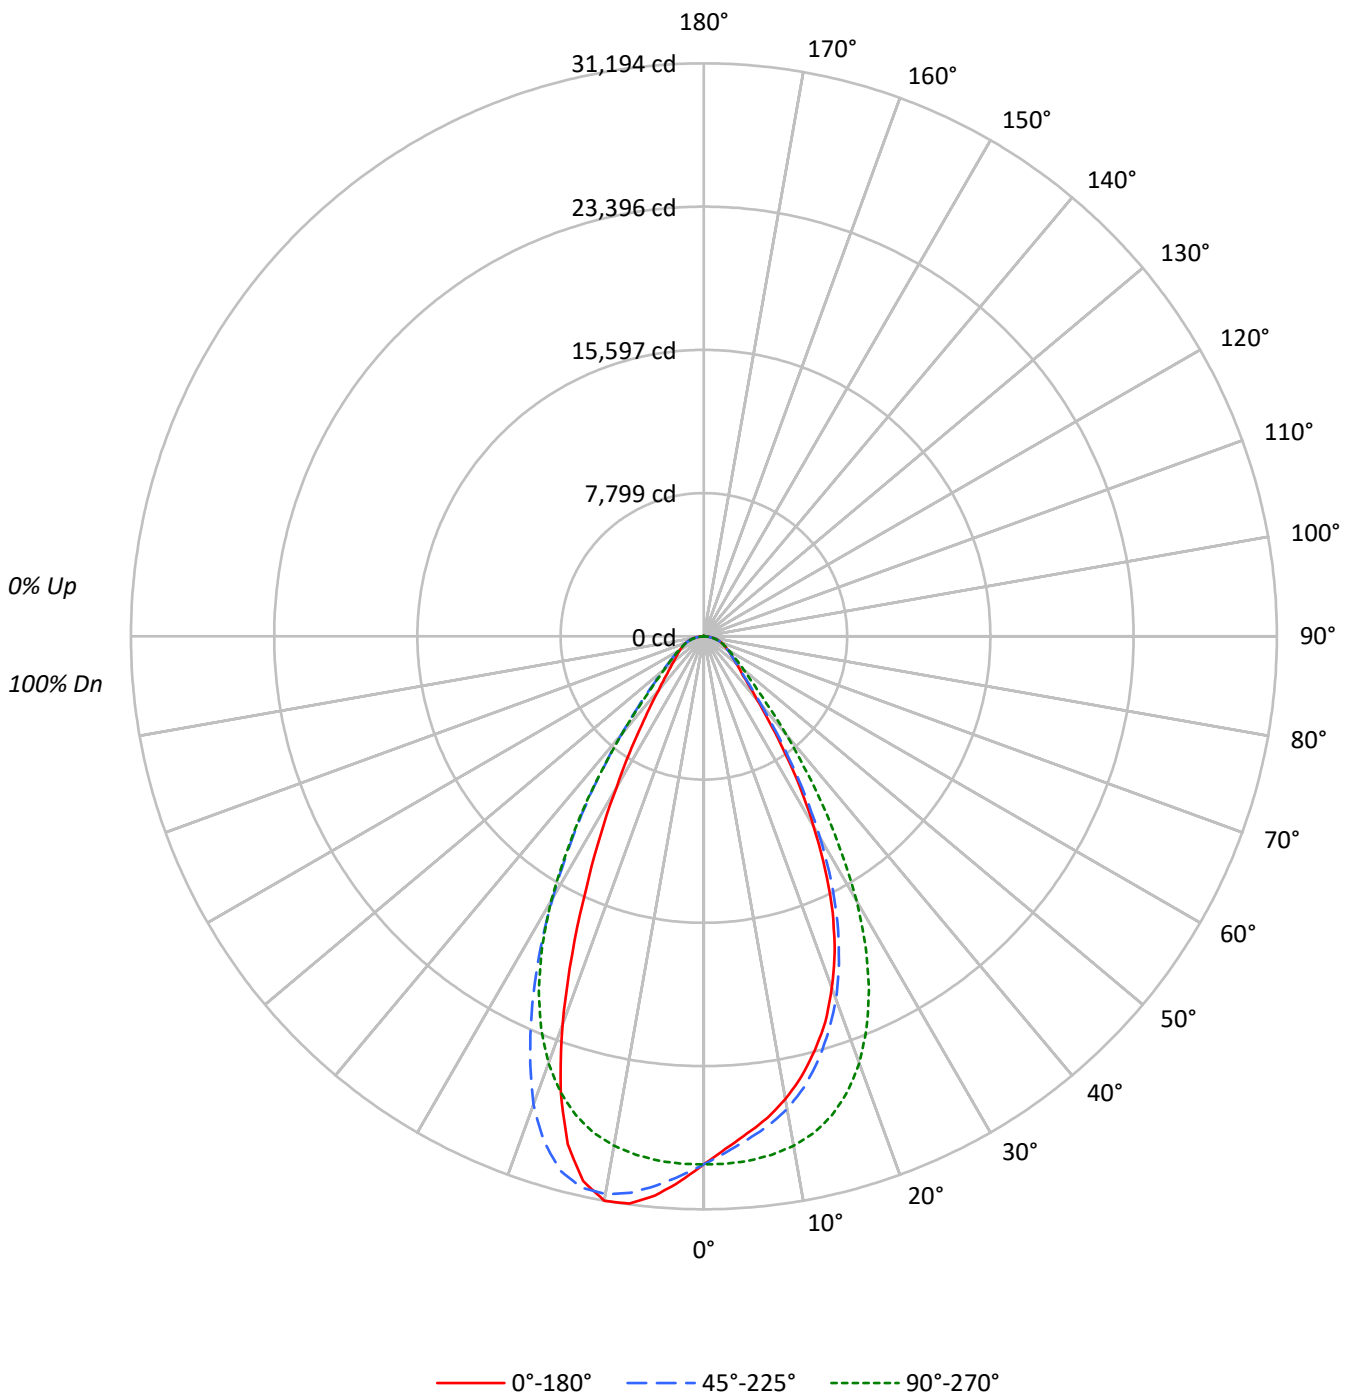



TEST NUMBER: P1433225
 CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	103	109	106	104	101	102	100	98	98	97	95	95	93	92	90	90	90	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81	81	81	81
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74	74	74	74
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	72	69	67	67	67	67
5	87	78	71	66	86	77	70	65	75	69	65	73	68	64	71	67	64	62	62	62	62
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57	57	57	57
7	78	67	60	56	76	67	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
8	74	63	56	52	72	62	56	52	61	55	51	60	55	51	59	54	51	49	49	49	49
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	135002	135002	135002	135002	135002
5°	128046	129544	135055	141533	144079
10°	121983	124566	134273	147038	148750
15°	113438	116468	131187	146510	139167
20°	101751	105177	123553	135617	112376
25°	85905	89156	110166	114596	78439
30°	64788	68544	90167	89266	51438
35°	43510	46136	65238	64184	33604
40°	27709	29612	42593	42867	23390
45°	19966	20797	27330	28504	18323
50°	16852	16986	20566	21101	15777
55°	15116	15152	17063	17513	14605
60°	14283	14161	15077	15397	14197
65°	14004	13879	14119	14394	14064
70°	14130	13886	13899	14167	14314
75°	14252	13821	13791	14281	14691
80°	14433	13427	13484	14433	15439
85°	13681	11358	11358	12985	14349

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 112.5°
 Vertical Angle: 45°
 Luminance: 38424 cd/sqm



TEST NUMBER: P1433225
 CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2733.5	8.5
10°-20°	7436.6	23.1
20°-30°	8721.6	27.1
30°-40°	6065.3	18.9
40°-50°	3014.2	9.4
50°-60°	1802.8	5.6
60°-70°	1268.9	3.9
70°-80°	817.4	2.5
80°-90°	259.6	0.8
90°-100°	1.5	0.0
100°-110°	1.8	0.0
110°-120°	1.8	0.0
120°-130°	2.3	0.0
130°-140°	3.1	0.0
140°-150°	3.8	0.0
150°-160°	4.2	0.0
160°-170°	4.1	0.0
170°-180°	1.8	0.0
0°-30°	18891.6	58.8
0°-40°	24956.9	77.6
0°-60°	29773.9	92.6
0°-90°	32119.8	99.9
90°-120°	5.1	0.0
90°-150°	14.3	0.0
90°-180°	24.0	0.1
0°-180°	32144.2	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	28748	28748	28748	28748	28748	
5°	27163	27480	28650	30024	30564	2548
15°	23333	23956	26983	30135	28625	6507
25°	16579	17206	21261	22116	15138	7480
35°	7590	8048	11380	11196	5862	4835
45°	3006	3131	4115	4292	2759	2430
55°	1846	1851	2084	2139	1784	1675
65°	1260	1249	1271	1295	1266	1252
75°	786	762	760	787	810	829
85°	254	211	211	241	266	261
90°	0	0	0	2	4	13
95°	0	0	1	2	4	1
105°	1	0	1	2	5	1
115°	1	1	2	2	5	1
125°	2	2	2	3	5	1
135°	2	4	4	4	6	2
145°	6	6	6	5	7	4
155°	10	9	9	9	10	5
165°	15	14	14	16	18	4
175°	18	18	19	20	23	2
180°	20	20	20	20	20	



TEST NUMBER: P1433225
 CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	28747.7	28747.7	28747.7	28747.7	28747.7	28747.7	28747.7	28747.7	28747.7
2.5°	27894.4	27912.7	28107.8	28361.7	28731.0	29102.4	29403.2	29601.6	29699.6
5°	27162.8	27264.2	27480.4	27946.7	28649.6	29393.5	30023.7	30436.1	30563.8
7.5°	26450.2	26509.0	26870.7	27459.9	28455.0	29614.0	30550.3	31031.7	31149.3
10°	25580.7	25713.8	26122.4	26817.3	28158.0	29753.0	30835.0	31179.9	31194.0
12.5°	24557.6	24733.9	25155.9	26032.4	27684.2	29703.5	30739.5	30626.3	30369.2
15°	23332.8	23487.5	23956.0	24972.7	26983.4	29409.7	30135.2	29214.0	28624.8
17.5°	22009.9	22150.1	22557.1	23676.7	25995.8	28859.8	28873.8	27051.3	25939.7
20°	20360.4	20470.4	21046.1	22144.7	24723.1	27978.0	27137.0	23803.4	22486.5
22.5°	18605.2	18708.1	19219.8	20363.1	23127.4	26788.7	24718.2	20536.1	18739.4
25°	16578.9	16634.9	17206.4	18240.3	21261.2	25331.6	22116.1	16976.2	15138.0
27.5°	14299.2	14394.6	14992.5	16048.5	19066.1	23484.8	19345.4	13872.3	12176.4
30°	11947.8	12105.8	12640.5	13586.1	16628.0	21117.3	16461.9	11047.6	9485.9
32.5°	9753.3	9867.0	10248.1	11236.2	13898.1	18796.6	13692.7	8852.0	7529.1
35°	7589.5	7703.2	8047.7	9018.0	11379.6	15893.2	11195.8	6955.5	5861.7
37.5°	5801.4	6002.5	6223.5	7011.0	8930.6	13149.9	8924.8	5600.9	4754.5
40°	4520.0	4552.4	4830.5	5334.5	6948.0	10282.1	6992.7	4471.0	3815.5
42.5°	3618.2	3706.1	3825.8	4203.1	5264.5	7862.3	5496.3	3669.4	3240.8
45°	3006.3	3040.8	3131.4	3384.8	4115.2	5785.7	4292.0	3095.8	2759.0
47.5°	2630.1	2615.0	2673.2	2863.0	3351.4	4471.6	3478.6	2655.4	2419.4
50°	2306.6	2297.4	2325.0	2451.6	2815.0	3431.2	2888.3	2317.9	2159.5
52.5°	2055.4	2063.5	2066.2	2145.0	2418.2	2798.3	2459.7	2065.7	1959.0
55°	1846.3	1856.5	1850.6	1908.8	2084.0	2352.4	2139.0	1857.6	1783.8
57.5°	1682.9	1675.4	1667.3	1698.6	1830.1	1995.6	1857.6	1680.2	1631.2
60°	1520.7	1513.7	1507.7	1528.2	1605.3	1728.3	1639.3	1525.5	1511.6
62.5°	1381.6	1377.3	1376.8	1373.0	1432.3	1509.9	1449.5	1386.4	1374.0
65°	1260.3	1255.4	1249.0	1243.1	1270.6	1342.8	1295.4	1261.4	1265.7
67.5°	1139.1	1139.1	1127.7	1118.6	1145.5	1183.3	1162.8	1143.3	1148.2
70°	1029.1	1029.6	1011.3	1004.3	1012.3	1052.8	1031.8	1034.4	1042.5
72.5°	911.0	898.1	884.6	884.1	885.2	916.4	909.4	915.8	924.5
75°	785.5	770.3	761.7	752.0	760.1	783.8	787.1	796.2	809.7
77.5°	664.2	640.9	634.0	629.1	623.7	650.6	660.9	673.3	693.2
80°	533.7	508.3	496.5	489.5	498.6	511.1	533.7	542.8	570.9
82.5°	394.6	375.7	361.2	360.6	364.9	376.2	395.7	413.0	429.1
85°	253.9	223.7	210.8	215.7	210.8	228.0	241.0	261.5	266.3
87.5°	91.6	71.7	68.4	75.5	73.9	79.2	90.5	98.6	99.2
90°	0.5	0.5	0.5	0.5	0.5	1.1	1.6	3.2	4.3
92.5°	0.5	0.5	0.5	0.5	0.5	1.1	1.6	3.2	4.3
95°	0.5	0.5	0.5	0.5	1.1	1.1	1.6	3.2	4.3
97.5°	1.1	0.5	0.5	0.5	1.1	1.1	1.6	3.2	4.3
100°	1.1	0.5	0.5	1.1	1.1	1.1	1.6	3.2	4.3
102.5°	1.1	0.5	0.5	1.1	1.1	1.6	2.1	3.7	4.3
105°	1.1	0.5	0.5	1.1	1.1	1.6	2.1	3.7	4.8
107.5°	1.1	0.5	1.1	1.1	1.1	1.6	2.1	3.7	4.8
110°	1.1	0.5	1.1	1.1	1.1	1.6	2.1	3.7	4.8



TEST NUMBER: P1433225
 CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
112.5°	1.1	0.5	1.1	1.1	1.1	1.6	2.1	3.7	4.8
115°	1.1	0.5	1.1	1.1	1.6	1.6	2.1	3.7	4.8
117.5°	1.1	0.5	1.1	1.6	1.6	1.6	2.1	3.7	4.8
120°	1.1	0.5	1.1	1.6	1.6	1.6	2.7	3.7	4.8
122.5°	1.1	1.1	1.6	2.1	2.1	2.1	2.7	4.3	4.8
125°	1.6	1.1	2.1	2.7	2.1	2.1	3.2	4.3	5.3
127.5°	1.6	1.1	2.1	2.7	2.7	2.7	3.2	4.3	5.3
130°	1.6	1.6	2.7	3.2	3.2	2.7	3.2	4.8	5.3
132.5°	2.1	2.1	3.7	4.3	3.7	3.2	3.7	5.3	6.0
135°	2.1	2.7	3.7	4.8	4.3	3.2	4.3	4.8	6.0
137.5°	2.7	3.2	4.8	5.3	4.8	3.7	4.3	5.3	6.0
140°	3.7	4.3	5.3	5.3	5.3	4.3	4.3	5.3	6.5
142.5°	4.8	4.8	6.0	6.0	6.0	4.8	4.8	6.0	6.5
145°	6.0	6.0	6.5	6.0	6.5	6.0	5.3	6.0	7.0
147.5°	7.0	7.0	7.0	6.5	6.5	6.0	6.0	6.5	7.6
150°	8.1	8.1	7.6	7.0	7.0	7.0	6.5	7.0	8.1
152.5°	9.2	8.6	8.1	7.6	7.6	7.6	7.6	8.1	8.6
155°	10.2	9.7	9.2	8.1	8.6	8.6	8.6	9.2	9.7
157.5°	11.9	10.8	10.2	9.7	9.7	10.2	10.2	10.8	11.3
160°	12.9	12.4	11.9	11.3	11.9	11.9	12.4	12.9	13.5
162.5°	14.0	13.5	12.9	12.9	12.9	12.9	14.0	14.5	15.6
165°	15.1	14.5	14.0	14.0	14.5	14.5	15.6	16.8	17.8
167.5°	15.1	15.1	15.1	15.1	15.6	15.6	16.8	18.4	19.4
170°	16.1	15.6	15.6	16.1	16.1	16.8	17.8	19.4	20.5
172.5°	17.3	16.8	17.3	17.3	17.8	17.8	19.4	21.0	22.1
175°	18.4	17.8	18.4	18.4	18.9	19.4	20.5	22.1	23.2
177.5°	18.9	18.4	18.4	18.4	18.9	20.0	21.0	22.6	23.7
180°	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0



TEST NUMBER: P1433225
 CATALOG NUMBER: EHBR1-36-UNV-ASM-L930

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.01	19.22	18.38	19.53	19.85	18.78	19.99	19.15	20.30	20.62
	3H	19.93	21.00	20.31	21.34	21.70	20.43	21.50	20.81	21.84	22.21
	4H	20.74	21.74	21.15	22.10	22.48	21.15	22.15	21.55	22.50	22.89
	6H	21.41	22.33	21.83	22.70	23.10	21.74	22.66	22.15	23.03	23.43
	8H	21.65	22.52	22.08	22.91	23.32	21.95	22.82	22.38	23.21	23.62
	12H	21.81	22.64	22.25	23.03	23.46	22.08	22.91	22.51	23.29	23.73
4H	2H	18.58	19.58	18.99	19.94	20.32	19.20	20.20	19.61	20.56	20.94
	3H	20.74	21.57	21.16	21.97	22.38	21.13	21.95	21.54	22.36	22.76
	4H	21.69	22.43	22.13	22.85	23.30	22.00	22.73	22.43	23.16	23.60
	6H	22.50	23.14	22.97	23.59	24.06	22.74	23.38	23.21	23.83	24.30
	8H	22.79	23.39	23.27	23.84	24.31	23.01	23.61	23.48	24.05	24.53
	12H	23.00	23.53	23.49	24.01	24.49	23.19	23.72	23.68	24.20	24.68
8H	4H	22.01	22.61	22.48	23.05	23.53	22.30	22.89	22.77	23.34	23.82
	6H	22.97	23.45	23.47	23.95	24.43	23.20	23.68	23.71	24.18	24.67
	8H	23.35	23.78	23.88	24.30	24.80	23.56	24.00	24.09	24.51	25.01
	12H	23.65	24.03	24.17	24.52	25.10	23.84	24.22	24.36	24.71	25.29
12H	4H	22.04	22.56	22.52	23.05	23.52	22.33	22.85	22.82	23.34	23.81
	6H	23.03	23.46	23.56	23.98	24.48	23.27	23.70	23.80	24.22	24.72
	8H	23.48	23.86	24.00	24.35	24.93	23.70	24.08	24.22	24.58	25.15

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-5

Test Date: 08/01/2025

Luminaire Tested: EHBR-60-L930-N

Data in this report applies to families of products including EHBR-60-L930-N

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-472-5
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/05/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Metalux
 Catalog Number: **EHBR-60-L930-N**
 Description: Elevate Round Highbay at, 60000 lumens, 3000K 90CRI LEDs with N lens

Spectral Parameters

CCT (K): 2996
 CIE u': 0.2519
 CIE v': 0.5169
 Duv: -0.0033
 CIE x: 0.4325
 CIE y: 0.3945
 CIE z: 0.1730
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 584
 Purity: 48.21818
 Rf: 91.3
 Rg: 102

CRI (Ra):	94.4		
R1:	96.8	R9:	61.4
R2:	98.1	R10:	94.4
R3:	97.8	R11:	95.7
R4:	95.6	R12:	88.5
R5:	96.9	R13:	97.3
R6:	95.7	R14:	97.8
R7:	90.9	R15:	92.3
R8:	83.0		



Test Conditions

Stabilization Time: 40M
 Operation Time: 1H 40M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-5

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-5

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3000K 7-step quadrangle

REPORT NUMBER: SP1-2506-472-5

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	101	NR	620	317	NR	750	7	NR	880	0	NR
365	0	NR	495	121	NR	625	320	NR	755	6	NR	885	0	NR
370	0	NR	500	141	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	158	NR	635	651	NR	765	4	NR	895	0	NR
380	0	NR	510	171	NR	640	207	NR	770	4	NR	900	0	NR
385	0	NR	515	182	NR	645	201	NR	775	3	NR	905	0	NR
390	0	NR	520	189	NR	650	174	NR	780	3	NR	910	0	NR
395	1	NR	525	194	NR	655	146	NR	785	2	NR	915	0	NR
400	1	NR	530	199	NR	660	124	NR	790	2	NR	920	0	NR
405	3	NR	535	205	NR	665	105	NR	795	2	NR	925	0	NR
410	4	NR	540	210	NR	670	96	NR	800	1	NR	930	0	NR
415	7	NR	545	216	NR	675	79	NR	805	1	NR	935	0	NR
420	13	NR	550	222	NR	680	67	NR	810	1	NR	940	0	NR
425	22	NR	555	230	NR	685	58	NR	815	1	NR	945	0	NR
430	37	NR	560	240	NR	690	49	NR	820	1	NR	950	0	NR
435	60	NR	565	248	NR	695	42	NR	825	1	NR	955	0	NR
440	101	NR	570	258	NR	700	36	NR	830	1	NR	960	0	NR
445	172	NR	575	268	NR	705	30	NR	835	1	NR	965	0	NR
450	223	NR	580	278	NR	710	26	NR	840	1	NR	970	0	NR
455	167	NR	585	287	NR	715	22	NR	845	0	NR	975	0	NR
460	126	NR	590	295	NR	720	19	NR	850	0	NR	980	0	NR
465	111	NR	595	298	NR	725	16	NR	855	0	NR	985	0	NR
470	86	NR	600	303	NR	730	14	NR	860	0	NR	990	0	NR
475	74	NR	605	307	NR	735	12	NR	865	0	NR	995	0	NR
480	77	NR	610	341	NR	740	10	NR	870	0	NR	1000	0	NR
485	86	NR	615	368	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-5

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.44

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	101	NR	620	317	NR	750	7	NR	880	0	NR
365	0	NR	495	121	NR	625	320	NR	755	6	NR	885	0	NR
370	0	NR	500	141	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	158	NR	635	651	NR	765	4	NR	895	0	NR
380	0	NR	510	171	NR	640	207	NR	770	4	NR	900	0	NR
385	0	NR	515	182	NR	645	201	NR	775	3	NR	905	0	NR
390	0	NR	520	189	NR	650	174	NR	780	3	NR	910	0	NR
395	1	NR	525	194	NR	655	146	NR	785	2	NR	915	0	NR
400	1	NR	530	199	NR	660	124	NR	790	2	NR	920	0	NR
405	3	NR	535	205	NR	665	105	NR	795	2	NR	925	0	NR
410	4	NR	540	210	NR	670	96	NR	800	1	NR	930	0	NR
415	7	NR	545	216	NR	675	79	NR	805	1	NR	935	0	NR
420	13	NR	550	222	NR	680	67	NR	810	1	NR	940	0	NR
425	22	NR	555	230	NR	685	58	NR	815	1	NR	945	0	NR
430	37	NR	560	240	NR	690	49	NR	820	1	NR	950	0	NR
435	60	NR	565	248	NR	695	42	NR	825	1	NR	955	0	NR
440	101	NR	570	258	NR	700	36	NR	830	1	NR	960	0	NR
445	172	NR	575	268	NR	705	30	NR	835	1	NR	965	0	NR
450	223	NR	580	278	NR	710	26	NR	840	1	NR	970	0	NR
455	167	NR	585	287	NR	715	22	NR	845	0	NR	975	0	NR
460	126	NR	590	295	NR	720	19	NR	850	0	NR	980	0	NR
465	111	NR	595	298	NR	725	16	NR	855	0	NR	985	0	NR
470	86	NR	600	303	NR	730	14	NR	860	0	NR	990	0	NR
475	74	NR	605	307	NR	735	12	NR	865	0	NR	995	0	NR
480	77	NR	610	341	NR	740	10	NR	870	0	NR	1000	0	NR
485	86	NR	615	368	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-5

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.85

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	101	NR	620	317	NR	750	7	NR	880	0	NR
365	0	NR	495	121	NR	625	320	NR	755	6	NR	885	0	NR
370	0	NR	500	141	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	158	NR	635	651	NR	765	4	NR	895	0	NR
380	0	NR	510	171	NR	640	207	NR	770	4	NR	900	0	NR
385	0	NR	515	182	NR	645	201	NR	775	3	NR	905	0	NR
390	0	NR	520	189	NR	650	174	NR	780	3	NR	910	0	NR
395	1	NR	525	194	NR	655	146	NR	785	2	NR	915	0	NR
400	1	NR	530	199	NR	660	124	NR	790	2	NR	920	0	NR
405	3	NR	535	205	NR	665	105	NR	795	2	NR	925	0	NR
410	4	NR	540	210	NR	670	96	NR	800	1	NR	930	0	NR
415	7	NR	545	216	NR	675	79	NR	805	1	NR	935	0	NR
420	13	NR	550	222	NR	680	67	NR	810	1	NR	940	0	NR
425	22	NR	555	230	NR	685	58	NR	815	1	NR	945	0	NR
430	37	NR	560	240	NR	690	49	NR	820	1	NR	950	0	NR
435	60	NR	565	248	NR	695	42	NR	825	1	NR	955	0	NR
440	101	NR	570	258	NR	700	36	NR	830	1	NR	960	0	NR
445	172	NR	575	268	NR	705	30	NR	835	1	NR	965	0	NR
450	223	NR	580	278	NR	710	26	NR	840	1	NR	970	0	NR
455	167	NR	585	287	NR	715	22	NR	845	0	NR	975	0	NR
460	126	NR	590	295	NR	720	19	NR	850	0	NR	980	0	NR
465	111	NR	595	298	NR	725	16	NR	855	0	NR	985	0	NR
470	86	NR	600	303	NR	730	14	NR	860	0	NR	990	0	NR
475	74	NR	605	307	NR	735	12	NR	865	0	NR	995	0	NR
480	77	NR	610	341	NR	740	10	NR	870	0	NR	1000	0	NR
485	86	NR	615	368	NR	745	8	NR	875	0	NR			

Summary

$R_f = 91.3$
 $R_g = 102$
 $CIE R_a = 94.4$
 $R_9 = 61.4$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)


CES01 = 86	CES26 = 91	CES51 = 96	CES76 = 89
CES02 = 63	CES27 = 96	CES52 = 95	CES77 = 85
CES03 = 32	CES28 = 96	CES53 = 93	CES78 = 86
CES04 = 70	CES29 = 90	CES54 = 98	CES79 = 89
CES05 = 51	CES30 = 96	CES55 = 98	CES80 = 91
CES06 = 51	CES31 = 90	CES56 = 95	CES81 = 72
CES07 = 44	CES32 = 84	CES57 = 95	CES82 = 95
CES08 = 42	CES33 = 91	CES58 = 95	CES83 = 93
CES09 = 29	CES34 = 92	CES59 = 99	CES84 = 96
CES10 = 76	CES35 = 96	CES60 = 96	CES85 = 80
CES11 = 59	CES36 = 90	CES61 = 96	CES86 = 77
CES12 = 65	CES37 = 94	CES62 = 95	CES87 = 91
CES13 = 44	CES38 = 99	CES63 = 94	CES88 = 96
CES14 = 74	CES39 = 97	CES64 = 96	CES89 = 82
CES15 = 72	CES40 = 94	CES65 = 92	CES90 = 97
CES16 = 48	CES41 = 94	CES66 = 95	CES91 = 82
CES17 = 50	CES42 = 91	CES67 = 94	CES92 = 78
CES18 = 57	CES43 = 88	CES68 = 93	CES93 = 87
CES19 = 72	CES44 = 99	CES69 = 94	CES94 = 73
CES20 = 67	CES45 = 93	CES70 = 90	CES95 = 85
CES21 = 86	CES46 = 93	CES71 = 90	CES96 = 92
CES22 = 79	CES47 = 86	CES72 = 96	CES97 = 93
CES23 = 92	CES48 = 95	CES73 = 85	CES98 = 94
CES24 = 91	CES49 = 91	CES74 = 90	CES99 = 93
CES25 = 72	CES50 = 96	CES75 = 90	



Color Rendition by Hue-Angle Bin



Measure Comparisons

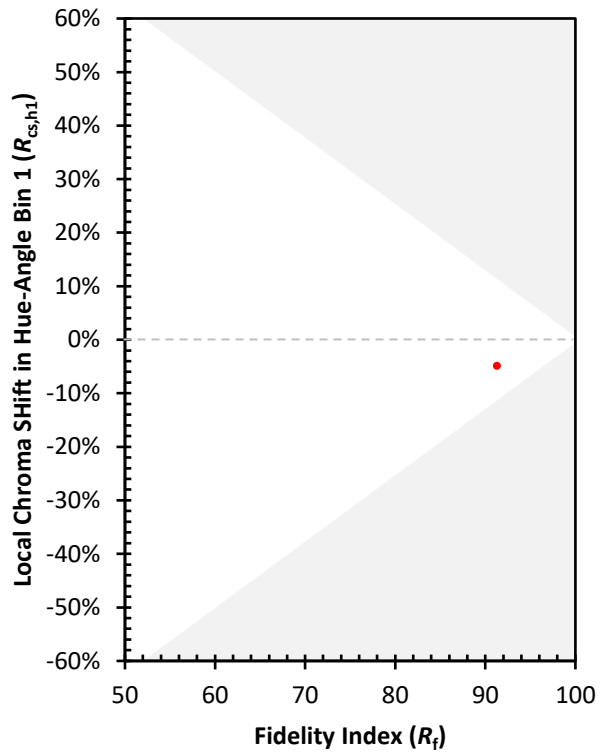

(END OF REPORT)