

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1444795

Luminaire Tested: EHBR1-18-UNV-TA-L940-UPL15

Issue Date: 5/1/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1444795  
REPORT IS A COMBINATION OF REPORTS P1444310 AND P1431635  
Test Lab: INNOVATION CENTER  
Issue Date: 5/1/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: EHBR1-18-UNV-TA-L940-UPL15  
Description: Elevate Round Highbay at, 18000 lumens, 4000K 90CRI LEDs with TA lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 18451.2 lumens  
Efficiency: N/A  
Efficacy: 177.4 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 0.77 / 0.88  
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')  
CIE Type: Direct

Input Watts (W): 104  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1444795  
CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

### Luminous Intensity Polar Plot

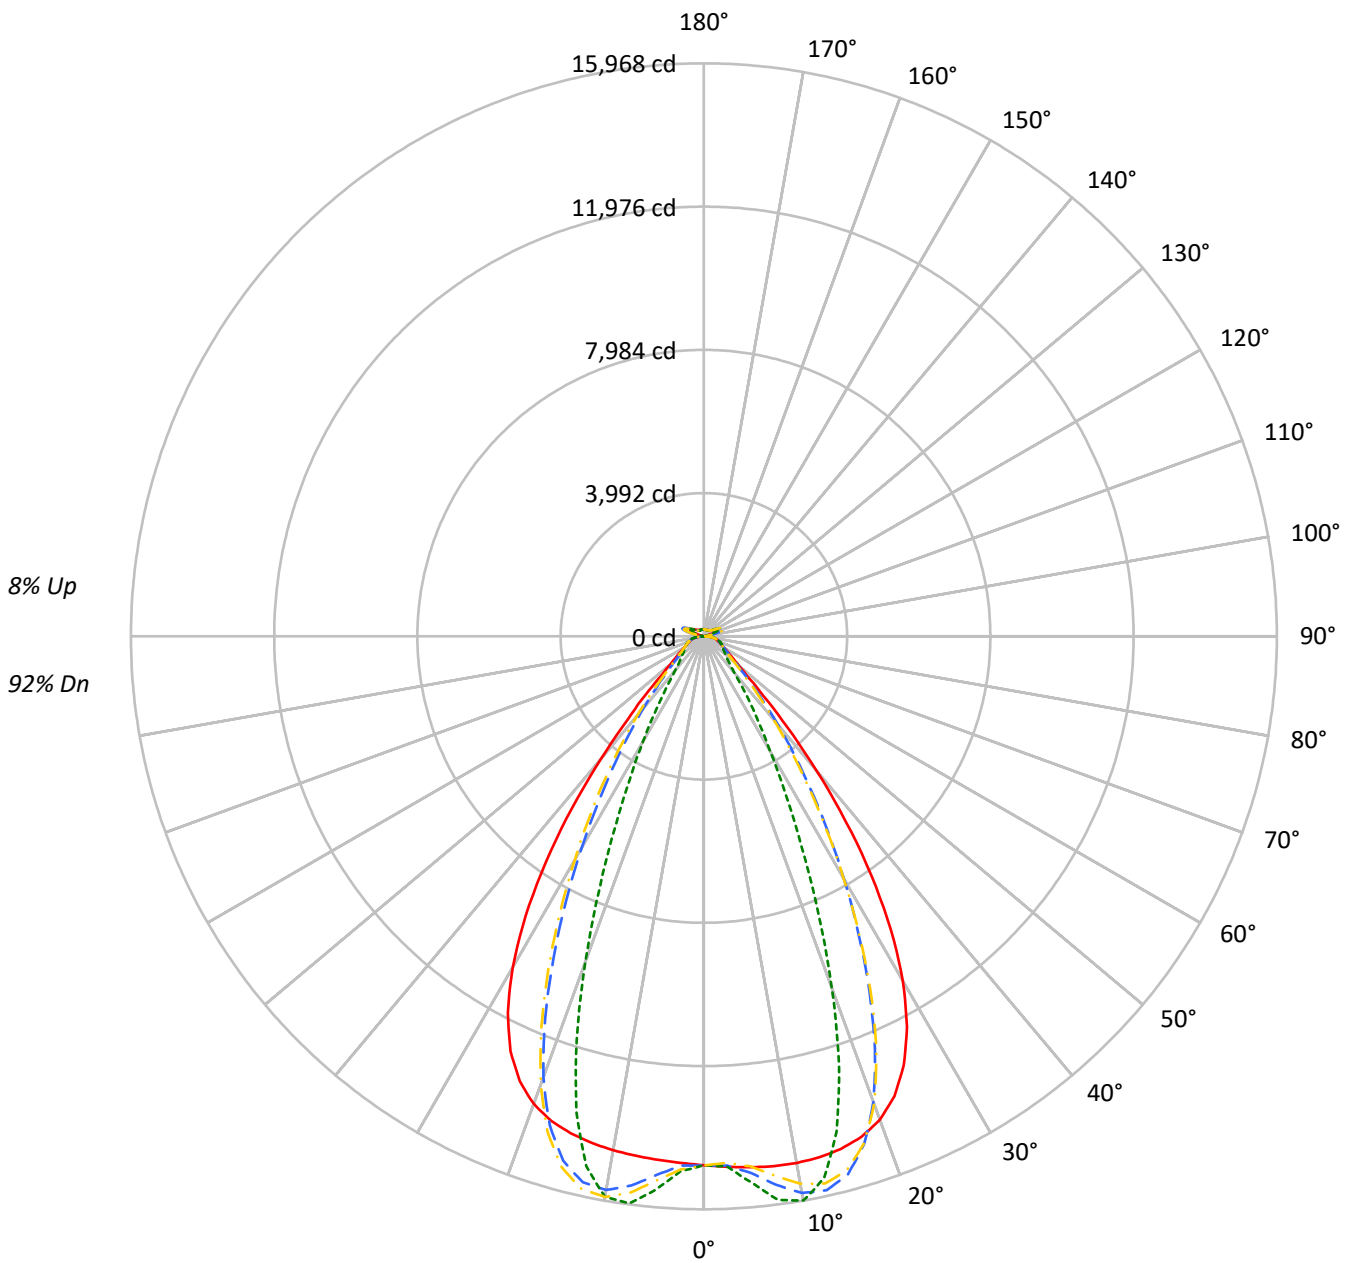

— 0°-180°    - - 45°-225°    - · - · 90°-270°    - · - · 135°-315°



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	113	113	113	113	107	107	107	100	100	100	95	95	95	95	95	95	92
1	110	106	103	101	107	104	101	98	98	96	94	93	91	89	88	87	86	88	87	86	83
2	103	97	92	88	100	95	90	87	90	87	83	86	83	80	82	80	78	82	80	78	75
3	97	89	83	79	94	87	82	77	83	79	75	80	76	73	76	73	71	76	73	71	69
4	91	82	76	71	88	80	74	70	77	72	68	74	70	66	71	68	65	71	68	65	63
5	86	76	69	64	83	75	68	64	72	66	62	69	65	61	67	63	60	67	63	60	58
6	81	71	64	59	79	69	63	58	67	61	57	65	60	56	63	59	55	63	59	55	54
7	76	66	59	54	74	65	58	54	63	57	53	61	56	52	59	55	51	59	55	51	50
8	72	62	55	50	70	61	54	50	59	53	49	57	52	49	55	51	48	55	51	48	46
9	68	58	51	47	67	57	51	47	55	50	46	54	49	45	52	48	45	52	48	45	43
10	65	54	48	44	63	54	48	43	52	47	43	51	46	42	50	45	42	50	45	42	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	69219	69219	69219	69219
5°	69554	71582	68580	72520
10°	70135	75156	68453	74659
15°	70479	68128	68333	65385
20°	69750	50753	67467	46959
25°	66021	32099	63839	29124
30°	57675	19289	55441	17628
35°	44386	12104	41834	10722
40°	28078	7592	25689	7135
45°	14472	5915	14232	5817
50°	8485	5261	8225	5179
55°	6500	4977	6259	4933
60°	5500	5085	5266	5018
65°	5166	5310	4969	5129
70°	5048	5560	4796	5351
75°	5396	5897	5105	5637
80°	5583	6530	5064	5961
85°	5258	6299	4251	5394

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 25°  
 Vertical Angle: 45°  
 Luminance: 22148 cd/sqm



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1452.6	7.9
10°-20°	4086.4	22.1
20°-30°	4654.1	25.2
30°-40°	3345.1	18.1
40°-50°	1542.8	8.4
50°-60°	738.3	4.0
60°-70°	538.7	2.9
70°-80°	409.3	2.2
80°-90°	188.6	1.0
90°-100°	42.5	0.2
100°-110°	246.0	1.3
110°-120°	454.5	2.5
120°-130°	277.6	1.5
130°-140°	178.0	1.0
140°-150°	131.6	0.7
150°-160°	91.4	0.5
160°-170°	55.0	0.3
170°-180°	18.8	0.1
0°-30°	10193.1	55.2
0°-40°	13538.3	73.4
0°-60°	15819.3	85.7
0°-90°	16955.9	91.9
90°-120°	743.0	4.0
90°-150°	1330.2	7.2
90°-180°	1495.0	8.1
0°-180°	18451.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	14740	14740	14740	14740	14740	
5°	14851	15284	14643	15484	14851	1419
15°	14786	14293	14336	13718	14786	4166
25°	13184	6410	12749	5816	13184	5977
35°	8146	2222	7678	1968	8146	5000
45°	2342	957	2303	941	2342	1991
55°	878	673	846	667	878	811
65°	539	554	519	535	539	539
75°	380	415	360	397	380	395
85°	181	216	146	185	181	170
90°	51	64	16	19	51	31
95°	20	22	20	22	20	19
105°	88	114	59	114	88	117
115°	396	481	415	481	396	366
125°	298	312	337	313	298	271
135°	233	207	251	209	233	182
145°	207	201	220	203	207	131
155°	193	193	205	195	193	90
165°	191	191	198	192	191	54
175°	196	198	199	198	196	19
180°	198	198	198	198	198	



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (FULL):**

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14796.0	14794.8	14794.6	14793.6	14793.3	14793.3	14792.8	14791.6	14790.8	14789.1	14787.3
5°	14850.9	14850.2	14850.6	14850.7	14849.7	14847.4	14843.8	14839.3	14833.8	14828.5	14823.9
7.5°	14893.4	14894.4	14895.7	14895.4	14892.2	14886.8	14879.4	14875.3	14877.7	14885.7	14904.1
10°	14901.1	14907.4	14909.9	14909.1	14902.7	14898.0	14899.9	14915.5	14946.6	14988.0	15044.8
12.5°	14870.9	14878.7	14878.4	14875.9	14869.6	14876.0	14898.6	14945.0	15011.7	15093.5	15189.4
15°	14786.1	14796.1	14793.3	14790.0	14785.8	14806.6	14851.8	14932.5	15035.5	15150.8	15268.8
17.5°	14621.3	14633.5	14627.6	14623.9	14620.3	14659.3	14737.0	14855.2	14984.8	15115.3	15227.1
20°	14335.7	14343.8	14329.7	14323.1	14328.7	14405.2	14519.5	14670.4	14807.1	14930.5	15006.9
22.5°	13869.4	13879.6	13853.2	13850.1	13882.6	14000.0	14144.7	14313.5	14441.9	14539.6	14569.1
25°	13184.4	13194.3	13163.0	13181.8	13237.1	13397.0	13569.3	13749.9	13859.3	13931.8	13911.8
27.5°	12259.8	12268.8	12239.1	12277.4	12365.0	12575.1	12777.8	12973.6	13071.3	13122.0	13057.8
30°	11093.7	11112.5	11077.4	11130.7	11264.4	11537.2	11769.5	11989.1	12086.4	12125.1	12025.0
32.5°	9708.7	9735.5	9696.8	9776.1	9962.6	10290.3	10554.2	10799.6	10907.2	10951.4	10838.3
35°	8146.5	8185.0	8140.6	8259.8	8489.8	8854.6	9146.9	9420.9	9548.3	9610.9	9497.0
37.5°	6491.5	6528.2	6504.2	6663.2	6915.8	7293.9	7592.3	7887.8	8031.8	8125.6	8035.8
40°	4866.7	4900.3	4918.4	5100.3	5337.9	5694.3	5980.9	6273.2	6434.3	6552.1	6496.6
42.5°	3435.0	3468.8	3530.6	3706.1	3904.2	4199.2	4444.7	4707.2	4861.1	4986.7	4965.3
45°	2341.5	2380.8	2458.2	2601.9	2745.2	2956.9	3137.1	3341.3	3467.0	3582.1	3583.4
47.5°	1640.8	1668.4	1737.6	1835.7	1929.2	2194.1	2205.0	2305.4	2389.9	2475.8	2487.0
50°	1264.5	1281.2	1317.9	1372.6	1425.5	1494.3	1557.2	1630.0	1682.0	1729.1	1740.4
52.5°	1039.3	1050.0	1068.6	1098.2	1129.0	1166.3	1200.1	1240.0	1268.2	1293.5	1298.8
55°	878.4	887.2	915.0	920.7	955.8	962.5	977.5	1001.8	1018.3	1033.4	1037.1
57.5°	757.1	763.4	769.3	781.8	792.7	808.4	821.1	838.5	848.9	859.8	860.7
60°	661.2	665.8	670.0	678.7	686.2	697.1	705.8	717.6	725.1	733.3	734.2
62.5°	589.9	593.2	596.0	601.7	607.1	615.4	622.3	632.2	639.2	645.5	646.9
65°	539.2	541.7	543.4	547.8	552.4	559.5	565.8	573.9	579.0	583.9	584.9
67.5°	494.3	496.7	498.4	502.4	505.6	511.0	515.2	521.3	525.1	529.0	529.1
70°	442.9	445.0	446.4	450.2	452.7	457.3	460.7	466.1	470.1	474.4	475.5
72.5°	407.2	408.5	410.4	413.8	417.4	422.2	426.8	432.5	437.2	441.7	443.6
75°	380.1	381.6	382.9	385.8	388.2	392.4	395.8	401.0	405.1	409.9	412.3
77.5°	341.1	342.8	343.8	346.8	348.8	352.8	355.3	360.0	363.3	367.7	369.9
80°	293.7	295.3	296.2	298.9	300.5	304.2	306.7	311.2	314.0	318.3	321.0
82.5°	241.4	242.9	243.3	246.0	246.9	249.9	251.6	256.3	259.7	265.4	269.3
85°	180.7	181.3	182.1	181.5	185.2	185.4	189.6	190.3	195.7	197.2	203.5
87.5°	110.5	112.2	113.0	115.5	116.5	119.1	119.8	122.5	124.0	127.1	128.5
90°	50.9	53.7	54.9	58.0	59.2	62.0	63.1	66.2	67.5	70.8	72.5
92.5°	17.0	18.2	19.3	20.6	21.7	23.1	24.4	25.6	26.8	28.2	30.5
95°	19.5	20.8	22.1	23.3	24.6	25.9	27.2	28.4	29.7	31.0	34.7
97.5°	24.3	25.4	26.6	27.7	28.8	29.9	31.0	32.1	33.3	34.4	38.8
100°	31.8	32.7	33.6	34.6	35.5	36.5	37.5	38.4	39.3	40.2	48.4
102.5°	52.4	55.7	59.1	62.3	65.7	68.9	72.4	75.6	78.9	82.3	99.8
105°	88.5	97.5	106.7	115.6	124.7	133.8	142.8	151.8	160.9	169.8	198.4
107.5°	150.9	167.6	184.4	201.1	217.9	234.7	251.5	268.1	284.9	301.6	330.5
110°	278.5	291.9	305.4	318.8	332.3	345.9	359.3	372.7	386.2	399.6	420.7



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	375.4	381.4	387.5	393.6	399.7	405.8	411.9	417.9	424.0	430.0	445.0
115°	396.3	398.5	400.6	402.6	404.8	406.8	409.0	410.9	413.1	415.0	425.3
117.5°	385.1	384.7	384.3	384.0	383.5	383.1	382.6	382.3	381.7	381.2	386.9
120°	359.5	357.7	355.8	353.8	352.0	349.9	348.1	346.2	344.1	342.1	344.5
122.5°	327.3	325.0	322.8	320.5	318.2	315.8	313.5	311.1	308.7	306.4	307.3
125°	297.5	295.1	293.0	290.6	288.3	285.8	283.5	281.1	278.7	276.2	276.6
127.5°	271.7	270.1	268.5	266.7	265.1	263.3	261.5	259.7	258.1	256.1	256.3
130°	255.3	253.8	252.3	250.7	249.2	247.6	246.0	244.3	242.7	240.9	241.1
132.5°	241.9	240.9	239.9	238.7	237.6	236.3	235.1	233.7	232.5	231.2	231.4
135°	233.2	232.2	231.2	230.2	229.2	227.9	226.8	225.6	224.2	223.0	223.3
137.5°	225.8	225.1	224.2	223.1	222.1	220.9	219.9	218.7	217.5	216.3	216.6
140°	219.2	218.4	217.6	216.6	215.8	214.7	213.7	212.6	211.6	210.4	210.8
142.5°	211.6	210.8	210.3	209.5	208.8	207.9	207.0	206.1	205.3	204.3	205.0
145°	206.7	206.2	205.6	205.1	204.3	203.6	202.8	202.0	201.3	200.5	201.1
147.5°	202.5	202.1	201.6	201.0	200.6	199.9	199.3	198.5	198.0	197.2	197.9
150°	198.8	198.3	198.0	197.5	196.9	196.4	195.7	195.1	194.5	193.8	194.4
152.5°	194.8	194.3	194.0	193.5	192.9	192.4	191.9	191.3	190.7	190.1	190.6
155°	192.7	192.2	191.7	191.3	190.8	190.3	189.8	189.2	188.7	188.0	188.5
157.5°	191.4	191.0	190.6	190.1	189.9	189.5	189.0	188.6	188.2	187.7	188.0
160°	191.2	190.8	190.4	190.0	189.6	189.1	188.8	188.3	187.9	187.4	187.7
162.5°	191.0	190.5	190.1	189.8	189.4	189.0	188.7	188.3	187.9	187.4	187.7
165°	191.4	191.2	190.9	190.6	190.3	190.1	189.8	189.5	189.2	188.8	189.1
167.5°	193.4	193.0	192.8	192.4	192.1	191.8	191.5	191.1	190.9	190.4	190.7
170°	194.3	194.1	193.9	193.7	193.5	193.3	193.1	192.9	192.7	192.5	192.7
172.5°	195.6	195.3	195.2	195.1	194.9	194.7	194.6	194.4	194.3	194.1	194.4
175°	195.7	195.6	195.5	195.4	195.3	195.2	195.1	195.0	195.0	194.8	195.0
177.5°	197.0	196.9	196.9	196.9	196.9	196.9	196.9	196.8	196.7	196.7	196.8
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14785.8	14784.0	14781.6	14778.4	14775.7	14772.6	14765.3	14763.0	14765.6	14767.1	14770.6
5°	14820.9	14821.9	14822.4	14829.1	14834.9	14849.3	14962.7	15007.8	15042.6	15064.8	15098.3
7.5°	14926.8	14960.9	14994.6	15040.0	15079.1	15131.9	15330.3	15414.8	15474.8	15518.0	15571.1
10°	15106.4	15180.8	15250.5	15332.3	15402.5	15482.9	15667.7	15749.9	15801.8	15839.7	15875.0
12.5°	15287.2	15390.3	15483.6	15574.6	15650.6	15720.4	15785.3	15814.1	15816.5	15817.8	15799.0
15°	15381.4	15480.0	15562.1	15622.3	15667.0	15686.8	15575.0	15516.3	15442.1	15381.1	15280.6
17.5°	15321.9	15381.1	15416.6	15413.1	15394.6	15332.7	15016.1	14841.9	14668.9	14513.1	14308.7
20°	15057.7	15053.2	15022.3	14934.8	14829.5	14665.6	14122.5	13809.3	13506.3	13240.4	12917.6
22.5°	14566.1	14488.8	14380.9	14192.3	13982.9	13696.5	12918.4	12457.5	12035.8	11663.4	11246.1
25°	13853.8	13694.7	13495.8	13196.4	12870.9	12453.3	11494.2	10921.0	10414.7	9975.6	9494.1
27.5°	12942.2	12702.5	12411.0	11996.7	11555.7	11020.7	9957.3	9324.7	8781.3	8310.6	7798.1
30°	11863.0	11551.3	11174.9	10660.6	10128.7	9521.9	8443.4	7802.7	7252.6	6768.3	6255.4
32.5°	10643.4	10278.3	9837.2	9260.1	8684.7	8060.9	7019.4	6399.2	5873.7	5407.7	4943.6
35°	9298.3	8906.7	8440.1	7851.3	7279.5	6673.0	5717.3	5158.1	4694.0	4282.2	3907.4
37.5°	7855.4	7470.9	7027.4	6472.5	5942.2	5392.6	4568.0	4099.4	3710.0	3368.2	3078.8
40°	6355.1	6018.7	5635.0	5155.3	4702.7	4244.9	3568.1	3196.1	2888.8	2628.1	2411.3
42.5°	4873.3	4612.6	4318.3	3939.2	3592.9	3244.4	2723.4	2447.8	2220.1	2032.5	1879.1
45°	3535.8	3361.3	3164.0	2900.4	2660.8	2417.7	2046.9	1853.2	1705.0	1584.0	1481.7
47.5°	2471.7	2370.5	2364.3	2120.8	1945.1	1796.4	1557.5	1435.2	1344.4	1271.0	1206.3
50°	1735.7	1686.8	1626.0	1539.1	1457.6	1373.5	1228.0	1154.0	1100.8	1056.4	1015.5
52.5°	1297.6	1272.3	1239.8	1193.7	1149.6	1102.2	1010.2	963.0	946.4	905.0	872.6
55°	1036.5	1021.8	1003.5	976.4	949.4	938.7	859.8	824.8	802.7	786.4	768.9
57.5°	860.9	850.0	839.1	820.8	805.2	786.4	744.5	726.5	713.4	703.8	691.7
60°	734.3	727.9	721.7	710.9	702.6	692.4	665.8	655.7	648.8	643.0	635.3
62.5°	648.1	644.8	641.6	635.9	631.7	626.2	607.9	603.1	599.6	596.7	592.1
65°	585.9	583.5	581.8	578.0	575.9	572.6	556.9	553.7	551.5	550.5	547.8
67.5°	529.4	526.8	525.7	523.0	522.1	520.1	507.3	505.5	504.8	505.1	504.1
70°	476.5	475.5	476.0	475.6	476.8	477.2	469.5	469.4	470.2	471.8	472.0
72.5°	444.9	444.9	445.4	445.7	446.8	447.4	440.9	440.7	441.0	442.3	442.3
75°	414.7	415.1	416.8	417.4	418.7	419.0	410.5	409.5	409.6	410.7	410.3
77.5°	372.9	374.7	377.9	379.5	382.2	382.6	373.0	371.9	371.9	373.1	372.1
80°	325.6	329.1	334.0	337.4	341.4	343.1	333.2	330.9	328.8	328.4	326.4
82.5°	275.3	279.5	285.5	288.5	292.8	293.8	277.4	274.3	272.4	272.6	270.8
85°	210.2	213.3	218.8	220.5	223.1	222.9	204.1	196.1	198.3	194.9	197.5
87.5°	131.8	133.7	137.0	137.5	138.7	138.4	119.6	115.9	114.8	114.9	113.5
90°	76.3	78.3	82.0	82.8	85.5	85.9	71.4	70.3	68.4	68.5	66.0
92.5°	32.9	35.0	37.5	39.8	42.2	44.4	45.0	46.8	44.5	42.1	39.9
95°	38.5	42.2	46.0	49.7	53.6	57.3	61.1	64.8	61.3	57.9	54.3
97.5°	43.3	47.7	52.1	56.6	61.0	65.4	69.9	74.3	70.6	66.7	63.0
100°	56.7	65.0	73.2	81.6	89.9	98.2	106.5	114.8	107.5	100.2	92.9
102.5°	117.4	135.1	152.6	170.2	187.7	205.4	223.1	240.7	224.0	207.2	190.4
105°	227.0	255.5	284.1	312.5	341.0	369.5	398.2	426.7	400.0	373.2	346.4
107.5°	359.4	388.4	417.3	446.2	475.1	504.0	533.3	562.2	536.1	509.9	483.8
110°	441.9	462.9	484.0	505.1	526.2	547.2	568.7	589.8	574.2	558.4	542.7



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	460.1	475.2	490.3	505.3	520.3	535.3	551.0	566.1	558.1	550.2	542.4
115°	435.4	445.7	455.8	465.9	476.1	486.2	496.9	507.2	504.6	502.0	499.5
117.5°	392.6	398.2	404.0	409.6	415.1	420.8	427.3	433.0	433.3	433.8	434.1
120°	346.9	349.3	351.6	353.9	356.3	358.6	361.9	364.4	366.5	368.5	370.5
122.5°	308.2	309.0	309.9	310.7	311.4	312.3	314.2	315.4	316.7	318.1	319.6
125°	277.0	277.4	277.8	278.2	278.4	278.8	280.5	281.0	281.1	281.1	281.1
127.5°	256.2	256.3	256.3	256.3	256.2	256.3	257.6	257.9	256.9	255.9	254.9
130°	241.3	241.4	241.6	241.7	241.9	242.0	243.6	244.1	242.4	240.6	239.0
132.5°	231.7	231.9	232.0	232.4	232.5	232.7	234.5	235.1	233.1	231.2	229.3
135°	223.5	224.0	224.2	224.4	224.7	225.2	227.0	227.7	225.9	224.1	222.2
137.5°	216.8	217.3	217.4	217.8	218.1	218.5	220.6	221.3	219.9	218.3	216.9
140°	211.1	211.6	212.0	212.4	212.8	213.4	215.7	216.5	215.4	214.2	213.0
142.5°	205.4	206.1	206.6	207.3	207.9	208.6	211.3	212.3	211.6	210.6	209.8
145°	201.7	202.5	203.2	203.9	204.7	205.5	208.5	209.7	209.2	208.6	208.0
147.5°	198.3	199.1	199.7	200.4	201.1	202.0	205.1	206.4	206.0	205.6	205.2
150°	195.1	195.7	196.4	197.1	198.0	198.7	202.3	203.7	203.4	203.0	202.6
152.5°	191.2	191.7	192.4	193.1	193.8	194.5	198.6	200.1	199.8	199.5	199.3
155°	188.8	189.4	189.8	190.3	190.8	191.5	195.9	197.3	197.1	196.9	196.8
157.5°	188.3	188.6	188.8	189.2	189.6	190.0	194.5	196.0	195.7	195.6	195.5
160°	187.9	188.2	188.3	188.7	188.8	189.2	193.8	195.2	195.1	194.9	194.7
162.5°	188.0	188.5	188.7	189.0	189.3	189.7	194.4	195.9	195.6	195.4	195.2
165°	189.2	189.4	189.6	189.9	190.1	190.3	194.6	195.9	195.8	195.6	195.5
167.5°	190.8	191.1	191.2	191.5	191.6	192.0	196.0	197.2	197.1	196.9	196.9
170°	192.8	192.9	193.1	193.3	193.6	193.9	197.2	198.3	198.1	197.8	197.6
172.5°	194.5	194.8	195.1	195.3	195.6	195.8	198.7	199.7	199.6	199.4	199.1
175°	195.2	195.3	195.6	195.8	196.0	196.1	198.4	199.2	199.1	199.0	198.9
177.5°	196.9	197.1	197.3	197.4	197.6	197.8	199.2	199.7	199.6	199.6	199.5
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14771.3	14776.6	14777.3	14783.4	14782.9	14790.1	14788.9	14794.8	14791.4	14796.2	14792.1
5°	15118.3	15149.8	15166.2	15196.9	15206.6	15234.1	15241.8	15266.9	15267.9	15287.8	15283.3
7.5°	15608.8	15655.1	15682.7	15720.6	15739.9	15771.5	15785.4	15808.8	15816.4	15834.9	15836.3
10°	15901.7	15924.2	15939.9	15950.5	15960.2	15964.7	15970.0	15968.6	15970.0	15967.9	15972.5
12.5°	15786.5	15753.6	15731.9	15690.7	15666.7	15621.3	15598.9	15555.1	15539.3	15501.7	15496.2
15°	15203.0	15088.4	15007.4	14889.7	14815.6	14699.8	14632.0	14527.4	14479.7	14396.6	14374.8
17.5°	14139.5	13926.8	13762.2	13551.0	13404.4	13207.0	13082.9	12919.5	12830.1	12698.2	12652.7
20°	12648.6	12333.8	12086.8	11792.7	11582.1	11319.9	11151.9	10940.1	10817.2	10655.3	10589.7
22.5°	10898.1	10506.3	10197.8	9850.3	9596.3	9304.0	9102.7	8873.6	8739.9	8564.1	8486.2
25°	9094.0	8661.8	8318.9	7952.8	7684.4	7391.4	7190.2	6965.0	6826.5	6659.7	6582.4
27.5°	7368.5	6931.1	6599.7	6259.3	6013.0	5748.6	5567.0	5370.5	5247.7	5105.1	5032.4
30°	5845.8	5459.9	5177.9	4895.4	4690.6	4475.9	4325.0	4162.1	4054.3	3932.3	3863.0
32.5°	4605.2	4307.3	4086.5	3862.3	3694.7	3515.3	3384.9	3241.1	3143.8	3034.9	2972.1
35°	3647.2	3415.8	3239.7	3055.1	2911.1	2758.3	2643.4	2519.4	2432.1	2338.2	2284.0
37.5°	2881.7	2697.7	2552.7	2399.5	2281.1	2154.5	2111.9	1969.5	1879.0	1804.2	1752.4
40°	2261.6	2115.2	1995.3	1878.1	1781.6	1685.5	1608.5	1532.5	1474.0	1420.5	1383.5
42.5°	1766.1	1660.1	1572.5	1486.6	1416.3	1346.3	1290.4	1238.1	1198.7	1163.7	1139.9
45°	1404.0	1331.0	1270.2	1209.7	1160.1	1113.3	1075.8	1042.3	1016.9	995.9	981.0
47.5°	1153.4	1103.4	1060.5	1019.7	986.1	955.4	930.2	922.0	894.8	876.3	869.3
50°	980.2	950.1	917.5	887.4	864.8	842.5	826.1	810.2	799.9	791.4	788.8
52.5°	851.0	828.0	809.8	790.7	775.9	759.9	748.7	738.0	732.4	728.0	727.4
55°	754.9	738.8	726.8	714.0	705.1	695.8	689.9	684.3	681.8	679.5	679.7
57.5°	682.2	671.4	663.6	655.3	650.5	646.0	644.5	643.1	643.9	644.2	645.4
60°	629.2	622.2	617.3	612.6	610.5	609.1	610.2	611.4	614.0	616.1	618.0
62.5°	588.6	584.6	582.2	579.7	579.4	579.6	581.7	583.9	587.1	589.5	591.3
65°	546.8	544.5	543.8	542.1	543.0	543.4	546.0	547.7	550.9	552.8	555.1
67.5°	504.6	504.0	504.6	504.6	506.0	507.3	509.8	511.7	514.4	516.1	518.0
70°	473.4	473.6	474.8	475.0	476.5	477.5	479.6	480.8	483.2	484.7	487.0
72.5°	443.1	442.6	442.9	442.2	442.7	442.4	443.6	444.3	446.4	447.5	450.3
75°	410.8	409.5	409.1	407.6	407.7	406.7	407.1	407.0	408.4	409.0	410.9
77.5°	371.8	369.5	368.4	366.0	365.9	364.9	366.0	366.5	368.9	370.1	372.4
80°	325.1	321.5	319.9	317.0	317.5	317.4	319.7	321.6	324.6	325.1	327.9
82.5°	270.3	266.5	264.9	262.1	262.7	262.7	265.0	265.3	267.8	269.0	272.2
85°	193.5	194.9	191.0	191.3	190.5	192.0	193.5	195.4	197.5	201.0	203.8
87.5°	113.9	113.5	114.9	115.0	116.9	118.0	121.2	123.0	126.5	129.3	134.3
90°	65.3	62.9	63.3	62.0	63.3	62.0	63.3	61.9	63.4	63.1	65.3
92.5°	37.3	35.1	32.5	30.2	27.8	25.5	24.2	23.3	22.0	21.1	19.8
95°	50.8	47.3	43.8	40.2	36.8	33.3	32.0	30.7	29.4	28.1	26.8
97.5°	59.2	55.4	51.6	47.9	44.1	40.3	39.5	38.7	37.7	36.9	36.1
100°	85.5	78.2	70.9	63.5	56.3	49.0	48.4	47.6	47.0	46.3	45.6
102.5°	173.8	157.0	140.3	123.5	106.9	90.1	87.2	84.3	81.3	78.4	75.6
105°	319.6	292.9	266.2	239.4	212.8	186.0	178.0	169.9	162.0	154.0	146.1
107.5°	457.7	431.5	405.5	379.4	353.4	327.3	314.6	302.0	289.4	276.8	264.2
110°	526.8	511.2	495.6	479.8	464.1	448.6	436.5	424.6	412.3	400.4	388.4



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	534.5	526.7	518.7	510.8	503.1	495.2	489.4	483.4	477.7	471.7	465.8
115°	496.8	494.4	491.8	489.4	486.9	484.3	483.8	483.5	483.0	482.5	482.2
117.5°	434.5	435.0	435.3	435.7	436.3	436.7	439.7	442.8	446.0	449.1	452.3
120°	372.6	374.6	376.7	378.7	380.9	383.0	387.1	391.3	395.4	399.7	404.0
122.5°	320.9	322.3	323.6	325.1	326.5	327.9	332.0	336.1	340.3	344.5	348.7
125°	281.1	281.0	281.0	281.0	280.9	281.1	284.3	287.7	291.0	294.6	297.9
127.5°	254.0	252.8	251.9	250.9	249.9	248.9	250.8	252.8	254.7	256.8	258.8
130°	237.2	235.6	233.8	232.2	230.4	228.7	229.4	230.1	230.9	231.7	232.4
132.5°	227.2	225.4	223.3	221.3	219.3	217.4	217.3	217.1	217.0	217.0	217.0
135°	220.2	218.6	216.5	214.7	212.7	210.9	210.4	209.7	209.2	208.7	208.3
137.5°	215.4	213.9	212.3	210.9	209.2	207.9	206.9	206.3	205.5	205.0	204.3
140°	211.8	210.6	209.2	208.0	206.7	205.6	204.9	204.3	203.7	203.2	202.6
142.5°	208.7	207.9	206.9	206.0	205.1	204.2	203.5	202.9	202.4	201.8	201.3
145°	207.4	206.8	206.2	205.5	205.0	204.3	203.8	203.3	202.8	202.4	202.1
147.5°	204.8	204.5	204.0	203.7	203.2	202.7	202.4	202.2	201.7	201.5	201.1
150°	202.3	202.0	201.5	201.2	200.8	200.4	200.1	199.9	199.7	199.7	199.4
152.5°	198.8	198.6	198.3	197.9	197.5	197.1	196.9	196.9	196.7	196.5	196.2
155°	196.5	196.2	196.0	195.7	195.5	195.3	195.0	194.7	194.5	194.2	194.0
157.5°	195.2	195.0	194.7	194.5	194.2	194.0	193.8	193.6	193.3	193.1	192.9
160°	194.5	194.3	194.1	193.9	193.6	193.4	193.0	192.8	192.4	192.1	191.9
162.5°	194.8	194.6	194.3	194.1	193.7	193.4	193.1	192.9	192.7	192.5	192.2
165°	195.2	195.0	194.8	194.5	194.3	194.2	193.8	193.5	193.1	192.9	192.6
167.5°	196.6	196.5	196.2	196.0	195.7	195.6	195.3	195.0	194.7	194.3	194.1
170°	197.4	197.1	196.9	196.7	196.4	196.1	195.8	195.6	195.2	195.0	194.7
172.5°	198.9	198.8	198.5	198.3	198.1	197.9	197.6	197.4	197.1	196.9	196.8
175°	198.8	198.8	198.7	198.5	198.5	198.4	198.3	198.3	198.2	198.1	197.9
177.5°	199.5	199.5	199.5	199.4	199.3	199.3	199.1	199.0	198.9	198.7	198.6
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14796.4	14792.7	14794.4	14787.5	14789.1	14780.7	14780.0	14770.6	14769.7	14760.7	14757.4
5°	15297.3	15289.1	15298.5	15283.9	15286.8	15267.9	15266.3	15242.0	15233.6	15203.1	15189.9
7.5°	15847.9	15844.9	15850.6	15838.4	15838.1	15821.2	15814.2	15792.4	15778.9	15746.9	15726.5
10°	15968.6	15971.4	15966.8	15967.9	15961.4	15959.6	15952.8	15948.6	15937.6	15929.3	15917.1
12.5°	15467.7	15470.7	15451.6	15463.7	15454.1	15476.5	15474.7	15501.0	15505.1	15538.4	15551.0
15°	14310.1	14306.5	14269.8	14292.9	14280.5	14329.6	14340.6	14406.6	14441.9	14526.6	14578.7
17.5°	12561.4	12552.0	12500.4	12528.5	12514.1	12586.4	12610.8	12716.2	12782.1	12918.6	13015.9
20°	10476.8	10458.7	10398.3	10431.3	10416.5	10498.6	10533.3	10660.8	10745.8	10926.5	11055.2
22.5°	8366.4	8337.8	8278.6	8309.3	8295.5	8380.5	8425.6	8553.6	8650.9	8836.5	8986.7
25°	6471.2	6445.7	6388.5	6410.1	6404.9	6476.9	6517.0	6638.0	6733.6	6910.4	7053.7
27.5°	4935.8	4909.2	4857.5	4872.8	4867.6	4928.9	4966.7	5067.8	5150.0	5298.9	5424.8
30°	3777.5	3745.6	3701.8	3710.2	3706.6	3756.3	3791.6	3876.8	3947.3	4073.1	4181.5
32.5°	2895.5	2863.4	2823.2	2827.1	2821.8	2860.8	2889.9	2963.9	3025.3	3132.3	3226.7
35°	2215.5	2253.0	2167.0	2221.5	2164.8	2248.0	2218.1	2264.4	2317.2	2407.3	2486.0
37.5°	1703.1	1677.0	1654.9	1652.6	1652.5	1671.7	1694.5	1739.0	1785.6	1852.8	1922.1
40°	1349.7	1331.3	1317.0	1315.9	1317.0	1330.7	1347.5	1378.4	1412.5	1460.6	1511.6
42.5°	1119.4	1107.3	1098.6	1098.0	1100.7	1110.4	1122.2	1140.4	1162.6	1193.9	1228.8
45°	968.9	962.1	957.3	957.0	958.3	963.3	970.0	981.5	995.6	1015.0	1037.1
47.5°	863.3	861.6	858.6	858.7	857.3	859.3	860.2	866.5	874.1	888.7	917.7
50°	786.3	786.3	784.3	784.1	782.1	782.0	780.4	783.0	786.4	795.5	804.8
52.5°	725.5	725.3	723.1	722.6	720.5	720.4	719.0	720.0	720.4	725.1	730.6
55°	678.0	676.6	673.6	672.6	671.9	673.0	672.6	672.6	672.0	673.9	675.5
57.5°	643.9	642.0	639.2	638.5	638.2	639.7	639.7	639.2	636.6	634.9	632.4
60°	616.9	615.1	612.0	611.3	611.7	613.7	613.6	611.9	608.1	604.7	600.9
62.5°	590.4	589.6	588.1	587.9	587.5	587.9	586.5	584.7	581.0	577.4	573.2
65°	554.9	555.3	554.0	554.2	552.8	552.7	550.6	548.9	545.1	541.8	537.6
67.5°	517.9	518.2	517.2	517.2	516.6	516.7	515.4	513.8	510.6	507.9	504.7
70°	487.5	488.3	487.7	487.9	487.0	486.7	484.7	483.2	479.9	477.7	474.7
72.5°	451.0	452.7	452.6	453.1	451.8	451.0	448.7	446.8	443.8	442.1	439.6
75°	411.7	413.8	414.5	415.4	413.6	412.5	410.0	408.4	406.0	405.0	403.4
77.5°	373.3	375.6	377.9	380.0	376.9	374.3	371.1	368.7	365.1	363.8	361.3
80°	330.2	334.4	339.3	343.5	338.1	332.6	327.3	323.4	318.7	316.9	313.8
82.5°	274.0	278.2	281.1	283.8	280.0	276.0	270.8	267.4	262.4	260.5	256.9
85°	208.1	213.4	215.1	216.5	214.1	212.0	207.2	200.7	197.5	192.6	190.0
87.5°	136.9	140.0	140.7	141.1	139.7	138.6	135.6	132.5	127.1	123.2	118.3
90°	64.5	65.8	63.8	63.9	62.7	63.6	61.2	60.8	57.1	56.2	52.8
92.5°	18.8	17.5	16.5	15.3	16.7	17.6	18.9	19.8	21.1	22.0	23.3
95°	25.5	24.3	23.0	21.7	22.7	23.8	24.8	25.8	26.8	27.9	28.9
97.5°	35.2	34.3	33.4	32.6	33.2	33.8	34.4	35.0	35.6	36.2	36.8
100°	44.9	44.3	43.5	42.9	42.9	42.9	42.9	42.9	42.9	42.9	42.9
102.5°	72.7	69.7	66.8	63.9	65.9	67.8	69.8	71.7	73.8	75.7	77.8
105°	138.1	130.2	122.1	114.2	122.0	129.6	137.3	145.1	152.7	160.5	168.3
107.5°	251.6	239.1	226.5	213.9	228.0	241.9	256.0	270.0	284.1	298.0	312.2
110°	376.5	364.5	352.5	340.5	355.4	370.3	385.2	400.1	415.0	429.9	445.0



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	460.0	454.2	448.3	442.5	452.1	461.7	471.3	481.0	490.5	500.2	509.8
115°	481.8	481.4	481.1	480.7	485.3	489.9	494.3	499.0	503.6	508.1	512.8
117.5°	455.5	458.6	461.9	465.2	466.7	468.1	469.6	471.0	472.6	474.0	475.7
120°	408.2	412.4	416.8	421.2	420.6	420.0	419.4	418.9	418.4	417.9	417.6
122.5°	352.9	357.2	361.6	366.0	364.6	363.3	362.1	360.9	359.8	358.6	357.6
125°	301.7	305.1	308.8	312.4	311.1	309.8	308.7	307.4	306.2	305.1	304.2
127.5°	261.0	263.2	265.3	267.6	267.0	266.4	266.0	265.4	265.0	264.6	264.3
130°	233.4	234.3	235.3	236.4	236.5	236.7	236.9	237.2	237.7	238.0	238.4
132.5°	217.2	217.3	217.4	217.6	218.3	219.0	219.9	220.7	221.6	222.6	223.6
135°	208.0	207.8	207.5	207.3	208.3	209.2	210.4	211.5	212.8	214.1	215.5
137.5°	203.8	203.3	202.9	202.4	203.5	204.5	205.6	206.7	208.0	209.3	210.8
140°	202.2	201.8	201.5	201.0	202.1	203.1	204.2	205.3	206.6	207.9	209.2
142.5°	201.0	200.4	200.1	199.8	200.7	201.6	202.6	203.7	204.9	206.0	207.3
145°	201.7	201.3	201.1	200.9	201.5	202.3	202.9	203.7	204.6	205.3	206.4
147.5°	201.0	200.7	200.6	200.4	201.0	201.4	202.0	202.4	203.2	203.8	204.6
150°	199.4	199.2	199.1	199.1	199.4	199.6	200.0	200.3	200.8	201.1	201.8
152.5°	196.2	196.0	196.0	195.9	196.2	196.5	196.9	197.1	197.5	197.9	198.3
155°	193.9	193.7	193.6	193.4	193.5	193.6	193.8	193.8	194.0	194.1	194.3
157.5°	192.8	192.6	192.4	192.2	192.2	192.1	192.2	192.1	192.1	192.1	192.2
160°	191.6	191.3	191.1	190.8	190.9	190.8	190.9	190.8	191.0	191.1	191.1
162.5°	192.0	191.8	191.6	191.5	191.4	191.1	191.0	190.8	190.7	190.6	190.5
165°	192.2	191.9	191.6	191.3	191.3	191.2	191.2	191.1	191.1	191.0	191.0
167.5°	193.9	193.5	193.3	192.9	192.8	192.5	192.3	192.0	191.9	191.7	191.6
170°	194.5	194.2	194.1	193.8	193.7	193.5	193.4	193.3	193.2	193.1	193.1
172.5°	196.6	196.3	196.1	195.9	195.8	195.6	195.6	195.6	195.5	195.5	195.4
175°	197.9	197.8	197.7	197.6	197.4	197.3	197.2	197.1	197.0	196.9	196.8
177.5°	198.4	198.3	198.3	198.2	198.1	198.1	198.1	198.1	198.1	198.0	198.0
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14747.9	14743.9	14733.7	14728.8	14719.3	14714.5	14707.1	14702.4	14696.4	14692.1	14689.7
5°	15156.5	15137.6	15099.8	15076.5	15035.7	15008.8	14968.3	14938.6	14896.7	14865.9	14826.3
7.5°	15688.1	15659.1	15610.7	15574.0	15516.9	15473.2	15409.2	15358.0	15287.2	15228.4	15156.1
10°	15904.5	15887.6	15865.9	15842.3	15810.7	15779.7	15735.9	15691.3	15631.9	15572.7	15495.5
12.5°	15584.6	15600.5	15631.9	15646.5	15670.5	15678.7	15689.6	15684.4	15674.8	15650.6	15615.6
15°	14678.6	14745.0	14849.9	14922.4	15024.1	15095.5	15189.9	15250.8	15320.7	15362.6	15402.3
17.5°	13188.3	13316.7	13501.8	13649.4	13847.6	14008.8	14206.3	14361.4	14540.6	14678.0	14824.3
20°	11279.4	11459.1	11714.7	11931.7	12218.9	12462.4	12774.4	13035.9	13340.8	13594.9	13869.3
22.5°	9225.0	9436.4	9729.2	9990.9	10333.8	10640.2	11031.1	11376.8	11789.0	12158.3	12566.8
25°	7286.8	7494.0	7792.2	8063.2	8433.5	8771.0	9198.1	9594.6	10073.0	10519.0	11031.1
27.5°	5624.7	5808.8	6070.9	6314.9	6654.0	6985.3	7418.7	7841.6	8352.0	8831.3	9383.3
30°	4343.8	4493.1	4703.2	4899.4	5171.8	5442.7	5828.7	6219.8	6727.7	7224.4	7790.3
32.5°	3366.3	3493.7	3669.0	3828.3	4038.1	4242.4	4526.8	4839.2	5284.8	5760.6	6307.7
35°	2605.9	2714.8	2864.1	3001.3	3173.8	3336.0	3548.2	3771.2	4111.3	4511.5	5001.1
37.5°	2077.6	2122.0	2228.5	2340.9	2484.2	2617.6	2783.5	2948.4	3191.6	3507.5	3907.4
40°	1580.0	1650.5	1737.2	1825.7	1934.2	2041.1	2223.2	2310.9	2471.1	2697.8	3008.2
42.5°	1274.9	1324.4	1385.5	1447.0	1522.6	1597.1	1689.2	1783.0	1902.7	2056.2	2277.0
45°	1066.8	1099.2	1138.5	1179.5	1229.1	1280.0	1341.7	1406.0	1487.2	1581.6	1715.7
47.5°	927.8	945.7	971.3	999.4	1033.5	1068.6	1108.8	1149.7	1200.1	1256.1	1332.5
50°	819.4	834.3	854.2	873.0	896.4	932.5	948.4	971.1	1001.3	1034.3	1077.0
52.5°	740.8	750.8	763.3	774.1	788.9	802.4	820.1	835.8	856.7	876.5	904.1
55°	679.7	683.4	690.4	697.3	707.7	716.9	729.0	739.2	752.6	764.4	781.8
57.5°	632.5	632.9	636.1	639.8	646.4	652.2	660.5	667.2	676.5	684.0	694.4
60°	598.6	596.8	597.5	598.7	602.4	606.2	611.5	615.9	621.8	626.1	631.8
62.5°	570.4	567.6	566.9	566.5	568.4	569.8	572.7	574.8	578.1	579.9	583.1
65°	534.7	531.3	530.0	528.5	529.1	528.6	529.7	529.7	531.5	531.9	533.6
67.5°	502.3	499.5	497.9	495.8	494.9	493.4	492.7	491.3	491.1	489.9	489.6
70°	472.8	470.1	468.7	466.8	465.8	463.9	462.7	460.2	458.8	456.6	455.3
72.5°	438.7	437.2	436.8	435.5	435.1	434.1	433.5	431.8	430.9	428.9	427.8
75°	403.0	401.8	401.6	400.3	400.2	398.9	398.7	396.8	395.9	394.0	393.2
77.5°	360.5	358.7	358.1	356.6	357.0	356.4	356.9	355.5	355.0	353.0	352.4
80°	312.7	310.2	309.3	307.3	307.8	306.9	307.8	307.7	308.5	306.9	306.6
82.5°	256.0	253.3	252.8	251.5	252.4	252.5	254.5	253.4	253.9	252.5	253.0
85°	186.2	184.3	181.6	181.2	179.4	181.3	178.9	180.5	177.9	179.7	177.3
87.5°	115.5	111.4	109.3	106.4	105.3	102.6	101.4	99.4	100.0	99.0	99.6
90°	52.7	49.8	50.1	48.3	49.1	47.7	48.9	48.3	49.8	49.1	50.9
92.5°	24.2	25.3	27.3	29.5	31.5	33.5	35.5	37.7	39.7	41.8	43.8
95°	29.9	30.9	33.6	36.4	39.1	41.8	44.6	47.3	50.0	52.8	55.5
97.5°	37.5	38.0	40.7	43.5	46.2	49.0	51.7	54.6	57.3	60.1	62.8
100°	42.9	42.9	50.8	58.5	66.3	74.2	82.0	89.7	97.6	105.4	113.2
102.5°	79.7	81.7	101.4	121.1	140.9	160.5	180.2	199.9	219.7	239.4	259.2
105°	175.9	183.7	213.7	243.8	273.8	304.0	334.0	364.2	394.3	424.5	454.5
107.5°	326.2	340.3	367.5	394.6	421.8	449.1	476.4	503.5	530.8	558.0	585.3
110°	459.9	474.8	493.0	511.2	529.5	547.7	565.9	584.1	602.5	620.7	639.0



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	519.4	529.1	539.7	550.4	561.0	571.8	582.4	593.1	603.8	614.5	625.2
115°	517.4	522.1	526.1	530.4	534.5	538.7	543.0	547.2	551.5	555.7	560.0
117.5°	477.1	478.8	479.5	480.2	480.9	481.7	482.5	483.2	484.2	484.9	485.8
120°	417.0	416.6	416.0	415.4	414.8	414.2	413.7	413.2	412.6	412.2	411.7
122.5°	356.4	355.3	354.8	354.2	353.7	353.2	352.7	352.3	351.8	351.4	351.0
125°	303.1	302.0	302.8	303.4	304.2	305.0	305.7	306.6	307.4	308.2	309.0
127.5°	263.8	263.7	265.3	267.1	268.8	270.5	272.3	274.2	275.9	277.7	279.5
130°	239.0	239.5	241.6	243.9	246.0	248.3	250.5	252.9	255.0	257.3	259.5
132.5°	224.6	225.8	227.8	229.9	232.1	234.3	236.4	238.6	240.7	243.1	245.0
135°	216.9	218.4	220.2	222.2	224.2	226.3	228.2	230.3	232.2	234.2	236.2
137.5°	212.1	213.6	215.2	216.8	218.4	220.1	221.6	223.3	224.8	226.5	228.1
140°	210.6	212.0	213.0	214.0	215.0	216.0	216.9	217.9	218.8	219.9	220.8
142.5°	208.4	209.8	210.4	211.1	211.7	212.5	213.2	213.9	214.4	215.0	215.7
145°	207.3	208.3	208.4	208.6	208.9	209.1	209.2	209.3	209.4	209.6	209.7
147.5°	205.2	206.1	206.0	206.0	206.1	206.1	206.1	206.0	206.0	206.0	205.9
150°	202.2	202.7	202.4	202.4	202.2	202.1	201.9	201.7	201.4	201.4	201.1
152.5°	198.7	199.2	198.8	198.8	198.4	198.2	198.0	197.8	197.4	197.2	197.0
155°	194.4	194.7	194.5	194.4	194.2	194.1	194.0	194.0	193.9	193.7	193.6
157.5°	192.2	192.2	192.1	192.0	191.9	191.8	191.8	191.8	191.8	191.8	191.9
160°	191.1	191.3	191.1	191.0	190.9	190.8	190.8	190.8	190.8	190.9	190.9
162.5°	190.3	190.3	190.1	190.1	190.0	190.0	190.0	190.1	190.1	190.1	190.1
165°	191.1	191.2	190.9	190.8	190.6	190.4	190.4	190.3	190.3	190.3	190.2
167.5°	191.5	191.4	191.4	191.5	191.5	191.5	191.5	191.8	191.8	192.0	192.1
170°	193.1	193.1	193.0	192.9	192.9	192.9	192.9	192.8	192.8	192.8	192.8
172.5°	195.4	195.4	195.2	195.0	194.8	194.7	194.6	194.5	194.3	194.2	194.1
175°	196.7	196.6	196.5	196.4	196.3	196.1	196.1	195.9	195.8	195.7	195.6
177.5°	197.9	197.8	197.7	197.7	197.7	197.6	197.6	197.6	197.6	197.6	197.5
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14686.7	14686.6	14685.2	14685.8	14686.1	14687.1	14688.4	14689.7	14690.0	14691.0	14691.2
5°	14796.7	14760.3	14733.5	14703.9	14681.7	14661.7	14648.4	14637.7	14633.6	14634.7	14637.2
7.5°	15094.7	15019.7	14957.8	14887.4	14828.8	14766.7	14715.2	14666.2	14630.6	14603.9	14589.1
10°	15421.8	15330.4	15243.0	15141.2	15044.6	14941.5	14848.2	14754.2	14675.7	14607.7	14557.7
12.5°	15566.9	15502.3	15426.8	15330.7	15227.4	15108.4	14988.3	14859.6	14739.8	14628.6	14539.0
15°	15413.2	15413.3	15385.8	15339.7	15267.9	15172.9	15058.5	14924.2	14783.0	14638.8	14507.1
17.5°	14925.4	15017.5	15068.6	15101.0	15091.1	15056.1	14983.3	14880.1	14748.5	14595.0	14434.3
20°	14087.7	14304.8	14459.6	14598.8	14676.8	14728.6	14723.4	14681.4	14587.7	14457.1	14289.8
22.5°	12914.2	13278.6	13566.1	13834.2	14022.2	14175.2	14247.8	14278.8	14236.3	14145.3	13988.1
25°	11488.9	11984.3	12407.1	12817.4	13125.1	13389.6	13548.6	13660.6	13669.5	13622.0	13481.7
27.5°	9905.1	10489.9	11024.9	11570.2	12003.0	12383.3	12632.7	12815.4	12873.4	12865.7	12738.4
30°	8323.3	8937.2	9527.0	10162.9	10698.5	11184.2	11513.8	11760.8	11855.9	11874.2	11751.7
32.5°	6829.5	7434.8	8023.1	8687.8	9277.1	9833.9	10223.3	10516.6	10627.3	10653.4	10519.0
35°	5473.7	6032.2	6591.2	7235.4	7821.4	8397.9	8808.2	9115.4	9218.7	9236.1	9080.7
37.5°	4298.1	4773.9	5261.0	5839.0	6377.2	6918.6	7308.5	7597.1	7672.4	7667.7	7491.7
40°	3308.2	3678.1	4069.4	4545.3	4992.8	5450.5	5779.6	6018.2	6057.8	6028.5	5843.7
42.5°	2487.6	2754.7	3038.5	3393.7	3725.7	4068.2	4307.7	4484.8	4490.5	4444.2	4278.2
45°	1853.2	2113.9	2232.9	2447.7	2661.5	2889.3	3035.5	3145.0	3128.0	3087.3	2961.1
47.5°	1412.7	1513.0	1619.2	1752.4	1876.9	2135.4	2116.2	2292.0	2165.4	2251.7	2061.7
50°	1121.9	1177.9	1235.1	1305.8	1370.8	1438.5	1480.7	1512.2	1508.1	1494.5	1458.1
52.5°	954.5	971.8	999.9	1040.2	1076.5	1113.0	1137.1	1156.6	1157.0	1151.5	1133.2
55°	797.7	819.7	840.0	866.2	911.0	917.9	952.3	945.3	948.0	938.4	948.2
57.5°	703.3	716.1	727.5	743.2	756.1	771.2	780.1	788.6	787.8	785.9	776.6
60°	636.5	643.5	649.8	659.0	666.0	674.6	678.7	683.1	681.6	678.4	670.1
62.5°	584.9	589.4	592.9	598.9	603.1	608.5	610.6	612.5	610.6	607.5	600.2
65°	534.0	536.9	539.1	543.6	546.7	551.2	553.0	554.7	553.0	550.7	545.1
67.5°	488.2	488.5	488.2	490.0	491.0	493.7	494.5	495.7	493.8	491.7	487.0
70°	453.3	452.6	451.8	452.5	452.6	454.0	454.2	454.0	451.6	448.1	442.9
72.5°	426.1	425.8	425.1	425.7	425.7	426.9	426.5	425.9	423.1	419.6	414.5
75°	391.2	390.9	389.6	389.6	388.6	389.0	387.6	386.7	383.5	380.7	376.0
77.5°	350.3	349.6	347.7	346.9	344.9	344.1	341.4	340.1	336.8	334.5	330.5
80°	304.6	303.9	301.4	300.1	296.8	294.7	290.8	288.5	284.8	282.6	278.7
82.5°	251.7	252.0	249.6	247.9	243.2	239.6	234.3	231.5	227.3	225.2	221.3
85°	179.1	176.5	177.9	177.8	174.8	171.7	167.4	164.4	160.9	158.8	156.1
87.5°	98.2	98.8	98.1	97.5	95.4	93.8	90.6	88.8	86.2	85.0	82.8
90°	47.1	46.0	42.5	41.4	37.9	36.0	32.0	30.5	26.8	26.1	23.8
92.5°	41.5	39.1	37.0	34.6	32.3	30.0	27.8	25.4	23.1	22.3	21.6
95°	52.2	48.9	45.7	42.3	38.9	35.6	32.4	29.1	25.7	25.1	24.3
97.5°	59.0	55.1	51.1	47.1	43.2	39.3	35.4	31.5	27.6	27.1	26.7
100°	104.2	95.1	86.1	77.0	68.0	59.0	49.9	40.8	31.9	31.3	30.8
102.5°	237.2	215.2	193.3	171.3	149.4	127.4	105.6	83.6	61.7	58.5	55.3
105°	421.3	387.9	354.9	321.7	288.3	255.2	222.0	188.7	155.5	144.8	134.1
107.5°	554.0	522.7	491.5	460.3	429.1	398.0	366.6	335.4	304.1	285.4	266.6
110°	614.2	589.5	564.8	540.0	515.3	490.5	465.6	440.9	416.2	399.9	383.8



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	607.1	589.0	570.9	552.7	534.7	516.5	498.3	480.2	462.0	452.1	442.3
115°	549.2	538.3	527.4	516.5	505.6	494.6	483.8	472.7	461.8	456.7	451.5
117.5°	480.4	474.8	469.3	463.7	458.2	452.5	447.0	441.4	435.8	434.1	432.3
120°	410.2	408.6	406.9	405.3	403.6	401.9	400.2	398.6	396.8	397.1	397.3
122.5°	351.8	352.4	353.2	353.8	354.6	355.2	356.1	356.5	357.3	358.7	360.2
125°	310.8	312.5	314.2	315.8	317.5	319.2	320.9	322.3	324.1	325.5	327.1
127.5°	281.5	283.3	285.3	287.1	289.0	290.9	292.8	294.6	296.4	297.8	299.2
130°	261.2	262.8	264.5	266.1	267.8	269.4	271.0	272.7	274.3	275.4	276.5
132.5°	246.6	248.1	249.6	251.0	252.6	254.0	255.6	256.9	258.5	259.4	260.2
135°	237.3	238.4	239.6	240.6	241.9	243.0	244.1	245.3	246.5	247.2	247.7
137.5°	229.1	229.9	231.0	231.8	232.8	233.7	234.8	235.7	236.8	237.1	237.6
140°	221.7	222.8	223.7	224.7	225.7	226.7	227.8	228.9	230.0	230.3	230.8
142.5°	216.5	217.2	218.0	218.7	219.6	220.3	221.3	222.1	223.0	223.4	223.8
145°	210.6	211.5	212.4	213.3	214.2	215.2	216.2	217.4	218.4	218.7	218.9
147.5°	206.6	207.4	208.2	209.1	209.8	210.6	211.6	212.5	213.5	213.7	214.0
150°	202.0	202.8	203.6	204.4	205.3	206.3	207.2	208.3	209.3	209.7	210.1
152.5°	197.9	198.8	199.7	200.6	201.6	202.5	203.7	204.8	205.8	206.1	206.5
155°	194.5	195.4	196.3	197.3	198.3	199.3	200.3	201.3	202.4	202.8	203.2
157.5°	192.7	193.4	194.2	195.2	196.0	196.9	197.9	198.8	199.7	200.1	200.4
160°	191.7	192.4	193.2	193.9	194.7	195.5	196.4	197.1	198.0	198.3	198.6
162.5°	190.9	191.6	192.5	193.0	194.0	194.7	195.6	196.3	197.1	197.4	197.8
165°	190.9	191.4	192.0	192.6	193.1	193.7	194.3	194.8	195.6	195.8	196.2
167.5°	192.7	193.0	193.4	193.9	194.4	194.8	195.3	195.7	196.3	196.6	196.9
170°	193.2	193.6	193.9	194.3	194.8	195.2	195.6	195.9	196.5	196.8	197.0
172.5°	194.3	194.5	194.9	195.1	195.3	195.6	195.9	196.2	196.5	196.9	197.1
175°	195.8	195.9	196.1	196.2	196.2	196.4	196.6	196.8	196.9	197.1	197.4
177.5°	197.6	197.7	197.8	197.9	198.1	198.2	198.3	198.3	198.5	198.8	199.0
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14690.7	14690.6	14690.1	14689.4	14688.8	14689.2	14689.8	14691.5	14694.5	14698.8	14704.3
5°	14639.2	14642.2	14643.9	14644.1	14642.6	14641.6	14643.0	14647.1	14655.3	14668.9	14687.4
7.5°	14585.1	14588.8	14594.5	14598.8	14599.5	14598.5	14598.8	14605.1	14620.1	14646.7	14684.0
10°	14527.3	14516.3	14522.2	14532.7	14541.2	14542.7	14543.7	14551.2	14573.2	14613.4	14673.3
12.5°	14474.0	14439.3	14432.6	14442.2	14454.9	14459.0	14457.8	14461.1	14486.8	14540.0	14623.6
15°	14403.9	14338.5	14316.1	14318.6	14334.4	14340.1	14336.0	14329.6	14354.7	14419.6	14527.7
17.5°	14290.4	14185.0	14143.9	14142.1	14160.5	14165.5	14155.3	14135.7	14160.4	14241.4	14375.6
20°	14117.8	13962.2	13884.9	13872.6	13892.6	13886.7	13866.5	13836.8	13869.2	13967.8	14127.4
22.5°	13807.5	13610.4	13478.2	13435.6	13459.6	13443.6	13414.0	13376.1	13419.2	13531.2	13709.0
25°	13300.6	13072.8	12891.9	12790.4	12809.5	12780.8	12748.6	12702.6	12754.0	12882.6	13078.3
27.5°	12555.5	12292.3	12068.2	11900.1	11906.3	11868.7	11831.7	11772.1	11836.3	11988.4	12209.1
30°	11564.7	11260.1	10987.2	10758.8	10738.3	10701.9	10664.0	10585.8	10666.1	10848.3	11106.1
32.5°	10320.4	9982.3	9666.8	9378.1	9323.6	9288.0	9254.2	9164.3	9269.5	9481.8	9778.2
35°	8865.3	8505.1	8163.1	7833.3	7743.1	7707.5	7678.0	7591.8	7723.0	7954.1	8274.1
37.5°	7268.0	6900.0	6560.5	6222.4	6094.8	6046.7	6025.1	5968.7	6120.1	6348.6	6669.9
40°	5628.3	5286.2	4981.7	4683.1	4537.7	4463.9	4452.6	4442.4	4588.7	4787.0	5078.7
42.5°	4094.4	3818.3	3583.6	3355.3	3223.6	3122.8	3122.8	3153.3	3285.1	3433.7	3658.6
45°	2832.2	2647.0	2497.4	2344.9	2385.7	2184.7	2302.7	2242.2	2307.3	2403.1	2549.3
47.5°	1946.9	1845.8	1763.6	1678.4	1616.2	1557.0	1562.1	1600.4	1661.7	1718.5	1794.6
50°	1418.9	1367.5	1325.5	1281.3	1250.5	1224.3	1225.8	1242.3	1274.6	1304.5	1344.3
52.5°	1111.8	1083.4	1060.7	1036.2	1020.0	1007.0	1007.7	1015.8	1033.2	1050.2	1073.1
55°	916.5	913.0	883.4	861.5	853.1	844.4	845.9	849.1	860.9	871.0	886.1
57.5°	768.0	754.6	745.8	734.2	728.9	722.9	724.2	725.4	733.3	740.0	750.9
60°	663.1	653.7	647.4	639.6	636.0	632.2	633.1	633.8	638.8	643.2	651.0
62.5°	593.5	585.1	579.6	573.5	571.1	568.5	569.0	569.2	572.4	575.7	581.5
65°	540.1	533.4	528.8	523.6	521.1	518.3	518.6	518.6	521.3	523.6	528.1
67.5°	483.5	478.5	475.6	471.4	469.6	466.9	466.8	466.0	467.7	468.6	471.7
70°	438.2	433.1	429.4	425.4	423.2	420.7	420.8	420.8	422.9	425.0	428.8
72.5°	410.2	405.4	402.0	398.5	396.4	394.4	394.0	393.7	395.2	396.4	398.9
75°	373.1	369.2	367.3	364.0	362.3	360.0	359.6	358.5	359.2	359.4	361.4
77.5°	328.1	324.4	322.8	319.6	318.2	315.5	315.3	314.1	314.6	314.2	315.7
80°	276.8	273.4	272.6	269.9	269.2	266.7	266.4	264.9	265.3	264.2	264.7
82.5°	219.6	216.5	215.9	213.3	213.3	211.1	210.9	208.7	208.7	206.8	203.8
85°	154.7	152.4	151.5	149.4	148.8	147.0	146.1	143.9	143.2	141.8	141.3
87.5°	81.6	80.2	78.9	78.0	76.1	72.9	72.7	70.4	70.6	69.0	69.1
90°	23.2	21.1	20.6	18.6	18.0	16.5	16.0	16.2	16.8	17.0	17.6
92.5°	20.8	20.0	19.3	18.5	17.7	17.0	16.2	17.0	17.7	18.5	19.3
95°	23.7	23.0	22.3	21.6	21.0	20.2	19.6	20.2	21.0	21.6	22.3
97.5°	26.3	25.8	25.4	25.0	24.5	24.1	23.7	24.2	24.6	25.1	25.5
100°	30.3	29.8	29.3	28.8	28.2	27.8	27.2	27.9	28.3	28.9	29.3
102.5°	52.2	49.0	45.8	42.7	39.5	36.3	33.2	36.3	39.5	42.8	45.9
105°	123.4	112.8	102.1	91.4	80.8	70.1	59.3	70.1	80.8	91.4	102.2
107.5°	247.8	229.1	210.3	191.5	172.6	153.8	135.0	153.9	172.7	191.5	210.4
110°	367.5	351.4	335.1	319.0	302.7	286.5	270.2	286.6	302.8	319.1	335.3



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	432.5	422.7	412.8	403.0	393.1	383.3	373.3	383.4	393.2	403.3	413.1
115°	446.4	441.1	436.1	430.9	425.7	420.5	415.1	420.6	425.9	431.3	436.6
117.5°	430.5	428.7	426.9	425.1	423.2	421.5	419.5	421.6	423.5	425.6	427.4
120°	397.5	397.8	398.1	398.3	398.5	398.7	398.7	398.8	398.8	398.8	398.7
122.5°	361.6	363.0	364.3	365.7	367.1	368.4	369.6	368.6	367.4	366.4	365.2
125°	328.5	330.0	331.4	332.9	334.2	335.7	336.8	336.0	334.8	333.7	332.4
127.5°	300.5	301.9	303.3	304.6	305.8	306.9	308.0	307.3	306.3	305.4	304.4
130°	277.4	278.7	279.5	280.6	281.5	282.4	283.1	282.7	282.0	281.6	280.8
132.5°	261.0	261.9	262.6	263.5	264.1	264.8	265.2	265.1	264.8	264.5	263.9
135°	248.4	249.0	249.4	250.1	250.5	250.9	251.2	251.3	251.2	251.1	250.8
137.5°	237.8	238.3	238.7	238.9	239.1	239.2	239.2	239.6	239.8	240.1	240.1
140°	231.1	231.5	231.9	232.1	232.4	232.6	232.6	233.0	233.2	233.3	233.3
142.5°	224.2	224.6	224.9	225.2	225.5	225.6	225.6	226.0	226.2	226.3	226.4
145°	219.2	219.5	219.7	219.9	220.1	220.1	220.0	220.4	220.7	220.9	221.2
147.5°	214.3	214.5	214.7	214.8	214.9	215.0	215.0	215.4	215.6	215.9	216.1
150°	210.5	210.8	211.2	211.5	211.7	211.9	211.9	212.2	212.4	212.5	212.6
152.5°	206.8	207.1	207.5	207.8	207.9	208.0	208.1	208.4	208.7	208.9	209.0
155°	203.6	203.9	204.2	204.6	204.8	205.1	205.2	205.5	205.6	205.8	205.9
157.5°	200.8	201.1	201.4	201.7	201.9	202.3	202.4	202.7	202.9	203.1	203.3
160°	198.9	199.3	199.6	199.8	200.1	200.4	200.6	200.9	201.1	201.2	201.5
162.5°	198.1	198.3	198.5	198.8	199.1	199.4	199.7	199.9	200.1	200.3	200.5
165°	196.6	196.9	197.1	197.5	197.9	198.3	198.5	198.7	198.8	198.9	199.0
167.5°	197.2	197.6	197.8	198.2	198.3	198.7	199.1	199.2	199.3	199.4	199.4
170°	197.3	197.7	197.9	198.2	198.4	198.7	198.9	199.0	199.1	199.2	199.3
172.5°	197.3	197.8	198.1	198.4	198.6	199.0	199.3	199.4	199.3	199.3	199.2
175°	197.6	198.0	198.2	198.4	198.7	199.0	199.3	199.1	199.1	199.0	198.9
177.5°	199.4	199.7	200.0	200.3	200.6	200.8	201.1	200.9	200.8	200.5	200.2
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14712.2	14719.5	14730.8	14741.0	14756.3	14768.4	14786.7	14800.5	14821.0	14834.4	14856.7
5°	14713.5	14742.3	14780.1	14817.1	14861.4	14901.8	14951.9	14994.6	15044.9	15086.0	15137.5
7.5°	14734.3	14789.8	14856.3	14923.4	14999.2	15070.1	15150.0	15222.3	15301.3	15368.3	15441.4
10°	14749.6	14835.2	14933.3	15031.9	15135.8	15232.3	15329.7	15413.9	15492.5	15557.3	15614.5
12.5°	14728.9	14846.8	14972.6	15094.1	15209.6	15309.4	15393.2	15458.0	15502.6	15533.0	15540.0
15°	14658.0	14800.0	14936.8	15057.8	15153.6	15227.6	15265.8	15283.6	15264.5	15232.5	15162.4
17.5°	14525.9	14675.7	14797.9	14893.4	14944.0	14964.1	14932.3	14877.3	14769.6	14649.9	14477.3
20°	14283.7	14423.1	14511.9	14563.9	14550.3	14500.2	14380.6	14235.2	14020.1	13791.0	13488.5
22.5°	13858.7	13980.6	14027.9	14031.8	13949.2	13823.7	13607.9	13358.5	13019.2	12666.5	12232.7
25°	13220.9	13327.7	13335.1	13293.2	13141.9	12938.6	12621.8	12268.9	11808.0	11337.9	10794.3
27.5°	12355.8	12458.2	12433.1	12354.8	12144.8	11872.9	11467.2	11011.4	10443.0	9887.9	9286.5
30°	11268.3	11377.8	11348.4	11247.9	10998.3	10676.8	10199.4	9669.8	9038.8	8445.9	7836.5
32.5°	9966.9	10105.4	10085.1	9989.7	9729.0	9385.0	8867.0	8305.4	7659.7	7075.5	6482.7
35°	8487.8	8655.9	8664.6	8602.2	8360.2	8020.2	7508.8	6965.1	6346.6	5795.4	5247.8
37.5°	6894.1	7089.0	7129.0	7112.2	6911.7	6611.5	6145.5	5657.8	5110.0	4626.8	4158.5
40°	5291.7	5488.9	5557.4	5577.7	5429.7	5197.2	4814.7	4421.1	3974.5	3583.0	3211.1
42.5°	3830.3	4005.1	4071.3	4112.9	4020.5	3865.5	3586.6	3300.6	2973.4	2691.1	2420.3
45°	2660.2	2783.9	2834.3	2876.1	2825.8	2738.4	2562.2	2383.3	2167.4	1982.8	1808.1
47.5°	1859.8	1928.1	1961.3	1981.6	1962.1	1916.6	1820.6	1717.1	1595.2	1487.4	1383.7
50°	1378.6	1414.9	1432.3	1444.1	1429.8	1404.5	1352.6	1296.2	1229.2	1168.2	1108.5
52.5°	1092.4	1113.3	1123.7	1130.0	1121.8	1106.3	1076.1	1042.7	1002.5	964.8	945.0
55°	920.4	919.3	943.1	931.6	943.1	917.4	912.0	875.3	841.9	818.5	793.0
57.5°	759.0	769.8	774.4	779.5	776.2	771.5	758.6	745.5	727.9	713.2	697.5
60°	657.0	665.9	671.0	676.0	675.7	674.0	666.5	658.7	647.7	638.8	629.3
62.5°	586.8	594.5	599.4	604.3	604.7	604.0	598.4	592.9	585.4	579.9	573.3
65°	531.5	536.9	540.3	544.2	543.9	542.9	537.8	533.3	527.1	523.3	518.5
67.5°	473.6	477.7	480.4	484.0	484.7	484.9	482.1	480.0	477.0	475.9	474.3
70°	432.5	437.4	441.7	446.3	448.8	450.0	448.8	447.7	446.0	445.2	443.9
72.5°	401.4	405.5	408.8	413.0	415.4	417.1	416.2	415.5	414.0	413.8	412.9
75°	362.7	365.6	367.4	370.6	371.8	373.4	372.8	373.1	372.6	373.8	373.8
77.5°	316.2	318.3	319.2	321.5	321.7	323.7	324.0	326.3	327.8	331.4	333.2
80°	263.8	265.2	265.2	267.6	268.6	271.9	273.3	277.0	278.7	281.8	282.1
82.5°	205.0	203.4	205.0	203.9	207.0	210.6	211.1	214.2	214.9	216.9	215.3
85°	140.1	140.0	138.7	139.0	138.1	138.4	138.0	138.5	138.0	138.1	136.6
87.5°	67.2	67.7	66.2	66.8	65.3	66.0	64.7	65.7	64.3	64.5	62.2
90°	17.9	18.4	18.8	19.4	20.0	21.5	22.9	24.4	26.0	27.4	28.9
92.5°	20.0	20.9	21.7	22.5	23.2	25.5	27.9	30.1	32.4	34.8	37.1
95°	23.0	23.7	24.3	25.2	25.8	29.2	32.5	35.8	39.1	42.5	45.8
97.5°	26.0	26.5	26.9	27.3	27.8	31.7	35.6	39.6	43.5	47.4	51.3
100°	30.0	30.5	31.0	31.5	32.0	41.1	50.2	59.3	68.3	77.4	86.5
102.5°	49.1	52.3	55.4	58.8	62.0	83.9	105.9	127.9	149.7	171.7	193.7
105°	112.9	123.6	134.3	145.1	155.8	189.0	222.4	255.6	288.8	322.1	355.3
107.5°	229.3	248.1	266.9	285.7	304.6	335.9	367.2	398.5	429.8	461.0	492.2
110°	351.7	367.8	384.2	400.4	416.7	441.5	466.4	491.3	516.0	540.8	565.6



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	423.2	432.9	442.9	452.7	462.7	480.9	499.2	517.4	535.6	553.8	571.9
115°	441.8	446.9	452.2	457.4	462.7	473.7	484.7	495.7	506.7	517.6	528.7
117.5°	429.4	431.4	433.2	435.0	436.8	442.4	448.2	453.8	459.5	465.1	470.8
120°	398.7	398.6	398.5	398.3	398.1	399.8	401.6	403.3	405.2	406.9	408.6
122.5°	364.0	362.7	361.5	360.1	358.9	358.1	357.7	356.9	356.4	355.8	355.1
125°	331.2	329.9	328.6	327.2	325.8	324.2	322.6	321.1	319.5	317.9	316.2
127.5°	303.3	302.0	301.0	299.7	298.5	296.6	294.9	293.0	291.2	289.5	287.6
130°	280.1	279.2	278.5	277.4	276.6	274.9	273.4	271.9	270.3	268.7	267.1
132.5°	263.6	262.9	262.4	261.6	261.0	259.5	258.2	256.7	255.3	253.8	252.5
135°	250.7	250.3	250.1	249.6	249.1	248.0	247.0	245.9	244.8	243.7	242.7
137.5°	240.1	240.0	239.9	239.7	239.6	238.6	237.8	236.8	236.0	235.1	234.2
140°	233.4	233.3	233.2	233.0	232.9	232.0	231.0	230.0	229.2	228.2	227.2
142.5°	226.4	226.4	226.3	226.1	226.0	225.2	224.6	223.8	223.1	222.3	221.6
145°	221.3	221.4	221.4	221.3	221.5	220.5	219.7	218.8	218.0	217.1	216.2
147.5°	216.2	216.3	216.5	216.4	216.6	215.9	215.2	214.5	213.8	213.1	212.4
150°	212.6	212.6	212.6	212.6	212.5	211.9	211.1	210.4	209.7	208.9	208.2
152.5°	209.0	209.1	209.2	209.2	209.2	208.6	207.8	207.0	206.3	205.4	204.8
155°	206.0	206.1	206.1	206.1	206.1	205.4	204.7	204.0	203.3	202.5	201.8
157.5°	203.4	203.5	203.6	203.7	203.7	203.1	202.4	201.9	201.2	200.7	200.0
160°	201.6	201.8	201.9	201.9	202.1	201.5	201.1	200.5	200.1	199.5	198.9
162.5°	200.7	200.9	201.0	201.0	201.1	200.6	200.2	199.7	199.2	198.5	198.1
165°	199.2	199.2	199.2	199.2	199.2	198.8	198.6	198.3	197.9	197.5	197.1
167.5°	199.6	199.6	199.6	199.6	199.6	199.3	199.2	198.9	198.6	198.3	198.1
170°	199.4	199.4	199.4	199.4	199.4	199.1	198.8	198.6	198.5	198.1	197.8
172.5°	199.1	199.0	199.0	198.9	198.8	198.6	198.4	198.3	198.2	198.1	197.9
175°	198.9	198.7	198.6	198.5	198.3	198.3	198.3	198.3	198.2	198.2	198.1
177.5°	200.1	199.9	199.7	199.5	199.3	199.2	199.2	199.1	199.1	199.0	198.9
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14870.6	14778.7	14766.6	14773.0	14788.4	14794.1	14810.6	14815.1	14831.8	14835.9	14851.9
5°	15177.3	15056.0	15062.0	15091.3	15135.4	15161.8	15205.2	15227.9	15269.4	15288.2	15325.7
7.5°	15500.9	15405.6	15435.3	15484.5	15545.0	15586.8	15639.0	15673.0	15717.9	15745.8	15781.8
10°	15659.8	15633.7	15666.4	15705.1	15739.6	15766.6	15788.7	15806.4	15817.9	15828.8	15833.6
12.5°	15538.9	15579.3	15584.8	15581.1	15558.3	15540.9	15501.7	15475.1	15427.9	15399.1	15342.8
15°	15090.7	15179.6	15130.4	15055.9	14946.9	14855.9	14727.5	14632.0	14498.3	14407.6	14273.5
17.5°	14304.2	14416.4	14288.2	14115.7	13896.4	13708.8	13475.1	13289.6	13057.4	12888.4	12671.6
20°	13196.9	13301.8	13073.0	12787.3	12448.0	12162.4	11825.7	11557.1	11244.1	11011.4	10730.5
22.5°	11818.4	11893.0	11570.8	11185.5	10753.2	10396.5	9993.9	9671.8	9314.8	9048.6	8749.1
25°	10293.2	10313.3	9926.8	9482.8	9001.1	8600.2	8170.4	7831.8	7467.6	7197.9	6904.0
27.5°	8753.7	8724.2	8306.5	7835.8	7329.0	6912.3	6493.1	6175.8	5856.8	5613.8	5360.6
30°	7300.8	7229.2	6795.4	6311.7	5819.7	5446.3	5098.2	4843.4	4589.7	4396.9	4193.7
32.5°	5968.4	5867.4	5445.2	4991.9	4577.5	4289.2	4031.1	3838.3	3633.4	3470.7	3300.0
35°	4788.2	4680.7	4306.6	3922.3	3608.6	3396.1	3193.3	3035.1	2861.2	2723.9	2575.6
37.5°	3775.4	3687.2	3373.9	3071.5	2834.3	2669.5	2503.4	2374.1	2230.4	2169.9	2011.6
40°	2914.6	2853.0	2608.0	2385.1	2206.9	2129.6	1960.8	1840.1	1732.6	1644.0	1558.2
42.5°	2273.4	2251.6	2013.2	1839.3	1713.9	1616.4	1522.4	1446.1	1371.8	1310.7	1253.1
45°	1668.4	1651.1	1545.2	1444.9	1359.4	1291.3	1227.7	1175.3	1126.6	1086.4	1049.8
47.5°	1299.2	1293.6	1232.7	1170.4	1116.6	1072.8	1031.6	996.8	964.5	937.6	928.9
50°	1056.7	1055.9	1020.2	981.8	943.4	918.1	891.8	871.2	850.5	834.4	817.3
52.5°	897.8	893.9	869.8	846.0	823.3	806.7	789.8	776.7	763.0	753.0	742.4
55°	772.9	777.0	763.0	748.9	734.6	724.3	712.5	703.9	694.4	688.1	681.8
57.5°	686.2	691.6	684.3	676.2	667.5	660.7	652.6	646.7	640.3	636.3	632.7
60°	623.1	629.0	626.1	622.0	616.7	612.6	607.4	604.1	600.0	597.7	595.7
62.5°	569.5	576.9	575.9	574.0	570.5	568.3	565.4	563.9	561.3	560.3	559.4
65°	516.1	524.4	524.2	523.3	521.4	520.8	519.0	518.6	517.3	517.9	517.7
67.5°	474.1	481.3	482.9	484.1	484.0	484.5	484.3	485.0	485.0	486.0	486.7
70°	443.8	448.8	450.0	451.2	451.6	452.5	452.5	453.2	453.0	453.8	454.0
72.5°	413.2	419.8	420.9	421.9	421.9	422.9	422.4	422.2	420.9	420.6	419.7
75°	375.0	383.5	385.3	386.5	386.7	387.6	386.4	385.7	383.5	382.6	381.0
77.5°	335.2	344.0	345.3	345.7	345.0	345.2	342.8	341.2	338.4	337.3	335.8
80°	283.3	296.3	297.4	296.5	294.5	294.1	291.8	290.3	286.9	285.8	284.5
82.5°	215.6	230.8	232.9	233.8	232.3	232.6	230.4	229.5	226.4	225.9	223.9
85°	136.1	151.3	153.8	153.4	151.8	151.4	150.1	150.6	150.3	151.1	151.6
87.5°	62.5	77.2	80.8	79.7	79.5	78.4	76.1	77.0	78.4	79.3	79.4
90°	30.5	36.3	37.7	36.8	34.6	33.4	31.2	30.5	28.5	27.6	25.7
92.5°	39.3	41.6	44.0	41.9	39.9	37.8	35.8	33.6	31.7	29.5	27.6
95°	49.1	52.4	55.7	53.0	50.2	47.5	44.8	42.0	39.3	36.6	33.8
97.5°	55.3	59.2	63.0	60.3	57.5	54.7	51.9	49.2	46.4	43.7	40.9
100°	95.5	104.3	113.4	105.6	97.7	89.9	82.2	74.3	66.5	58.7	51.0
102.5°	215.6	237.4	259.3	239.6	219.9	200.1	180.5	160.7	141.1	121.2	101.5
105°	388.5	421.6	454.7	424.6	394.5	364.4	334.3	304.2	274.0	243.9	213.8
107.5°	523.5	554.3	585.4	558.2	531.0	503.7	476.4	449.3	422.1	394.7	367.6
110°	590.5	614.7	639.4	620.9	602.8	584.4	566.2	547.9	529.6	511.4	493.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	590.1	607.6	625.6	614.8	604.1	593.4	582.7	571.9	561.3	550.6	540.0
115°	539.5	549.8	560.5	556.1	551.9	547.6	543.3	539.1	534.8	530.6	526.5
117.5°	476.4	481.0	486.3	485.4	484.6	483.7	483.0	482.0	481.4	480.5	479.9
120°	410.3	410.9	412.3	412.8	413.3	413.8	414.3	414.8	415.2	415.9	416.4
122.5°	354.4	352.7	351.7	352.1	352.5	353.0	353.4	353.8	354.3	354.9	355.3
125°	314.7	311.8	309.8	308.9	308.2	307.3	306.5	305.7	304.9	304.2	303.5
127.5°	285.7	282.7	280.4	278.7	276.9	275.1	273.3	271.5	269.7	267.9	266.3
130°	265.6	262.5	260.6	258.3	256.2	253.9	251.6	249.5	247.2	244.9	242.7
132.5°	251.0	248.0	246.2	244.2	242.0	239.9	237.8	235.6	233.4	231.2	229.1
135°	241.6	238.9	237.5	235.4	233.7	231.6	229.6	227.7	225.7	223.6	221.8
137.5°	233.2	230.7	229.4	227.8	226.3	224.7	223.2	221.6	220.1	218.4	216.9
140°	226.3	223.5	222.2	221.3	220.5	219.4	218.6	217.6	216.8	215.8	214.8
142.5°	220.9	218.3	217.2	216.5	216.0	215.4	214.9	214.3	213.6	213.0	212.3
145°	215.4	212.4	211.2	211.1	211.1	210.9	210.8	210.7	210.6	210.5	210.4
147.5°	211.7	208.7	207.5	207.6	207.7	207.6	207.8	207.8	207.9	207.9	207.9
150°	207.4	204.0	202.6	202.9	203.0	203.3	203.5	203.7	203.9	204.1	204.3
152.5°	203.9	199.8	198.3	198.5	198.8	199.0	199.4	199.6	199.9	200.2	200.5
155°	201.0	196.6	194.9	194.9	195.0	195.2	195.3	195.4	195.6	195.7	196.0
157.5°	199.3	194.7	193.1	193.0	193.0	193.1	193.1	193.1	193.2	193.3	193.5
160°	198.3	193.9	192.2	192.1	192.1	192.1	192.1	192.0	192.1	192.2	192.4
162.5°	197.3	193.0	191.5	191.3	191.2	191.2	191.3	191.1	191.2	191.2	191.4
165°	196.7	192.9	191.5	191.5	191.5	191.5	191.6	191.6	191.7	191.9	192.1
167.5°	197.8	194.3	193.2	193.1	192.9	192.8	192.8	192.6	192.6	192.5	192.5
170°	197.6	194.8	193.9	193.9	194.0	193.9	193.9	194.0	194.0	194.0	194.1
172.5°	197.6	195.6	194.9	195.1	195.3	195.4	195.6	195.6	195.7	195.9	196.1
175°	198.0	196.8	196.5	196.4	196.5	196.6	196.7	196.7	196.8	196.9	197.1
177.5°	198.8	198.4	198.3	198.3	198.3	198.3	198.3	198.3	198.3	198.3	198.3
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14854.9	14872.2	14870.9	14887.0	14886.3	14901.5	14898.4	14911.6	14908.6	14919.8	14913.2
5°	15342.2	15375.1	15386.0	15415.7	15421.9	15448.5	15449.0	15470.2	15467.6	15484.1	15475.4
7.5°	15803.1	15833.9	15848.5	15871.6	15883.1	15902.3	15909.7	15925.5	15929.2	15938.5	15938.2
10°	15842.0	15841.9	15849.2	15845.9	15852.3	15848.6	15856.5	15853.6	15865.3	15862.3	15871.0
12.5°	15318.6	15266.6	15247.7	15201.0	15190.8	15150.8	15153.6	15128.0	15140.4	15124.5	15151.4
15°	14193.6	14073.2	14013.6	13908.8	13875.9	13793.1	13786.4	13731.4	13746.2	13717.5	13759.6
17.5°	12531.3	12341.6	12237.4	12084.5	12023.7	11906.6	11883.0	11812.2	11823.2	11787.6	11838.4
20°	10549.3	10320.0	10188.8	10011.7	9932.8	9793.2	9756.2	9677.0	9686.9	9651.4	9708.9
22.5°	8544.7	8304.7	8156.5	7971.0	7870.3	7738.9	7699.5	7619.9	7624.5	7591.1	7646.4
25°	6702.5	6472.5	6328.6	6160.1	6072.7	5952.3	5910.8	5839.5	5843.5	5816.0	5865.5
27.5°	5184.9	4996.1	4875.8	4734.5	4656.2	4557.1	4516.8	4456.7	4456.5	4436.4	4477.9
30°	4051.7	3894.2	3786.1	3663.1	3589.4	3500.2	3461.2	3407.4	3405.1	3390.7	3423.7
32.5°	3172.4	3032.3	2933.7	2825.5	2759.3	2682.8	2645.8	2602.6	2598.6	2585.7	2612.8
35°	2466.2	2348.1	2263.3	2172.2	2178.9	2065.9	2084.7	1996.8	1973.0	1967.8	1987.9
37.5°	1906.1	1814.7	1745.8	1677.5	1631.3	1583.5	1557.8	1534.7	1532.1	1529.9	1543.9
40°	1491.9	1427.9	1377.9	1331.0	1299.3	1270.1	1254.0	1241.3	1238.3	1236.6	1245.1
42.5°	1207.5	1164.3	1132.0	1103.4	1084.2	1068.3	1059.5	1052.4	1050.1	1050.1	1055.1
45°	1020.2	994.0	973.2	955.4	943.1	948.5	932.6	940.9	929.9	941.2	933.7
47.5°	898.4	876.1	863.3	850.7	843.1	837.2	837.4	837.5	839.9	840.3	842.7
50°	804.5	791.5	782.6	774.6	770.7	767.5	768.6	769.4	771.7	771.9	773.6
52.5°	734.9	726.4	721.0	716.1	714.3	712.5	713.3	712.9	714.0	713.5	714.9
55°	678.3	674.3	672.6	670.8	671.1	670.5	670.9	669.1	668.0	666.6	667.9
57.5°	631.8	631.3	632.5	633.2	635.4	636.1	636.6	634.5	632.6	630.8	631.8
60°	596.1	597.0	599.8	602.1	605.2	606.6	607.4	606.2	604.8	603.3	604.3
62.5°	560.8	562.2	565.5	568.1	571.8	573.7	575.9	575.9	576.5	575.9	576.6
65°	519.9	521.5	524.6	526.8	530.2	531.9	534.0	534.4	535.6	535.3	536.3
67.5°	488.6	490.2	492.7	494.8	497.9	499.6	501.5	501.6	502.1	502.0	503.0
70°	455.5	456.2	458.6	460.2	463.3	465.1	467.3	468.0	469.3	469.5	470.6
72.5°	420.1	419.8	421.1	421.8	424.2	425.6	428.4	430.0	432.2	432.8	433.6
75°	381.5	381.2	382.8	383.5	385.4	386.9	390.0	392.0	395.6	397.1	396.6
77.5°	336.9	337.6	340.7	342.4	345.0	346.9	350.9	354.1	360.5	363.4	360.5
80°	286.9	287.8	291.0	292.5	296.0	298.1	302.7	306.4	312.3	313.6	311.9
82.5°	225.6	225.8	228.6	229.8	234.3	237.6	243.3	246.3	250.0	249.4	248.9
85°	153.8	155.9	159.5	163.0	168.4	173.8	179.2	183.6	180.5	185.4	179.8
87.5°	82.2	82.0	86.8	86.1	93.7	98.1	102.9	105.1	107.6	107.0	107.1
90°	25.1	23.8	23.6	22.2	22.5	20.9	21.5	20.1	21.0	19.3	21.9
92.5°	25.4	24.4	23.2	22.2	21.0	20.0	18.8	17.7	16.6	15.5	16.6
95°	31.1	30.1	29.1	27.9	26.9	25.9	24.9	23.9	22.8	21.8	23.1
97.5°	38.2	37.6	37.0	36.4	35.8	35.2	34.6	34.0	33.3	32.7	33.5
100°	43.1	43.1	43.1	43.1	43.0	43.0	43.0	43.0	43.0	43.0	43.7
102.5°	81.8	79.8	77.9	75.9	74.0	71.9	70.0	68.0	66.1	64.1	67.0
105°	183.8	176.1	168.3	160.6	152.9	145.2	137.5	129.8	122.1	114.4	122.3
107.5°	340.5	326.4	312.4	298.3	284.2	270.2	256.2	242.1	228.2	214.1	226.7
110°	475.0	460.0	445.0	430.1	415.1	400.3	385.4	370.5	355.6	340.7	352.7



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	529.4	519.6	509.9	500.3	490.6	481.1	471.5	461.9	452.3	442.7	448.5
115°	522.3	517.6	513.0	508.4	503.8	499.2	494.5	490.0	485.5	480.9	481.3
117.5°	479.1	477.5	475.9	474.3	472.8	471.3	469.8	468.3	466.8	465.5	462.2
120°	417.1	417.4	417.8	418.3	418.8	419.3	419.7	420.3	420.9	421.5	417.1
122.5°	355.8	356.9	357.9	359.0	360.2	361.4	362.5	363.7	365.0	366.3	361.9
125°	302.7	303.7	304.7	305.8	306.8	308.0	309.2	310.4	311.6	313.0	309.4
127.5°	264.5	264.8	265.1	265.3	265.8	266.2	266.7	267.3	267.9	268.5	266.2
130°	240.6	240.0	239.4	239.1	238.6	238.3	237.9	237.8	237.6	237.4	236.4
132.5°	226.9	225.9	224.8	223.9	222.8	222.0	221.1	220.4	219.6	219.0	218.7
135°	219.8	218.4	217.0	215.6	214.3	213.1	211.9	210.8	209.8	208.8	209.1
137.5°	215.2	213.9	212.4	211.1	209.8	208.6	207.3	206.3	205.2	204.2	204.7
140°	213.9	212.4	211.0	209.7	208.5	207.3	206.2	205.1	203.9	203.1	203.4
142.5°	211.7	210.6	209.2	208.0	206.8	205.7	204.7	203.8	202.7	202.0	202.3
145°	210.2	209.3	208.3	207.4	206.6	205.8	205.0	204.3	203.6	203.1	203.3
147.5°	208.0	207.3	206.5	205.9	205.2	204.7	204.1	203.6	203.1	202.7	202.7
150°	204.5	204.1	203.7	203.3	202.7	202.4	202.1	201.7	201.4	201.2	201.1
152.5°	200.8	200.4	200.0	199.7	199.2	199.0	198.6	198.3	198.2	197.9	197.9
155°	196.2	196.0	195.8	195.6	195.5	195.6	195.4	195.4	195.3	195.2	195.3
157.5°	193.6	193.6	193.5	193.6	193.6	193.7	193.6	193.8	193.7	193.9	194.0
160°	192.6	192.5	192.4	192.4	192.4	192.3	192.2	192.3	192.3	192.3	192.5
162.5°	191.5	191.6	191.6	191.7	191.9	192.0	192.2	192.5	192.6	192.8	192.9
165°	192.3	192.2	192.2	192.1	192.2	192.2	192.2	192.4	192.4	192.5	192.8
167.5°	192.4	192.6	192.6	192.8	192.9	192.9	193.1	193.4	193.6	193.9	194.1
170°	194.1	194.1	194.1	194.1	194.1	194.2	194.2	194.2	194.3	194.4	194.6
172.5°	196.3	196.3	196.2	196.3	196.2	196.3	196.3	196.3	196.3	196.4	196.5
175°	197.0	197.3	197.4	197.5	197.6	197.7	197.8	197.9	198.0	198.1	198.1
177.5°	198.3	198.3	198.3	198.3	198.3	198.4	198.4	198.4	198.4	198.3	198.4
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14924.2	14916.8	14924.4	14916.7	14924.4	14915.1	14921.4	14911.4	14913.9	14903.4	14906.1
5°	15488.5	15476.6	15482.9	15467.5	15469.1	15448.5	15448.1	15424.0	15417.7	15390.3	15378.3
7.5°	15944.8	15940.9	15943.2	15933.2	15932.1	15917.9	15911.2	15891.4	15878.9	15853.6	15836.5
10°	15872.6	15884.3	15887.3	15899.1	15901.5	15913.3	15915.8	15927.5	15929.9	15938.7	15938.8
12.5°	15150.1	15189.6	15199.1	15247.9	15268.5	15324.3	15354.2	15415.7	15452.3	15513.6	15551.3
15°	13758.4	13826.7	13853.9	13949.2	14002.0	14113.2	14183.0	14310.7	14400.9	14536.6	14633.3
17.5°	11842.9	11938.4	11981.4	12110.6	12195.0	12359.1	12477.4	12672.1	12821.2	13037.6	13209.2
20°	9718.7	9824.9	9883.4	10030.7	10130.2	10322.0	10469.7	10709.1	10908.5	11182.8	11417.3
22.5°	7663.7	7764.7	7829.7	7979.6	8091.6	8291.6	8456.7	8709.4	8933.0	9242.0	9523.1
25°	5884.3	5976.9	6035.6	6171.2	6276.4	6460.2	6617.9	6860.7	7079.6	7389.5	7677.9
27.5°	4498.5	4576.0	4632.6	4748.2	4841.0	4996.9	5132.3	5333.1	5521.6	5789.8	6046.5
30°	3443.9	3512.7	3567.7	3668.4	3754.4	3889.6	4008.7	4177.3	4333.4	4546.7	4750.9
32.5°	2631.8	2691.0	2740.0	2828.2	2906.2	3027.8	3135.2	3282.9	3416.9	3597.8	3765.9
35°	2006.6	2123.0	2114.7	2236.4	2256.0	2343.3	2439.0	2568.3	2686.9	2840.7	2983.7
37.5°	1557.4	1590.2	1625.3	1679.0	1735.5	1814.9	1895.8	2053.7	2111.7	2227.9	2346.3
40°	1256.0	1278.0	1301.2	1337.6	1377.1	1433.1	1491.9	1567.3	1644.4	1738.8	1835.1
42.5°	1061.8	1074.3	1089.0	1110.4	1134.7	1170.2	1209.6	1260.7	1314.5	1380.8	1448.5
45°	948.7	942.7	947.1	958.6	973.2	994.8	1019.7	1051.3	1086.3	1129.2	1175.0
47.5°	843.1	845.6	846.9	853.1	860.9	875.5	890.6	912.0	953.4	966.1	991.1
50°	773.5	774.7	774.3	777.5	781.5	790.9	800.7	815.2	829.6	848.9	867.3
52.5°	715.1	716.8	716.5	718.6	720.7	726.7	732.8	743.2	752.7	764.9	775.4
55°	669.0	671.3	672.1	673.9	674.9	678.1	680.5	685.4	689.4	696.4	702.7
57.5°	633.5	636.6	638.1	638.6	637.4	637.2	636.4	637.4	638.3	642.0	645.5
60°	605.7	608.1	608.5	608.1	605.8	604.2	601.6	600.7	600.3	602.1	604.1
62.5°	576.4	577.3	576.7	575.9	573.3	571.8	569.0	568.0	567.1	568.4	569.4
65°	536.0	536.7	536.0	535.6	533.2	532.0	529.6	528.9	527.6	527.9	527.7
67.5°	503.2	503.9	503.4	502.7	501.1	500.3	498.6	497.5	495.9	495.4	494.2
70°	470.5	471.0	470.1	469.5	467.7	466.9	465.4	465.1	463.8	463.5	462.3
72.5°	432.8	432.8	431.5	431.2	429.8	429.8	429.1	429.7	429.7	430.3	430.0
75°	394.3	393.7	392.1	391.9	390.8	391.3	390.5	391.5	391.7	393.1	393.2
77.5°	355.7	353.7	350.6	349.1	347.0	346.8	345.5	346.4	346.1	347.8	348.4
80°	307.0	304.6	300.5	298.7	296.2	295.8	294.7	295.8	295.2	297.2	298.5
82.5°	245.1	243.0	238.9	237.3	234.5	234.8	233.6	234.8	234.6	237.4	239.1
85°	181.3	179.9	175.6	171.9	167.7	165.2	162.8	162.4	161.6	162.8	163.8
87.5°	104.7	103.4	100.1	97.9	90.6	90.8	87.9	87.8	87.1	86.5	87.9
90°	21.7	24.0	23.9	26.1	26.2	28.6	29.0	31.2	31.3	33.6	34.1
92.5°	17.7	18.8	19.9	21.0	22.1	23.2	24.3	25.4	27.9	30.1	32.6
95°	24.4	25.6	26.9	28.2	29.5	30.7	32.0	33.4	36.9	40.3	43.9
97.5°	34.5	35.3	36.1	37.0	37.8	38.8	39.6	40.4	44.3	48.1	51.8
100°	44.4	45.1	45.7	46.5	47.1	47.8	48.5	49.2	56.6	63.8	71.1
102.5°	69.9	72.9	75.7	78.6	81.5	84.5	87.4	90.3	107.0	123.7	140.4
105°	130.3	138.3	146.3	154.2	162.2	170.1	178.2	186.1	212.9	239.5	266.4
107.5°	239.2	251.8	264.4	277.1	289.6	302.2	314.8	327.5	353.5	379.6	405.7
110°	364.6	376.7	388.6	400.7	412.6	424.6	436.7	448.8	464.4	480.1	495.8



TEST NUMBER: P1444795

CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	454.4	460.1	466.1	471.9	477.8	483.7	489.7	495.5	503.5	511.2	519.1
115°	481.7	482.0	482.5	482.8	483.2	483.7	484.2	484.7	487.3	489.8	492.3
117.5°	459.0	455.8	452.6	449.5	446.4	443.3	440.2	437.2	436.8	436.2	435.9
120°	412.9	408.7	404.4	400.0	395.9	391.8	387.7	383.6	381.5	379.4	377.4
122.5°	357.8	353.5	349.2	345.1	341.0	336.8	332.8	328.8	327.4	326.0	324.5
125°	305.8	302.3	298.8	295.3	292.0	288.6	285.3	282.0	282.0	282.0	282.1
127.5°	264.0	262.0	259.8	257.8	255.8	254.0	252.0	250.1	251.2	252.2	253.2
130°	235.4	234.6	233.7	232.8	232.3	231.5	230.8	230.1	232.0	233.6	235.4
132.5°	218.7	218.6	218.5	218.6	218.6	218.7	218.9	218.9	221.0	222.9	224.9
135°	209.3	209.6	210.1	210.5	211.0	211.5	212.1	212.7	214.7	216.4	218.4
137.5°	205.1	205.6	206.2	206.8	207.6	208.1	209.0	209.7	211.2	212.7	214.2
140°	203.8	204.0	204.6	205.1	205.7	206.2	206.9	207.5	208.8	210.0	211.2
142.5°	202.7	203.0	203.5	203.9	204.5	205.1	205.6	206.2	207.0	207.9	209.0
145°	203.6	203.8	204.2	204.6	205.0	205.4	205.9	206.3	206.9	207.4	208.1
147.5°	202.9	203.1	203.4	203.7	204.0	204.3	204.5	204.8	205.2	205.6	206.1
150°	201.2	201.3	201.5	201.6	201.9	202.1	202.3	202.4	202.8	203.1	203.5
152.5°	198.1	198.1	198.2	198.3	198.5	198.6	198.7	198.9	199.3	199.6	199.9
155°	195.5	195.6	195.8	196.0	196.3	196.4	196.7	196.9	197.1	197.3	197.6
157.5°	194.2	194.2	194.5	194.7	194.9	195.1	195.4	195.5	195.7	195.9	196.1
160°	192.8	193.1	193.3	193.6	193.9	194.2	194.4	194.8	195.0	195.2	195.4
162.5°	193.1	193.3	193.6	193.8	194.0	194.2	194.3	194.5	194.9	195.1	195.5
165°	193.0	193.3	193.7	193.9	194.2	194.6	194.8	195.2	195.3	195.6	195.7
167.5°	194.4	194.6	195.0	195.2	195.5	195.7	196.0	196.3	196.5	196.6	196.9
170°	194.9	195.2	195.4	195.6	195.8	196.0	196.3	196.6	196.9	197.0	197.3
172.5°	196.7	196.9	197.0	197.1	197.3	197.6	197.8	198.0	198.3	198.4	198.6
175°	198.1	198.1	198.2	198.2	198.3	198.3	198.3	198.4	198.4	198.5	198.5
177.5°	198.5	198.6	198.7	198.8	198.9	199.0	199.1	199.2	199.2	199.2	199.2
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14895.7	14896.4	14884.3	14883.7	14872.4	14871.0	14860.0	14856.7	14847.8	14844.6	14835.5
5°	15347.6	15333.0	15299.2	15279.3	15245.9	15223.7	15187.6	15164.0	15129.1	15102.7	15067.6
7.5°	15804.7	15782.0	15744.0	15713.2	15666.9	15629.8	15575.6	15531.1	15472.4	15421.5	15359.8
10°	15938.8	15935.2	15925.5	15911.5	15890.0	15865.6	15828.8	15790.2	15738.8	15682.8	15614.2
12.5°	15608.9	15644.6	15693.1	15721.9	15756.9	15772.3	15786.6	15783.0	15773.6	15745.3	15705.6
15°	14773.4	14873.4	15006.0	15108.7	15226.8	15312.7	15407.6	15466.7	15525.6	15552.8	15569.5
17.5°	13444.3	13633.8	13871.4	14068.3	14295.5	14478.1	14678.1	14828.7	14983.6	15094.5	15194.9
20°	11737.0	12011.5	12347.7	12644.6	12989.7	13289.7	13618.5	13888.4	14166.8	14384.4	14590.4
22.5°	9885.2	10211.3	10617.6	10994.0	11439.0	11839.0	12290.3	12683.1	13093.2	13435.7	13767.0
25°	8064.2	8421.9	8866.1	9286.1	9790.1	10255.4	10790.5	11280.1	11810.1	12270.2	12724.9
27.5°	6401.4	6752.6	7206.1	7653.2	8186.2	8681.9	9255.3	9794.7	10398.2	10954.7	11524.0
30°	5034.8	5332.6	5739.3	6172.2	6698.0	7202.5	7782.0	8336.7	8964.6	9572.3	10213.5
32.5°	3988.9	4215.8	4535.5	4901.7	5386.7	5866.9	6418.9	6954.3	7572.6	8186.4	8853.3
35°	3168.0	3344.9	3588.7	3874.3	4285.1	4699.0	5187.3	5674.2	6251.1	6833.5	7481.8
37.5°	2498.1	2641.7	2832.6	3047.2	3376.7	3716.4	4116.7	4520.3	5021.6	5537.9	6125.5
40°	1950.8	2066.9	2215.6	2375.7	2624.4	2886.2	3195.8	3508.9	3911.5	4333.5	4819.8
42.5°	1532.5	1618.2	1723.2	1840.2	2072.3	2211.3	2421.2	2647.6	2943.6	3250.0	3615.5
45°	1230.7	1289.2	1362.0	1440.4	1548.2	1666.1	1809.8	1960.6	2241.8	2379.8	2602.1
47.5°	1027.8	1067.0	1113.3	1162.8	1226.3	1294.9	1380.1	1467.3	1580.1	1696.9	1833.9
50°	891.1	931.0	946.9	972.5	1009.3	1048.5	1096.5	1144.6	1205.1	1266.4	1336.9
52.5°	789.7	802.6	819.9	836.2	859.0	903.6	918.0	943.1	977.0	1010.2	1047.3
55°	712.1	720.6	731.9	741.7	755.5	768.7	787.7	804.4	827.0	847.0	871.6
57.5°	651.9	657.3	665.1	671.5	680.5	687.8	699.0	708.1	721.1	732.4	747.3
60°	608.1	611.6	616.9	621.1	626.8	630.6	636.2	640.4	647.3	653.1	661.4
62.5°	572.3	574.2	577.5	580.0	583.7	585.6	588.5	590.4	594.2	597.1	601.7
65°	529.4	529.7	532.1	533.1	536.0	537.0	539.4	540.3	543.3	545.5	549.6
67.5°	494.1	493.2	493.2	492.4	492.7	492.0	492.2	491.3	492.6	493.2	496.4
70°	462.0	460.7	460.2	458.7	458.3	456.8	456.3	455.0	454.8	454.4	455.5
72.5°	430.7	430.3	430.4	429.4	429.3	428.3	428.4	427.7	428.4	428.7	430.1
75°	394.7	394.8	395.6	394.6	394.9	394.0	394.4	393.5	394.0	393.8	395.2
77.5°	351.0	352.0	353.8	353.5	354.1	353.1	353.6	352.4	352.7	352.0	352.5
80°	301.7	303.8	306.4	306.3	307.3	306.7	307.6	306.6	307.0	305.7	305.4
82.5°	243.2	245.0	247.7	247.8	250.2	250.7	253.3	253.2	254.9	253.9	253.1
85°	166.2	167.5	169.9	171.2	173.7	175.1	177.8	178.8	176.9	180.4	177.7
87.5°	86.8	90.0	88.2	92.4	91.5	95.7	94.7	98.8	97.9	101.4	100.9
90°	37.0	37.7	40.7	41.6	45.2	46.3	47.6	46.1	47.4	46.0	47.1
92.5°	34.9	37.4	39.8	42.2	44.5	47.0	44.7	42.5	40.3	38.2	35.9
95°	47.4	50.9	54.4	57.9	61.4	64.9	61.2	57.5	53.8	49.9	46.2
97.5°	55.6	59.3	63.2	66.9	70.7	74.4	70.0	65.5	61.1	56.7	52.3
100°	78.4	85.7	93.0	100.2	107.6	114.9	106.7	98.4	90.1	81.8	73.4
102.5°	157.2	173.9	190.7	207.4	224.1	240.8	223.2	205.7	188.0	170.5	152.9
105°	293.1	319.9	346.6	373.4	400.0	427.0	398.5	369.9	341.4	312.9	284.3
107.5°	431.8	457.9	484.1	510.2	536.3	562.4	533.6	504.6	475.8	446.7	417.8
110°	511.6	527.2	543.0	558.7	574.5	590.2	569.0	548.0	526.9	505.8	484.6



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	526.9	534.9	542.7	550.7	558.5	566.5	551.4	536.4	521.3	506.3	491.2
115°	494.9	497.3	499.9	502.5	505.1	507.7	497.6	487.4	477.2	467.1	456.9
117.5°	435.5	435.2	434.7	434.5	434.0	433.7	428.1	422.4	416.7	410.9	405.4
120°	375.4	373.3	371.3	369.3	367.3	365.1	362.9	360.5	358.1	355.7	353.3
122.5°	323.2	321.9	320.5	319.1	317.6	316.2	315.4	314.5	313.6	312.7	311.8
125°	282.1	282.1	282.1	282.1	282.1	282.1	281.7	281.4	280.8	280.4	280.0
127.5°	254.2	255.3	256.2	257.2	258.1	259.1	259.0	259.0	258.9	258.8	258.8
130°	237.0	238.8	240.5	242.0	243.6	245.4	245.2	244.9	244.8	244.6	244.4
132.5°	226.9	228.8	230.8	232.8	234.6	236.5	236.3	236.0	235.6	235.4	235.1
135°	220.2	222.0	223.8	225.7	227.4	229.2	228.8	228.5	228.1	227.8	227.4
137.5°	215.7	217.2	218.6	220.1	221.5	222.8	222.5	222.2	221.6	221.4	221.0
140°	212.3	213.6	214.7	215.9	217.0	218.1	217.6	217.2	216.6	216.1	215.6
142.5°	209.8	210.6	211.5	212.4	213.3	214.1	213.3	212.6	211.9	211.2	210.5
145°	208.7	209.2	209.8	210.5	210.7	211.4	210.6	209.7	208.8	208.0	207.2
147.5°	206.5	206.7	207.0	207.5	207.7	208.0	207.2	206.4	205.6	204.8	203.8
150°	203.8	204.1	204.3	204.7	205.0	205.2	204.4	203.5	202.6	201.7	200.9
152.5°	200.2	200.5	200.7	201.0	201.2	201.5	200.6	199.9	199.0	198.2	197.2
155°	197.7	198.0	198.1	198.3	198.3	198.5	197.8	197.2	196.4	195.7	195.0
157.5°	196.3	196.5	196.7	196.8	196.9	197.0	196.6	196.0	195.5	194.9	194.3
160°	195.6	195.6	195.8	195.9	196.1	196.2	195.6	195.4	194.9	194.4	193.9
162.5°	195.7	195.9	196.1	196.3	196.6	196.8	196.3	195.7	195.3	194.7	194.1
165°	195.8	196.0	196.2	196.4	196.4	196.6	196.1	195.9	195.5	195.1	194.7
167.5°	196.9	197.1	197.2	197.4	197.5	197.6	197.1	196.9	196.5	196.2	195.7
170°	197.5	197.6	197.9	198.1	198.3	198.3	198.1	197.9	197.5	197.2	196.9
172.5°	198.8	198.9	199.0	199.2	199.3	199.6	199.2	198.9	198.6	198.3	198.0
175°	198.5	198.6	198.7	198.7	198.7	198.8	198.5	198.3	198.1	197.8	197.5
177.5°	199.2	199.2	199.2	199.2	199.2	199.2	199.0	198.8	198.6	198.4	198.3
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7	14739.7
2.5°	14832.3	14825.8	14821.7	14816.4	14813.2	14809.1	14806.1	14803.5	14801.4	14799.5	14798.1
5°	15040.9	15007.7	14982.0	14954.1	14931.2	14908.4	14890.8	14876.2	14866.2	14858.6	14854.2
7.5°	15306.4	15245.7	15191.7	15135.0	15084.0	15033.9	14990.7	14953.6	14925.6	14907.5	14896.5
10°	15543.6	15462.3	15381.9	15297.3	15217.2	15139.4	15067.6	15004.4	14954.5	14921.2	14901.9
12.5°	15649.9	15580.7	15498.6	15406.7	15308.4	15209.0	15112.1	15024.7	14951.4	14902.1	14873.7
15°	15556.2	15527.8	15472.1	15400.8	15307.6	15204.8	15091.0	14984.0	14885.6	14821.8	14784.8
17.5°	15251.7	15291.3	15287.1	15259.8	15192.8	15106.3	14990.3	14870.2	14747.1	14661.8	14615.2
20°	14737.7	14862.4	14925.6	14958.1	14931.8	14875.7	14770.7	14648.7	14505.3	14393.9	14326.0
22.5°	14015.5	14235.6	14372.8	14473.1	14494.4	14475.3	14382.6	14266.7	14106.7	13972.9	13872.6
25°	13085.7	13408.2	13624.9	13794.9	13860.9	13878.0	13799.1	13683.7	13505.5	13349.6	13211.8
27.5°	11990.7	12409.6	12699.1	12927.4	13030.5	13075.2	13002.5	12884.8	12674.0	12487.9	12307.9
30°	10757.8	11254.8	11603.4	11877.1	12002.8	12061.8	11984.7	11853.3	11608.0	11384.0	11157.2
32.5°	9438.2	9982.2	10361.9	10659.2	10783.7	10839.2	10738.3	10590.9	10307.3	10043.4	9778.9
35°	8056.6	8605.7	8988.6	9278.1	9382.3	9415.9	9286.8	9116.3	8802.1	8512.5	8224.1
37.5°	6646.9	7157.7	7505.8	7765.5	7830.1	7835.9	7680.4	7492.1	7161.8	6876.3	6589.2
40°	5249.4	5680.1	5961.1	6169.1	6191.5	6171.5	6002.5	5813.0	5504.0	5248.1	4996.1
42.5°	3932.9	4258.2	4458.7	4601.1	4592.6	4553.1	4398.2	4235.3	3980.4	3785.6	3587.2
45°	2805.2	3019.6	3136.9	3220.2	3193.4	3155.8	3035.2	2921.0	2747.8	2621.9	2488.6
47.5°	1948.8	2204.8	2160.3	2323.2	2182.8	2275.6	2082.4	1975.9	1884.1	1817.2	1741.8
50°	1395.1	1453.8	1482.2	1501.5	1491.3	1477.0	1442.3	1411.3	1369.2	1338.7	1303.0
52.5°	1077.4	1106.8	1122.8	1134.5	1132.2	1127.0	1111.9	1098.0	1078.4	1065.4	1049.8
55°	912.6	913.1	942.6	930.0	948.7	926.7	935.4	911.1	915.0	894.1	880.1
57.5°	758.4	770.4	775.8	781.1	779.6	778.7	772.8	769.8	763.2	761.2	756.5
60°	667.2	673.4	674.7	677.1	675.1	674.3	669.8	668.1	663.7	662.9	659.7
62.5°	604.5	607.7	607.7	607.7	605.1	602.6	597.5	594.9	591.0	590.3	588.4
65°	552.3	555.6	556.2	556.8	555.0	553.0	548.6	545.6	541.8	540.3	538.2
67.5°	498.3	501.9	503.1	505.0	503.8	503.5	500.4	499.3	496.7	496.1	494.1
70°	456.0	457.5	457.4	457.3	454.9	452.8	449.2	447.6	444.9	444.3	442.6
72.5°	430.9	431.9	431.3	430.3	427.2	424.0	419.9	416.8	413.3	411.1	408.6
75°	395.4	396.8	395.9	395.3	392.5	390.5	387.1	385.4	382.9	382.3	380.6
77.5°	351.9	352.5	351.0	351.0	348.8	347.5	345.0	344.5	342.8	342.8	341.2
80°	303.4	303.0	300.7	300.3	298.1	297.6	295.6	295.8	294.3	295.0	293.7
82.5°	249.7	248.3	245.3	244.4	241.9	241.8	240.5	241.5	240.6	241.9	241.2
85°	178.9	179.2	177.9	177.9	177.3	177.5	177.4	178.2	178.3	179.5	179.4
87.5°	99.8	101.2	100.9	102.2	102.1	103.6	104.2	106.3	106.6	108.6	108.6
90°	45.8	47.2	45.8	47.3	46.8	48.6	48.4	50.3	49.9	51.4	50.6
92.5°	33.6	31.5	29.3	27.0	25.9	24.7	23.8	22.5	21.4	20.2	19.1
95°	42.4	38.7	34.8	31.1	29.8	28.4	27.2	25.9	24.6	23.3	22.1
97.5°	47.8	43.4	38.9	34.5	33.4	32.2	31.0	29.9	28.8	27.7	26.6
100°	65.1	56.8	48.6	40.2	39.3	38.4	37.5	36.5	35.5	34.6	33.6
102.5°	135.4	117.7	100.1	82.5	79.1	75.7	72.5	69.0	65.7	62.3	59.1
105°	255.8	227.3	198.7	170.1	161.1	152.0	142.9	133.9	124.7	115.7	106.7
107.5°	388.8	359.8	330.8	301.9	285.2	268.4	251.6	234.8	218.1	201.2	184.5
110°	463.6	442.4	421.3	400.0	386.6	373.1	359.6	346.1	332.6	319.0	305.5



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	476.1	461.0	445.8	430.6	424.6	418.4	412.3	406.2	400.0	393.8	387.8
115°	446.7	436.5	426.2	415.9	413.8	411.7	409.6	407.4	405.3	403.0	400.9
117.5°	399.6	393.9	388.0	382.3	382.7	383.2	383.5	383.8	384.1	384.4	384.7
120°	350.8	348.4	346.0	343.5	345.5	347.3	349.2	351.0	352.8	354.5	356.3
122.5°	310.9	309.9	309.0	308.0	310.3	312.6	314.8	317.0	319.2	321.2	323.3
125°	279.6	279.0	278.7	278.1	280.5	282.8	285.0	287.2	289.4	291.4	293.6
127.5°	258.7	258.5	258.5	258.3	260.1	261.6	263.3	264.8	266.4	267.8	269.2
130°	244.1	243.8	243.6	243.4	244.9	246.4	248.0	249.3	250.6	251.8	253.1
132.5°	234.9	234.5	234.2	233.9	235.1	236.1	237.2	238.0	239.1	239.8	240.6
135°	227.1	226.6	226.3	225.8	226.9	228.0	228.9	229.7	230.7	231.3	232.1
137.5°	220.7	220.1	219.8	219.4	220.3	221.3	222.1	222.8	223.6	224.3	224.9
140°	215.1	214.5	214.1	213.5	214.4	215.1	216.0	216.6	217.4	217.8	218.5
142.5°	209.7	209.0	208.4	207.6	208.2	208.7	209.2	209.8	210.3	210.7	211.1
145°	206.4	205.4	204.6	203.7	204.2	204.7	205.1	205.5	205.8	206.1	206.4
147.5°	203.1	202.2	201.3	200.5	201.0	201.2	201.5	201.8	202.1	202.3	202.4
150°	199.9	199.0	198.1	197.1	197.4	197.7	198.0	198.3	198.3	198.5	198.7
152.5°	196.4	195.5	194.6	193.7	193.9	194.1	194.2	194.4	194.5	194.6	194.8
155°	194.3	193.5	192.8	191.9	192.2	192.3	192.4	192.6	192.6	192.7	192.7
157.5°	193.7	193.0	192.5	191.8	191.8	191.9	191.9	191.8	191.7	191.7	191.6
160°	193.4	192.9	192.4	191.7	191.7	191.7	191.7	191.6	191.6	191.5	191.5
162.5°	193.5	192.9	192.3	191.6	191.6	191.6	191.6	191.5	191.5	191.3	191.2
165°	194.2	193.8	193.4	192.9	192.8	192.7	192.6	192.4	192.3	192.0	191.9
167.5°	195.4	194.9	194.4	193.9	193.9	194.0	194.0	193.9	193.8	193.6	193.6
170°	196.6	196.1	195.8	195.4	195.3	195.3	195.1	195.0	194.9	194.7	194.6
172.5°	197.5	197.1	196.9	196.3	196.3	196.3	196.2	196.1	195.9	195.8	195.8
175°	197.1	196.9	196.6	196.3	196.2	196.2	196.1	196.1	196.0	195.9	195.8
177.5°	198.1	197.9	197.6	197.4	197.4	197.4	197.3	197.2	197.2	197.2	197.1
180°	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P1444795  
 CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	357.5°	360°
0°	14739.7	14739.7
2.5°	14796.8	14796.0
5°	14851.8	14850.9
7.5°	14893.7	14893.4
10°	14898.6	14901.1
12.5°	14868.9	14870.9
15°	14782.0	14786.1
17.5°	14616.0	14621.3
20°	14330.2	14335.7
22.5°	13867.2	13869.4
25°	13194.0	13184.4
27.5°	12276.2	12259.8
30°	11109.6	11093.7
32.5°	9718.6	9708.7
35°	8152.8	8146.5
37.5°	6504.4	6491.5
40°	4904.0	4866.7
42.5°	3500.4	3435.0
45°	2419.0	2341.5
47.5°	1688.7	1640.8
50°	1280.0	1264.5
52.5°	1043.0	1039.3
55°	880.0	878.4
57.5°	757.6	757.1
60°	661.4	661.2
62.5°	589.6	589.9
65°	539.1	539.2
67.5°	494.6	494.3
70°	443.3	442.9
72.5°	407.9	407.2
75°	380.6	380.1
77.5°	341.6	341.1
80°	294.6	293.7
82.5°	242.2	241.4
85°	180.7	180.7
87.5°	110.6	110.5
90°	52.0	50.9
92.5°	18.1	17.0
95°	20.8	19.5
97.5°	25.4	24.3
100°	32.7	31.8
102.5°	55.7	52.4
105°	97.5	88.5
107.5°	167.7	150.9
110°	292.0	278.5



TEST NUMBER: P1444795  
CATALOG NUMBER: EHBR1-18-UNV-TA-L940-UPL15

**CANDELA DISTRIBUTION (continued):**

	357.5°	360°
112.5°	381.5	375.4
115°	398.6	396.3
117.5°	384.9	385.1
120°	357.8	359.5
122.5°	325.2	327.3
125°	295.5	297.5
127.5°	270.4	271.7
130°	254.1	255.3
132.5°	241.3	241.9
135°	232.6	233.2
137.5°	225.5	225.8
140°	218.8	219.2
142.5°	211.3	211.6
145°	206.5	206.7
147.5°	202.4	202.5
150°	198.7	198.8
152.5°	194.7	194.8
155°	192.7	192.7
157.5°	191.5	191.4
160°	191.3	191.2
162.5°	191.0	191.0
165°	191.6	191.4
167.5°	193.4	193.4
170°	194.4	194.3
172.5°	195.6	195.6
175°	195.7	195.7
177.5°	197.1	197.0
180°	198.2	198.2

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-7

Test Date: 08/04/2025

Luminaire Tested: EHBR-60-L940-N

Data in this report applies to families of products including EHBR-60-L940-N

**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2506-472-7  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 08/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **EHBR-60-L940-N**  
 Description: Elevate Round Highbay at, 60000 lumens, 4000K 90CRI LEDs with N lens

**Spectral Parameters**

CCT (K): 3963  
 CIE u': 0.2267  
 CIE v': 0.5003  
 Duv: -0.0016  
 CIE x: 0.3810  
 CIE y: 0.3738  
 CIE z: 0.2453  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 580  
 Purity: 26.49712  
 Rf: 90.7  
 Rg: 101

CRI (Ra):	93.4		
R1:	95.2	R9:	66.4
R2:	95.1	R10:	86.6
R3:	93.3	R11:	94.4
R4:	94.5	R12:	75.4
R5:	94.2	R13:	95.0
R6:	92.9	R14:	95.4
R7:	94.0	R15:	92.8
R8:	87.7		



**Test Conditions**


Stabilization Time: 44M  
 Operation Time: 1H 44M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-7


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-7

**CIE 1931 Chromaticity Diagram**

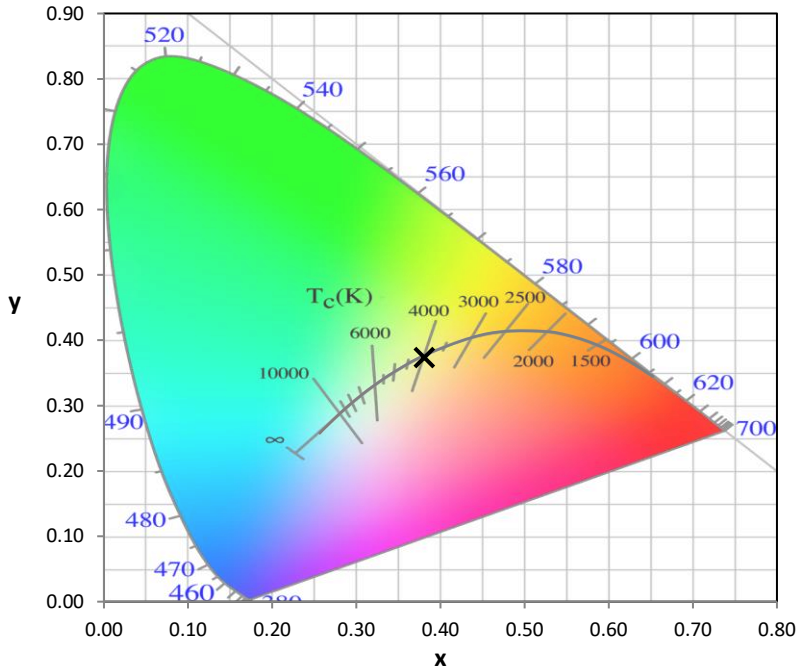

**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**

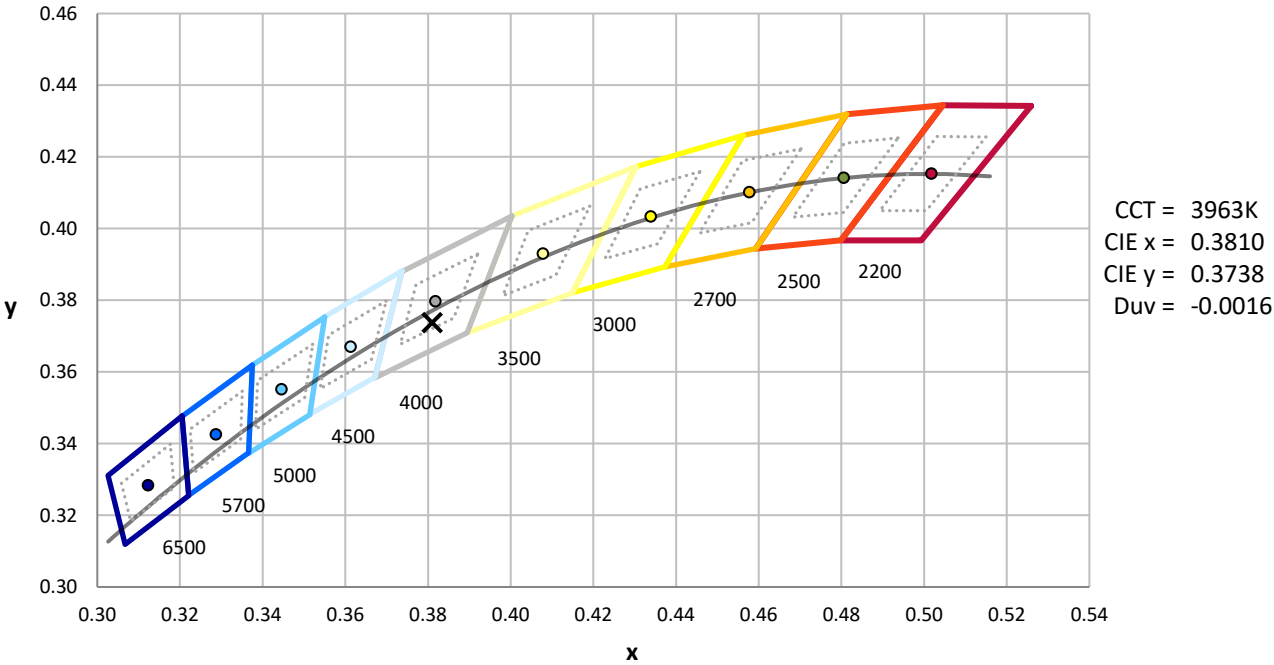

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-7

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-7

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 1.76**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-7

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.64

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

**Summary**

$R_f = 90.7$   
 $R_g = 101$   
 $CIE R_a = 93.4$   
 $R_9 = 66.4$




**Color Vector Graphics**



**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 86	CES26 = 90	CES51 = 99	CES76 = 83
CES02 = 62	CES27 = 93	CES52 = 97	CES77 = 87
CES03 = 31	CES28 = 94	CES53 = 95	CES78 = 79
CES04 = 69	CES29 = 91	CES54 = 96	CES79 = 94
CES05 = 49	CES30 = 98	CES55 = 95	CES80 = 91
CES06 = 50	CES31 = 92	CES56 = 95	CES81 = 80
CES07 = 42	CES32 = 84	CES57 = 94	CES82 = 96
CES08 = 41	CES33 = 95	CES58 = 95	CES83 = 95
CES09 = 29	CES34 = 90	CES59 = 98	CES84 = 93
CES10 = 74	CES35 = 94	CES60 = 93	CES85 = 82
CES11 = 57	CES36 = 84	CES61 = 93	CES86 = 84
CES12 = 63	CES37 = 92	CES62 = 90	CES87 = 90
CES13 = 43	CES38 = 93	CES63 = 92	CES88 = 97
CES14 = 74	CES39 = 98	CES64 = 91	CES89 = 84
CES15 = 71	CES40 = 96	CES65 = 88	CES90 = 99
CES16 = 47	CES41 = 98	CES66 = 88	CES91 = 74
CES17 = 49	CES42 = 89	CES67 = 87	CES92 = 78
CES18 = 56	CES43 = 89	CES68 = 87	CES93 = 87
CES19 = 71	CES44 = 99	CES69 = 88	CES94 = 75
CES20 = 66	CES45 = 93	CES70 = 84	CES95 = 83
CES21 = 85	CES46 = 95	CES71 = 80	CES96 = 91
CES22 = 78	CES47 = 92	CES72 = 93	CES97 = 93
CES23 = 91	CES48 = 96	CES73 = 78	CES98 = 93
CES24 = 90	CES49 = 93	CES74 = 92	CES99 = 94
CES25 = 71	CES50 = 99	CES75 = 81	

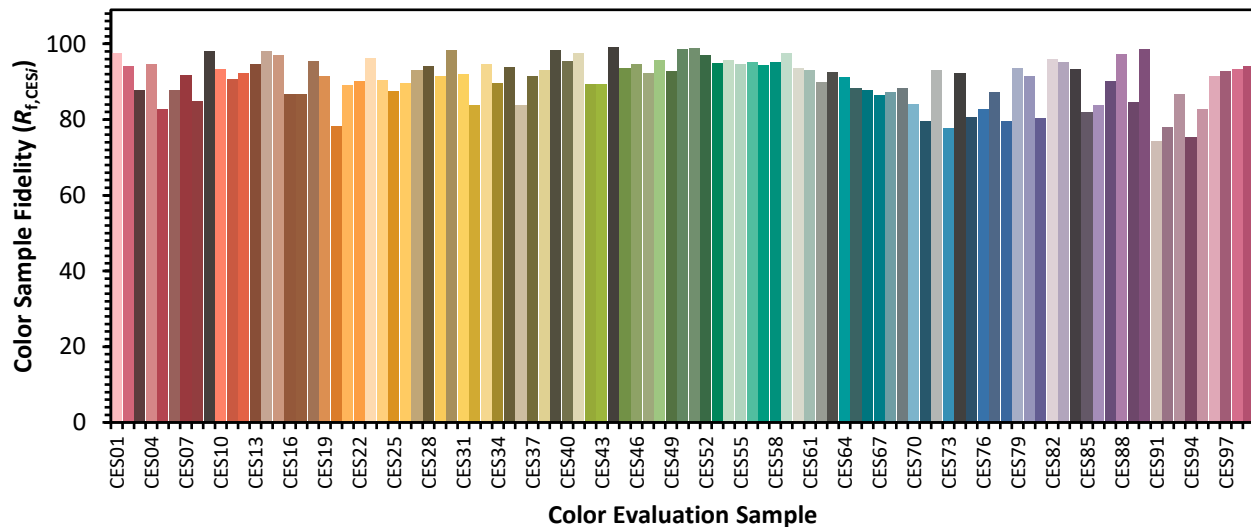

Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)