

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1433710

Luminaire Tested: EHBR1-12-UNV-TASM-L940-UPL24

Issue Date: 3/20/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1433710  
REPORT IS A COMBINATION OF REPORTS P1431647 AND P1431635  
Test Lab: INNOVATION CENTER  
Issue Date: 3/20/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: EHBR1-12-UNV-TASM-L940-UPL24  
Description: Elevate Round Highbay at, 12000 lumens, 4000K 90CRI LEDs with TASM lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13721.2 lumens  
Efficiency: N/A  
Efficacy: 169.0 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.84 / 0.9  
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')  
CIE Type: Semi-Direct

Input Watts (W): 81.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1433710  
CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

### Luminous Intensity Polar Plot

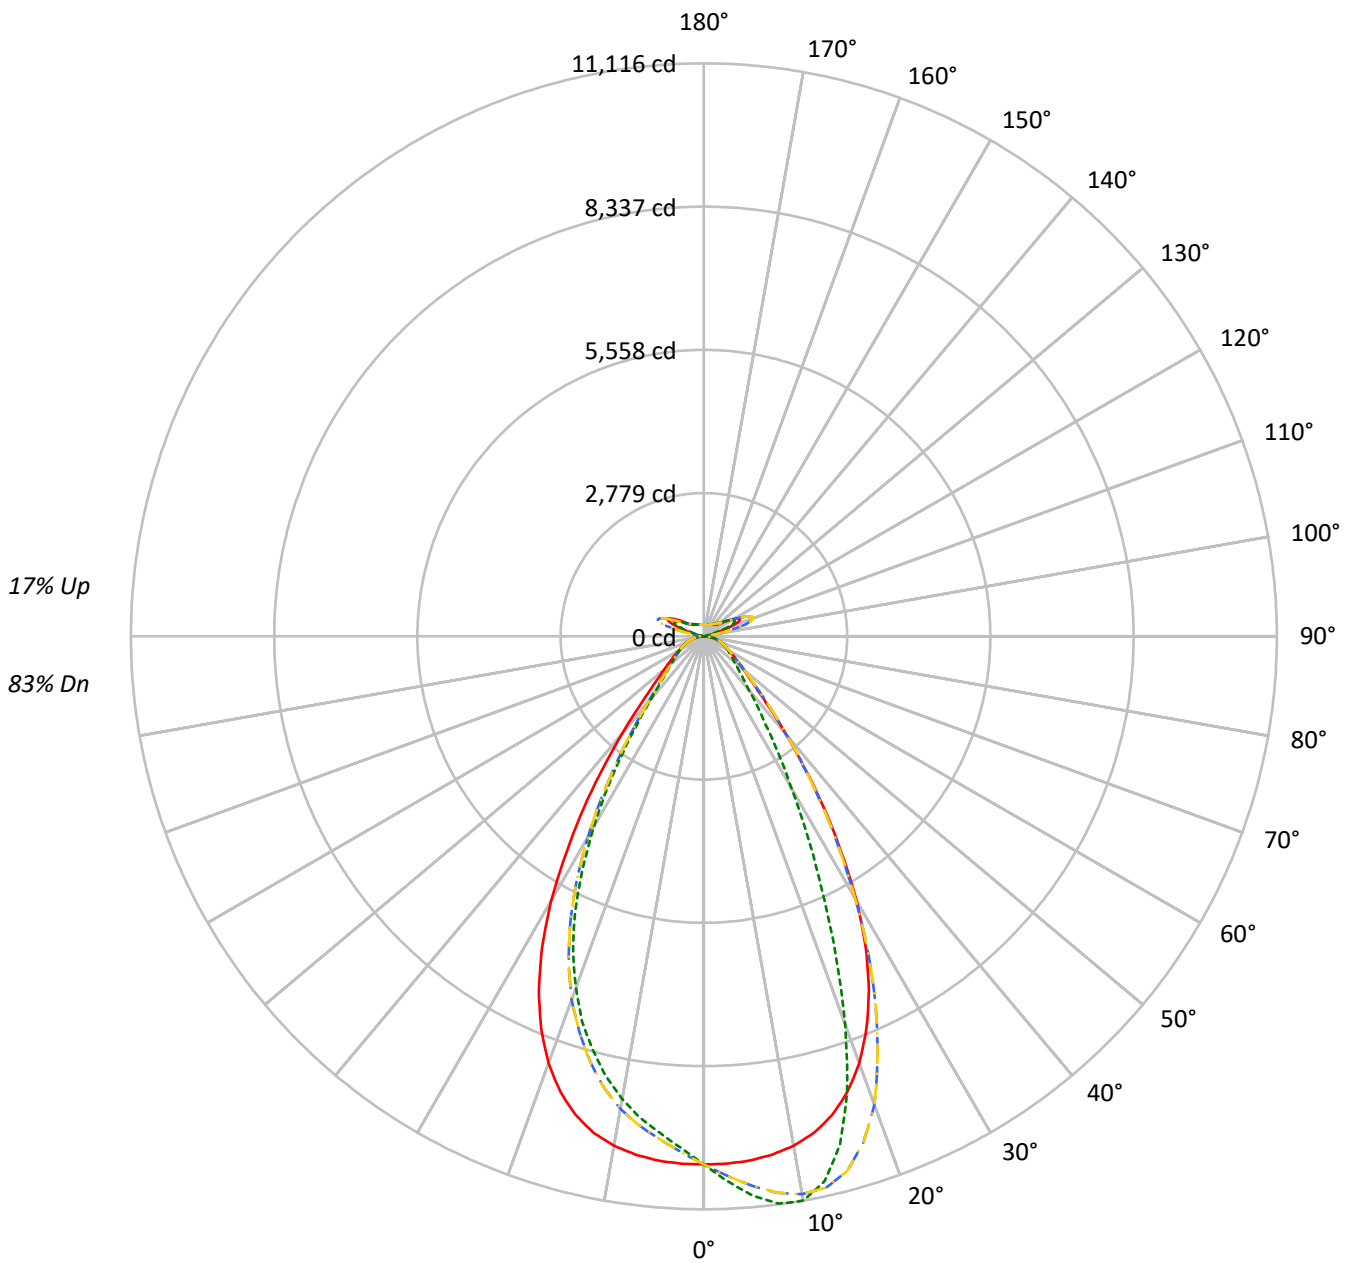

— 0°-180°    - - 45°-225°    - · - 90°-270°    - · - 135°-315°



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	115	115	115	115	111	111	111	111	102	102	102	94	94	94	87	87	87	87	87	87	83
1	108	104	101	98	103	100	98	95	93	91	89	87	85	84	81	79	78	78	78	78	75
2	101	95	90	85	97	91	87	83	85	82	79	80	77	75	75	73	71	71	71	71	68
3	94	86	80	75	91	84	78	74	79	74	70	74	70	67	69	67	64	64	64	64	62
4	88	79	73	67	85	77	71	66	72	67	64	68	64	61	65	61	59	59	59	59	56
5	83	73	66	61	80	71	65	60	67	62	58	64	59	56	60	57	54	54	54	54	52
6	78	67	61	56	75	66	59	55	62	57	53	59	55	51	57	53	50	50	50	50	48
7	73	63	56	51	71	61	55	50	58	53	49	56	51	47	53	49	46	46	46	46	44
8	69	58	52	47	67	57	51	46	55	49	45	52	47	44	50	46	43	43	43	43	41
9	65	55	48	44	63	53	47	43	51	46	42	49	44	41	47	43	40	40	40	40	38
10	62	51	45	41	60	50	44	40	48	43	39	46	42	38	45	40	38	38	38	38	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	48108	48108	48108	48108
5°	47815	51010	47815	45333
10°	47227	52319	47227	42905
15°	45833	48621	45833	39633
20°	42865	38987	42865	35301
25°	37939	27013	37939	29584
30°	30805	17574	30805	22135
35°	22094	11381	22094	14736
40°	14285	7844	14285	9293
45°	9063	6077	9063	6621
50°	6731	5163	6731	5515
55°	5495	4704	5495	4868
60°	4758	4481	4758	4508
65°	4338	4321	4338	4303
70°	4111	4234	4111	4179
75°	3844	4095	3844	3973
80°	3378	3868	3378	3614
85°	2185	2761	2185	2633

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 12743 cd/sqm



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	974.1	7.1
10°-20°	2650.0	19.3
20°-30°	3107.9	22.7
30°-40°	2161.4	15.8
40°-50°	1074.1	7.8
50°-60°	642.4	4.7
60°-70°	452.2	3.3
70°-80°	291.3	2.1
80°-90°	96.5	0.7
90°-100°	60.2	0.4
100°-110°	395.8	2.9
110°-120°	731.6	5.3
120°-130°	434.4	3.2
130°-140°	262.1	1.9
140°-150°	180.8	1.3
150°-160°	117.5	0.9
160°-170°	66.9	0.5
170°-180°	22.1	0.2
0°-30°	6732.0	49.1
0°-40°	8893.4	64.8
0°-60°	10609.9	77.3
0°-90°	11449.8	83.4
90°-120°	1187.6	8.7
90°-150°	2065.0	15.0
90°-180°	2271.0	16.6
0°-180°	13721.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	10244	10244	10244	10244	10244	
5°	10209	10891	10209	9679	10209	969
15°	9616	10200	9616	8315	9616	2687
25°	7576	5394	7576	5908	7576	3430
35°	4055	2089	4055	2704	4055	2531
45°	1466	983	1466	1071	1466	1200
55°	743	636	743	658	743	679
65°	453	451	453	449	453	455
75°	271	288	271	280	271	284
85°	75	95	75	90	75	84
90°	17	18	17	17	17	11
95°	32	29	32	28	32	34
105°	182	91	182	138	182	245
115°	779	664	779	632	779	710
125°	498	521	498	456	498	459
135°	314	362	314	333	314	249
145°	283	296	283	275	283	178
155°	251	262	251	243	251	117
165°	234	241	234	230	234	67
175°	232	235	232	228	232	22
180°	231	231	231	231	231	



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2
2.5°	10238.2	10370.6	10477.8	10548.5	10583.4	10548.5	10477.8	10370.6	10238.2	10106.7	10016.2
5°	10209.3	10474.3	10698.9	10845.9	10891.4	10845.9	10698.9	10474.3	10209.3	9958.7	9792.6
7.5°	10139.9	10552.9	10886.6	11058.1	11100.0	11058.1	10886.6	10552.9	10139.9	9785.3	9575.4
10°	10034.0	10602.5	10988.0	11110.9	11115.9	11110.9	10988.0	10602.5	10034.0	9556.4	9308.7
12.5°	9865.2	10584.8	10954.0	10913.7	10822.0	10913.7	10954.0	10584.8	9865.2	9276.6	8964.3
15°	9615.5	10480.1	10738.6	10410.4	10200.4	10410.4	10738.6	10480.1	9615.5	8899.0	8536.7
17.5°	9263.5	10284.2	10289.2	9639.6	9243.6	9639.6	10289.2	10284.2	9263.5	8437.2	8038.2
20°	8810.0	9969.9	9670.2	8482.4	8013.0	8482.4	9670.2	9969.9	8810.0	7891.2	7499.8
22.5°	8241.4	9546.1	8808.3	7318.1	6677.8	7318.1	8808.3	9546.1	8241.4	7256.4	6848.9
25°	7576.4	9026.9	7881.1	6049.5	5394.4	6049.5	7881.1	9026.9	7576.4	6499.9	6131.4
27.5°	6794.2	8368.8	6893.7	4943.4	4339.0	4943.4	6893.7	8368.8	6794.2	5718.8	5342.5
30°	5925.4	7525.1	5866.2	3936.8	3380.3	3936.8	5866.2	7525.1	5925.4	4841.4	4504.4
32.5°	4952.5	6698.2	4879.4	3154.4	2683.0	3154.4	4879.4	6698.2	4952.5	4004.0	3651.9
35°	4055.1	5663.6	3989.6	2478.6	2088.8	2478.6	3989.6	5663.6	4055.1	3213.5	2867.8
37.5°	3182.4	4686.0	3180.4	1995.9	1694.3	1995.9	3180.4	4686.0	3182.4	2498.4	2217.7
40°	2475.9	3664.0	2491.9	1593.2	1359.6	1593.2	2491.9	3664.0	2475.9	1900.9	1721.4
42.5°	1876.0	2801.7	1958.6	1307.6	1154.9	1307.6	1958.6	2801.7	1876.0	1497.8	1363.3
45°	1466.4	2061.7	1529.5	1103.2	983.2	1103.2	1529.5	2061.7	1466.4	1206.2	1115.8
47.5°	1194.3	1593.4	1239.6	946.3	862.1	946.3	1239.6	1593.4	1194.3	1020.2	952.6
50°	1003.1	1222.7	1029.3	826.0	769.5	826.0	1029.3	1222.7	1003.1	873.6	828.5
52.5°	861.8	997.1	876.5	736.1	698.1	736.1	876.5	997.1	861.8	764.3	736.3
55°	742.6	838.3	762.3	661.9	635.7	661.9	762.3	838.3	742.6	680.2	659.4
57.5°	652.2	711.1	661.9	598.8	581.3	598.8	661.9	711.1	652.2	605.3	594.1
60°	572.0	615.8	584.1	543.6	538.7	543.6	584.1	615.8	572.0	544.5	537.3
62.5°	510.4	538.0	516.5	494.1	489.7	494.1	516.5	538.0	510.4	489.3	490.6
65°	452.8	478.5	461.6	449.5	451.0	449.5	461.6	478.5	452.8	443.0	445.0
67.5°	408.2	421.7	414.3	407.4	409.2	407.4	414.3	421.7	408.2	398.6	401.8
70°	360.7	375.2	367.6	368.7	371.5	368.7	367.6	375.2	360.7	357.8	360.4
72.5°	315.5	326.5	324.0	326.4	329.4	326.4	324.0	326.5	315.5	315.0	315.3
75°	270.8	279.3	280.4	283.7	288.5	283.7	280.4	279.3	270.8	267.9	271.4
77.5°	222.3	231.9	235.5	239.9	247.1	239.9	235.5	231.9	222.3	224.2	225.9
80°	177.7	182.1	190.1	193.4	203.5	193.4	190.1	182.1	177.7	174.4	176.9
82.5°	130.1	134.1	141.0	147.1	152.9	147.1	141.0	134.1	130.1	128.5	128.7
85°	75.1	81.2	85.9	93.2	94.9	93.2	85.9	81.2	75.1	76.9	75.1
87.5°	26.3	28.2	32.2	35.1	35.3	35.1	32.2	28.2	26.3	26.9	24.4
90°	16.6	28.0	48.4	26.3	17.9	26.3	48.4	28.0	16.6	29.2	45.6
92.5°	21.6	38.1	68.6	35.1	24.1	35.1	68.6	38.1	21.6	37.9	73.2
95°	31.9	47.0	87.5	38.8	29.2	38.8	87.5	47.0	31.9	50.6	102.2
97.5°	49.5	58.3	98.8	41.5	35.5	41.5	98.8	58.3	49.5	61.9	117.3
100°	65.9	65.9	180.6	47.7	40.5	47.7	180.6	65.9	65.9	75.9	182.8
102.5°	99.9	129.0	418.8	95.8	49.4	95.8	418.8	129.0	99.9	142.6	388.0
105°	181.7	295.2	737.4	248.1	91.2	248.1	737.4	295.2	181.7	298.8	691.5
107.5°	344.2	550.8	950.2	489.9	213.3	489.9	950.2	550.8	344.2	529.3	912.0
110°	550.6	769.9	1037.0	671.2	432.4	671.2	1037.0	769.9	550.6	727.0	956.1



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	716.8	858.0	1013.2	744.2	598.6	744.2	1013.2	858.0	716.8	802.4	915.8
115°	778.8	845.5	904.8	741.7	664.1	741.7	904.8	845.5	778.8	783.6	817.6
117.5°	752.3	773.7	781.5	696.4	667.9	696.4	781.5	773.7	752.3	704.4	694.2
120°	679.3	670.4	658.2	629.6	630.1	629.6	658.2	670.4	679.3	615.1	579.6
122.5°	587.5	568.7	556.2	561.8	578.5	561.8	556.2	568.7	587.5	523.3	496.7
125°	498.2	479.2	484.6	503.9	520.7	503.9	484.6	479.2	498.2	444.2	437.7
127.5°	422.8	413.9	433.0	454.8	469.1	454.8	433.0	413.9	422.8	388.8	396.1
130°	368.8	371.2	396.5	414.8	423.8	414.8	396.5	371.2	368.8	352.4	369.9
132.5°	335.0	344.9	369.0	384.8	390.0	384.8	369.0	344.9	335.0	330.2	351.3
135°	313.8	328.5	350.3	360.6	362.2	360.6	350.3	328.5	313.8	315.3	335.0
137.5°	301.5	316.1	332.7	340.7	338.4	340.7	332.7	316.1	301.5	305.4	320.3
140°	294.1	308.7	316.3	325.6	323.4	325.6	316.3	308.7	294.1	296.6	307.9
142.5°	286.8	300.2	304.0	310.6	308.3	310.6	304.0	300.2	286.8	289.3	296.8
145°	283.1	293.0	290.3	299.3	295.9	299.3	290.3	293.0	283.1	284.2	288.2
147.5°	276.8	284.2	280.4	288.2	284.8	288.2	280.4	284.2	276.8	276.8	278.3
150°	269.4	274.5	269.2	278.3	277.4	278.3	269.2	274.5	269.4	268.2	269.6
152.5°	259.6	264.6	259.6	269.8	268.8	269.8	259.6	264.6	259.6	258.3	259.7
155°	251.2	253.7	251.2	261.4	261.6	261.4	251.2	253.7	251.2	251.0	251.4
157.5°	245.2	246.7	245.4	254.4	254.6	254.4	245.4	246.7	245.2	245.2	245.4
160°	239.6	242.1	241.1	248.8	249.1	248.8	241.1	242.1	239.6	240.7	240.9
162.5°	237.5	237.5	236.7	244.5	244.8	244.5	236.7	237.5	237.5	237.5	238.8
165°	234.4	235.6	233.5	238.9	240.6	238.9	233.5	235.6	234.4	235.4	235.4
167.5°	233.5	232.3	232.6	236.9	238.6	236.9	232.6	232.3	233.5	234.6	234.6
170°	231.1	231.3	230.5	234.8	236.5	234.8	230.5	231.3	231.1	232.4	233.5
172.5°	231.7	231.7	229.7	232.8	235.8	232.8	229.7	231.7	231.7	232.8	234.0
175°	232.1	231.0	230.1	232.1	235.0	232.1	230.1	231.0	232.1	231.9	231.9
177.5°	230.9	231.2	231.6	233.5	237.7	233.5	231.6	231.2	230.9	231.9	231.9
180°	231.2	231.2	231.2	231.2	231.2	231.2	231.2	231.2	231.2	231.2	231.2



TEST NUMBER: P1433710

CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**CANDELA DISTRIBUTION (continued):**

	247.5°	270°	292.5°	315°	337.5°	360°
0°	10244.2	10244.2	10244.2	10244.2	10244.2	10244.2
2.5°	9946.6	9940.1	9946.6	10016.2	10106.7	10238.2
5°	9715.6	9679.4	9715.6	9792.6	9958.7	10209.3
7.5°	9446.4	9425.5	9446.4	9575.4	9785.3	10139.9
10°	9163.1	9115.7	9163.1	9308.7	9556.4	10034.0
12.5°	8813.8	8751.0	8813.8	8964.3	9276.6	9865.2
15°	8369.7	8314.7	8369.7	8536.7	8899.0	9615.5
17.5°	7893.2	7843.2	7893.2	8038.2	8437.2	9263.5
20°	7294.6	7255.4	7294.6	7499.8	7891.2	8810.0
22.5°	6666.7	6630.0	6666.7	6848.9	7256.4	8241.4
25°	5927.9	5907.8	5927.9	6131.4	6499.9	7576.4
27.5°	5129.5	5095.5	5129.5	5342.5	5718.8	6794.2
30°	4313.9	4257.6	4313.9	4504.4	4841.4	5925.4
32.5°	3516.1	3475.6	3516.1	3651.9	4004.0	4952.5
35°	2745.0	2704.5	2745.0	2867.8	3213.5	4055.1
37.5°	2139.0	2067.3	2139.0	2217.7	2498.4	3182.4
40°	1622.3	1610.7	1622.3	1721.4	1900.9	2475.9
42.5°	1320.6	1289.3	1320.6	1363.3	1497.8	1876.0
45°	1083.6	1071.3	1083.6	1115.8	1206.2	1466.4
47.5°	931.8	937.2	931.8	952.6	1020.2	1194.3
50°	818.7	822.0	818.7	828.5	873.6	1003.1
52.5°	735.3	732.5	735.3	736.3	764.3	861.8
55°	661.6	657.9	661.6	659.4	680.2	742.6
57.5°	597.0	599.7	597.0	594.1	605.3	652.2
60°	539.4	541.9	539.4	537.3	544.5	572.0
62.5°	490.8	492.4	490.8	490.6	489.3	510.4
65°	447.4	449.1	447.4	445.0	443.0	452.8
67.5°	405.9	405.9	405.9	401.8	398.6	408.2
70°	366.9	366.7	366.9	360.4	357.8	360.7
72.5°	320.0	324.7	320.0	315.3	315.0	315.5
75°	274.5	279.9	274.5	271.4	267.9	270.8
77.5°	228.4	236.6	228.4	225.9	224.2	222.3
80°	181.1	190.1	181.1	176.9	174.4	177.7
82.5°	133.9	140.6	133.9	128.7	128.5	130.1
85°	79.7	90.5	79.7	75.1	76.9	75.1
87.5°	25.5	32.7	25.5	24.4	26.9	26.3
90°	26.6	16.6	26.6	45.6	29.2	16.6
92.5°	40.5	24.1	40.5	73.2	37.9	21.6
95°	46.8	27.9	46.8	102.2	50.6	31.9
97.5°	51.8	35.6	51.8	117.3	61.9	49.5
100°	60.7	47.0	60.7	182.8	75.9	65.9
102.5°	128.7	79.7	128.7	388.0	142.6	99.9
105°	270.9	137.6	270.9	691.5	298.8	181.7
107.5°	485.0	238.3	485.0	912.0	529.3	344.2
110°	643.6	444.9	643.6	956.1	727.0	550.6



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**CANDELA DISTRIBUTION (continued):**

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	691.5	601.0	691.5	915.8	802.4	716.8
115°	665.0	632.5	665.0	817.6	783.6	778.8
117.5°	607.2	611.1	607.2	694.2	704.4	752.3
120°	540.4	565.8	540.4	579.6	615.1	679.3
122.5°	478.9	509.1	478.9	496.7	523.3	587.5
125°	425.9	456.4	425.9	437.7	444.2	498.2
127.5°	389.4	409.8	389.4	396.1	388.8	422.8
130°	360.6	378.3	360.6	369.9	352.4	368.8
132.5°	340.7	352.1	340.7	351.3	330.2	335.0
135°	323.3	333.2	323.3	335.0	315.3	313.8
137.5°	308.4	316.9	308.4	320.3	305.4	301.5
140°	294.9	302.2	294.9	307.9	296.6	294.1
142.5°	281.3	286.4	281.3	296.8	289.3	286.8
145°	271.6	275.4	271.6	288.2	284.2	283.1
147.5°	263.2	265.7	263.2	278.3	276.8	276.8
150°	254.7	257.2	254.7	269.6	268.2	269.4
152.5°	246.1	248.8	246.1	259.7	258.3	259.6
155°	240.2	242.9	240.2	251.4	251.0	251.2
157.5°	236.7	238.4	236.7	245.4	245.2	245.2
160°	233.6	235.0	233.6	240.9	240.7	239.6
162.5°	230.2	231.7	230.2	238.8	237.5	237.5
165°	229.4	229.6	229.4	235.4	235.4	234.4
167.5°	228.3	229.6	228.3	234.6	234.6	233.5
170°	228.4	228.6	228.4	233.5	232.4	231.1
172.5°	228.8	229.0	228.8	234.0	232.8	231.7
175°	228.0	228.2	228.0	231.9	231.9	232.1
177.5°	229.4	229.6	229.4	231.9	231.9	230.9
180°	231.2	231.2	231.2	231.2	231.2	231.2



TEST NUMBER: P1433710  
 CATALOG NUMBER: EHBR1-12-UNV-TASM-L940-UPL24

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.31	14.30	13.95	14.92	15.62	12.63	13.62	13.26	14.24	14.94
	3H	14.85	15.73	15.50	16.36	17.11	14.47	15.35	15.12	15.98	16.73
	4H	15.49	16.31	16.15	16.95	17.71	15.25	16.07	15.92	16.72	17.48
	6H	15.96	16.72	16.64	17.38	18.15	15.89	16.64	16.57	17.30	18.07
	8H	16.11	16.83	16.80	17.50	18.28	16.11	16.82	16.80	17.50	18.27
	12H	16.18	16.86	16.87	17.53	18.33	16.23	16.91	16.93	17.58	18.38
4H	2H	13.72	14.54	14.39	15.18	15.94	13.20	14.02	13.87	14.66	15.42
	3H	15.51	16.19	16.19	16.87	17.65	15.25	15.93	15.93	16.61	17.39
	4H	16.28	16.89	16.97	17.58	18.39	16.15	16.77	16.85	17.46	18.26
	6H	16.89	17.42	17.61	18.13	18.96	16.92	17.45	17.64	18.16	18.98
	8H	17.09	17.58	17.81	18.29	19.12	17.19	17.68	17.91	18.39	19.22
	12H	17.19	17.63	17.92	18.36	19.19	17.35	17.79	18.09	18.53	19.36
8H	4H	16.53	17.02	17.24	17.73	18.56	16.43	16.92	17.15	17.63	18.46
	6H	17.27	17.67	18.01	18.42	19.25	17.33	17.73	18.08	18.49	19.32
	8H	17.54	17.89	18.30	18.65	19.50	17.69	18.04	18.45	18.80	19.65
	12H	17.71	18.02	18.46	18.76	19.67	17.93	18.24	18.69	18.99	19.90
12H	4H	16.53	16.97	17.27	17.70	18.54	16.43	16.87	17.17	17.61	18.44
	6H	17.31	17.67	18.07	18.43	19.27	17.38	17.73	18.14	18.49	19.34
	8H	17.62	17.93	18.38	18.68	19.59	17.78	18.09	18.54	18.83	19.75

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-6

Test Date: 08/01/2025

Luminaire Tested: EHBR-60-L935-N

Data in this report applies to families of products including EHBR-60-L935-N

**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2506-472-6  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 08/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **EHBR-60-L935-N**  
 Description: Elevate Round Highbay at, 60000 lumens, 3500K 90CRI LEDs with N lens

**Spectral Parameters**

CCT (K): 3406  
 CIE u': 0.2394  
 CIE v': 0.5094  
 Duv: -0.0028  
 CIE x: 0.4076  
 CIE y: 0.3856  
 CIE z: 0.2068  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 582  
 Purity: 38.0517  
 Rf: 91.3  
 Rg: 100

CRI (Ra):	94.6		
R1:	96.6	R9:	63.8
R2:	98.4	R10:	94.7
R3:	98.1	R11:	96.6
R4:	95.8	R12:	80.9
R5:	96.2	R13:	97.4
R6:	95.4	R14:	98.3
R7:	91.8	R15:	93.1
R8:	84.4		



**Test Conditions**


Stabilization Time: 35M  
 Operation Time: 1H 35M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-6

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-6

**CIE 1931 Chromaticity Diagram**

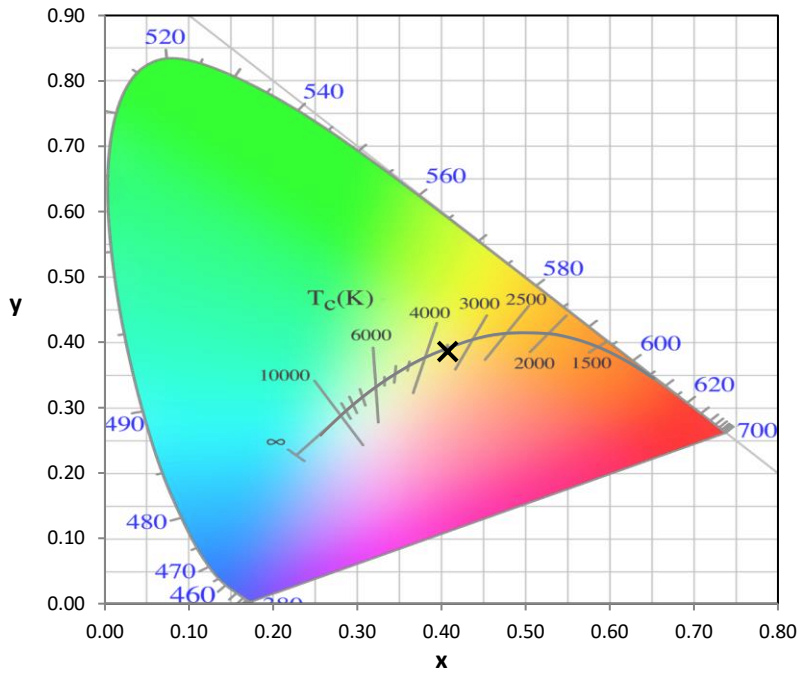

**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**



Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-6

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	140	NR	620	338	NR	750	8	NR	880	0	NR
365	0	NR	495	159	NR	625	339	NR	755	7	NR	885	0	NR
370	0	NR	500	182	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	202	NR	635	653	NR	765	5	NR	895	0	NR
380	0	NR	510	216	NR	640	222	NR	770	4	NR	900	0	NR
385	0	NR	515	228	NR	645	214	NR	775	3	NR	905	0	NR
390	0	NR	520	236	NR	650	185	NR	780	3	NR	910	0	NR
395	1	NR	525	242	NR	655	157	NR	785	3	NR	915	0	NR
400	2	NR	530	248	NR	660	133	NR	790	2	NR	920	0	NR
405	3	NR	535	253	NR	665	113	NR	795	2	NR	925	0	NR
410	4	NR	540	258	NR	670	103	NR	800	2	NR	930	0	NR
415	7	NR	545	264	NR	675	85	NR	805	1	NR	935	0	NR
420	13	NR	550	270	NR	680	72	NR	810	1	NR	940	0	NR
425	22	NR	555	278	NR	685	62	NR	815	1	NR	945	0	NR
430	38	NR	560	286	NR	690	53	NR	820	1	NR	950	0	NR
435	65	NR	565	295	NR	695	45	NR	825	1	NR	955	0	NR
440	108	NR	570	303	NR	700	39	NR	830	1	NR	960	0	NR
445	193	NR	575	311	NR	705	33	NR	835	1	NR	965	0	NR
450	312	NR	580	319	NR	710	28	NR	840	1	NR	970	0	NR
455	300	NR	585	326	NR	715	24	NR	845	0	NR	975	0	NR
460	214	NR	590	332	NR	720	20	NR	850	0	NR	980	0	NR
465	184	NR	595	333	NR	725	17	NR	855	0	NR	985	0	NR
470	153	NR	600	336	NR	730	15	NR	860	0	NR	990	0	NR
475	122	NR	605	337	NR	735	12	NR	865	0	NR	995	0	NR
480	115	NR	610	367	NR	740	10	NR	870	0	NR	1000	0	NR
485	125	NR	615	390	NR	745	9	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-6

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 1.62**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	140	NR	620	338	NR	750	8	NR	880	0	NR
365	0	NR	495	159	NR	625	339	NR	755	7	NR	885	0	NR
370	0	NR	500	182	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	202	NR	635	653	NR	765	5	NR	895	0	NR
380	0	NR	510	216	NR	640	222	NR	770	4	NR	900	0	NR
385	0	NR	515	228	NR	645	214	NR	775	3	NR	905	0	NR
390	0	NR	520	236	NR	650	185	NR	780	3	NR	910	0	NR
395	1	NR	525	242	NR	655	157	NR	785	3	NR	915	0	NR
400	2	NR	530	248	NR	660	133	NR	790	2	NR	920	0	NR
405	3	NR	535	253	NR	665	113	NR	795	2	NR	925	0	NR
410	4	NR	540	258	NR	670	103	NR	800	2	NR	930	0	NR
415	7	NR	545	264	NR	675	85	NR	805	1	NR	935	0	NR
420	13	NR	550	270	NR	680	72	NR	810	1	NR	940	0	NR
425	22	NR	555	278	NR	685	62	NR	815	1	NR	945	0	NR
430	38	NR	560	286	NR	690	53	NR	820	1	NR	950	0	NR
435	65	NR	565	295	NR	695	45	NR	825	1	NR	955	0	NR
440	108	NR	570	303	NR	700	39	NR	830	1	NR	960	0	NR
445	193	NR	575	311	NR	705	33	NR	835	1	NR	965	0	NR
450	312	NR	580	319	NR	710	28	NR	840	1	NR	970	0	NR
455	300	NR	585	326	NR	715	24	NR	845	0	NR	975	0	NR
460	214	NR	590	332	NR	720	20	NR	850	0	NR	980	0	NR
465	184	NR	595	333	NR	725	17	NR	855	0	NR	985	0	NR
470	153	NR	600	336	NR	730	15	NR	860	0	NR	990	0	NR
475	122	NR	605	337	NR	735	12	NR	865	0	NR	995	0	NR
480	115	NR	610	367	NR	740	10	NR	870	0	NR	1000	0	NR
485	125	NR	615	390	NR	745	9	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-6

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR M/P: 3.3

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	140	NR	620	338	NR	750	8	NR	880	0	NR
365	0	NR	495	159	NR	625	339	NR	755	7	NR	885	0	NR
370	0	NR	500	182	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	202	NR	635	653	NR	765	5	NR	895	0	NR
380	0	NR	510	216	NR	640	222	NR	770	4	NR	900	0	NR
385	0	NR	515	228	NR	645	214	NR	775	3	NR	905	0	NR
390	0	NR	520	236	NR	650	185	NR	780	3	NR	910	0	NR
395	1	NR	525	242	NR	655	157	NR	785	3	NR	915	0	NR
400	2	NR	530	248	NR	660	133	NR	790	2	NR	920	0	NR
405	3	NR	535	253	NR	665	113	NR	795	2	NR	925	0	NR
410	4	NR	540	258	NR	670	103	NR	800	2	NR	930	0	NR
415	7	NR	545	264	NR	675	85	NR	805	1	NR	935	0	NR
420	13	NR	550	270	NR	680	72	NR	810	1	NR	940	0	NR
425	22	NR	555	278	NR	685	62	NR	815	1	NR	945	0	NR
430	38	NR	560	286	NR	690	53	NR	820	1	NR	950	0	NR
435	65	NR	565	295	NR	695	45	NR	825	1	NR	955	0	NR
440	108	NR	570	303	NR	700	39	NR	830	1	NR	960	0	NR
445	193	NR	575	311	NR	705	33	NR	835	1	NR	965	0	NR
450	312	NR	580	319	NR	710	28	NR	840	1	NR	970	0	NR
455	300	NR	585	326	NR	715	24	NR	845	0	NR	975	0	NR
460	214	NR	590	332	NR	720	20	NR	850	0	NR	980	0	NR
465	184	NR	595	333	NR	725	17	NR	855	0	NR	985	0	NR
470	153	NR	600	336	NR	730	15	NR	860	0	NR	990	0	NR
475	122	NR	605	337	NR	735	12	NR	865	0	NR	995	0	NR
480	115	NR	610	367	NR	740	10	NR	870	0	NR	1000	0	NR
485	125	NR	615	390	NR	745	9	NR	875	0	NR			

**Summary**

$R_f = 91.3$   
 $R_g = 100$   
 $CIE R_a = 94.6$   
 $R_9 = 63.8$



**Color Vector Graphics**




**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 86	CES26 = 94	CES51 = 97	CES76 = 90
CES02 = 63	CES27 = 92	CES52 = 98	CES77 = 86
CES03 = 31	CES28 = 97	CES53 = 98	CES78 = 86
CES04 = 70	CES29 = 97	CES54 = 93	CES79 = 90
CES05 = 50	CES30 = 92	CES55 = 92	CES80 = 91
CES06 = 51	CES31 = 97	CES56 = 96	CES81 = 74
CES07 = 43	CES32 = 89	CES57 = 94	CES82 = 96
CES08 = 41	CES33 = 99	CES58 = 95	CES83 = 94
CES09 = 29	CES34 = 94	CES59 = 98	CES84 = 95
CES10 = 75	CES35 = 97	CES60 = 92	CES85 = 79
CES11 = 58	CES36 = 81	CES61 = 93	CES86 = 79
CES12 = 64	CES37 = 96	CES62 = 86	CES87 = 92
CES13 = 44	CES38 = 87	CES63 = 94	CES88 = 98
CES14 = 74	CES39 = 99	CES64 = 91	CES89 = 84
CES15 = 72	CES40 = 97	CES65 = 90	CES90 = 96
CES16 = 48	CES41 = 96	CES66 = 89	CES91 = 75
CES17 = 49	CES42 = 94	CES67 = 88	CES92 = 76
CES18 = 56	CES43 = 93	CES68 = 89	CES93 = 86
CES19 = 71	CES44 = 99	CES69 = 90	CES94 = 74
CES20 = 67	CES45 = 97	CES70 = 88	CES95 = 83
CES21 = 86	CES46 = 97	CES71 = 83	CES96 = 92
CES22 = 78	CES47 = 91	CES72 = 94	CES97 = 96
CES23 = 91	CES48 = 91	CES73 = 83	CES98 = 95
CES24 = 90	CES49 = 96	CES74 = 90	CES99 = 92
CES25 = 71	CES50 = 98	CES75 = 85	



Color Rendition by Hue-Angle Bin

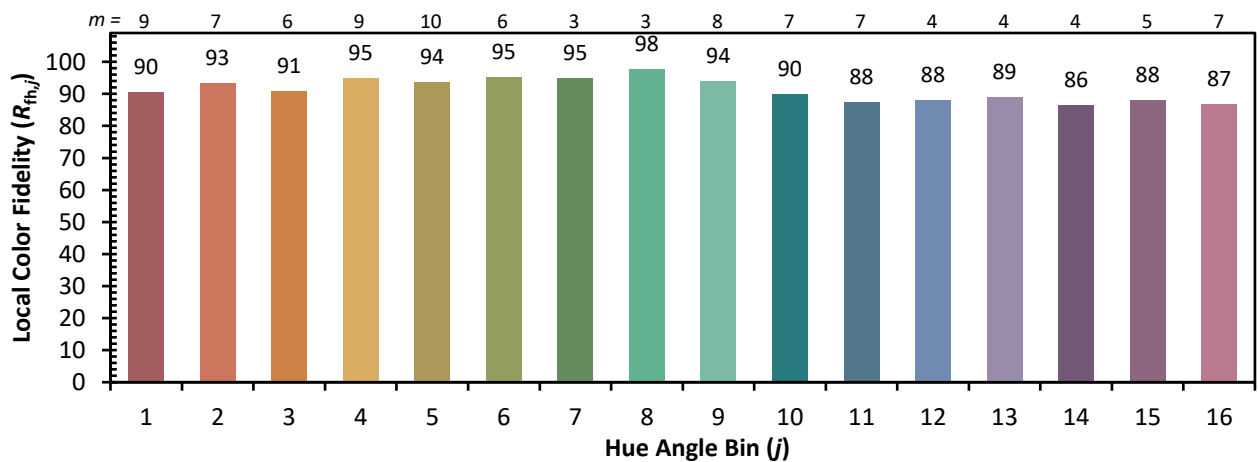

Measure Comparisons



(END OF REPORT)