

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number: P1444837

Luminaire Tested: EHBR1-48-UNV-TA-L940-UPL24

Issue Date: 5/1/2026

Test Information

Test Method: LM-79-2019
Report Number: P1444837
REPORT IS A COMBINATION OF REPORTS P1444333 AND P1431635
Test Lab: INNOVATION CENTER
Issue Date: 5/1/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-48-UNV-TA-L940-UPL24
Description: Elevate Round Highbay at, 48000 lumens, 4000K 90CRI LEDs with TA lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 46411.8 lumens
Efficiency: N/A
Efficacy: 168.7 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 0.77 / 0.88
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')
CIE Type: Direct

Input Watts (W): 275.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1444837
CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

Luminous Intensity Polar Plot

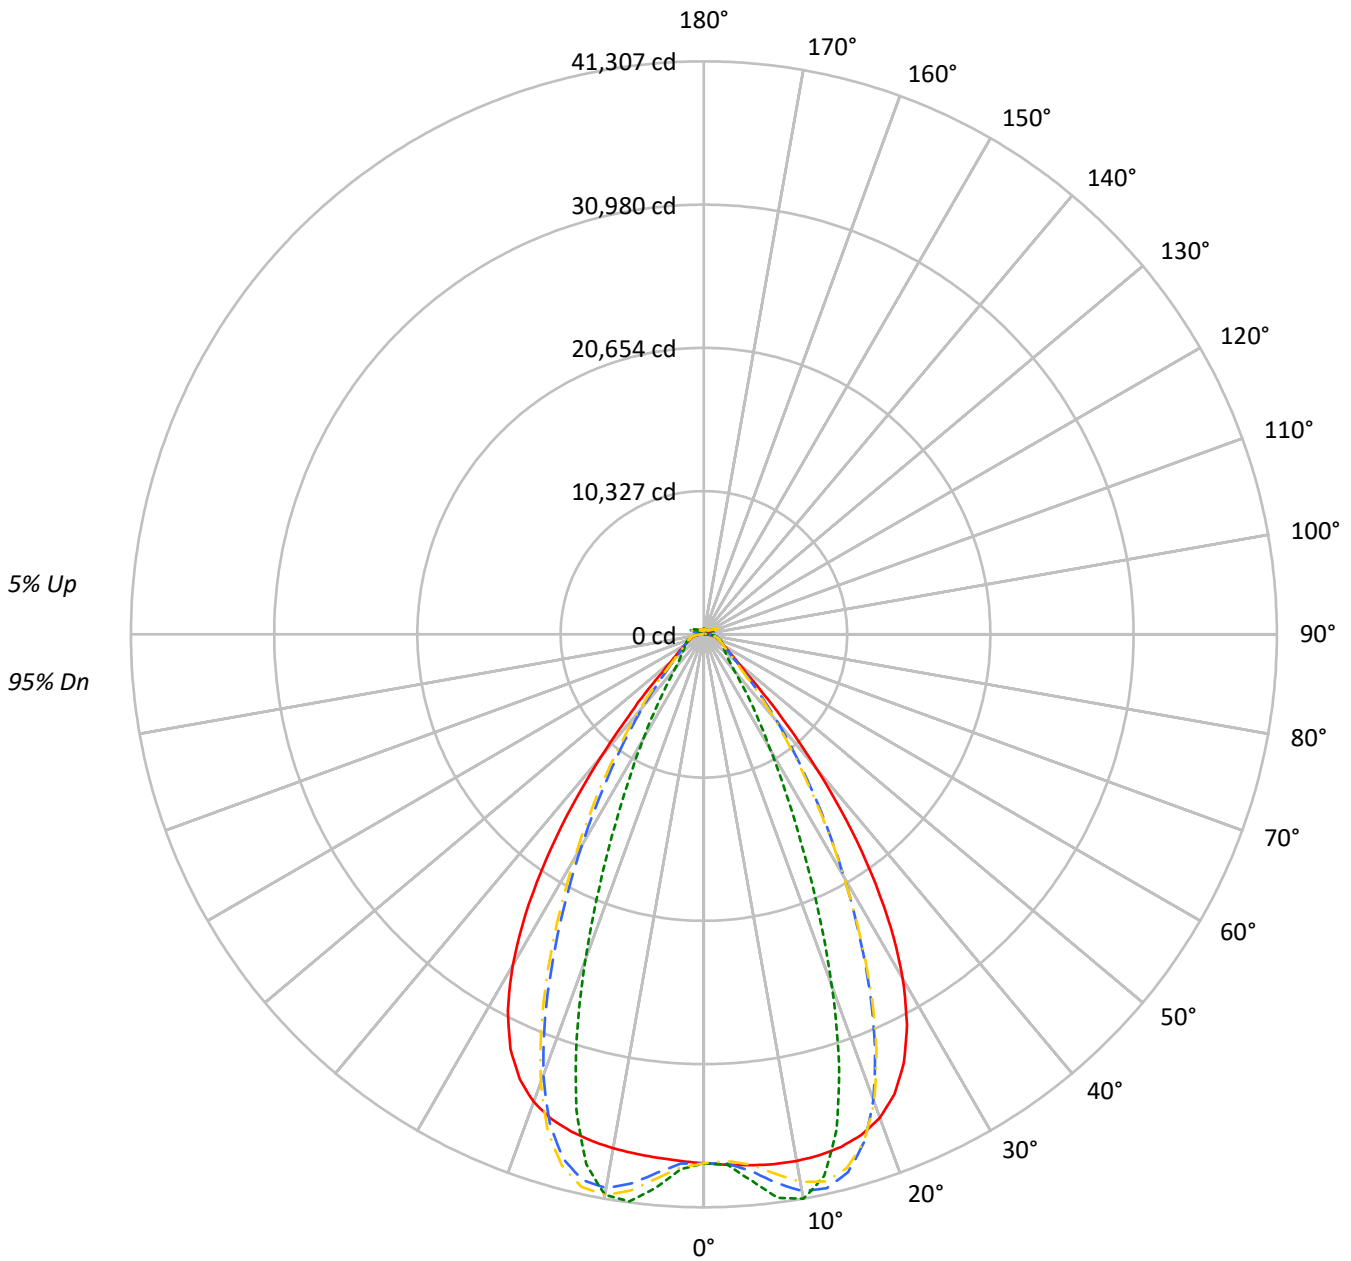

— 0°-180° - - 45°-225° ··· 90°-270° - · 135°-315°



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	97	97	97	97	97	97	95
1	111	107	104	101	108	104	102	99	99	97	95	95	93	91	90	89	88	88	88	88	85
2	104	98	93	89	101	96	91	87	91	88	85	88	85	82	84	82	80	84	82	80	77
3	98	90	84	79	95	88	83	78	85	80	76	81	78	74	78	75	73	78	75	73	71
4	92	83	76	72	89	81	75	71	78	73	69	76	71	68	73	70	67	73	70	67	65
5	86	77	70	65	84	75	69	65	73	68	63	71	66	62	68	65	61	68	65	61	60
6	82	71	65	60	80	70	64	59	68	63	58	66	61	58	64	60	57	64	60	57	55
7	77	67	60	55	75	66	59	55	64	58	54	62	57	53	60	56	53	60	56	53	51
8	73	62	56	51	71	61	55	51	60	54	50	58	53	50	57	52	49	57	52	49	48
9	69	58	52	48	68	58	52	47	56	51	47	55	50	46	54	49	46	54	49	46	44
10	66	55	49	44	64	54	48	44	53	48	44	52	47	43	51	46	43	51	46	43	42

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	179062	179062	179062	179062
5°	179929	185175	177411	187601
10°	181431	194420	177080	193134
15°	182321	176240	176770	169144
20°	180436	131293	174531	121477
25°	170789	83035	165145	75339
30°	149197	49898	143419	45602
35°	114823	31311	108218	27736
40°	72636	19641	66456	18456
45°	37438	15301	36817	15049
50°	21950	13610	21276	13398
55°	16816	12876	16194	12761
60°	14229	13154	13622	12983
65°	13365	13737	12852	13268
70°	13056	14384	12405	13842
75°	13960	15255	13205	14579
80°	14445	16891	13097	15420
85°	13605	16299	10995	13954

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 25°
 Vertical Angle: 45°
 Luminance: 57294 cd/sqm



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	3757.8	8.1
10°-20°	10571.0	22.8
20°-30°	12039.6	25.9
30°-40°	8653.5	18.6
40°-50°	3991.0	8.6
50°-60°	1909.9	4.1
60°-70°	1393.5	3.0
70°-80°	1058.7	2.3
80°-90°	485.6	1.0
90°-100°	75.3	0.2
100°-110°	406.4	0.9
110°-120°	750.2	1.6
120°-130°	465.8	1.0
130°-140°	308.4	0.7
140°-150°	235.9	0.5
150°-160°	169.0	0.4
160°-170°	104.2	0.2
170°-180°	36.1	0.1
0°-30°	26368.4	56.8
0°-40°	35022.0	75.5
0°-60°	40922.8	88.2
0°-90°	43860.6	94.5
90°-120°	1231.9	2.7
90°-150°	2242.0	4.8
90°-180°	2551.0	5.5
0°-180°	46411.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	38130	38130	38130	38130	38130	
5°	38418	39538	37880	40056	38418	3671
15°	38250	36974	37086	35486	38250	10777
25°	34106	16582	32979	15045	34106	15461
35°	21074	5747	19862	5090	21074	12934
45°	6057	2476	5957	2435	6057	5152
55°	2272	1740	2188	1724	2272	2098
65°	1395	1434	1342	1385	1395	1393
75°	983	1075	930	1027	983	1023
85°	468	560	378	480	468	439
90°	122	156	32	40	122	77
95°	34	38	34	38	34	32
105°	149	190	102	190	149	196
115°	657	791	688	791	657	608
125°	504	519	569	520	504	459
135°	410	354	440	358	410	319
145°	376	356	398	362	376	237
155°	359	356	381	361	359	167
165°	365	362	377	365	365	103
175°	377	380	384	381	377	36
180°	382	382	382	382	382	



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38275.6	38272.5	38271.9	38269.3	38268.6	38268.6	38267.2	38264.2	38262.2	38257.8	38252.9
5°	38417.6	38415.9	38417.0	38417.2	38414.5	38408.6	38399.3	38387.8	38373.4	38359.9	38347.6
7.5°	38527.5	38530.2	38533.5	38532.8	38524.5	38510.5	38491.4	38480.7	38487.0	38507.8	38555.3
10°	38547.5	38563.9	38570.2	38568.3	38551.6	38539.6	38544.2	38584.7	38665.1	38772.3	38919.0
12.5°	38469.3	38489.4	38488.7	38482.1	38466.0	38482.4	38540.9	38661.1	38833.5	39045.1	39293.2
15°	38249.9	38275.9	38268.6	38259.9	38249.2	38303.0	38419.9	38628.7	38895.0	39193.3	39498.7
17.5°	37823.8	37855.2	37839.9	37830.2	37821.2	37922.1	38122.8	38428.6	38764.0	39101.4	39390.9
20°	37084.8	37105.9	37069.5	37052.4	37066.8	37264.5	37560.3	37950.9	38304.3	38623.4	38821.2
22.5°	35878.6	35904.8	35836.5	35828.6	35912.9	36216.5	36590.8	37027.4	37359.5	37612.4	37688.6
25°	34106.5	34132.3	34051.2	34099.6	34242.9	34656.6	35102.3	35569.3	35852.6	36040.1	35988.3
27.5°	31714.7	31738.2	31661.2	31760.2	31986.7	32530.2	33054.8	33561.4	33813.9	33945.2	33778.9
30°	28698.0	28746.8	28655.9	28794.0	29139.8	29845.4	30446.4	31014.5	31266.3	31366.2	31107.3
32.5°	25115.2	25184.5	25084.4	25289.8	25772.3	26619.9	27302.6	27937.3	28215.9	28329.9	28037.6
35°	21074.2	21173.6	21058.7	21367.1	21962.1	22906.0	23662.0	24370.7	24700.5	24862.3	24567.6
37.5°	16792.9	16887.8	16825.5	17236.9	17890.4	18868.7	19640.4	20404.9	20777.4	21020.1	20787.7
40°	12589.7	12676.4	12723.5	13194.0	13808.5	14730.6	15471.7	16228.2	16645.0	16949.5	16806.2
42.5°	8885.8	8973.3	9133.3	9587.2	10099.7	10863.0	11497.9	12177.1	12575.1	12900.0	12844.8
45°	6057.3	6158.9	6359.2	6731.0	7101.6	7649.2	8115.4	8643.6	8968.8	9266.4	9269.9
47.5°	4244.7	4316.0	4495.1	4748.9	4990.5	5676.1	5704.2	5963.7	6182.3	6404.8	6433.6
50°	3271.3	3314.2	3409.2	3550.7	3687.5	3865.5	4028.4	4216.5	4351.1	4473.0	4502.1
52.5°	2688.8	2716.0	2764.4	2841.0	2920.4	3017.2	3104.4	3207.7	3280.9	3346.2	3359.9
55°	2272.5	2295.1	2367.0	2381.6	2472.4	2489.9	2528.7	2591.6	2634.1	2673.3	2683.0
57.5°	1958.3	1974.7	1990.0	2022.6	2050.6	2091.3	2124.1	2169.2	2196.0	2224.3	2226.7
60°	1710.5	1722.3	1733.2	1755.9	1774.9	1803.2	1825.7	1856.4	1875.7	1896.8	1899.3
62.5°	1526.0	1534.5	1541.8	1556.7	1570.3	1592.1	1610.0	1635.6	1653.5	1669.9	1673.6
65°	1395.0	1401.1	1405.8	1417.1	1429.0	1447.5	1463.7	1484.7	1497.8	1510.4	1513.1
67.5°	1278.8	1284.6	1289.5	1299.8	1308.0	1321.8	1332.7	1348.5	1358.3	1368.3	1368.6
70°	1145.6	1151.1	1154.8	1164.5	1171.1	1182.9	1191.7	1205.8	1216.0	1227.2	1230.0
72.5°	1053.5	1056.8	1061.7	1070.5	1079.7	1092.4	1104.1	1118.8	1131.1	1142.7	1147.6
75°	983.4	987.3	990.4	998.0	1004.3	1015.0	1023.8	1037.2	1048.0	1060.4	1066.5
77.5°	882.3	886.6	889.4	896.9	902.4	912.7	919.3	931.3	940.0	951.3	956.8
80°	759.9	764.0	766.1	773.2	777.6	787.0	793.3	804.9	812.3	823.6	830.2
82.5°	624.5	628.4	629.5	636.2	638.6	646.4	651.0	662.9	671.9	686.6	696.8
85°	467.6	469.0	471.3	469.5	479.1	479.6	490.3	492.4	506.4	510.2	526.3
87.5°	285.9	290.1	292.3	298.8	301.6	308.1	310.1	316.9	320.8	328.7	332.4
90°	122.2	128.8	131.1	138.9	141.0	147.9	149.6	157.4	159.6	167.6	170.9
92.5°	30.3	32.1	33.8	36.1	37.8	40.5	42.8	44.9	46.8	49.4	53.2
95°	34.2	36.3	38.4	40.5	42.6	44.7	46.8	48.9	51.0	53.1	59.1
97.5°	42.6	44.4	46.2	48.1	49.8	51.7	53.5	55.3	57.1	58.8	66.1
100°	54.9	56.5	57.9	59.5	61.0	62.6	64.1	65.7	67.2	68.8	82.3
102.5°	89.2	94.7	100.1	105.6	111.1	116.4	122.0	127.4	132.8	138.3	166.8
105°	149.0	163.6	178.6	193.3	208.1	222.9	237.8	252.4	267.2	281.9	328.7
107.5°	251.9	279.2	306.7	334.1	361.6	388.8	416.3	443.6	470.9	498.0	545.4
110°	461.6	483.4	505.5	527.5	549.4	571.5	593.5	615.2	637.2	659.0	693.6



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	621.4	631.2	641.1	651.0	660.9	670.7	680.6	690.3	700.3	709.9	734.5
115°	657.1	660.4	664.0	667.2	670.7	673.9	677.2	680.5	683.8	686.9	703.6
117.5°	640.8	640.0	639.2	638.5	637.5	636.8	635.8	634.9	633.9	633.0	642.3
120°	601.2	597.8	594.8	591.2	588.1	584.4	581.2	577.7	574.2	570.5	574.5
122.5°	550.5	546.6	543.0	538.8	534.9	530.7	526.8	522.2	518.3	514.1	515.2
125°	504.3	500.3	496.7	492.5	488.2	483.9	479.7	475.4	471.2	466.7	467.1
127.5°	464.7	461.9	459.0	455.9	452.8	449.4	446.3	442.8	439.7	436.1	436.0
130°	440.4	437.9	435.2	432.3	429.5	426.2	423.2	420.0	417.0	413.7	413.6
132.5°	421.3	419.4	417.5	415.2	413.0	410.3	408.1	405.2	402.8	400.3	400.1
135°	409.7	407.8	406.1	404.0	401.8	399.3	396.9	394.4	392.0	389.3	389.5
137.5°	400.2	398.6	396.9	394.8	392.8	390.3	388.1	385.7	383.4	380.9	380.9
140°	391.8	390.3	388.6	386.5	384.8	382.6	380.4	378.2	375.9	373.5	373.8
142.5°	381.7	380.3	379.0	377.3	375.8	373.7	371.9	369.8	367.9	365.9	366.4
145°	375.7	374.5	373.5	372.0	370.5	368.7	367.1	365.1	363.6	361.7	362.3
147.5°	370.6	369.6	368.7	367.5	366.3	364.6	363.2	361.6	360.2	358.6	359.3
150°	366.1	365.3	364.5	363.3	362.0	360.6	359.2	357.8	356.4	354.9	355.5
152.5°	361.0	360.1	359.3	358.2	357.1	355.5	354.6	353.0	351.7	350.3	350.9
155°	359.1	358.1	357.1	356.2	355.0	353.7	352.4	351.2	350.0	348.6	349.1
157.5°	358.9	357.8	357.2	356.0	355.3	354.1	353.2	352.1	351.1	350.0	350.2
160°	360.3	359.4	358.6	357.7	356.6	355.5	354.6	353.6	352.8	351.7	351.9
162.5°	362.0	361.0	360.2	359.1	358.4	357.2	356.4	355.5	354.7	353.6	353.8
165°	364.7	364.2	363.5	362.8	362.0	361.4	360.6	359.8	359.1	358.2	358.3
167.5°	370.0	369.1	368.6	367.7	366.9	366.1	365.3	364.5	363.9	362.9	363.1
170°	372.9	372.2	371.8	371.4	370.8	370.2	369.8	369.2	368.7	368.1	368.3
172.5°	376.0	375.5	375.2	374.9	374.3	374.1	373.6	373.2	372.9	372.4	372.8
175°	377.2	376.8	376.7	376.4	376.1	375.8	375.6	375.4	375.4	375.0	375.1
177.5°	380.0	379.8	379.8	379.7	379.7	379.6	379.5	379.2	379.0	379.0	379.2
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38249.2	38244.5	38238.2	38230.1	38223.2	38215.2	38196.1	38190.4	38196.7	38201.0	38209.8
5°	38340.0	38342.7	38343.7	38361.1	38376.1	38413.5	38706.9	38823.4	38913.6	38970.9	39057.7
7.5°	38614.1	38702.2	38789.4	38906.7	39007.9	39144.6	39657.8	39876.3	40031.6	40143.2	40280.5
10°	39078.4	39270.9	39451.4	39662.8	39844.5	40052.7	40530.4	40743.3	40877.6	40975.4	41066.8
12.5°	39546.2	39813.1	40054.3	40289.7	40486.3	40666.8	40834.8	40909.3	40915.6	40918.7	40870.3
15°	39789.8	40045.0	40257.5	40413.1	40528.7	40579.9	40290.6	40138.8	39947.1	39789.1	39529.2
17.5°	39636.0	39789.1	39881.0	39871.9	39824.1	39664.2	38844.9	38394.1	37946.8	37543.6	37014.9
20°	38952.5	38940.7	38860.9	38634.7	38362.1	37938.2	36533.5	35723.0	34939.5	34251.3	33416.4
22.5°	37680.8	37480.8	37201.7	36713.9	36172.0	35431.4	33418.4	32226.3	31135.4	30171.8	29092.3
25°	35838.3	35426.6	34912.0	34137.6	33295.4	32215.2	29734.2	28251.3	26941.7	25805.7	24560.2
27.5°	33480.1	32860.1	32106.0	31034.1	29893.2	28509.3	25758.6	24122.2	22716.2	21498.4	20172.7
30°	30688.3	29881.9	28908.2	27577.8	26201.6	24632.1	21842.2	20184.8	18761.7	17508.8	16182.1
32.5°	27533.4	26588.8	25447.8	23954.8	22466.4	20852.6	18158.3	16553.9	15194.5	13989.2	12788.5
35°	24053.6	23040.7	21833.6	20310.6	18831.3	17262.2	14790.1	13343.4	12143.0	11077.6	10108.1
37.5°	20321.0	19326.4	18179.1	16743.7	15371.9	13950.1	11817.0	10604.7	9597.3	8713.1	7964.5
40°	16440.0	15569.7	14577.0	13336.1	12165.3	10981.2	9230.2	8268.0	7473.0	6798.6	6237.6
42.5°	12606.7	11932.1	11170.9	10190.3	9294.4	8392.8	7045.1	6332.1	5743.3	5257.8	4861.2
45°	9146.5	8695.3	8184.8	7503.1	6883.1	6254.2	5295.0	4794.1	4410.6	4097.6	3832.9
47.5°	6393.9	6132.2	6116.3	5486.3	5031.6	4647.1	4029.2	3712.7	3477.7	3288.1	3120.5
50°	4490.3	4363.6	4206.4	3981.5	3770.6	3553.2	3176.7	2985.4	2847.8	2732.9	2626.9
52.5°	3356.8	3291.0	3207.3	3088.0	2973.6	2851.4	2613.2	2491.4	2448.1	2341.1	2257.2
55°	2681.2	2643.5	2595.8	2525.7	2456.2	2428.3	2224.1	2133.7	2076.5	2034.2	1989.2
57.5°	2227.1	2199.0	2170.7	2123.2	2083.0	2034.2	1925.8	1879.5	1845.4	1820.5	1789.3
60°	1899.7	1882.9	1867.0	1839.2	1817.5	1791.2	1722.3	1696.2	1678.4	1663.5	1643.5
62.5°	1676.7	1668.1	1659.9	1645.0	1634.0	1619.8	1572.7	1560.1	1551.2	1543.7	1531.5
65°	1515.7	1509.5	1505.0	1495.1	1489.6	1481.2	1440.9	1432.4	1426.8	1424.2	1417.1
67.5°	1369.5	1363.0	1360.0	1352.9	1350.7	1345.5	1312.4	1307.8	1305.9	1306.7	1304.2
70°	1232.7	1230.0	1231.4	1230.2	1233.4	1234.3	1214.3	1214.2	1216.3	1220.5	1220.9
72.5°	1150.7	1150.7	1152.3	1153.0	1156.0	1157.4	1140.7	1139.9	1140.8	1144.0	1144.1
75°	1072.7	1074.0	1078.2	1079.7	1083.1	1083.9	1061.8	1059.3	1059.5	1062.4	1061.4
77.5°	964.7	969.4	977.5	981.7	988.5	989.8	965.0	962.1	962.2	965.2	962.7
80°	842.2	851.2	864.0	872.9	883.4	887.6	862.1	856.1	850.4	849.6	844.5
82.5°	712.1	723.0	738.3	746.4	757.6	760.1	717.6	709.5	704.7	705.2	700.5
85°	543.6	551.8	565.8	570.4	577.2	576.7	528.1	507.3	512.9	504.2	511.0
87.5°	341.0	345.8	354.6	355.7	359.0	358.2	309.3	299.7	296.9	297.0	293.5
90°	179.4	183.4	191.7	192.6	198.3	198.3	159.4	155.6	151.5	152.8	147.3
92.5°	57.4	61.0	65.0	68.8	72.9	76.8	76.2	78.7	75.2	71.0	67.6
95°	65.2	71.4	77.5	83.8	89.9	96.1	102.2	108.4	102.6	96.8	91.0
97.5°	73.3	80.6	87.8	95.1	102.4	109.7	116.9	124.2	118.0	111.6	105.5
100°	95.8	109.4	122.8	136.3	149.8	163.4	176.9	190.5	178.6	166.5	154.6
102.5°	195.5	224.2	252.9	281.6	310.3	339.1	368.1	396.9	369.5	341.9	314.4
105°	375.2	421.8	468.3	514.7	561.2	607.9	654.9	701.4	657.6	613.9	570.1
107.5°	592.5	639.9	686.8	734.0	781.2	828.3	876.2	923.4	880.7	837.7	795.1
110°	728.1	762.3	796.7	831.0	865.3	899.7	935.0	969.4	943.7	917.9	892.1



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	758.9	783.5	808.0	832.3	856.6	881.2	907.0	931.6	918.5	905.3	892.3
115°	719.8	736.4	752.6	769.0	785.4	801.6	819.5	836.3	831.8	827.4	823.0
117.5°	651.1	660.1	669.1	678.1	686.9	695.8	706.8	716.2	716.4	716.8	717.2
120°	577.9	581.6	585.1	588.7	592.1	595.5	601.4	605.5	608.6	611.4	614.5
122.5°	516.3	517.4	518.4	519.5	520.5	521.4	525.3	526.9	528.8	530.7	532.6
125°	467.4	467.7	467.9	468.2	468.2	468.5	472.0	472.7	472.4	472.0	471.7
127.5°	435.5	435.3	434.8	434.5	433.8	433.6	436.5	436.8	434.8	432.8	430.8
130°	413.4	413.2	412.9	412.8	412.6	412.4	415.8	416.5	413.5	410.1	407.0
132.5°	400.0	400.0	399.7	399.8	399.7	399.5	403.3	404.1	400.8	397.0	393.5
135°	389.3	389.5	389.4	389.4	389.4	389.7	393.9	394.9	391.7	388.0	384.7
137.5°	380.7	380.8	380.9	381.0	381.0	381.1	386.0	387.1	384.4	381.3	378.6
140°	373.9	374.1	374.2	374.7	374.8	375.4	380.5	381.9	379.7	377.3	375.0
142.5°	366.6	367.3	367.9	368.8	369.3	370.1	376.1	377.9	376.2	374.2	372.6
145°	362.8	363.8	364.5	365.5	366.2	367.4	374.0	376.3	375.2	373.8	372.5
147.5°	359.5	360.4	361.1	361.9	362.7	364.0	371.1	373.3	372.6	371.5	370.7
150°	356.1	356.9	357.6	358.6	359.7	360.8	368.8	371.4	370.8	370.0	369.3
152.5°	351.4	352.1	352.8	353.6	354.5	355.5	365.3	368.2	367.7	366.8	366.3
155°	349.5	349.9	350.3	351.0	351.5	352.5	363.1	366.1	365.7	365.2	364.6
157.5°	350.3	350.5	350.6	351.0	351.4	351.9	363.0	366.2	365.7	365.3	364.8
160°	351.8	352.0	352.0	352.3	352.3	352.6	364.2	367.2	366.9	366.3	365.9
162.5°	353.9	354.6	354.6	355.0	355.1	355.8	367.3	370.7	370.0	369.5	368.8
165°	358.4	358.3	358.4	358.6	358.7	358.9	369.8	372.6	372.3	371.7	371.3
167.5°	363.1	363.3	363.2	363.6	363.7	364.2	374.2	377.0	376.8	376.1	375.8
170°	368.3	368.6	368.6	368.8	369.1	369.5	378.0	380.2	380.0	379.3	378.9
172.5°	372.9	373.3	373.6	373.9	374.1	374.6	381.8	383.9	383.7	383.2	382.6
175°	375.4	375.5	375.8	376.2	376.5	376.8	382.4	383.9	383.7	383.5	383.2
177.5°	379.5	379.6	379.8	380.1	380.4	380.7	384.0	385.0	384.9	384.9	384.8
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38211.7	38225.1	38227.1	38242.8	38241.5	38260.2	38257.3	38272.5	38263.6	38276.2	38265.6
5°	39109.2	39190.6	39233.2	39312.6	39337.7	39408.8	39428.9	39493.8	39496.5	39547.9	39536.1
7.5°	40378.1	40498.1	40569.3	40667.4	40717.2	40799.1	40835.1	40895.6	40915.1	40963.2	40966.8
10°	41135.8	41194.0	41234.7	41262.1	41287.2	41298.9	41312.6	41308.9	41312.6	41307.2	41318.9
12.5°	40837.8	40752.7	40696.4	40589.9	40528.2	40410.4	40352.6	40239.4	40198.4	40101.1	40087.1
15°	39328.4	39031.9	38822.5	38517.9	38326.3	38026.6	37851.3	37580.9	37457.4	37242.4	37186.1
17.5°	36577.3	36027.0	35601.1	35054.7	34675.7	34165.0	33844.0	33421.3	33189.9	32849.0	32731.0
20°	32720.4	31906.2	31267.3	30506.3	29961.7	29283.1	28848.7	28300.8	27982.7	27564.1	27394.4
22.5°	28192.2	27178.5	26380.7	25481.6	24824.5	24068.3	23547.9	22955.1	22609.0	22154.3	21952.8
25°	23525.1	22407.2	21520.2	20572.9	19878.6	19120.6	18600.0	18017.7	17659.6	17227.9	17027.8
27.5°	19061.5	17929.8	17072.6	16191.9	15555.0	14871.0	14401.3	13892.9	13575.0	13206.5	13018.3
30°	15122.3	14124.2	13394.7	12663.9	12134.0	11578.6	11188.2	10766.8	10488.0	10172.5	9993.2
32.5°	11913.0	11142.5	10571.3	9991.3	9557.8	9093.5	8756.3	8384.4	8132.8	7851.0	7688.6
35°	9435.0	8836.2	8380.6	7903.2	7530.8	7135.4	6838.2	6517.2	6291.4	6048.8	5908.6
37.5°	7454.6	6978.5	6603.6	6207.1	5901.1	5573.6	5463.2	5094.9	4861.0	4667.4	4533.2
40°	5850.4	5471.8	5161.6	4858.3	4608.9	4360.4	4161.0	3964.2	3813.2	3674.7	3578.9
42.5°	4568.7	4294.4	4067.8	3845.7	3663.7	3482.7	3338.3	3202.7	3101.0	3010.4	2948.7
45°	3631.9	3443.3	3285.8	3129.4	3000.9	2880.1	2782.9	2696.4	2630.7	2576.3	2537.7
47.5°	2983.7	2854.6	2743.5	2638.0	2550.8	2471.6	2406.4	2385.2	2314.6	2267.0	2248.9
50°	2535.8	2457.8	2373.4	2295.5	2237.3	2179.3	2137.1	2095.6	2069.3	2047.4	2040.7
52.5°	2201.4	2141.8	2094.8	2045.5	2007.0	1965.9	1936.7	1909.1	1894.6	1883.1	1881.7
55°	1952.8	1911.1	1880.1	1847.0	1824.0	1799.8	1784.7	1770.1	1763.7	1757.9	1758.4
57.5°	1764.7	1736.9	1716.7	1695.2	1682.7	1671.2	1667.4	1663.7	1665.7	1666.5	1669.8
60°	1627.7	1609.6	1596.8	1584.5	1579.3	1575.7	1578.5	1581.7	1588.4	1593.8	1598.5
62.5°	1522.7	1512.3	1506.1	1499.5	1498.9	1499.2	1504.9	1510.4	1518.7	1524.9	1529.6
65°	1414.5	1408.6	1406.6	1402.4	1404.5	1405.8	1412.6	1416.8	1425.1	1430.1	1436.0
67.5°	1305.3	1303.9	1305.1	1305.1	1309.0	1312.2	1318.7	1323.6	1330.6	1335.1	1340.0
70°	1224.6	1225.2	1228.2	1228.7	1232.8	1235.1	1240.8	1243.8	1250.2	1254.0	1259.8
72.5°	1146.2	1144.9	1145.6	1143.8	1145.2	1144.6	1147.8	1149.3	1154.7	1157.7	1164.7
75°	1062.6	1059.2	1058.3	1054.5	1054.6	1051.9	1053.2	1053.0	1056.6	1058.0	1063.1
77.5°	961.7	955.9	953.0	946.6	946.6	944.1	946.6	948.2	954.5	957.4	963.2
80°	841.1	831.8	827.6	820.2	821.4	821.1	827.2	832.0	839.5	841.0	848.3
82.5°	699.1	689.6	685.1	677.9	679.5	679.7	685.4	686.3	693.0	695.8	704.3
85°	500.6	504.2	494.1	494.9	492.7	496.8	500.6	505.3	510.8	520.0	527.1
87.5°	294.8	293.5	297.0	297.5	302.6	305.2	313.4	318.1	327.3	334.5	347.5
90°	146.9	141.5	143.8	141.4	145.7	143.6	147.6	144.8	149.7	149.7	156.2
92.5°	63.2	59.6	55.2	51.6	47.4	44.1	41.7	40.3	38.1	36.8	34.5
95°	85.3	79.6	73.9	68.1	62.4	56.6	54.5	52.5	50.3	48.3	46.1
97.5°	99.3	93.1	86.9	80.6	74.4	68.3	66.9	65.5	64.1	62.7	61.3
100°	142.4	130.6	118.7	106.7	94.8	82.9	81.8	80.7	79.6	78.4	77.3
102.5°	287.1	259.7	232.4	205.1	177.8	150.3	145.5	140.8	136.0	131.3	126.5
105°	526.2	482.3	438.6	394.7	351.1	307.3	294.3	281.1	268.0	255.0	242.0
107.5°	752.2	709.4	666.8	624.1	581.4	538.8	518.1	497.5	476.7	456.1	435.5
110°	866.0	840.3	814.7	788.7	763.2	737.6	717.7	698.1	678.2	658.6	638.9



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	879.2	866.2	853.0	840.1	827.2	814.2	804.6	794.9	785.3	775.6	765.7
115°	818.5	814.2	809.9	805.6	801.5	797.1	796.3	795.5	794.6	793.9	793.2
117.5°	717.5	717.9	718.2	718.8	719.2	719.8	724.7	729.5	734.5	739.6	744.9
120°	617.5	620.7	623.6	626.7	629.8	633.1	639.5	646.2	652.8	659.7	666.6
122.5°	534.4	536.4	538.1	540.3	542.2	544.4	550.6	557.1	563.6	570.3	577.2
125°	470.9	470.6	470.1	469.5	469.1	469.0	474.0	479.1	484.5	490.0	495.4
127.5°	428.7	426.4	424.3	422.3	420.1	418.2	420.9	423.8	426.6	429.7	432.7
130°	403.7	400.4	396.9	393.8	390.3	387.2	387.9	388.8	389.6	390.5	391.6
132.5°	389.7	386.1	382.3	378.5	374.7	371.1	370.3	369.8	369.1	368.8	368.5
135°	381.0	377.6	373.8	370.2	366.5	363.1	361.8	360.3	359.1	357.8	356.8
137.5°	375.7	372.8	369.8	367.0	363.7	360.9	359.1	357.6	355.8	354.6	353.1
140°	372.5	370.2	367.5	365.2	362.6	360.4	358.7	357.5	355.9	354.8	353.5
142.5°	370.4	368.7	366.7	364.8	362.9	361.0	359.5	358.2	356.8	355.7	354.4
145°	371.1	369.9	368.4	367.1	365.6	364.4	362.9	361.9	360.7	359.8	359.0
147.5°	369.8	368.7	367.8	366.7	365.7	364.6	363.6	363.1	361.9	361.4	360.5
150°	368.3	367.4	366.4	365.8	364.6	363.8	363.1	362.5	361.8	361.5	360.7
152.5°	365.2	364.6	363.7	363.1	362.0	361.2	360.5	360.2	359.6	359.2	358.5
155°	364.0	363.4	362.7	362.1	361.3	360.8	360.2	359.4	358.9	358.3	357.7
157.5°	364.3	363.7	363.0	362.6	361.8	361.2	360.6	360.1	359.3	358.9	358.2
160°	365.3	364.9	364.2	363.6	363.1	362.5	361.6	361.1	360.2	359.7	358.8
162.5°	368.2	367.4	366.9	366.1	365.4	364.7	364.1	363.5	362.9	362.3	361.7
165°	370.7	370.1	369.6	369.0	368.6	368.0	367.3	366.6	365.9	365.2	364.5
167.5°	375.3	374.9	374.3	373.9	373.2	372.7	372.0	371.4	370.6	370.0	369.0
170°	378.3	377.7	377.2	376.6	376.0	375.4	374.7	374.1	373.3	372.9	372.0
172.5°	382.2	382.0	381.3	380.9	380.2	379.8	379.4	378.9	378.2	377.8	377.3
175°	383.1	382.9	382.8	382.3	382.3	382.0	381.7	381.5	381.2	381.1	380.7
177.5°	384.8	384.6	384.6	384.3	384.2	384.2	383.9	383.7	383.6	383.2	383.1
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38276.6	38266.9	38271.5	38253.6	38257.8	38236.2	38234.2	38209.8	38207.3	38184.3	38175.7
5°	39572.6	39551.2	39575.3	39537.8	39545.2	39496.5	39492.4	39429.3	39407.6	39328.7	39294.7
7.5°	40996.9	40988.9	41003.5	40972.2	40971.2	40927.7	40909.7	40853.2	40818.1	40735.4	40682.4
10°	41308.9	41316.2	41304.2	41307.2	41290.3	41285.6	41268.2	41257.2	41228.8	41207.3	41175.7
12.5°	40013.2	40021.0	39971.5	40002.9	39978.1	40036.0	40031.3	40099.4	40109.9	40196.0	40228.7
15°	37018.7	37009.3	36914.5	36974.2	36942.2	37069.1	37097.5	37268.2	37359.5	37578.7	37713.3
17.5°	32494.9	32470.5	32336.9	32409.6	32372.6	32559.7	32622.5	32895.5	33065.8	33419.0	33670.6
20°	27102.3	27055.5	26899.3	26984.5	26946.4	27158.9	27248.5	27578.4	27798.1	28265.8	28598.5
22.5°	21642.8	21568.9	21415.8	21495.4	21459.3	21679.6	21796.1	22127.2	22378.8	22858.9	23247.4
25°	16740.2	16674.3	16526.4	16582.1	16568.7	16754.9	16858.6	17171.8	17419.0	17876.3	18247.2
27.5°	12768.1	12699.6	12565.9	12605.4	12591.7	12750.5	12848.2	13109.8	13322.5	13707.6	14033.2
30°	9772.1	9689.5	9576.1	9597.9	9588.6	9717.2	9808.5	10028.8	10211.1	10536.5	10817.1
32.5°	7490.3	7407.2	7303.1	7313.3	7299.5	7400.4	7475.6	7667.3	7826.1	8102.8	8347.0
35°	5731.1	5828.2	5605.8	5746.7	5600.0	5815.3	5737.9	5857.6	5994.3	6227.4	6431.1
37.5°	4405.8	4338.2	4281.0	4274.9	4274.6	4324.5	4383.4	4498.7	4619.1	4792.9	4972.3
40°	3491.4	3443.9	3406.9	3404.2	3406.9	3442.4	3485.9	3565.6	3653.8	3778.6	3910.4
42.5°	2895.8	2864.3	2842.0	2840.4	2847.5	2872.6	2902.9	2950.2	3007.6	3088.4	3178.9
45°	2506.3	2488.8	2476.4	2475.7	2478.9	2492.1	2509.5	2539.0	2575.3	2625.7	2683.0
47.5°	2233.1	2228.8	2221.0	2221.3	2217.8	2223.2	2225.1	2241.6	2261.0	2299.0	2373.8
50°	2034.1	2034.1	2028.7	2028.4	2023.3	2023.1	2018.8	2025.3	2034.3	2057.9	2081.9
52.5°	1876.8	1876.2	1870.5	1869.3	1863.9	1863.7	1859.9	1862.5	1863.8	1875.7	1889.9
55°	1753.8	1750.2	1742.5	1740.1	1738.0	1741.2	1739.8	1739.8	1738.3	1743.3	1747.5
57.5°	1665.7	1660.8	1653.7	1651.5	1651.0	1654.6	1654.8	1653.5	1646.9	1642.4	1636.0
60°	1595.8	1591.1	1583.2	1581.3	1582.4	1587.5	1587.2	1583.0	1573.1	1564.5	1554.5
62.5°	1527.3	1525.4	1521.4	1520.8	1519.8	1520.7	1517.2	1512.6	1502.8	1493.7	1482.8
65°	1435.3	1436.3	1433.3	1433.8	1430.3	1429.7	1424.3	1419.9	1410.0	1401.7	1390.6
67.5°	1339.8	1340.5	1338.1	1338.1	1336.3	1336.5	1333.3	1329.2	1320.9	1314.1	1305.4
70°	1261.1	1263.0	1261.6	1262.1	1259.8	1258.9	1253.9	1249.9	1241.3	1235.6	1227.9
72.5°	1166.8	1171.1	1170.9	1171.9	1168.6	1166.8	1160.7	1155.8	1148.1	1143.5	1137.3
75°	1065.1	1070.6	1072.1	1074.6	1069.7	1067.2	1060.6	1056.6	1050.2	1047.5	1043.4
77.5°	965.7	971.8	977.6	983.0	975.2	968.3	960.0	953.6	944.5	941.1	934.6
80°	854.2	864.9	877.8	888.6	874.6	860.5	846.8	836.6	824.6	819.7	811.7
82.5°	708.7	719.7	727.1	734.0	724.3	713.9	700.6	691.7	678.7	674.0	664.7
85°	538.4	552.1	556.5	560.2	554.0	548.5	536.0	519.2	511.0	498.2	491.5
87.5°	354.1	362.3	363.9	365.1	361.4	358.7	350.6	342.7	328.7	318.5	306.0
90°	154.8	159.2	155.0	156.1	152.1	153.7	146.6	145.1	134.5	131.4	122.1
92.5°	32.9	30.7	29.0	27.1	29.5	30.8	33.2	34.5	36.7	38.1	40.3
95°	44.1	41.9	39.9	37.7	39.4	41.1	42.8	44.4	46.1	47.8	49.5
97.5°	59.9	58.5	57.1	55.7	56.7	57.7	58.7	59.6	60.7	61.6	62.8
100°	76.2	75.1	74.0	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
102.5°	121.8	117.0	112.3	107.5	110.8	113.9	117.2	120.4	123.6	126.8	130.2
105°	229.0	216.0	203.0	190.0	202.5	215.1	227.8	240.4	252.9	265.8	278.5
107.5°	414.8	394.3	373.7	353.1	376.2	399.1	422.1	445.0	468.0	490.9	514.2
110°	619.4	599.8	580.1	560.6	584.9	609.3	633.6	657.9	682.4	706.7	731.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	756.2	746.7	737.2	727.7	743.4	759.0	774.8	790.7	806.3	822.2	837.9
115°	792.5	791.9	791.3	790.8	798.2	805.6	813.0	820.6	828.1	835.5	843.2
117.5°	750.0	755.1	760.4	765.7	768.1	770.5	773.1	775.4	778.1	780.5	783.2
120°	673.5	680.3	687.4	694.5	693.5	692.6	691.7	690.7	690.2	689.3	689.0
122.5°	584.0	590.8	597.9	605.0	603.0	600.8	598.9	596.9	595.2	593.4	591.8
125°	501.2	506.9	512.7	518.6	516.5	514.5	512.4	510.8	509.0	507.2	505.7
127.5°	436.2	439.7	443.0	446.7	445.7	444.8	444.2	443.4	442.8	442.4	442.1
130°	392.8	394.2	395.9	397.3	397.5	397.8	398.6	399.1	400.0	400.6	401.7
132.5°	368.7	368.5	368.7	368.9	370.0	371.2	372.7	374.1	375.9	377.4	379.7
135°	356.1	355.4	354.8	354.4	356.1	357.6	359.6	361.6	363.9	366.3	368.8
137.5°	352.1	351.0	350.2	349.3	351.0	352.6	354.6	356.5	358.9	361.2	363.9
140°	352.5	351.5	351.0	350.1	351.8	353.3	355.2	357.2	359.5	361.9	364.4
142.5°	353.6	352.4	351.9	351.3	352.5	354.1	356.0	357.8	359.8	361.9	364.2
145°	358.1	357.3	356.9	356.3	357.2	358.3	359.6	361.0	362.6	364.0	366.0
147.5°	360.0	359.4	359.1	358.7	359.5	360.3	361.2	362.0	363.4	364.6	366.0
150°	360.6	360.1	359.8	359.6	360.1	360.5	361.2	361.6	362.4	363.2	364.3
152.5°	358.4	357.8	357.8	357.5	357.8	358.1	358.7	359.1	359.8	360.4	361.4
155°	357.4	356.9	356.4	356.1	356.1	356.1	356.4	356.4	356.7	356.9	357.3
157.5°	357.9	357.4	357.1	356.5	356.4	356.1	356.2	356.0	356.2	355.8	356.0
160°	358.4	357.6	357.0	356.4	356.4	356.1	356.3	356.0	356.1	356.1	356.3
162.5°	361.2	360.6	360.3	359.7	359.4	358.8	358.5	357.9	357.7	357.4	357.3
165°	363.6	363.0	362.4	361.6	361.4	361.2	360.8	360.6	360.5	360.2	360.1
167.5°	368.7	367.8	367.3	366.5	366.1	365.4	365.1	364.6	364.2	363.7	363.6
170°	371.6	370.9	370.5	370.0	369.7	369.2	369.1	368.7	368.6	368.4	368.4
172.5°	376.9	376.3	375.9	375.5	375.2	374.9	374.7	374.6	374.3	374.3	374.1
175°	380.5	380.2	380.1	379.8	379.6	379.4	379.2	379.0	378.9	378.5	378.4
177.5°	382.6	382.4	382.3	382.2	382.0	382.0	382.0	382.0	382.0	381.9	381.7
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38151.0	38140.9	38114.6	38101.5	38077.1	38064.8	38045.7	38033.4	38018.0	38006.6	38000.6
5°	39208.0	39159.2	39061.5	39001.3	38895.7	38826.1	38721.3	38644.5	38536.2	38456.4	38354.1
7.5°	40583.2	40508.4	40383.2	40288.2	40140.5	40027.6	39861.9	39729.3	39546.2	39394.1	39207.0
10°	41143.1	41099.5	41043.3	40982.2	40900.4	40820.1	40706.9	40591.6	40437.9	40284.9	40085.2
12.5°	40315.7	40356.7	40437.9	40475.7	40537.8	40558.8	40587.2	40573.9	40548.8	40486.3	40395.8
15°	37971.9	38143.6	38414.9	38602.6	38865.6	39050.3	39294.7	39451.9	39633.0	39741.3	39844.2
17.5°	34116.6	34448.7	34927.5	35309.5	35822.2	36239.1	36750.0	37151.3	37614.7	37970.2	38348.7
20°	29178.5	29643.6	30304.5	30865.8	31608.9	32238.9	33046.1	33722.3	34511.1	35168.7	35878.3
22.5°	23863.8	24410.9	25168.1	25845.2	26732.5	27525.0	28536.4	29430.5	30496.9	31452.2	32508.8
25°	18850.0	19386.1	20157.6	20858.6	21816.4	22689.5	23794.4	24820.2	26057.6	27211.6	28536.4
27.5°	14550.4	15026.6	15704.7	16335.8	17213.1	18070.1	19191.4	20285.2	21605.6	22845.8	24273.5
30°	11237.0	11623.4	12166.7	12674.3	13378.6	14079.6	15078.3	16089.9	17403.8	18688.9	20152.6
32.5°	8708.4	9037.7	9491.3	9903.4	10446.1	10974.6	11710.1	12518.4	13671.0	14902.0	16317.2
35°	6741.2	7023.0	7409.1	7764.1	8210.3	8629.9	9178.8	9755.7	10635.3	11670.7	12937.3
37.5°	5374.5	5489.3	5764.9	6055.7	6426.4	6771.2	7200.5	7627.1	8256.4	9073.4	10108.1
40°	4087.2	4269.6	4493.9	4723.0	5003.7	5280.2	5751.2	5978.0	6392.3	6978.8	7781.8
42.5°	3297.8	3426.1	3584.0	3743.3	3938.8	4131.5	4369.7	4612.4	4922.1	5319.3	5890.5
45°	2759.7	2843.4	2945.1	3051.2	3179.7	3311.2	3470.7	3637.2	3847.1	4091.3	4438.3
47.5°	2400.2	2446.4	2512.8	2585.3	2673.4	2764.4	2868.1	2974.3	3104.7	3249.5	3447.1
50°	2119.6	2158.2	2209.8	2258.2	2319.0	2412.2	2453.4	2512.0	2590.4	2675.7	2786.2
52.5°	1916.5	1942.2	1974.6	2002.4	2040.9	2075.8	2121.5	2162.0	2216.2	2267.3	2338.7
55°	1758.4	1767.7	1786.1	1804.0	1830.6	1854.4	1885.8	1912.3	1946.9	1977.5	2022.5
57.5°	1636.2	1637.1	1645.6	1654.9	1672.0	1687.0	1708.6	1726.0	1750.0	1769.6	1796.5
60°	1548.5	1543.8	1545.5	1548.8	1558.5	1568.1	1582.0	1593.3	1608.4	1619.5	1634.6
62.5°	1475.4	1468.1	1466.4	1465.6	1470.4	1473.9	1481.4	1486.9	1495.6	1500.3	1508.4
65°	1383.2	1374.5	1371.2	1367.2	1368.6	1367.5	1370.4	1370.5	1374.8	1375.9	1380.5
67.5°	1299.6	1292.3	1287.9	1282.6	1280.2	1276.4	1274.7	1271.0	1270.4	1267.3	1266.6
70°	1223.3	1216.2	1212.4	1207.5	1205.0	1199.9	1196.8	1190.5	1186.9	1181.1	1177.9
72.5°	1134.9	1130.9	1129.8	1126.5	1125.5	1122.7	1121.4	1117.0	1114.5	1109.6	1106.8
75°	1042.6	1039.3	1039.1	1035.7	1035.4	1032.0	1031.1	1026.5	1024.1	1019.1	1017.1
77.5°	932.7	927.8	926.4	922.5	923.4	921.8	923.2	919.6	918.1	913.2	911.6
80°	808.9	802.7	800.1	794.9	796.3	793.9	796.3	796.0	797.9	793.9	793.2
82.5°	662.2	655.4	654.1	650.5	652.9	653.2	658.4	655.6	656.7	653.0	654.6
85°	481.8	476.8	469.7	468.7	464.2	468.9	462.8	466.9	460.2	464.9	458.7
87.5°	298.8	288.3	282.8	275.3	272.4	265.2	262.3	257.0	258.6	256.2	257.6
90°	120.8	112.7	112.2	106.2	106.9	101.9	104.1	101.0	103.8	100.5	103.7
92.5°	41.7	43.5	46.8	50.5	53.6	56.9	60.3	64.0	67.1	70.7	73.8
95°	51.1	52.8	57.3	61.8	66.2	70.7	75.4	79.8	84.3	88.8	93.3
97.5°	63.7	64.7	69.2	73.7	78.2	82.6	87.1	91.9	96.3	100.8	105.3
100°	72.9	72.9	85.7	98.4	111.1	124.1	136.8	149.5	162.6	175.2	188.0
102.5°	133.4	136.7	168.8	201.1	233.3	265.4	297.8	330.2	362.3	394.8	427.1
105°	291.0	303.7	352.8	402.1	451.2	500.4	549.8	599.1	648.3	697.6	746.8
107.5°	537.1	560.1	604.6	649.1	693.4	738.0	782.8	827.3	871.7	916.4	961.2
110°	755.8	780.3	810.0	840.0	869.9	899.7	929.7	959.6	989.7	1019.7	1049.9



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	853.7	869.6	887.0	904.7	922.1	939.8	957.3	975.0	992.7	1010.5	1028.1
115°	850.9	858.6	865.4	872.5	879.4	886.5	893.4	900.7	908.1	915.2	922.4
117.5°	785.7	788.7	789.8	791.2	792.6	794.2	795.6	797.3	799.0	800.7	802.1
120°	688.3	687.6	686.8	686.2	685.3	684.8	684.2	683.6	683.3	682.8	682.2
122.5°	590.0	588.7	587.9	587.3	586.8	586.4	585.8	585.7	585.4	585.1	584.6
125°	504.2	502.9	504.4	505.9	507.5	509.1	510.6	512.7	514.4	516.1	518.0
127.5°	441.7	441.7	444.9	448.0	451.3	454.5	458.0	461.4	464.7	468.3	471.6
130°	402.8	404.1	408.0	412.2	416.1	420.3	424.5	428.8	432.7	436.9	441.0
132.5°	381.5	383.9	387.6	391.7	395.6	399.6	403.8	407.8	411.9	416.1	419.9
135°	371.4	374.3	377.9	381.6	385.3	389.1	392.9	396.8	400.3	404.1	407.8
137.5°	366.4	369.2	372.4	375.4	378.3	381.7	384.9	388.0	391.0	394.2	397.2
140°	366.9	369.7	371.5	373.8	375.7	377.9	379.7	382.0	383.7	386.1	387.8
142.5°	366.4	369.0	370.2	371.7	373.2	375.0	376.5	378.0	379.3	380.6	381.9
145°	367.6	369.7	370.1	370.9	371.4	372.1	372.6	373.3	373.6	374.1	374.5
147.5°	367.3	368.8	368.8	369.3	369.6	369.8	370.0	370.3	370.2	370.6	370.7
150°	365.1	366.2	366.0	366.0	365.8	365.8	365.5	365.6	365.3	365.3	365.0
152.5°	362.0	363.0	362.4	362.4	361.9	361.7	361.3	361.1	360.7	360.5	360.3
155°	357.5	357.8	357.6	357.5	357.2	357.0	356.7	356.9	356.7	356.6	356.6
157.5°	355.9	356.0	355.8	355.7	355.3	355.4	355.2	355.2	355.2	355.6	355.7
160°	356.1	356.3	356.0	355.8	355.7	355.5	355.4	355.5	355.6	356.0	356.2
162.5°	356.8	356.7	356.4	356.3	356.2	356.2	356.2	356.4	356.4	356.7	357.0
165°	360.2	360.3	359.7	359.7	359.4	359.2	359.1	359.1	359.3	359.4	359.6
167.5°	363.2	363.2	363.2	363.3	363.3	363.4	363.6	364.2	364.3	364.8	365.0
170°	368.3	368.4	368.2	368.1	368.0	368.0	368.0	368.0	368.2	368.3	368.3
172.5°	374.1	374.1	373.9	373.6	373.3	373.2	372.9	372.9	372.7	372.5	372.2
175°	378.2	378.1	377.9	377.8	377.6	377.3	377.1	376.8	376.6	376.5	376.3
177.5°	381.6	381.3	381.1	381.1	381.0	380.9	380.9	380.8	380.8	380.8	380.5
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	37993.0	37992.6	37988.9	37990.5	37991.3	37994.0	37997.3	38000.6	38001.4	38004.0	38004.5
5°	38277.3	38183.3	38113.8	38037.3	37979.8	37928.1	37893.7	37866.3	37855.6	37858.3	37864.7
7.5°	39048.3	38854.3	38694.2	38512.2	38360.4	38199.7	38066.5	37939.9	37847.5	37778.8	37740.3
10°	39894.4	39658.1	39432.0	39168.6	38918.7	38652.1	38410.5	38167.4	37964.6	37788.5	37659.2
12.5°	40269.8	40102.8	39907.4	39658.8	39391.5	39083.7	38773.0	38440.0	38130.2	37842.6	37610.7
15°	39872.3	39872.6	39801.4	39682.1	39496.5	39250.5	38954.5	38607.3	38241.8	37868.9	37528.2
17.5°	38610.4	38848.5	38980.9	39064.7	39039.0	38948.4	38760.0	38493.4	38152.7	37755.4	37339.7
20°	36443.4	37004.9	37405.3	37765.4	37967.2	38101.2	38087.8	37979.3	37736.7	37398.9	36965.9
22.5°	33407.6	34350.1	35094.0	35787.5	36273.9	36669.6	36857.7	36937.5	36827.6	36592.2	36185.7
25°	29720.4	31002.0	32095.7	33157.1	33953.3	34637.5	35048.7	35338.4	35361.4	35238.5	34875.8
27.5°	25623.3	27136.1	28520.3	29930.9	31050.5	32034.2	32679.6	33152.0	33302.0	33282.3	32952.9
30°	21531.4	23119.5	24645.3	26290.2	27675.6	28932.3	29784.9	30423.8	30670.0	30717.2	30400.3
32.5°	17667.1	19233.1	20754.6	22474.3	23998.9	25439.2	26446.5	27205.4	27491.6	27559.1	27211.6
35°	14160.0	15604.8	17050.7	18717.3	20233.2	21724.7	22786.0	23580.5	23847.9	23893.0	23490.6
37.5°	11118.6	12349.6	13609.6	15105.0	16497.0	17897.7	18906.2	19652.8	19847.6	19835.6	19380.2
40°	8557.8	9514.8	10527.2	11758.3	12915.7	14099.7	14951.3	15568.5	15670.8	15595.1	15116.8
42.5°	6435.1	7126.2	7860.2	8779.2	9637.9	10524.1	11143.6	11601.9	11616.4	11496.6	11067.3
45°	4794.1	5468.4	5776.2	6331.8	6885.0	7474.2	7852.6	8135.6	8091.8	7986.3	7660.1
47.5°	3654.7	3913.8	4188.7	4533.2	4855.4	5241.1	5474.5	5929.1	5601.7	5824.9	5333.5
50°	2902.2	3047.0	3195.1	3378.0	3546.3	3721.1	3830.3	3911.9	3901.3	3866.2	3772.1
52.5°	2469.0	2513.9	2586.7	2690.8	2784.7	2879.3	2941.5	2992.1	2993.0	2978.9	2931.2
55°	2063.6	2120.4	2172.9	2240.8	2356.6	2374.4	2463.6	2445.5	2452.5	2427.8	2453.1
57.5°	1819.4	1852.5	1882.0	1922.5	1955.9	1994.9	2017.9	2040.1	2038.1	2033.2	2008.9
60°	1646.4	1664.7	1681.1	1704.6	1723.1	1745.1	1755.7	1767.0	1763.3	1755.1	1733.5
62.5°	1513.1	1524.5	1533.9	1549.0	1560.2	1573.9	1579.5	1584.3	1579.5	1571.7	1552.6
65°	1381.4	1388.8	1394.8	1406.2	1414.1	1425.9	1430.5	1435.0	1430.6	1424.6	1410.0
67.5°	1262.8	1263.5	1262.9	1267.6	1270.0	1277.1	1279.1	1282.4	1277.4	1272.1	1259.8
70°	1172.8	1170.9	1168.7	1170.5	1170.9	1174.3	1174.9	1174.3	1168.3	1159.2	1145.7
72.5°	1102.4	1101.4	1099.7	1101.3	1101.3	1104.4	1103.3	1101.9	1094.3	1085.6	1072.3
75°	1012.0	1011.2	1007.9	1007.9	1005.2	1006.2	1002.5	1000.4	992.0	984.7	972.8
77.5°	906.1	904.4	899.5	897.6	892.2	890.0	883.1	879.7	871.2	865.2	855.1
80°	788.0	786.1	779.8	776.2	767.8	762.4	752.2	746.4	736.7	730.9	721.0
82.5°	651.3	652.1	645.6	641.3	629.1	619.8	606.2	598.9	588.1	582.5	572.3
85°	463.2	456.6	460.1	459.9	452.2	444.1	433.1	425.4	416.4	410.9	403.8
87.5°	254.1	255.6	253.8	252.3	246.9	242.8	234.1	229.7	223.0	219.8	214.4
90°	95.7	94.2	86.5	85.2	77.6	74.0	65.4	62.7	54.9	53.3	48.1
92.5°	70.0	66.2	62.7	58.7	55.2	51.4	47.6	43.9	40.1	38.5	37.5
95°	87.8	82.5	77.0	71.6	66.1	60.7	55.2	49.8	44.3	43.2	42.1
97.5°	98.9	92.5	86.1	79.8	73.4	67.0	60.7	54.2	47.8	47.0	46.4
100°	173.3	158.7	143.8	128.9	114.2	99.4	84.7	69.9	55.2	54.4	53.6
102.5°	391.1	355.3	319.5	283.7	248.1	212.1	176.3	140.3	104.5	99.3	94.2
105°	692.6	638.3	584.2	529.9	475.7	421.4	367.2	312.8	258.5	241.1	223.7
107.5°	910.2	859.2	808.4	757.4	706.5	655.6	604.5	553.5	502.4	471.8	441.1
110°	1009.4	969.0	928.9	888.4	848.1	807.6	767.2	726.8	686.3	660.0	633.8



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	998.7	969.2	940.0	910.3	881.0	851.2	821.9	792.2	762.6	746.7	730.8
115°	905.0	887.4	869.8	852.2	834.7	817.1	799.4	781.5	763.7	755.5	747.2
117.5°	793.6	784.7	776.1	767.3	758.5	749.5	740.7	731.7	722.8	720.1	717.4
120°	680.3	678.0	675.4	673.1	670.7	668.4	665.8	663.3	660.6	661.4	662.1
122.5°	586.4	587.9	589.5	590.8	592.5	593.8	595.5	596.6	598.0	600.7	603.3
125°	521.3	524.3	527.6	530.7	533.7	536.8	540.1	542.9	546.1	548.6	551.5
127.5°	475.4	478.8	482.5	485.8	489.5	492.8	496.4	499.5	503.1	505.6	508.4
130°	444.4	447.4	450.7	453.7	456.9	460.0	463.0	466.2	469.3	471.5	473.7
132.5°	422.8	425.8	428.7	431.4	434.4	437.1	440.1	442.9	446.0	447.7	449.6
135°	410.3	412.3	414.8	416.9	419.4	421.5	423.9	426.3	428.8	430.1	431.8
137.5°	399.1	401.0	403.1	404.9	407.0	408.9	411.1	413.1	415.5	416.4	417.7
140°	389.9	391.8	393.8	395.8	397.9	399.8	402.3	404.3	406.8	407.8	409.0
142.5°	383.6	385.0	386.6	388.2	390.1	391.7	393.5	395.6	397.5	398.7	399.8
145°	376.4	378.1	379.9	381.6	383.5	385.3	387.7	389.7	392.0	392.8	393.9
147.5°	372.1	373.5	375.2	376.8	378.4	380.0	382.1	383.9	386.0	386.9	387.8
150°	366.7	368.1	369.7	371.2	373.0	374.8	376.9	378.7	381.2	382.2	383.2
152.5°	361.9	363.3	365.0	366.9	368.7	370.7	372.8	374.9	377.1	378.1	379.1
155°	358.3	359.7	361.6	363.3	365.3	367.0	369.1	371.1	373.2	374.3	375.3
157.5°	357.3	358.5	360.2	361.9	363.5	365.2	367.3	368.8	370.9	371.7	372.6
160°	357.6	358.8	360.4	361.9	363.4	365.0	366.7	368.2	369.9	370.8	371.6
162.5°	358.4	359.9	361.4	362.7	364.4	365.9	367.5	369.0	370.7	371.4	372.2
165°	360.7	361.9	363.1	364.1	365.4	366.3	367.7	368.8	370.2	370.9	371.8
167.5°	366.1	366.9	367.6	368.6	369.6	370.5	371.5	372.5	373.6	374.3	375.0
170°	369.1	369.9	370.5	371.4	372.2	373.0	373.9	374.6	375.7	376.3	376.9
172.5°	372.8	373.0	373.8	374.1	374.7	375.2	375.8	376.5	377.0	377.7	378.2
175°	376.8	376.9	377.2	377.3	377.6	377.9	378.3	378.7	379.0	379.5	379.8
177.5°	380.6	380.8	380.9	381.0	381.4	381.6	381.8	382.0	382.3	382.7	383.2
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38003.3	38002.8	38001.6	37999.9	37998.2	37999.2	38000.9	38005.3	38012.9	38023.9	38038.3
5°	37869.9	37877.6	37882.0	37882.6	37878.7	37876.2	37880.0	37890.4	37911.5	37946.8	37994.6
7.5°	37730.0	37739.6	37754.3	37765.4	37767.4	37764.7	37765.4	37781.7	37820.6	37889.4	37985.9
10°	37580.6	37552.2	37567.2	37594.6	37616.4	37620.3	37623.0	37642.4	37699.2	37803.2	37958.2
12.5°	37442.7	37352.8	37335.4	37360.2	37393.3	37403.8	37400.9	37409.2	37475.8	37613.4	37829.5
15°	37261.3	37092.1	37034.3	37040.6	37081.5	37096.2	37085.5	37069.1	37133.9	37302.0	37581.7
17.5°	36967.6	36694.9	36588.6	36584.0	36631.7	36644.4	36618.1	36567.3	36631.2	36840.8	37188.0
20°	36521.2	36118.6	35918.5	35886.7	35938.6	35923.4	35871.1	35794.1	35878.0	36133.0	36545.9
22.5°	35718.6	35208.6	34866.6	34756.4	34818.5	34777.1	34700.6	34602.4	34714.0	35003.6	35463.5
25°	34407.3	33817.9	33349.8	33087.3	33136.8	33062.5	32979.3	32860.4	32993.3	33325.8	33832.0
27.5°	32479.8	31798.9	31219.0	30784.3	30800.2	30703.0	30607.2	30453.2	30619.2	31012.8	31583.7
30°	29916.6	29128.7	28422.5	27831.8	27779.0	27684.7	27586.5	27384.4	27592.2	28063.3	28730.5
32.5°	26697.8	25823.0	25007.0	24260.1	24119.2	24027.2	23939.8	23707.1	23979.2	24528.5	25294.9
35°	22933.4	22001.6	21116.9	20263.9	20030.4	19938.4	19861.9	19639.1	19978.6	20576.3	21404.1
37.5°	18801.5	17849.7	16971.2	16096.5	15766.7	15641.9	15586.3	15440.3	15832.0	16423.2	17254.4
40°	14559.8	13674.7	12887.2	12114.6	11738.5	11547.7	11518.5	11491.9	11870.6	12383.5	13138.0
42.5°	10591.6	9877.6	9270.3	8679.8	8339.1	8078.4	8078.2	8157.4	8498.2	8882.4	9464.2
45°	7326.6	6847.4	6460.5	6065.9	6171.3	5651.5	5956.9	5800.2	5968.7	6216.4	6594.7
47.5°	5036.3	4774.7	4562.2	4341.7	4181.0	4027.6	4041.0	4140.0	4298.6	4445.6	4642.5
50°	3670.6	3537.4	3429.1	3314.7	3234.7	3166.9	3170.9	3213.8	3297.1	3374.6	3477.6
52.5°	2876.2	2802.7	2743.9	2680.6	2638.6	2605.0	2606.8	2627.6	2672.7	2716.9	2775.9
55°	2370.7	2361.8	2285.3	2228.5	2206.9	2184.3	2188.4	2196.5	2227.3	2253.1	2292.2
57.5°	1986.5	1952.3	1929.3	1899.4	1885.7	1869.9	1873.4	1876.5	1897.0	1914.3	1942.5
60°	1715.4	1691.1	1674.8	1654.5	1645.5	1635.4	1637.6	1639.5	1652.6	1664.0	1684.1
62.5°	1535.3	1513.5	1499.3	1483.6	1477.3	1470.5	1472.1	1472.7	1480.9	1489.1	1504.4
65°	1397.0	1379.8	1368.0	1354.5	1347.8	1340.8	1341.5	1341.5	1348.5	1354.5	1366.0
67.5°	1250.9	1237.9	1230.2	1219.5	1215.1	1207.8	1207.7	1205.4	1209.9	1212.4	1220.1
70°	1133.6	1120.5	1110.7	1100.4	1094.8	1088.4	1088.5	1088.7	1093.9	1099.4	1109.5
72.5°	1061.1	1048.6	1039.9	1030.9	1025.6	1020.2	1019.1	1018.6	1022.4	1025.4	1032.0
75°	965.2	955.1	950.1	941.6	937.3	931.3	930.2	927.5	929.3	929.9	934.8
77.5°	848.7	839.2	835.1	826.6	823.0	816.1	815.6	812.4	813.8	812.9	816.7
80°	716.1	707.4	705.2	698.1	696.4	690.1	689.0	685.2	686.3	683.4	684.9
82.5°	567.9	560.0	558.3	551.8	551.8	546.0	545.8	540.0	540.0	535.0	527.1
85°	400.0	394.3	391.9	386.5	385.0	380.3	377.9	372.4	370.4	366.9	365.8
87.5°	211.1	207.5	204.2	201.7	196.9	188.7	187.9	182.1	182.6	178.5	178.8
90°	47.1	42.3	41.6	37.1	36.1	32.9	32.0	32.0	32.8	32.9	33.7
92.5°	36.2	35.0	33.7	32.5	31.2	30.0	28.7	30.0	31.2	32.5	33.7
95°	41.0	39.9	38.8	37.6	36.5	35.4	34.3	35.4	36.5	37.8	38.9
97.5°	45.7	45.0	44.3	43.6	42.9	42.2	41.5	42.4	43.0	43.8	44.4
100°	52.7	51.9	51.1	50.2	49.4	48.5	47.7	48.8	49.7	50.5	51.3
102.5°	89.1	83.9	78.7	73.6	68.4	63.3	58.0	63.3	68.4	73.8	78.9
105°	206.2	188.8	171.4	153.9	136.4	119.0	101.5	119.1	136.5	154.0	171.7
107.5°	410.4	379.9	349.1	318.4	287.6	256.9	226.1	257.0	287.9	318.6	349.4
110°	607.2	580.8	554.3	527.9	501.3	474.9	448.3	475.0	501.6	528.1	554.7



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	714.7	698.7	682.6	666.8	650.5	634.5	618.3	634.8	651.0	667.4	683.5
115°	739.0	730.6	722.3	713.9	705.3	697.0	688.3	697.4	706.1	714.8	723.4
117.5°	714.5	712.0	709.1	706.4	703.4	700.6	697.5	700.9	704.0	707.6	710.5
120°	662.5	663.3	663.9	664.4	664.9	665.3	665.6	665.8	665.8	665.8	665.8
122.5°	605.9	608.6	611.0	613.5	615.9	618.2	620.4	618.8	617.0	615.3	613.2
125°	554.0	557.0	559.5	562.2	564.6	567.3	569.2	568.0	566.2	564.4	562.2
127.5°	510.9	513.4	515.9	518.6	520.6	522.8	524.8	523.7	522.1	520.6	518.7
130°	475.8	478.1	480.0	482.0	483.8	485.4	486.9	486.2	485.3	484.5	483.2
132.5°	451.3	453.3	455.0	456.7	457.9	459.5	460.3	460.3	459.8	459.4	458.4
135°	433.3	434.7	436.0	437.6	438.5	439.6	440.1	440.6	440.4	440.3	439.6
137.5°	418.8	420.0	420.8	421.8	422.4	423.0	423.2	424.0	424.3	424.8	424.6
140°	410.0	411.3	412.2	413.0	413.8	414.6	414.8	415.6	415.9	416.2	416.0
142.5°	400.9	402.0	403.0	404.1	404.6	405.3	405.5	406.3	406.6	406.8	406.8
145°	394.8	395.7	396.5	397.4	397.8	398.3	398.2	399.3	399.7	400.1	400.3
147.5°	388.6	389.6	390.2	390.8	391.3	391.8	391.9	392.6	393.2	393.5	393.9
150°	384.2	385.3	386.1	387.0	387.7	388.3	388.4	389.1	389.3	389.7	389.6
152.5°	380.0	380.9	381.7	382.3	383.1	383.6	383.8	384.4	385.0	385.3	385.5
155°	376.2	377.1	378.0	378.8	379.4	380.1	380.7	381.2	381.7	382.0	382.3
157.5°	373.4	374.4	375.1	375.9	376.5	377.4	378.0	378.6	379.1	379.6	379.9
160°	372.3	373.3	373.9	374.7	375.5	376.1	376.7	377.4	378.0	378.3	379.0
162.5°	372.9	373.8	374.2	375.1	375.7	376.5	377.0	377.7	378.3	378.9	379.3
165°	372.8	373.5	374.2	375.1	375.9	376.8	377.4	377.9	378.2	378.6	378.9
167.5°	375.7	376.5	377.1	377.9	378.5	379.4	380.1	380.5	380.8	381.0	381.3
170°	377.6	378.2	379.0	379.5	380.3	380.9	381.4	381.6	382.0	382.2	382.5
172.5°	378.8	379.6	380.2	381.0	381.6	382.3	382.9	383.2	383.2	383.2	383.1
175°	380.3	381.0	381.4	382.0	382.4	383.0	383.6	383.4	383.6	383.4	383.4
177.5°	383.8	384.5	385.0	385.4	386.1	386.4	387.0	386.5	386.4	386.0	385.6
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38058.7	38077.8	38106.9	38133.3	38173.1	38204.4	38251.4	38287.2	38340.3	38374.9	38432.6
5°	38062.1	38136.5	38234.5	38330.0	38444.9	38549.2	38678.8	38789.2	38919.4	39025.7	39158.9
7.5°	38115.9	38259.5	38431.6	38605.0	38801.2	38984.6	39191.3	39378.4	39582.9	39756.0	39945.0
10°	38155.6	38377.1	38630.8	38886.0	39154.5	39404.1	39656.1	39873.9	40077.3	40244.9	40392.8
12.5°	38101.8	38406.9	38732.3	39046.7	39345.3	39603.7	39820.5	39987.9	40103.5	40182.0	40200.3
15°	37918.8	38285.9	38639.8	38952.8	39200.7	39391.8	39490.8	39537.1	39487.4	39404.9	39223.4
17.5°	37577.0	37964.2	38280.6	38527.5	38658.4	38710.3	38628.4	38485.7	38207.1	37897.8	37451.0
20°	36950.2	37311.0	37540.5	37675.2	37640.2	37510.6	37201.1	36824.9	36268.5	35675.6	34893.1
22.5°	35850.9	36166.4	36288.6	36298.6	36084.8	35760.4	35202.1	34557.0	33679.3	32766.7	31644.6
25°	34200.8	34477.1	34496.4	34387.9	33996.6	33470.8	32651.2	31738.5	30545.8	29329.9	27923.7
27.5°	31963.0	32227.9	32163.1	31960.6	31417.3	30713.7	29664.3	28485.2	27014.8	25578.8	24023.2
30°	29149.8	29433.2	29357.0	29097.2	28451.2	27619.6	26384.8	25014.9	23382.3	21848.6	20272.2
32.5°	25783.3	26141.5	26089.0	25842.1	25167.8	24277.8	22938.1	21485.1	19814.9	18303.4	16770.0
35°	21956.8	22391.7	22414.3	22252.8	21626.9	20747.3	19424.3	18017.9	16418.1	14992.0	13575.5
37.5°	17834.2	18338.4	18442.0	18398.5	17879.8	17103.2	15897.8	14636.2	13218.9	11969.0	10757.5
40°	13688.8	14199.2	14376.3	14428.9	14046.0	13444.6	12455.3	11437.0	10281.5	9268.8	8306.8
42.5°	9908.3	10360.8	10532.0	10639.7	10400.7	9999.6	9278.0	8538.4	7692.0	6961.5	6261.2
45°	6881.6	7201.6	7331.8	7440.2	7310.1	7083.8	6628.0	6165.5	5606.7	5129.5	4677.5
47.5°	4811.3	4987.8	5073.7	5126.3	5075.9	4957.8	4709.8	4441.9	4126.5	3847.6	3579.4
50°	3566.2	3660.2	3705.2	3735.5	3698.7	3633.1	3499.0	3353.1	3179.9	3021.9	2867.4
52.5°	2826.1	2880.0	2906.7	2923.0	2902.0	2861.9	2783.8	2697.3	2593.4	2495.8	2444.5
55°	2380.8	2378.0	2439.8	2410.0	2439.8	2373.3	2359.2	2264.2	2177.9	2117.2	2051.5
57.5°	1963.4	1991.4	2003.2	2016.5	2008.0	1995.8	1962.6	1928.5	1883.0	1845.0	1804.4
60°	1699.6	1722.6	1735.7	1748.8	1748.0	1743.4	1724.2	1703.8	1675.4	1652.6	1628.1
62.5°	1517.8	1537.8	1550.6	1563.2	1564.3	1562.5	1547.9	1533.9	1514.5	1500.2	1483.3
65°	1374.8	1388.8	1397.6	1407.6	1407.1	1404.4	1391.2	1379.5	1363.6	1353.7	1341.2
67.5°	1225.2	1235.8	1242.5	1252.0	1253.9	1254.5	1247.2	1241.7	1234.0	1231.2	1226.9
70°	1118.8	1131.7	1142.6	1154.5	1161.0	1164.2	1161.0	1158.2	1153.7	1151.7	1148.4
72.5°	1038.2	1049.1	1057.6	1068.5	1074.6	1078.9	1076.5	1074.9	1071.0	1070.5	1068.2
75°	938.2	945.7	950.5	958.7	961.9	966.0	964.2	965.2	963.9	967.0	966.9
77.5°	817.9	823.5	825.7	831.6	832.2	837.2	838.3	844.1	848.2	857.2	862.1
80°	682.5	686.1	686.1	692.1	694.8	703.2	707.1	716.6	721.0	729.0	729.8
82.5°	530.2	526.1	530.2	527.7	535.4	544.7	546.0	554.0	555.9	561.0	557.0
85°	362.5	362.2	359.0	359.5	357.1	358.2	356.8	358.4	356.9	357.1	353.5
87.5°	173.7	175.2	171.4	172.7	169.0	170.7	167.4	170.0	166.2	166.8	161.1
90°	34.1	34.8	35.2	36.1	37.3	39.4	41.7	44.0	46.8	49.0	51.5
92.5°	35.0	36.4	37.7	38.9	40.2	44.1	47.8	51.6	55.4	59.2	62.9
95°	40.1	41.2	42.3	43.7	44.8	50.3	55.7	61.2	66.7	72.1	77.6
97.5°	45.5	46.1	46.9	47.5	48.4	54.8	61.2	67.6	74.1	80.5	86.8
100°	52.3	53.1	53.9	55.0	55.8	70.6	85.4	100.3	115.2	129.8	144.6
102.5°	84.2	89.3	94.6	100.0	105.2	141.1	177.1	213.1	248.7	284.6	320.5
105°	189.1	206.6	224.4	241.9	259.4	313.8	368.2	422.7	476.8	531.0	585.4
107.5°	380.3	411.0	442.0	472.8	503.6	554.8	605.8	656.9	708.1	759.1	810.0
110°	581.6	607.9	634.7	661.4	687.9	728.4	769.1	809.5	850.1	890.6	931.0



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	699.9	716.0	732.3	748.2	764.4	794.0	824.0	853.6	883.5	912.8	942.5
115°	732.2	740.4	749.0	757.4	766.1	784.0	801.7	819.7	837.5	855.2	873.0
117.5°	713.6	716.6	719.8	722.4	725.5	734.6	743.6	752.7	761.8	770.9	779.9
120°	665.6	665.2	664.9	664.4	664.1	666.6	669.5	672.1	674.8	677.3	679.8
122.5°	611.3	608.9	606.8	604.5	602.1	600.7	599.6	598.2	597.2	595.8	594.5
125°	560.2	557.7	555.5	552.9	550.5	547.6	544.9	541.8	539.0	536.0	533.1
127.5°	517.2	514.8	513.0	510.5	508.3	504.9	501.7	498.3	495.3	491.7	488.6
130°	481.9	480.3	478.9	476.7	475.1	472.0	469.3	466.2	463.2	460.3	457.3
132.5°	457.5	456.3	455.1	453.4	452.2	449.4	447.0	444.0	441.4	438.6	436.1
135°	439.3	438.3	437.7	436.6	435.6	433.2	431.3	429.0	426.9	424.8	422.7
137.5°	424.6	424.1	423.7	423.2	422.5	420.5	418.9	416.9	415.2	413.3	411.6
140°	416.1	415.7	415.3	414.8	414.2	412.3	410.5	408.4	406.7	404.6	402.8
142.5°	406.7	406.4	406.1	405.5	405.2	403.5	402.2	400.7	399.1	397.6	396.1
145°	400.3	400.1	400.2	399.8	399.8	397.9	396.4	394.6	393.2	391.3	389.8
147.5°	394.1	394.0	394.1	394.0	394.1	392.5	391.4	389.9	388.8	387.2	386.1
150°	389.8	389.8	389.8	389.5	389.4	387.9	386.8	385.4	384.3	382.7	381.7
152.5°	385.6	385.8	385.9	386.0	386.1	384.8	383.6	382.2	380.9	379.5	378.2
155°	382.5	382.6	382.8	382.8	382.8	381.7	380.6	379.3	378.2	376.9	375.8
157.5°	380.2	380.5	380.8	380.9	381.0	380.0	379.1	378.1	377.1	376.0	375.1
160°	379.3	379.6	379.9	380.1	380.4	379.6	379.0	377.9	377.3	376.2	375.2
162.5°	379.7	380.1	380.4	380.6	380.9	380.0	379.5	378.6	377.8	376.7	375.8
165°	379.3	379.4	379.6	379.6	379.7	379.2	378.7	378.2	377.6	376.9	376.4
167.5°	381.6	381.6	381.9	382.0	382.1	381.7	381.6	381.1	380.7	380.3	379.8
170°	382.6	382.8	382.9	382.9	383.0	382.6	382.3	382.0	381.8	381.1	380.7
172.5°	383.2	383.1	383.1	383.1	382.9	382.6	382.5	382.3	382.1	381.8	381.5
175°	383.3	383.1	383.1	383.0	382.8	382.8	382.7	382.6	382.5	382.3	382.3
177.5°	385.4	385.2	384.8	384.5	384.2	384.1	384.0	383.9	384.0	383.9	383.7
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38468.4	38230.8	38199.4	38216.1	38255.8	38270.5	38313.4	38325.1	38368.1	38378.8	38420.1
5°	39262.2	38948.1	38963.8	39039.3	39153.6	39221.7	39334.1	39392.9	39500.1	39548.8	39645.8
7.5°	40099.1	39852.5	39929.4	40056.8	40213.0	40321.2	40456.2	40544.1	40660.5	40732.7	40825.7
10°	40510.1	40442.5	40527.1	40627.4	40716.5	40786.3	40843.5	40889.4	40919.3	40947.4	40959.7
12.5°	40197.3	40301.9	40316.3	40306.6	40247.5	40202.5	40101.1	40032.3	39910.0	39835.6	39690.2
15°	39038.0	39267.9	39140.6	38947.8	38665.8	38430.7	38098.5	37851.3	37505.4	37270.9	36923.8
17.5°	37003.4	37293.6	36961.8	36515.8	35948.5	35463.0	34858.6	34378.8	33777.8	33340.8	32779.9
20°	34139.0	34410.2	33818.5	33079.2	32201.5	31462.9	30591.8	29896.8	29087.4	28485.2	27758.6
22.5°	30572.7	30765.9	29932.3	28935.6	27817.4	26894.6	25853.2	25019.9	24096.2	23407.8	22633.0
25°	26627.3	26679.3	25679.4	24531.2	23284.9	22247.8	21135.9	20259.9	19317.8	18620.1	17859.6
27.5°	22645.0	22568.6	21487.8	20270.2	18959.3	17881.4	16796.8	15976.0	15150.9	14522.4	13867.3
30°	18886.3	18701.2	17579.0	16327.6	15055.0	14088.9	13188.6	12529.3	11872.9	11374.4	10848.5
32.5°	15439.5	15178.4	14086.0	12913.5	11841.3	11095.7	10428.1	9929.3	9399.2	8978.1	8536.8
35°	12386.6	12108.3	11140.6	10146.6	9335.1	8785.5	8260.8	7851.5	7401.5	7046.2	6662.9
37.5°	9766.5	9538.4	8727.8	7945.6	7331.8	6905.9	6476.0	6141.5	5769.6	5613.3	5203.7
40°	7539.7	7380.3	6746.5	6169.9	5708.9	5508.8	5072.4	4760.1	4482.1	4252.9	4030.9
42.5°	5881.1	5824.6	5207.8	4758.2	4433.6	4181.5	3938.3	3740.8	3548.6	3390.7	3241.5
45°	4315.8	4271.2	3997.3	3737.8	3516.6	3340.4	3176.1	3040.2	2914.6	2810.5	2715.7
47.5°	3360.7	3346.5	3188.7	3027.8	2888.5	2775.3	2668.6	2578.4	2495.0	2425.5	2402.9
50°	2733.4	2731.6	2639.1	2539.7	2440.5	2375.0	2306.9	2253.7	2200.1	2158.4	2114.4
52.5°	2322.5	2312.4	2250.0	2188.7	2129.7	2086.8	2043.3	2009.2	1973.7	1948.0	1920.6
55°	1999.5	2010.0	1973.9	1937.3	1900.4	1873.7	1843.2	1820.7	1796.4	1780.1	1763.6
57.5°	1775.1	1789.0	1770.1	1749.4	1726.9	1709.3	1688.2	1672.8	1656.5	1646.1	1636.5
60°	1611.8	1627.1	1619.5	1609.0	1595.2	1584.7	1571.3	1562.6	1552.2	1546.4	1541.0
62.5°	1473.3	1492.4	1489.7	1484.8	1475.9	1470.0	1462.8	1459.0	1452.0	1449.5	1446.9
65°	1335.1	1356.6	1356.2	1353.8	1348.8	1347.2	1342.6	1341.8	1338.2	1339.6	1339.3
67.5°	1226.4	1245.1	1249.2	1252.2	1252.0	1253.2	1252.8	1254.6	1254.6	1257.3	1258.9
70°	1148.1	1161.0	1164.2	1167.3	1168.1	1170.6	1170.6	1172.2	1171.7	1174.1	1174.3
72.5°	1068.8	1085.8	1089.0	1091.5	1091.5	1093.9	1092.6	1092.3	1088.8	1088.2	1085.7
75°	970.1	992.0	996.9	999.9	1000.4	1002.5	999.5	997.7	992.0	989.8	985.8
77.5°	867.1	889.8	893.3	894.4	892.5	893.0	886.7	882.5	875.3	872.3	868.5
80°	733.0	766.5	769.2	767.0	761.8	761.0	754.9	750.9	742.3	739.4	736.1
82.5°	557.8	597.1	602.6	605.0	600.7	601.7	595.9	593.6	585.7	584.3	579.1
85°	352.2	391.5	397.9	397.0	392.7	391.8	388.3	389.4	388.8	390.9	392.0
87.5°	161.8	199.8	209.0	206.1	205.6	202.9	196.9	199.1	202.8	205.1	205.3
90°	53.8	67.7	69.8	68.8	64.2	62.7	58.3	57.4	53.6	52.6	49.0
92.5°	66.7	70.4	74.3	70.9	67.5	64.2	60.8	57.2	54.0	50.5	47.3
95°	83.1	88.2	93.7	89.3	84.6	80.1	75.6	71.1	66.6	62.1	57.7
97.5°	93.3	99.4	105.6	101.2	96.7	92.1	87.7	83.2	78.7	74.1	69.6
100°	159.5	173.8	188.4	175.6	162.9	150.1	137.3	124.5	111.7	98.9	86.2
102.5°	356.3	391.9	427.5	395.2	362.9	330.5	298.4	266.1	233.9	201.5	169.3
105°	639.7	693.4	747.6	698.0	648.8	599.5	550.3	500.9	451.8	402.4	353.3
107.5°	861.0	911.1	961.7	917.1	872.5	828.0	783.2	738.6	694.0	649.4	604.9
110°	971.3	1010.6	1050.7	1020.5	990.5	960.3	930.4	900.2	870.3	840.5	810.5



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	972.0	1000.0	1029.1	1011.1	993.5	975.8	958.1	940.3	922.8	905.1	887.8
115°	890.7	906.4	923.5	916.1	909.0	901.7	894.5	887.4	880.2	873.0	866.2
117.5°	788.8	795.3	803.6	801.8	800.3	798.4	796.8	795.2	793.8	792.3	790.9
120°	682.3	682.2	684.1	684.4	684.9	685.2	685.8	686.2	686.7	687.3	687.9
122.5°	593.1	588.9	586.7	586.9	587.1	587.3	587.7	588.1	588.4	588.9	589.5
125°	530.1	524.0	520.0	518.2	516.5	514.6	512.8	511.0	509.4	507.7	506.2
127.5°	485.1	478.4	474.2	470.8	467.4	463.9	460.5	457.0	453.8	450.3	447.2
130°	454.5	447.8	443.8	439.6	435.7	431.4	427.4	423.2	419.1	415.0	410.9
132.5°	433.2	426.6	423.0	419.0	415.2	411.0	407.2	403.0	399.1	394.8	391.1
135°	420.5	414.2	411.1	407.3	404.0	400.1	396.5	392.7	389.2	385.2	382.0
137.5°	409.6	403.4	400.7	397.6	394.8	391.7	389.0	385.7	382.7	379.4	376.6
140°	400.9	394.4	391.6	389.7	388.0	385.9	384.1	382.2	380.3	378.3	376.4
142.5°	394.6	388.2	385.7	384.4	383.4	381.9	380.9	379.5	378.2	376.6	375.4
145°	388.2	381.2	378.5	378.0	377.8	377.3	376.9	376.5	376.1	375.5	375.1
147.5°	384.5	377.3	374.6	374.7	374.6	374.4	374.5	374.2	374.3	374.1	374.1
150°	380.1	371.9	368.8	369.1	369.2	369.5	369.8	369.9	370.3	370.4	370.7
152.5°	376.7	366.9	363.4	363.7	364.3	364.4	364.8	365.2	365.8	366.2	366.6
155°	374.2	363.7	359.9	359.7	359.9	360.0	360.2	360.5	360.7	361.0	361.4
157.5°	373.7	362.6	358.9	358.5	358.5	358.5	358.5	358.7	358.8	359.0	359.3
160°	374.2	363.1	359.4	359.0	359.0	358.8	358.7	358.6	358.8	358.9	359.2
162.5°	374.7	363.8	360.3	359.8	359.6	359.4	359.4	359.1	359.3	359.2	359.6
165°	375.5	366.0	362.7	362.4	362.4	362.2	362.2	362.2	362.4	362.5	362.8
167.5°	379.2	370.5	368.0	367.5	367.2	366.7	366.7	366.1	366.1	365.9	365.9
170°	380.1	373.3	371.1	370.9	371.1	370.9	370.8	370.8	370.8	370.6	370.8
172.5°	381.1	376.2	374.5	374.6	374.9	375.1	375.4	375.5	375.7	376.0	376.3
175°	382.1	379.2	378.4	378.3	378.4	378.6	378.7	378.9	379.0	379.2	379.6
177.5°	383.8	382.9	382.5	382.5	382.5	382.5	382.5	382.5	382.5	382.7	382.7
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38428.0	38472.8	38469.3	38511.2	38509.1	38548.5	38540.6	38574.6	38566.9	38595.9	38578.9
5°	39688.5	39773.7	39801.8	39878.7	39894.6	39963.5	39964.9	40019.6	40013.0	40055.7	40033.0
7.5°	40880.9	40960.4	40998.2	41057.9	41087.8	41137.2	41156.6	41197.3	41207.1	41231.1	41230.3
10°	40981.5	40981.2	40999.9	40991.6	41008.2	40998.6	41019.0	41011.6	41041.7	41034.0	41056.7
12.5°	39627.5	39493.0	39444.0	39323.3	39296.9	39193.3	39200.7	39134.2	39166.3	39125.5	39195.0
15°	36717.4	36405.6	36251.5	35980.5	35895.5	35681.2	35663.9	35521.5	35560.0	35485.5	35594.4
17.5°	32417.0	31926.2	31656.9	31261.1	31103.9	30800.9	30740.2	30557.0	30585.5	30493.1	30624.6
20°	27289.9	26696.8	26357.0	25899.4	25695.2	25334.0	25238.1	25033.2	25058.9	24967.1	25115.8
22.5°	22104.2	21483.4	21099.9	20620.1	20359.4	20019.7	19917.7	19711.9	19723.6	19637.4	19780.4
25°	17338.8	16743.6	16371.3	15935.5	15709.3	15397.9	15290.7	15105.9	15116.3	15045.2	15173.6
27.5°	13412.8	12924.4	12613.0	12247.7	12044.9	11788.9	11684.4	11528.9	11528.6	11476.4	11583.6
30°	10481.4	10073.9	9794.2	9476.1	9285.6	9054.6	8953.7	8814.6	8808.5	8771.5	8856.7
32.5°	8206.7	7844.2	7589.1	7309.2	7138.2	6939.9	6844.4	6732.6	6722.5	6688.9	6758.9
35°	6379.6	6074.4	5855.0	5619.3	5636.7	5344.2	5392.8	5165.6	5104.0	5090.5	5142.6
37.5°	4930.7	4694.3	4516.2	4339.6	4220.1	4096.4	4029.8	3970.1	3963.3	3957.5	3994.0
40°	3859.4	3694.0	3564.4	3443.3	3361.0	3285.5	3243.9	3211.1	3203.3	3198.9	3221.0
42.5°	3123.6	3012.0	2928.4	2854.6	2804.5	2763.5	2740.6	2722.5	2716.3	2716.5	2729.4
45°	2639.1	2571.3	2517.5	2471.6	2439.6	2453.7	2412.4	2434.0	2405.4	2434.9	2415.5
47.5°	2324.1	2266.4	2233.1	2200.5	2181.2	2165.6	2166.2	2166.4	2172.6	2173.5	2179.9
50°	2081.0	2047.7	2024.5	2003.7	1993.6	1985.4	1988.3	1990.4	1996.3	1996.8	2001.5
52.5°	1901.1	1879.2	1865.2	1852.3	1847.8	1843.2	1845.1	1844.3	1847.0	1845.6	1849.4
55°	1754.7	1744.4	1740.0	1735.2	1735.9	1734.6	1735.5	1730.8	1728.0	1724.5	1727.7
57.5°	1634.6	1633.2	1636.2	1638.1	1643.6	1645.6	1646.9	1641.5	1636.4	1631.8	1634.5
60°	1542.1	1544.3	1551.7	1557.5	1565.4	1569.2	1571.4	1568.3	1564.6	1560.8	1563.1
62.5°	1450.8	1454.3	1463.1	1469.7	1479.3	1484.2	1489.7	1490.0	1491.5	1490.0	1491.6
65°	1344.7	1349.1	1357.0	1362.5	1371.5	1375.9	1381.4	1382.5	1385.5	1384.9	1387.6
67.5°	1264.1	1268.2	1274.8	1280.0	1287.9	1292.5	1297.4	1297.7	1298.8	1298.5	1301.0
70°	1178.3	1180.2	1186.2	1190.5	1198.5	1203.1	1208.8	1210.5	1214.0	1214.6	1217.4
72.5°	1086.7	1085.8	1089.4	1091.3	1097.3	1101.0	1108.2	1112.1	1118.1	1119.7	1121.8
75°	986.9	986.1	990.3	992.0	997.1	1000.8	1008.9	1014.1	1023.2	1027.0	1026.1
77.5°	871.5	873.4	881.3	885.7	892.5	897.2	907.7	916.0	932.9	940.1	932.7
80°	742.3	744.5	752.7	756.8	765.6	771.3	783.0	792.7	807.9	811.2	806.9
82.5°	583.6	584.2	591.5	594.7	606.2	614.6	629.4	637.2	646.5	645.1	644.0
85°	397.9	403.3	412.5	421.7	435.8	449.3	463.4	475.0	466.8	479.6	465.2
87.5°	212.7	212.1	224.5	222.6	242.3	253.8	266.0	271.8	278.3	277.0	277.1
90°	48.5	45.9	46.4	43.4	44.8	41.6	44.0	41.1	44.2	40.4	46.5
92.5°	43.8	42.2	40.2	38.6	36.5	34.9	32.9	31.1	29.3	27.5	29.3
95°	53.2	51.5	49.8	48.1	46.4	44.7	43.0	41.4	39.7	38.0	40.2
97.5°	65.1	64.1	63.2	62.1	61.2	60.2	59.3	58.2	57.2	56.2	57.6
100°	73.4	73.4	73.4	73.4	73.1	73.1	73.1	73.1	73.1	73.1	74.3
102.5°	137.0	133.7	130.5	127.1	123.9	120.6	117.5	114.2	111.1	107.8	112.5
105°	304.0	291.4	278.7	266.1	253.3	240.7	228.2	215.5	202.9	190.3	203.4
107.5°	560.6	537.5	514.5	491.4	468.3	445.4	422.5	399.5	376.6	353.7	374.2
110°	780.6	756.2	731.6	707.3	682.9	658.3	634.0	609.7	585.3	560.9	580.5



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	870.3	854.1	838.3	822.5	806.6	791.0	775.2	759.5	743.8	728.2	737.7
115°	859.1	851.4	843.8	836.2	828.7	821.0	813.5	806.1	798.7	791.2	791.8
117.5°	789.4	786.6	784.0	781.3	778.7	776.1	773.6	771.2	768.7	766.5	761.2
120°	688.8	689.2	689.6	690.3	691.0	691.9	692.4	693.4	694.4	695.4	688.2
122.5°	590.0	591.3	592.9	594.5	596.3	598.0	599.9	601.9	604.1	606.1	599.0
125°	504.5	506.0	507.3	508.9	510.2	512.2	514.0	516.1	518.0	520.3	514.3
127.5°	443.9	444.1	444.0	444.5	444.8	445.5	446.2	447.0	447.9	449.1	445.3
130°	406.8	405.7	404.4	403.5	402.3	401.7	401.2	400.6	400.2	400.0	398.5
132.5°	387.0	385.0	382.8	380.9	379.0	377.5	375.8	374.7	373.4	372.5	372.0
135°	378.0	375.3	372.7	370.1	367.6	365.7	363.3	361.7	359.9	358.3	358.9
137.5°	373.4	370.9	368.1	365.8	363.2	361.3	359.0	357.2	355.5	353.9	354.8
140°	374.3	371.7	369.0	366.7	364.5	362.3	360.3	358.6	356.5	355.3	355.8
142.5°	373.9	371.8	369.2	367.2	364.9	363.2	361.3	359.8	357.9	356.8	357.4
145°	374.5	372.8	371.0	369.3	367.8	366.5	364.8	363.9	362.8	362.0	362.4
147.5°	373.8	372.7	371.2	370.0	368.7	367.7	366.6	365.9	365.0	364.5	364.6
150°	370.9	370.1	369.2	368.5	367.6	367.1	366.4	366.0	365.4	365.1	365.2
152.5°	367.1	366.5	365.6	365.0	364.4	363.9	363.3	363.2	362.7	362.4	362.5
155°	361.7	361.4	361.1	361.0	360.7	360.8	360.5	360.7	360.5	360.7	360.8
157.5°	359.5	359.6	359.5	359.7	359.8	359.9	360.0	360.4	360.4	360.7	361.0
160°	359.6	359.6	359.5	359.6	359.6	359.6	359.8	359.9	360.1	360.2	360.6
162.5°	359.7	360.1	360.3	360.5	360.9	361.2	361.7	362.2	362.5	363.1	363.5
165°	363.1	363.2	363.1	363.2	363.3	363.5	363.6	364.2	364.3	364.7	365.2
167.5°	365.8	366.0	366.0	366.2	366.6	367.0	367.3	367.8	368.3	368.9	369.4
170°	370.6	370.6	370.6	370.6	370.6	370.9	371.1	371.2	371.4	371.7	372.1
172.5°	376.4	376.4	376.1	376.4	376.1	376.4	376.4	376.6	376.6	376.8	376.9
175°	379.5	379.8	380.0	380.3	380.3	380.4	380.6	380.7	380.9	381.1	381.1
177.5°	382.7	382.8	382.8	382.8	382.8	383.0	383.0	383.0	383.0	382.8	382.9
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38607.3	38587.9	38607.7	38587.6	38607.7	38583.6	38599.9	38573.9	38580.6	38553.5	38560.5
5°	40067.1	40036.3	40052.7	40012.7	40016.9	39963.5	39962.5	39900.3	39883.9	39813.1	39782.0
7.5°	41247.5	41237.4	41243.1	41217.3	41214.4	41177.9	41160.6	41109.1	41076.7	41011.6	40967.1
10°	41060.6	41090.7	41098.5	41129.2	41135.5	41165.9	41172.3	41202.7	41209.0	41231.5	41231.7
12.5°	39191.7	39293.9	39318.3	39444.6	39497.7	39642.1	39719.6	39878.7	39973.2	40131.9	40229.4
15°	35591.4	35768.1	35838.6	36085.1	36221.4	36509.1	36690.0	37020.3	37253.5	37604.4	37854.6
17.5°	30636.1	30883.2	30994.7	31328.9	31546.9	31971.6	32277.7	32781.4	33167.1	33727.0	34170.7
20°	25141.2	25415.8	25567.1	25948.4	26205.7	26701.9	27084.0	27703.0	28219.3	28928.7	29535.3
22.5°	19825.2	20086.6	20254.5	20642.5	20932.1	21449.6	21876.7	22530.1	23108.5	23907.9	24635.3
25°	15222.1	15461.5	15613.4	15964.2	16236.3	16711.8	17119.6	17748.0	18314.0	19115.9	19861.7
27.5°	11637.1	11837.6	11984.0	12283.2	12523.1	12926.4	13276.7	13796.1	14283.7	14977.4	15641.6
30°	8909.1	9086.9	9229.3	9489.9	9712.4	10062.0	10370.1	10806.3	11209.8	11761.8	12290.3
32.5°	6808.1	6961.2	7088.1	7316.1	7517.9	7832.7	8110.3	8492.7	8839.1	9307.2	9741.9
35°	5190.8	5492.1	5470.7	5785.2	5835.8	6061.8	6309.4	6643.8	6950.5	7348.6	7718.6
37.5°	4029.0	4113.7	4204.3	4343.4	4489.5	4695.1	4904.3	5312.8	5462.6	5763.5	6069.8
40°	3248.9	3306.2	3366.1	3460.0	3562.4	3707.2	3859.5	4054.4	4254.1	4498.0	4747.2
42.5°	2746.7	2779.1	2817.2	2872.4	2935.5	3027.4	3129.3	3261.4	3400.3	3572.0	3747.3
45°	2454.0	2438.7	2449.9	2479.7	2517.7	2573.5	2637.8	2719.6	2810.0	2921.3	3039.7
47.5°	2181.2	2187.4	2190.8	2206.9	2227.3	2264.7	2303.7	2359.2	2466.5	2499.1	2563.7
50°	2001.0	2004.0	2002.9	2011.1	2021.5	2045.8	2071.1	2108.7	2146.2	2196.0	2243.5
52.5°	1850.0	1854.2	1853.6	1859.0	1864.5	1879.9	1895.9	1922.5	1947.0	1978.7	2005.9
55°	1730.7	1736.5	1738.7	1743.3	1745.9	1754.0	1760.3	1773.1	1783.5	1801.4	1818.0
57.5°	1639.0	1646.9	1650.5	1652.1	1648.8	1648.5	1646.3	1649.0	1651.2	1660.8	1670.1
60°	1566.7	1573.1	1574.1	1573.1	1567.2	1562.9	1556.1	1554.0	1552.9	1557.5	1562.6
62.5°	1491.2	1493.4	1491.8	1490.0	1483.3	1479.2	1472.1	1469.5	1467.2	1470.4	1473.0
65°	1386.6	1388.5	1386.6	1385.5	1379.4	1376.1	1370.2	1368.2	1364.8	1365.7	1365.0
67.5°	1301.6	1303.7	1302.1	1300.5	1296.3	1294.3	1290.0	1287.1	1283.0	1281.5	1278.6
70°	1217.0	1218.6	1216.2	1214.6	1209.8	1208.0	1203.9	1203.0	1199.8	1199.0	1195.8
72.5°	1119.7	1119.7	1116.4	1115.4	1111.8	1111.7	1110.1	1111.5	1111.5	1113.1	1112.4
75°	1020.0	1018.6	1014.4	1013.6	1010.9	1012.2	1010.4	1012.8	1013.1	1016.8	1017.2
77.5°	920.3	915.0	907.0	903.1	897.7	897.1	893.9	896.1	895.4	899.6	901.3
80°	794.2	787.8	777.6	772.5	766.2	765.3	762.4	765.3	763.8	768.8	772.2
82.5°	634.1	628.6	617.9	613.9	606.5	607.2	604.1	607.2	606.8	614.1	618.4
85°	469.0	465.4	454.4	444.6	433.7	427.3	421.1	420.0	418.1	421.1	423.6
87.5°	270.9	267.5	258.9	253.2	234.1	235.0	227.5	227.1	225.3	223.6	227.5
90°	45.2	50.3	49.3	53.9	53.5	58.8	58.8	63.9	63.2	68.1	68.3
92.5°	31.1	32.9	34.8	36.5	38.4	40.2	42.0	43.8	47.7	51.3	55.5
95°	42.2	44.3	46.4	48.5	50.6	52.7	54.8	56.9	62.7	68.4	74.2
97.5°	59.1	60.4	61.8	63.2	64.6	66.0	67.4	68.8	75.0	81.1	87.3
100°	75.4	76.5	77.6	78.7	79.8	81.0	82.1	83.2	95.4	107.2	119.2
102.5°	117.3	122.0	126.8	131.5	136.5	141.2	146.0	150.7	178.2	205.5	232.8
105°	216.3	229.4	242.6	255.6	268.6	281.6	294.7	307.7	351.6	395.2	439.2
107.5°	394.8	415.3	435.9	456.7	477.3	497.9	518.5	539.2	581.8	624.7	667.3
110°	600.2	619.9	639.5	659.2	678.8	698.5	718.3	738.1	763.9	789.5	815.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	747.3	756.8	766.5	776.2	785.8	795.6	805.3	815.1	828.0	840.9	854.0
115°	792.5	793.0	793.9	794.6	795.4	796.1	797.2	798.0	802.4	806.6	811.0
117.5°	755.9	750.8	745.8	740.5	735.4	730.7	725.8	721.1	720.5	720.0	719.7
120°	681.6	674.5	667.7	660.7	654.2	647.4	641.1	634.5	631.5	628.5	625.5
122.5°	592.2	585.3	578.6	571.8	565.3	558.9	552.7	546.3	544.3	542.4	540.5
125°	508.6	502.9	497.4	491.9	486.8	481.6	476.6	471.5	471.9	472.3	472.9
127.5°	442.0	438.6	435.5	432.3	429.6	426.6	424.0	421.2	423.4	425.6	427.8
130°	397.2	395.9	394.9	393.6	393.2	392.2	391.7	390.9	394.4	397.5	401.0
132.5°	372.2	372.2	372.5	372.8	373.3	373.9	374.7	375.4	379.1	382.7	386.5
135°	359.5	360.2	361.3	362.2	363.7	364.8	366.4	367.6	371.4	374.8	378.5
137.5°	355.8	356.7	358.0	359.2	361.0	362.4	364.3	365.8	368.7	371.6	374.6
140°	356.7	357.5	358.7	359.8	361.1	362.4	364.1	365.3	368.0	370.2	372.6
142.5°	358.4	359.0	360.1	361.2	362.5	363.6	365.0	366.1	368.1	369.8	372.0
145°	363.1	363.6	364.6	365.3	366.3	367.3	368.4	369.4	370.8	372.0	373.3
147.5°	365.2	365.6	366.3	367.1	367.9	368.6	369.3	370.0	371.2	372.0	373.0
150°	365.6	365.9	366.2	366.6	367.3	367.9	368.6	369.0	369.8	370.5	371.5
152.5°	363.0	363.2	363.5	363.9	364.4	364.8	365.3	365.9	366.7	367.3	368.1
155°	361.3	361.9	362.4	362.9	363.5	363.8	364.6	364.9	365.7	366.2	367.0
157.5°	361.6	361.9	362.6	362.9	363.6	364.0	364.6	365.0	365.7	366.1	366.7
160°	361.3	362.1	362.6	363.3	364.0	364.6	365.3	366.0	366.6	367.1	367.6
162.5°	364.1	364.6	365.2	365.6	366.1	366.7	367.2	367.7	368.7	369.0	369.9
165°	366.0	366.5	367.3	367.7	368.7	369.3	370.0	370.6	371.0	371.5	372.0
167.5°	370.0	370.5	371.4	371.9	372.6	373.2	373.9	374.4	375.0	375.3	375.8
170°	372.6	373.2	373.8	374.3	374.9	375.4	376.0	376.5	377.1	377.6	378.2
172.5°	377.3	377.8	378.2	378.4	378.8	379.5	379.8	380.1	380.7	381.1	381.5
175°	381.1	381.1	381.2	381.4	381.5	381.5	381.7	382.0	382.1	382.3	382.3
177.5°	383.1	383.2	383.4	383.5	383.7	383.7	383.9	384.0	384.0	384.0	384.0
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38533.5	38535.2	38504.1	38502.4	38473.3	38469.6	38441.2	38432.6	38409.6	38401.2	38377.7
5°	39702.6	39664.7	39577.2	39525.8	39439.4	39382.1	39288.5	39227.5	39137.2	39069.1	38978.2
7.5°	40885.0	40826.2	40728.0	40648.4	40528.4	40432.7	40292.3	40177.3	40025.3	39893.6	39733.9
10°	41231.7	41222.7	41197.7	41161.2	41105.4	41042.7	40947.1	40847.5	40714.3	40569.5	40392.1
12.5°	40378.5	40470.7	40596.3	40670.7	40761.4	40801.0	40838.2	40828.9	40804.4	40731.3	40628.6
15°	38217.1	38476.0	38818.8	39084.5	39390.2	39612.3	39857.7	40010.5	40163.0	40233.4	40276.4
17.5°	34778.8	35269.0	35883.7	36393.2	36980.9	37453.0	37970.5	38360.1	38760.7	39047.8	39307.3
20°	30362.3	31072.5	31941.9	32710.0	33603.1	34379.1	35229.6	35927.8	36647.8	37210.9	37743.7
22.5°	25571.9	26415.4	27466.5	28440.2	29591.5	30626.2	31793.5	32809.6	33870.4	34756.7	35613.6
25°	20861.3	21786.3	22935.7	24022.0	25325.9	26529.4	27913.9	29180.3	30551.4	31741.8	32917.8
27.5°	16559.9	17468.1	18641.5	19797.8	21176.6	22459.0	23942.5	25337.6	26898.8	28338.5	29811.4
30°	13024.5	13794.8	14846.9	15966.9	17326.8	18631.8	20131.3	21566.2	23190.3	24762.3	26421.2
32.5°	10318.9	10905.7	11732.9	12680.0	13934.7	15177.0	16604.8	17990.0	19589.3	21177.3	22902.6
35°	8195.1	8652.8	9283.5	10022.5	11085.1	12156.0	13418.9	14678.5	16170.7	17677.5	19354.5
37.5°	6462.3	6833.6	7327.6	7882.7	8735.0	9613.8	10649.5	11693.7	12990.3	14326.0	15845.8
40°	5046.4	5347.1	5731.6	6145.6	6789.2	7466.3	8267.1	9077.0	10118.7	11210.3	12468.1
42.5°	3964.2	4186.2	4457.7	4760.3	5360.8	5720.2	6263.4	6849.1	7614.8	8407.4	9353.0
45°	3183.6	3335.0	3523.4	3726.3	4005.0	4310.0	4681.9	5071.9	5799.4	6156.2	6731.3
47.5°	2658.6	2760.3	2880.1	3008.0	3172.3	3349.7	3570.3	3795.8	4087.5	4389.8	4744.2
50°	2305.1	2408.4	2449.6	2515.8	2610.9	2712.2	2836.6	2961.0	3117.4	3275.9	3458.4
52.5°	2042.7	2076.4	2121.1	2163.3	2222.2	2337.5	2374.8	2439.8	2527.6	2613.4	2709.1
55°	1842.3	1864.2	1893.3	1918.7	1954.4	1988.4	2037.6	2080.8	2139.3	2191.0	2254.7
57.5°	1686.3	1700.3	1720.5	1737.1	1760.3	1779.4	1808.2	1831.7	1865.3	1894.6	1933.2
60°	1573.0	1582.3	1595.8	1606.7	1621.4	1631.5	1645.8	1656.7	1674.5	1689.4	1710.9
62.5°	1480.4	1485.2	1494.1	1500.5	1509.8	1514.9	1522.5	1527.3	1537.0	1544.6	1556.6
65°	1369.3	1370.5	1376.4	1379.1	1386.5	1389.1	1395.3	1397.6	1405.7	1411.2	1421.8
67.5°	1278.3	1275.8	1275.9	1273.8	1274.8	1272.6	1273.3	1271.0	1274.2	1275.9	1284.0
70°	1195.2	1191.7	1190.5	1186.7	1185.6	1181.7	1180.6	1177.0	1176.6	1175.5	1178.3
72.5°	1114.2	1113.3	1113.6	1110.9	1110.6	1107.9	1108.0	1106.3	1108.2	1109.0	1112.7
75°	1021.2	1021.5	1023.2	1020.9	1021.5	1019.3	1020.2	1018.0	1019.1	1018.8	1022.4
77.5°	907.8	910.5	915.4	914.4	916.0	913.5	914.6	911.6	912.5	910.5	911.9
80°	780.3	786.0	792.6	792.4	795.2	793.3	795.9	793.0	794.2	790.8	789.9
82.5°	629.0	633.8	640.9	641.2	647.4	648.5	655.4	655.1	659.5	656.7	654.7
85°	430.0	433.3	439.5	442.9	449.2	453.2	459.9	462.6	457.7	466.5	459.6
87.5°	224.5	232.9	228.3	239.1	236.5	247.5	245.2	255.4	253.4	262.2	261.0
90°	74.7	75.4	82.2	83.3	91.4	93.4	97.9	95.4	99.7	97.5	101.6
92.5°	59.2	63.4	67.4	71.3	75.2	79.3	75.5	71.8	68.2	64.7	60.9
95°	79.8	85.6	91.3	97.1	102.8	108.5	102.4	96.3	90.2	84.0	77.8
97.5°	93.4	99.7	105.8	112.0	118.3	124.5	117.2	109.9	102.7	95.5	88.1
100°	131.1	143.0	154.9	166.9	178.9	190.8	177.3	163.8	150.4	136.8	123.3
102.5°	260.4	287.6	315.0	342.5	369.8	397.2	368.6	340.0	311.2	282.5	253.6
105°	482.9	526.8	570.4	614.3	658.0	702.2	655.5	609.0	562.3	515.9	469.2
107.5°	710.2	752.8	795.8	838.4	881.2	924.2	877.1	829.8	782.8	735.5	688.2
110°	841.2	866.9	892.7	918.7	944.4	970.4	936.0	901.6	867.3	832.8	798.4



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	867.0	880.3	893.2	906.5	919.5	932.7	908.3	883.9	859.3	834.9	810.3
115°	815.5	819.8	824.2	828.8	833.1	837.5	821.2	804.8	788.5	772.1	755.5
117.5°	719.3	719.1	718.7	718.7	718.1	717.8	708.8	699.9	690.8	681.8	672.6
120°	622.4	619.5	616.6	613.6	610.5	607.4	603.9	600.5	596.7	593.1	589.3
122.5°	538.7	536.9	535.0	533.2	531.1	529.2	528.1	527.1	525.8	524.7	523.3
125°	473.4	473.8	474.3	474.8	475.1	475.5	475.0	474.9	474.4	474.2	473.6
127.5°	429.8	432.0	434.0	436.1	438.0	440.0	440.1	440.7	440.8	441.0	441.1
130°	404.1	407.6	410.7	413.7	416.7	420.1	419.9	420.1	420.1	420.2	420.1
132.5°	390.2	393.8	397.3	401.1	404.5	408.0	407.9	408.0	407.6	407.7	407.6
135°	382.0	385.5	388.8	392.4	395.5	398.8	398.6	398.5	398.0	398.1	397.7
137.5°	377.2	380.4	383.0	385.8	388.4	391.2	390.8	390.6	390.3	390.3	389.9
140°	374.9	377.2	379.4	381.7	383.8	386.1	385.5	385.1	384.6	384.1	383.5
142.5°	373.7	375.5	377.1	379.1	380.6	382.4	381.3	380.5	379.6	378.8	377.8
145°	374.6	376.0	377.2	378.4	379.3	380.7	379.4	378.4	377.0	376.1	374.8
147.5°	373.8	374.8	375.4	376.4	376.8	377.8	376.6	375.5	374.3	373.0	371.8
150°	372.1	373.0	373.7	374.3	374.9	375.7	374.3	373.1	371.7	370.4	369.2
152.5°	368.8	369.5	370.1	370.6	371.3	371.7	370.4	369.4	368.0	366.6	365.4
155°	367.3	367.9	368.2	368.7	368.9	369.3	368.0	367.3	366.1	365.0	363.7
157.5°	367.1	367.6	368.1	368.4	368.7	369.1	368.2	367.5	366.5	365.9	364.8
160°	368.0	368.5	368.8	369.1	369.6	369.7	369.0	368.6	367.9	367.1	366.2
162.5°	370.2	371.0	371.4	371.8	372.4	372.8	372.0	371.4	370.4	369.7	368.7
165°	372.4	372.8	373.3	373.7	373.9	374.2	373.8	373.3	372.7	372.2	371.5
167.5°	376.1	376.8	377.0	377.4	377.6	377.9	377.2	377.0	376.3	375.7	375.0
170°	378.6	379.0	379.6	379.9	380.3	380.5	380.2	379.8	379.3	378.8	378.2
172.5°	382.0	382.3	382.5	382.9	383.1	383.5	383.1	382.5	382.1	381.5	380.9
175°	382.3	382.5	382.8	382.8	382.8	382.9	382.5	382.1	381.7	381.2	380.9
177.5°	384.0	384.0	384.0	383.9	383.9	383.9	383.7	383.4	383.1	382.8	382.3
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9	38129.9
2.5°	38369.5	38352.8	38342.1	38328.4	38320.0	38309.4	38301.6	38295.0	38289.6	38284.7	38280.9
5°	38909.0	38823.2	38756.6	38684.5	38625.4	38566.3	38520.7	38483.0	38457.0	38437.6	38426.0
7.5°	39595.9	39438.9	39299.3	39152.3	39020.6	38891.1	38779.4	38683.1	38610.9	38564.2	38535.7
10°	40209.4	39999.2	39791.3	39572.6	39365.1	39164.0	38978.2	38814.9	38685.6	38599.7	38549.4
12.5°	40484.4	40305.3	40093.1	39855.5	39601.3	39344.0	39093.4	38867.3	38677.5	38550.2	38476.7
15°	40242.2	40168.6	40024.6	39840.2	39599.0	39333.1	39038.7	38762.0	38507.5	38342.4	38246.8
17.5°	39454.4	39556.9	39545.8	39475.4	39301.9	39078.2	38778.2	38467.4	38149.0	37928.4	37807.9
20°	38124.8	38447.3	38610.9	38694.9	38626.8	38481.6	38210.0	37894.6	37523.5	37235.5	37059.7
22.5°	36256.5	36825.9	37180.7	37440.3	37495.4	37446.0	37206.1	36906.1	36492.6	36146.3	35886.7
25°	33851.3	34685.5	35246.3	35685.8	35856.6	35900.7	35696.7	35398.3	34937.2	34533.9	34177.3
27.5°	31018.4	32102.3	32851.0	33441.7	33708.3	33824.0	33636.1	33331.8	32786.3	32304.8	31839.1
30°	27829.1	29115.0	30016.5	30724.7	31049.8	31202.6	31003.0	30663.3	30028.5	29449.1	28862.4
32.5°	24415.5	25822.7	26805.0	27574.2	27896.3	28039.9	27779.0	27397.4	26663.7	25981.2	25296.9
35°	20841.6	22262.0	23252.5	24001.2	24271.1	24357.8	24024.0	23582.9	22770.1	22020.9	21274.9
37.5°	17194.8	18516.3	19416.5	20088.5	20255.6	20270.5	19868.4	19381.2	18526.8	17788.2	17045.5
40°	13579.6	14694.0	15420.9	15958.7	16016.7	15965.0	15527.7	15037.5	14238.2	13576.5	12924.4
42.5°	10174.2	11015.4	11534.1	11902.6	11880.7	11778.5	11377.6	10956.2	10296.8	9792.8	9279.7
45°	7256.8	7811.4	8114.6	8330.3	8261.1	8163.7	7851.7	7556.3	7108.3	6782.7	6437.9
47.5°	5041.4	5703.7	5588.4	6010.0	5646.8	5886.7	5387.1	5111.6	4873.8	4700.8	4505.9
50°	3609.2	3761.0	3834.3	3884.3	3857.8	3820.9	3731.1	3650.8	3542.2	3463.0	3370.8
52.5°	2787.3	2863.1	2904.7	2934.8	2928.9	2915.5	2876.3	2840.6	2789.7	2756.2	2715.7
55°	2361.0	2362.1	2438.5	2405.7	2454.2	2397.4	2419.8	2356.9	2367.0	2313.0	2276.8
57.5°	1961.9	1993.0	2007.0	2020.6	2016.7	2014.3	1999.1	1991.6	1974.4	1969.2	1957.0
60°	1725.7	1742.0	1745.3	1751.6	1746.4	1744.4	1732.5	1728.3	1716.8	1714.7	1706.7
62.5°	1563.8	1572.2	1572.2	1572.2	1565.4	1558.8	1545.7	1538.8	1529.0	1526.9	1522.2
65°	1428.7	1437.3	1438.7	1440.5	1435.6	1430.5	1418.9	1411.4	1401.4	1397.6	1392.3
67.5°	1289.2	1298.4	1301.5	1306.2	1303.4	1302.3	1294.4	1291.4	1284.8	1283.2	1278.3
70°	1179.6	1183.5	1183.2	1183.1	1176.9	1171.4	1162.1	1157.8	1150.9	1149.5	1144.9
72.5°	1114.5	1117.2	1115.6	1113.1	1105.1	1096.9	1086.1	1078.2	1069.2	1063.6	1057.1
75°	1022.9	1026.4	1024.1	1022.6	1015.3	1010.0	1001.3	997.0	990.6	988.8	984.4
77.5°	910.2	911.9	908.3	907.8	902.3	898.9	892.4	891.3	886.6	886.7	882.5
80°	784.8	783.9	777.9	776.8	771.3	769.9	764.8	765.1	761.4	762.9	759.9
82.5°	645.8	642.3	634.5	632.2	625.9	625.3	622.0	624.8	622.5	625.9	623.9
85°	462.8	463.8	460.4	460.4	458.6	459.1	458.8	461.0	461.3	464.3	464.2
87.5°	258.1	261.7	261.0	264.4	264.2	268.0	269.3	275.0	275.7	280.9	280.9
90°	99.5	104.3	101.9	106.9	106.0	111.7	111.9	117.5	116.9	121.8	120.1
92.5°	57.3	53.7	50.2	46.4	44.5	42.5	41.2	38.8	37.3	35.2	33.4
95°	71.6	65.5	59.3	53.2	51.1	48.9	46.8	44.7	42.6	40.5	38.4
97.5°	80.9	73.6	66.3	59.1	57.2	55.4	53.5	51.7	49.8	48.1	46.2
100°	109.7	96.1	82.7	68.9	67.4	65.9	64.3	62.8	61.2	59.5	57.9
102.5°	225.0	196.2	167.3	138.5	133.0	127.6	122.1	116.5	111.1	105.6	100.1
105°	422.7	375.9	329.3	282.6	267.8	252.9	238.0	223.1	208.3	193.5	178.6
107.5°	641.0	593.6	546.2	498.8	471.6	444.1	416.7	389.1	361.9	334.2	306.8
110°	763.9	729.5	694.9	660.3	638.5	616.4	594.2	572.1	550.1	528.0	505.8



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	785.7	761.1	736.4	711.5	701.7	691.7	681.9	671.8	661.7	651.6	641.6
115°	738.9	722.5	705.8	689.0	685.8	682.2	678.9	675.3	672.0	668.4	664.7
117.5°	663.6	654.4	645.2	635.9	636.6	637.3	638.2	638.7	639.3	639.8	640.2
120°	585.5	581.7	578.2	574.3	577.6	580.7	584.0	586.9	590.1	592.9	595.9
122.5°	522.3	520.9	519.8	518.2	522.3	526.2	529.9	533.7	537.4	540.7	544.3
125°	473.4	472.7	472.3	471.6	475.9	479.8	483.7	487.3	491.2	494.5	498.1
127.5°	441.5	441.6	442.0	441.9	445.1	447.7	450.7	453.2	456.1	458.4	460.8
130°	420.2	420.0	420.2	420.0	422.8	425.5	428.3	430.5	433.1	435.1	437.2
132.5°	407.6	407.3	407.3	407.0	409.4	411.3	413.5	415.0	416.8	418.0	419.4
135°	397.7	397.3	397.2	396.7	398.7	400.8	402.6	404.1	405.8	406.9	408.2
137.5°	389.7	389.3	389.1	388.7	390.5	392.3	393.9	395.4	396.8	398.1	399.0
140°	383.2	382.5	382.3	381.5	383.3	384.8	386.4	387.6	389.0	389.8	390.8
142.5°	376.9	375.8	375.3	374.1	375.5	376.6	377.7	378.7	379.7	380.5	381.0
145°	373.7	372.3	371.4	370.0	371.1	371.9	372.9	373.7	374.3	374.7	375.3
147.5°	370.9	369.5	368.2	367.0	367.9	368.5	369.0	369.5	370.1	370.4	370.7
150°	367.8	366.2	364.8	363.4	364.0	364.5	364.8	365.4	365.9	366.0	366.2
152.5°	363.9	362.6	361.1	359.6	360.1	360.4	360.6	360.7	361.0	361.2	361.3
155°	362.7	361.4	360.2	358.7	359.1	359.2	359.4	359.5	359.5	359.5	359.5
157.5°	363.9	362.6	361.9	360.6	360.7	360.6	360.7	360.3	360.3	360.0	359.7
160°	365.5	364.6	363.7	362.7	362.5	362.4	362.4	362.0	361.9	361.5	361.1
162.5°	367.7	366.7	365.6	364.5	364.4	364.3	364.2	363.7	363.6	363.2	362.9
165°	370.9	370.1	369.4	368.5	368.3	368.0	367.9	367.3	367.1	366.4	366.0
167.5°	374.3	373.6	372.8	371.8	371.8	371.8	371.7	371.4	371.3	370.8	370.7
170°	377.7	377.0	376.5	375.7	375.5	375.4	375.1	374.8	374.3	374.1	373.6
172.5°	380.3	379.7	379.0	378.2	378.2	378.0	377.7	377.6	377.1	376.9	376.8
175°	380.3	379.9	379.2	378.8	378.6	378.5	378.3	378.2	378.0	377.8	377.5
177.5°	382.1	381.8	381.2	380.9	380.9	380.9	380.7	380.6	380.6	380.4	380.3
180°	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P1444837
 CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	38129.9	38129.9
2.5°	38277.6	38275.6
5°	38419.9	38417.6
7.5°	38528.1	38527.5
10°	38540.9	38547.5
12.5°	38464.0	38469.3
15°	38239.4	38249.9
17.5°	37810.1	37823.8
20°	37070.5	37084.8
22.5°	35872.7	35878.6
25°	34131.3	34106.5
27.5°	31757.2	31714.7
30°	28739.2	28698.0
32.5°	25140.9	25115.2
35°	21090.4	21074.2
37.5°	16826.0	16792.9
40°	12686.0	12589.7
42.5°	9054.9	8885.8
45°	6257.8	6057.3
47.5°	4368.6	4244.7
50°	3311.3	3271.3
52.5°	2698.1	2688.8
55°	2276.6	2272.5
57.5°	1959.7	1958.3
60°	1710.9	1710.5
62.5°	1525.4	1526.0
65°	1394.7	1395.0
67.5°	1279.6	1278.8
70°	1146.6	1145.6
72.5°	1055.1	1053.5
75°	984.4	983.4
77.5°	883.8	882.3
80°	762.0	759.9
82.5°	626.7	624.5
85°	467.5	467.6
87.5°	286.0	285.9
90°	124.7	122.2
92.5°	31.9	30.3
95°	36.3	34.2
97.5°	44.4	42.6
100°	56.5	54.9
102.5°	94.7	89.2
105°	163.8	149.0
107.5°	279.3	251.9
110°	483.7	461.6



TEST NUMBER: P1444837
CATALOG NUMBER: EHBR1-48-UNV-TA-L940-UPL24

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	631.5	621.4
115°	660.7	657.1
117.5°	640.6	640.8
120°	598.4	601.2
122.5°	547.2	550.5
125°	501.1	504.3
127.5°	462.7	464.7
130°	438.5	440.4
132.5°	420.4	421.3
135°	408.9	409.7
137.5°	399.6	400.2
140°	391.2	391.8
142.5°	381.4	381.7
145°	375.5	375.7
147.5°	370.4	370.6
150°	366.1	366.1
152.5°	361.0	361.0
155°	359.2	359.1
157.5°	359.1	358.9
160°	360.6	360.3
162.5°	362.3	362.0
165°	365.3	364.7
167.5°	370.0	370.0
170°	373.2	372.9
172.5°	376.3	376.0
175°	377.4	377.2
177.5°	380.3	380.0
180°	382.3	382.3

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-7

Test Date: 08/04/2025

Luminaire Tested: EHBR-60-L940-N

Data in this report applies to families of products including EHBR-60-L940-N

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-472-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/05/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Metalux
 Catalog Number: **EHBR-60-L940-N**
 Description: Elevate Round Highbay at, 60000 lumens, 4000K 90CRI LEDs with N lens

Spectral Parameters

CCT (K): 3963
 CIE u': 0.2267
 CIE v': 0.5003
 Duv: -0.0016
 CIE x: 0.3810
 CIE y: 0.3738
 CIE z: 0.2453
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 580
 Purity: 26.49712
 Rf: 90.7
 Rg: 101

CRI (Ra):	93.4		
R1:	95.2	R9:	66.4
R2:	95.1	R10:	86.6
R3:	93.3	R11:	94.4
R4:	94.5	R12:	75.4
R5:	94.2	R13:	95.0
R6:	92.9	R14:	95.4
R7:	94.0	R15:	92.8
R8:	87.7		



Test Conditions

Stabilization Time: 44M
 Operation Time: 1H 44M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-7


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-7

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

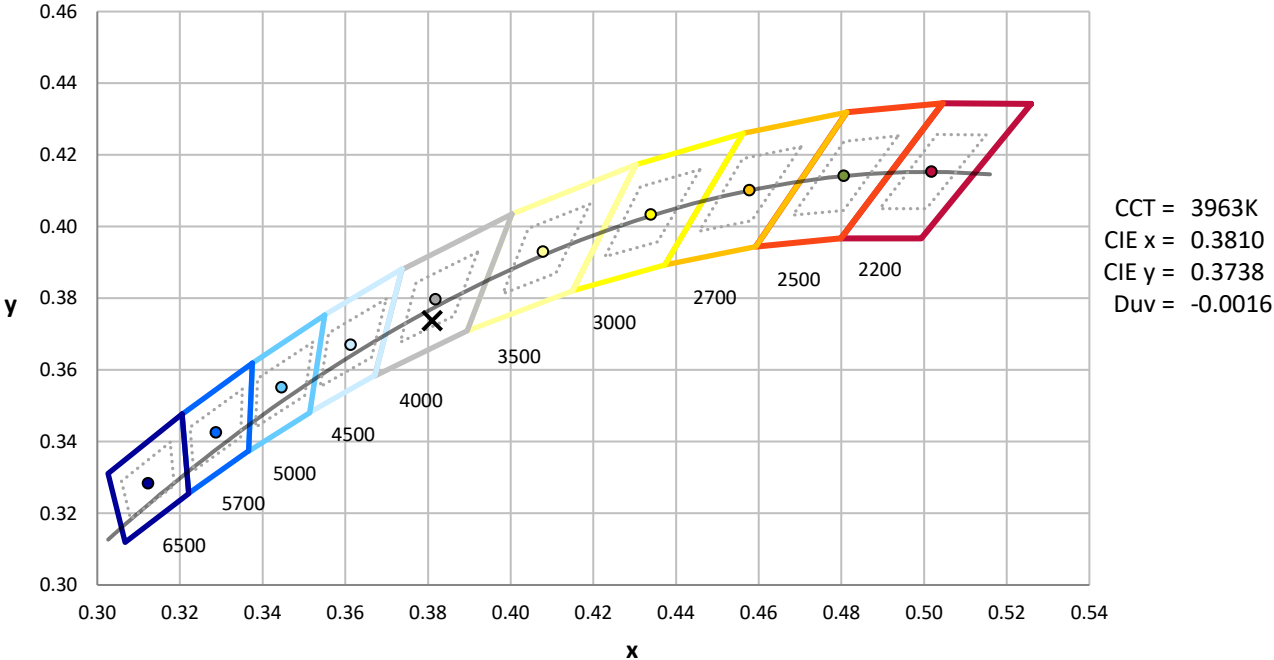

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-7

Photopic Flux vs. Wavelength

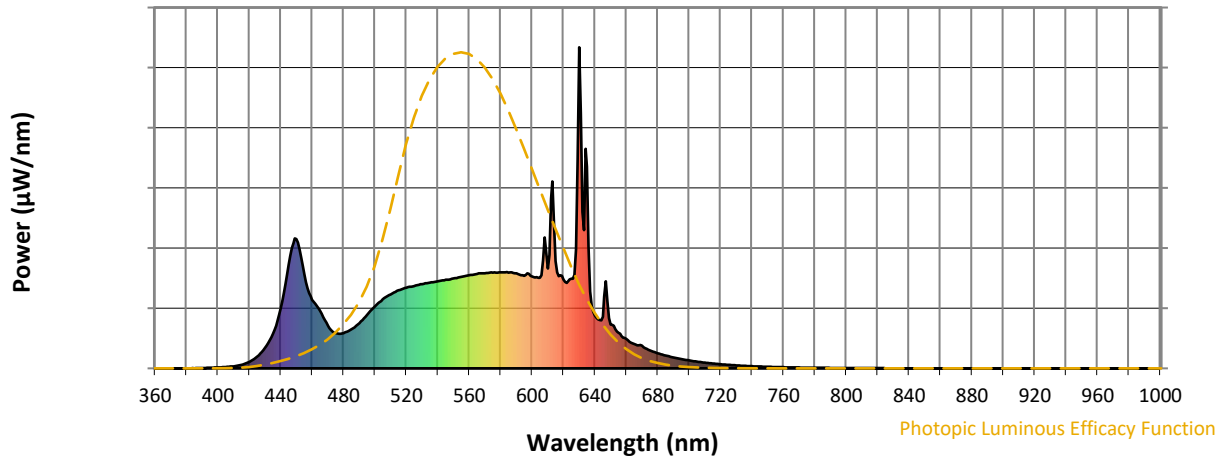


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-7

Scotopic Flux vs. Wavelength

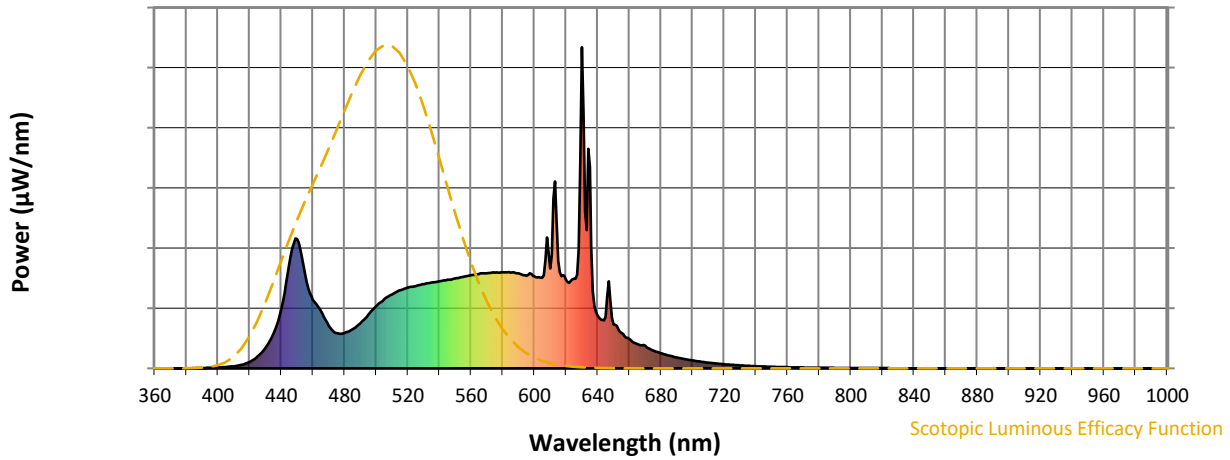


Scotopic Lumens: NR

S/P: 1.76

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-7

Melanopic Flux vs. Wavelength

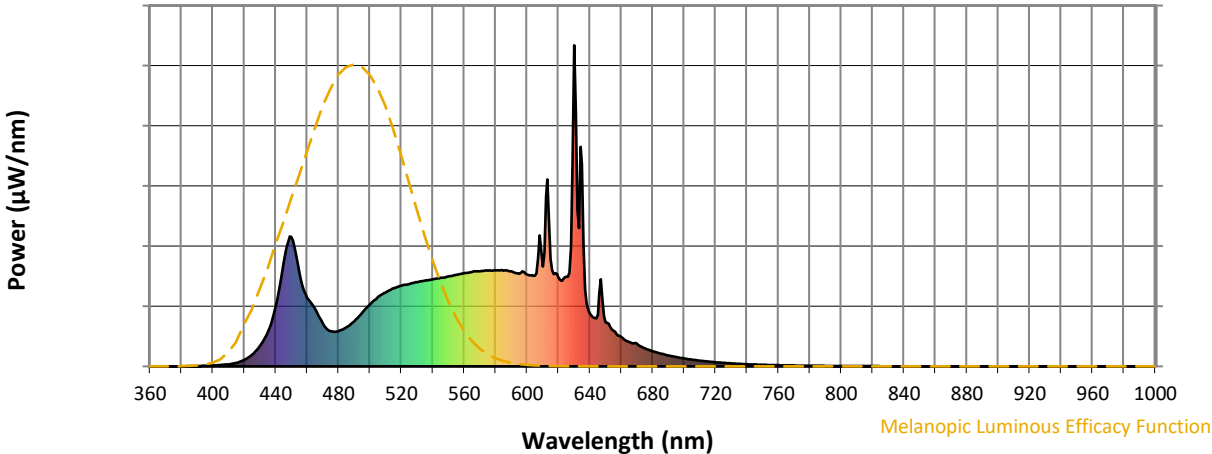


Melanopic Lumens: NR M/P: 3.64





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	141	NR	620	276	NR	750	5	NR	880	0	NR
365	0	NR	495	167	NR	625	279	NR	755	4	NR	885	0	NR
370	0	NR	500	193	NR	630	1000	NR	760	4	NR	890	0	NR
375	0	NR	505	215	NR	635	628	NR	765	3	NR	895	0	NR
380	0	NR	510	230	NR	640	164	NR	770	3	NR	900	0	NR
385	0	NR	515	243	NR	645	161	NR	775	2	NR	905	0	NR
390	1	NR	520	251	NR	650	137	NR	780	2	NR	910	0	NR
395	2	NR	525	256	NR	655	111	NR	785	2	NR	915	0	NR
400	3	NR	530	262	NR	660	92	NR	790	1	NR	920	0	NR
405	4	NR	535	267	NR	665	76	NR	795	1	NR	925	0	NR
410	6	NR	540	271	NR	670	71	NR	800	1	NR	930	0	NR
415	11	NR	545	276	NR	675	56	NR	805	1	NR	935	0	NR
420	20	NR	550	280	NR	680	47	NR	810	1	NR	940	0	NR
425	37	NR	555	285	NR	685	40	NR	815	1	NR	945	0	NR
430	63	NR	560	290	NR	690	34	NR	820	1	NR	950	0	NR
435	108	NR	565	294	NR	695	29	NR	825	1	NR	955	0	NR
440	186	NR	570	296	NR	700	25	NR	830	0	NR	960	0	NR
445	323	NR	575	298	NR	705	21	NR	835	0	NR	965	0	NR
450	403	NR	580	299	NR	710	18	NR	840	0	NR	970	0	NR
455	293	NR	585	298	NR	715	15	NR	845	0	NR	975	0	NR
460	214	NR	590	296	NR	720	13	NR	850	0	NR	980	0	NR
465	180	NR	595	288	NR	725	11	NR	855	0	NR	985	0	NR
470	132	NR	600	286	NR	730	9	NR	860	0	NR	990	0	NR
475	109	NR	605	282	NR	735	8	NR	865	0	NR	995	0	NR
480	110	NR	610	311	NR	740	7	NR	870	0	NR	1000	0	NR
485	121	NR	615	334	NR	745	6	NR	875	0	NR			

Summary

$R_f = 90.7$
 $R_g = 101$
 $CIE R_a = 93.4$
 $R_9 = 66.4$

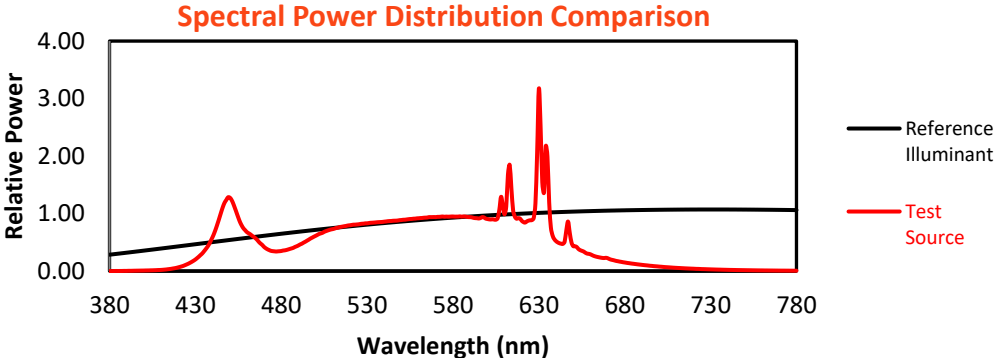


Color Vector Graphics

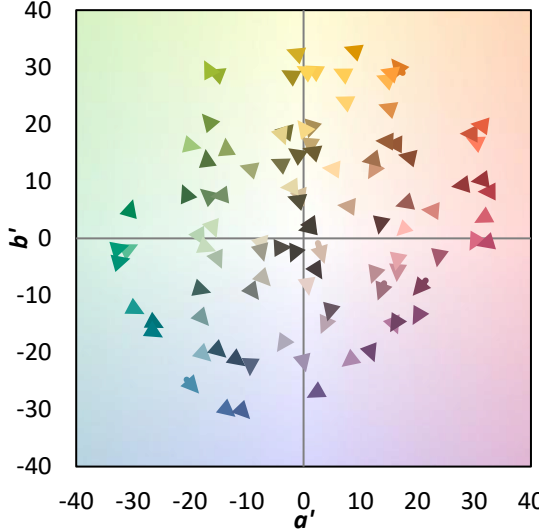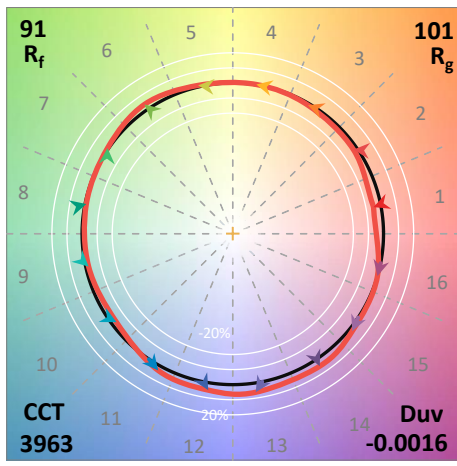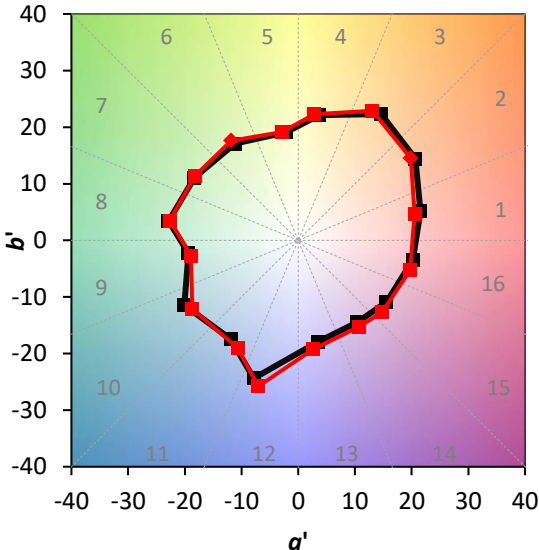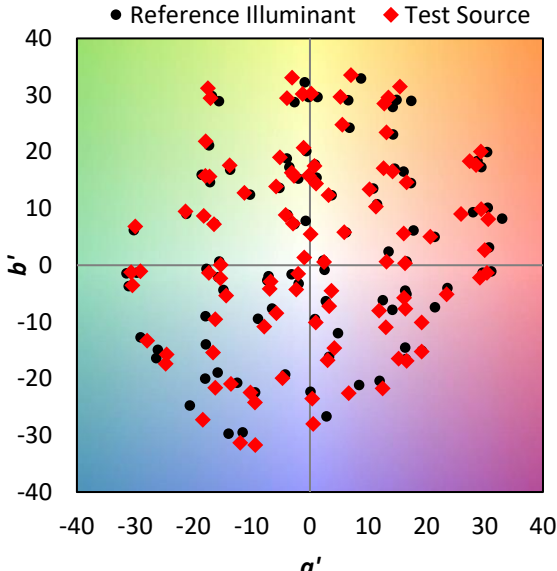

Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 90	CES51 = 99	CES76 = 83
CES02 = 62	CES27 = 93	CES52 = 97	CES77 = 87
CES03 = 31	CES28 = 94	CES53 = 95	CES78 = 79
CES04 = 69	CES29 = 91	CES54 = 96	CES79 = 94
CES05 = 49	CES30 = 98	CES55 = 95	CES80 = 91
CES06 = 50	CES31 = 92	CES56 = 95	CES81 = 80
CES07 = 42	CES32 = 84	CES57 = 94	CES82 = 96
CES08 = 41	CES33 = 95	CES58 = 95	CES83 = 95
CES09 = 29	CES34 = 90	CES59 = 98	CES84 = 93
CES10 = 74	CES35 = 94	CES60 = 93	CES85 = 82
CES11 = 57	CES36 = 84	CES61 = 93	CES86 = 84
CES12 = 63	CES37 = 92	CES62 = 90	CES87 = 90
CES13 = 43	CES38 = 93	CES63 = 92	CES88 = 97
CES14 = 74	CES39 = 98	CES64 = 91	CES89 = 84
CES15 = 71	CES40 = 96	CES65 = 88	CES90 = 99
CES16 = 47	CES41 = 98	CES66 = 88	CES91 = 74
CES17 = 49	CES42 = 89	CES67 = 87	CES92 = 78
CES18 = 56	CES43 = 89	CES68 = 87	CES93 = 87
CES19 = 71	CES44 = 99	CES69 = 88	CES94 = 75
CES20 = 66	CES45 = 93	CES70 = 84	CES95 = 83
CES21 = 85	CES46 = 95	CES71 = 80	CES96 = 91
CES22 = 78	CES47 = 92	CES72 = 93	CES97 = 93
CES23 = 91	CES48 = 96	CES73 = 78	CES98 = 93
CES24 = 90	CES49 = 93	CES74 = 92	CES99 = 94
CES25 = 71	CES50 = 99	CES75 = 81	

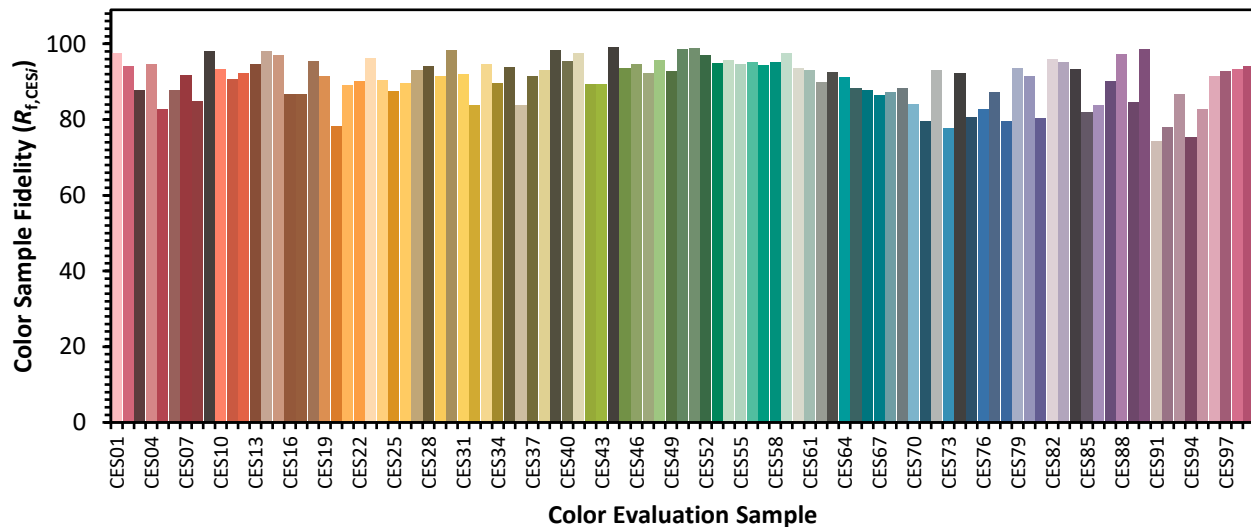

Color Rendition by Hue-Angle Bin



Measure Comparisons

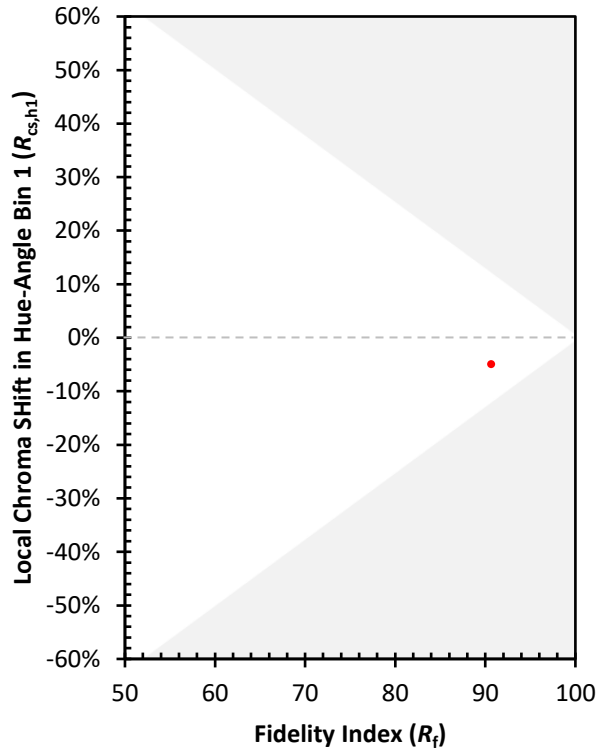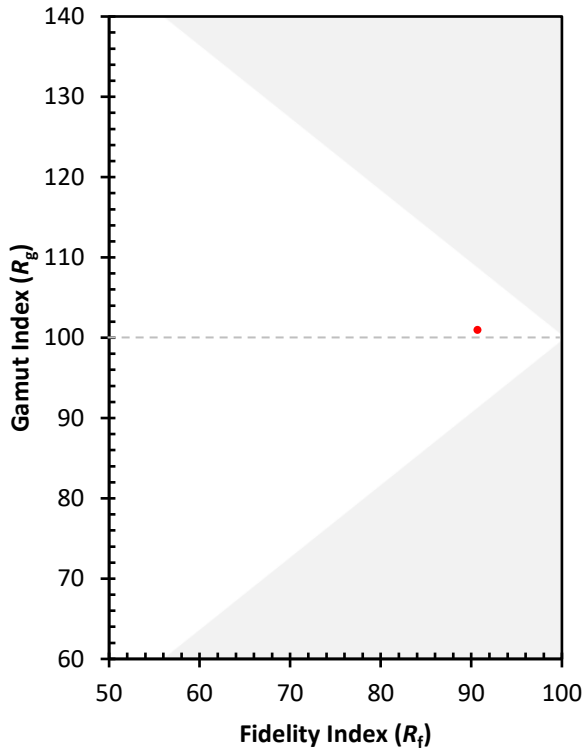

(END OF REPORT)