

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number:

Luminaire Tested: EHBR1-24-UNV-ASM-L950-UPL12

Issue Date: 3/20/2026

Test Information

Test Method: LM-79-2019
Report Number: REPORT IS A COMBINATION OF REPORTS P1431708 AND P1431635
Test Lab: INNOVATION CENTER
Issue Date: 3/20/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: EHBR1-24-UNV-ASM-L950-UPL12
Description: Elevate Round Highbay at, 24000 lumens, 5000K 90CRI LEDs with ASM lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 24142.1 lumens
Efficiency: N/A
Efficacy: 177.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.99 / 0.92
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')
CIE Type: Direct

Input Watts (W): 135.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER:
CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

Luminous Intensity Polar Plot

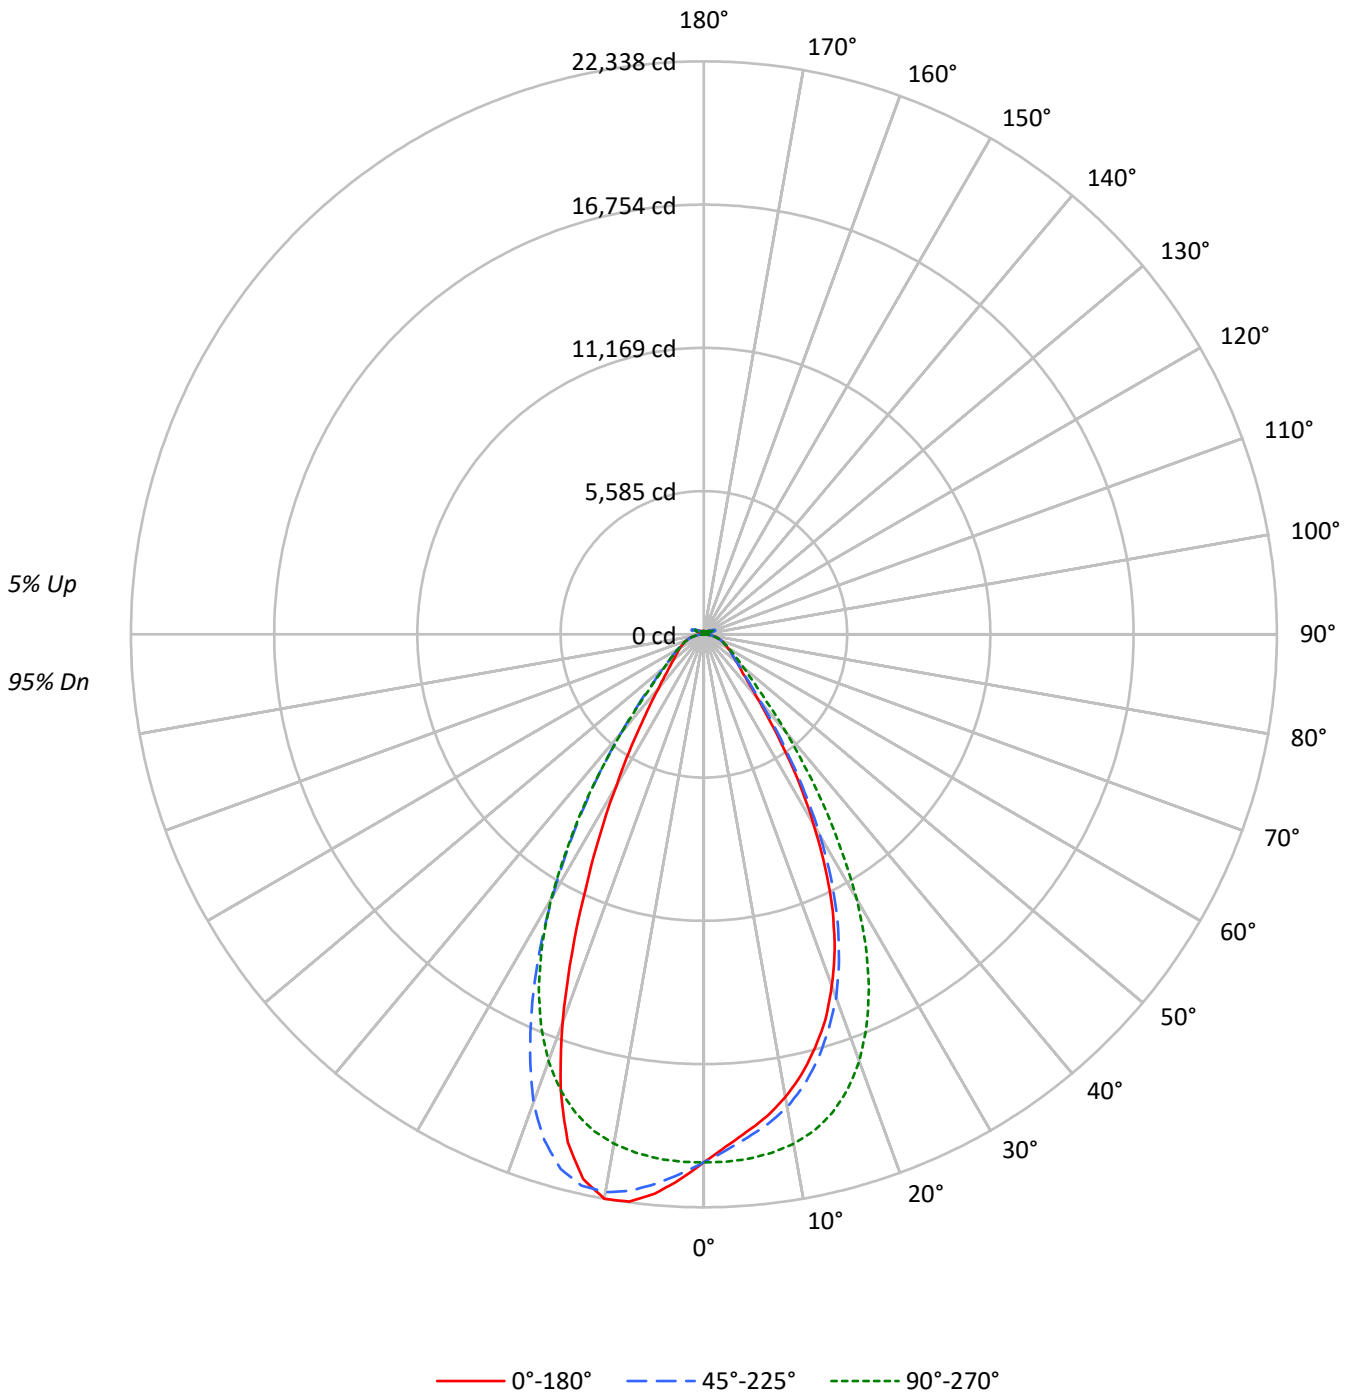



TEST NUMBER:

CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	118	118	118	118	115	115	115	115	108	108	108	103	103	103	98	98	98	98	98	98	95
1	111	107	104	101	108	105	102	99	100	97	95	95	93	92	91	90	88	88	88	88	86
2	104	98	93	89	101	96	91	87	92	88	85	88	85	82	84	82	80	84	82	80	78
3	97	90	84	79	95	88	82	78	84	80	76	81	77	74	78	75	72	78	75	72	70
4	91	82	76	71	89	81	75	70	78	73	69	75	71	68	73	69	66	73	69	66	64
5	86	76	69	64	84	75	69	64	73	67	63	70	66	62	68	64	61	68	64	61	59
6	81	71	64	59	79	70	63	59	68	62	58	66	61	57	64	60	56	64	60	56	55
7	77	66	59	54	75	65	59	54	63	58	53	62	57	53	60	56	52	60	56	52	51
8	72	62	55	50	71	61	55	50	59	54	50	58	53	49	57	52	49	57	52	49	47
9	69	58	51	47	67	57	51	47	56	50	46	55	49	46	53	49	45	53	49	45	44
10	65	54	48	44	64	54	48	44	53	47	43	52	46	43	50	46	43	50	46	43	41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	96676	96676	96676	96676	96676
5°	91101	92166	96087	100696	102508
10°	86219	88046	94907	103929	105139
15°	79644	81771	92104	102863	97707
20°	70940	73329	86141	94551	78348
25°	59451	61701	76241	79307	54284
30°	44481	47060	61905	61287	35315
35°	29612	31400	44401	43683	22871
40°	18675	19958	28706	28891	15764
45°	13306	13859	18214	18996	12211
50°	11083	11172	13526	13878	10376
55°	9783	9806	11043	11334	9452
60°	9059	8981	9563	9765	9004
65°	8647	8570	8717	8887	8684
70°	8398	8254	8263	8420	8508
75°	7985	7744	7727	8001	8231
80°	7263	6760	6788	7263	7771
85°	5290	4393	4393	5019	5548

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 112.5°
 Vertical Angle: 45°
 Luminance: 25608 cd/sqm



TEST NUMBER:

CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1957.5	8.1
10°-20°	5325.4	22.1
20°-30°	6245.6	25.9
30°-40°	4343.4	18.0
40°-50°	2158.5	8.9
50°-60°	1291.0	5.3
60°-70°	908.7	3.8
70°-80°	585.3	2.4
80°-90°	187.9	0.8
90°-100°	30.6	0.1
100°-110°	197.1	0.8
110°-120°	363.5	1.5
120°-130°	216.5	0.9
130°-140°	131.6	0.5
140°-150°	91.7	0.4
150°-160°	60.5	0.3
160°-170°	35.4	0.1
170°-180°	11.9	0.0
0°-30°	13528.4	56.0
0°-40°	17871.9	74.0
0°-60°	21321.3	88.3
0°-90°	23003.2	95.3
90°-120°	591.2	2.4
90°-150°	1031.1	4.3
90°-180°	1139.0	4.7
0°-180°	24142.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	20586	20586	20586	20586	20586	
5°	19452	19679	20516	21500	21887	1825
15°	16709	17155	19323	21580	20498	4660
25°	11872	12322	15225	15838	10840	5357
35°	5435	5763	8149	8017	4198	3462
45°	2153	2242	2947	3074	1976	1740
55°	1322	1325	1492	1532	1277	1200
65°	902	894	910	928	906	896
75°	562	546	544	564	580	594
85°	182	151	151	172	191	187
90°	8	23	8	25	11	13
95°	14	51	16	44	17	14
105°	69	343	91	367	48	92
115°	314	406	387	450	332	289
125°	227	218	248	242	261	207
135°	166	168	158	176	183	130
145°	140	146	144	147	150	88
155°	126	130	129	129	135	59
165°	122	124	124	124	129	35
175°	123	125	125	125	129	12
180°	125	125	125	125	125	



TEST NUMBER:

CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	20586.5	20586.5	20586.5	20586.5	20586.5	20586.5	20586.5	20586.5	20586.5
2.5°	19975.4	19988.5	20128.2	20310.1	20574.5	20840.5	21055.9	21197.9	21268.2
5°	19451.6	19524.1	19678.9	20012.8	20516.2	21048.9	21500.2	21795.5	21887.0
7.5°	18941.2	18983.3	19242.3	19664.2	20376.9	21206.8	21877.3	22222.1	22306.2
10°	18318.5	18413.9	18706.5	19204.1	20164.2	21306.4	22081.1	22328.2	22338.2
12.5°	17585.9	17712.1	18014.4	18642.0	19824.8	21270.9	22012.8	21931.7	21747.6
15°	16708.8	16819.6	17155.1	17883.1	19323.0	21060.5	21580.1	20920.4	20498.5
17.5°	15761.5	15861.8	16153.3	16955.1	18615.8	20666.7	20676.8	19371.7	18575.7
20°	14580.2	14659.0	15071.3	15858.0	17704.4	20035.2	19433.0	17045.8	16102.8
22.5°	13323.3	13397.1	13763.4	14582.2	16561.7	19183.6	17700.9	14706.1	13419.5
25°	11872.3	11912.4	12321.6	13062.0	15225.3	18140.2	15837.6	12156.8	10840.4
27.5°	10239.8	10308.1	10736.2	11492.4	13653.4	16817.7	13853.4	9934.0	8719.5
30°	8555.9	8669.0	9052.0	9729.0	11907.4	15122.3	11788.5	7911.2	6792.9
32.5°	6984.4	7065.8	7338.8	8046.3	9952.6	13460.4	9805.5	6339.0	5391.6
35°	5434.9	5516.3	5763.0	6457.9	8149.1	11381.3	8017.4	4980.9	4197.6
37.5°	4154.4	4298.5	4456.7	5020.7	6395.3	9416.8	6391.1	4010.8	3404.7
40°	3236.8	3260.0	3459.2	3820.1	4975.5	7363.0	5007.6	3201.7	2732.3
42.5°	2591.0	2653.9	2739.7	3009.9	3770.0	5630.2	3935.9	2627.7	2320.8
45°	2152.9	2177.6	2242.4	2423.9	2947.0	4143.2	3073.5	2217.0	1975.7
47.5°	1883.4	1872.6	1914.3	2050.2	2399.9	3202.1	2491.0	1901.6	1732.5
50°	1651.8	1645.3	1665.0	1755.7	2015.8	2457.0	2068.3	1660.0	1546.4
52.5°	1471.9	1477.8	1479.6	1536.0	1731.7	2003.9	1761.4	1479.2	1402.9
55°	1322.1	1329.5	1325.2	1366.9	1492.3	1684.7	1531.7	1330.2	1277.3
57.5°	1205.2	1199.8	1194.0	1216.4	1310.6	1429.1	1330.2	1203.2	1168.1
60°	1089.0	1084.0	1079.7	1094.4	1149.6	1237.6	1173.9	1092.5	1082.4
62.5°	989.4	986.3	985.9	983.2	1025.6	1081.3	1038.0	992.9	984.0
65°	902.5	899.1	894.5	890.2	909.9	961.6	927.6	903.3	906.4
67.5°	815.7	815.7	807.6	801.0	820.3	847.4	832.7	818.7	822.3
70°	736.9	737.3	724.2	719.1	725.0	753.9	738.8	740.8	746.5
72.5°	652.4	643.1	633.5	633.1	633.8	656.2	651.2	655.9	662.0
75°	562.5	551.6	545.5	538.5	544.3	561.3	563.6	570.2	579.8
77.5°	475.6	459.0	454.0	450.5	446.6	466.0	473.3	482.1	496.4
80°	382.1	364.0	355.6	350.6	357.1	366.0	382.1	388.7	408.8
82.5°	282.5	269.1	258.7	258.3	261.4	269.4	283.4	295.7	307.3
85°	181.8	160.2	151.0	154.4	151.0	163.2	172.5	187.2	190.7
87.5°	65.6	51.4	49.1	54.1	52.9	56.8	64.9	70.6	71.0
90°	8.5	13.5	22.9	14.7	8.5	14.5	24.8	14.8	11.1
92.5°	12.3	20.3	36.6	19.0	11.0	19.4	34.8	19.1	14.3
95°	14.1	23.4	50.9	25.4	16.4	23.8	44.1	21.0	16.8
97.5°	18.2	25.9	58.4	30.9	25.1	29.5	49.8	22.3	19.9
100°	23.8	30.3	90.9	38.2	33.2	33.2	90.3	25.4	22.4
102.5°	40.0	64.0	192.6	71.3	50.1	64.8	208.8	49.5	26.8
105°	68.8	134.5	342.9	148.7	90.6	147.2	366.6	125.0	47.8
107.5°	118.6	240.6	452.5	262.8	171.1	273.8	472.1	244.8	108.2
110°	221.0	319.2	474.4	360.8	273.4	382.4	515.1	334.7	216.9



TEST NUMBER:

CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
112.5°	298.4	342.9	454.4	398.2	355.8	426.1	503.3	370.9	299.2
115°	314.0	329.8	405.7	388.8	386.8	419.9	449.6	369.6	331.7
117.5°	303.4	301.1	344.6	349.9	373.7	384.3	388.5	347.1	333.6
120°	281.0	268.0	287.7	305.6	337.5	333.1	327.7	314.0	314.8
122.5°	252.8	237.9	247.0	260.5	292.4	283.0	277.2	280.8	289.2
125°	227.0	211.7	218.2	221.6	248.1	238.7	241.9	252.1	261.0
127.5°	203.9	193.5	197.5	194.2	211.0	206.6	216.4	227.7	235.4
130°	188.3	179.6	184.8	176.4	184.5	185.5	198.3	208.1	213.0
132.5°	175.7	170.0	176.2	165.9	168.1	172.7	184.9	193.6	196.5
135°	166.3	161.7	168.1	158.8	157.9	164.5	175.9	181.3	182.8
137.5°	158.6	154.6	161.3	154.3	151.9	158.7	167.1	171.8	170.9
140°	151.8	148.5	155.5	150.0	148.7	155.3	159.1	164.3	163.8
142.5°	144.5	142.0	150.3	146.5	145.3	151.4	153.2	157.1	156.3
145°	139.6	137.8	146.3	144.0	143.8	148.4	146.8	151.5	150.4
147.5°	135.5	134.2	141.7	140.7	140.7	144.0	142.2	146.3	145.1
150°	131.8	130.5	137.7	136.7	137.3	139.8	137.0	141.7	141.8
152.5°	128.3	126.5	133.0	132.0	132.7	135.2	132.7	138.1	137.8
155°	125.9	124.3	129.5	128.7	129.1	130.4	129.1	134.5	134.9
157.5°	124.5	123.1	127.2	126.8	126.8	127.8	127.2	131.9	132.3
160°	123.5	122.5	125.8	125.4	125.2	126.4	126.3	130.4	130.7
162.5°	122.4	121.3	125.3	124.7	124.7	124.7	124.9	129.0	129.7
165°	121.8	121.4	124.2	124.2	123.9	124.6	124.1	127.4	128.8
167.5°	121.8	121.2	124.3	124.3	124.1	123.5	124.3	127.3	128.8
170°	122.1	121.6	124.1	123.9	123.3	123.7	123.8	126.9	128.2
172.5°	122.8	122.5	125.3	124.7	124.4	124.4	124.4	126.7	128.8
175°	122.9	122.6	124.8	124.8	125.2	125.0	125.2	126.8	129.0
177.5°	123.9	123.6	124.8	124.8	124.5	125.3	126.1	127.9	130.5
180°	125.3	125.3	125.3	125.3	125.3	125.3	125.3	125.3	125.3



TEST NUMBER: CATALOG
 CATALOG NUMBER: EHBR1-24-UNV-ASM-L950-UPL12

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.00	17.13	16.45	17.55	17.98	16.76	17.90	17.21	18.31	18.75
	3H	17.81	18.82	18.28	19.25	19.74	18.32	19.33	18.79	19.76	20.25
	4H	18.55	19.49	19.04	19.94	20.44	18.97	19.91	19.46	20.36	20.86
	6H	19.12	19.99	19.62	20.45	20.96	19.47	20.33	19.97	20.80	21.31
	8H	19.30	20.12	19.82	20.61	21.13	19.63	20.44	20.14	20.93	21.45
	12H	19.41	20.19	19.92	20.66	21.21	19.71	20.49	20.22	20.96	21.51
4H	2H	16.52	17.46	17.00	17.91	18.41	17.14	18.09	17.63	18.53	19.04
	3H	18.56	19.33	19.05	19.83	20.35	18.95	19.73	19.45	20.23	20.75
	4H	19.42	20.12	19.94	20.63	21.18	19.74	20.44	20.26	20.95	21.50
	6H	20.12	20.72	20.66	21.25	21.83	20.38	20.98	20.92	21.51	22.09
	8H	20.34	20.90	20.89	21.44	22.02	20.58	21.14	21.13	21.68	22.26
	12H	20.48	20.97	21.05	21.54	22.13	20.70	21.19	21.26	21.76	22.34
8H	4H	19.68	20.24	20.23	20.78	21.36	19.98	20.55	20.53	21.08	21.66
	6H	20.50	20.95	21.08	21.54	22.13	20.75	21.20	21.33	21.79	22.38
	8H	20.80	21.21	21.40	21.80	22.40	21.03	21.44	21.63	22.03	22.64
	12H	21.00	21.36	21.60	21.93	22.61	21.22	21.57	21.81	22.15	22.83
12H	4H	19.69	20.18	20.26	20.75	21.34	19.99	20.49	20.56	21.06	21.64
	6H	20.54	20.94	21.14	21.54	22.14	20.79	21.20	21.39	21.80	22.40
	8H	20.88	21.24	21.48	21.82	22.49	21.12	21.48	21.72	22.06	22.73

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-8

Test Date: 08/04/2025

Luminaire Tested: EHBR-60-L950-N

Data in this report applies to families of products including EHBR-60-L950-N

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-472-8
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/05/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Metalux
 Catalog Number: **EHBR-60-L950-N**
 Description: Elevate Round Highbay at, 60000 lumens, 5000K 90CRI LEDs with N lens

Spectral Parameters

CCT (K): 4901
 CIE u': 0.2131
 CIE v': 0.4853
 Duv: -0.0008
 CIE x: 0.3477
 CIE y: 0.3520
 CIE z: 0.3003
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 574
 Purity: 9.953987
 Rf: 90.7
 Rg: 100.5

CRI (Ra):	94.3		
R1:	95.8	R9:	72.3
R2:	96.5	R10:	89.1
R3:	94.4	R11:	94.9
R4:	95.3	R12:	68.4
R5:	94.1	R13:	96.4
R6:	92.5	R14:	96.4
R7:	95.5	R15:	93.9
R8:	90.1		



Test Conditions

Stabilization Time: 35M
 Operation Time: 1H 35M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-8

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-8

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles




CCT = 4901K
 CIE x = 0.3477
 CIE y = 0.3520
 Duv = -0.0008

Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-8

Photopic Flux vs. Wavelength

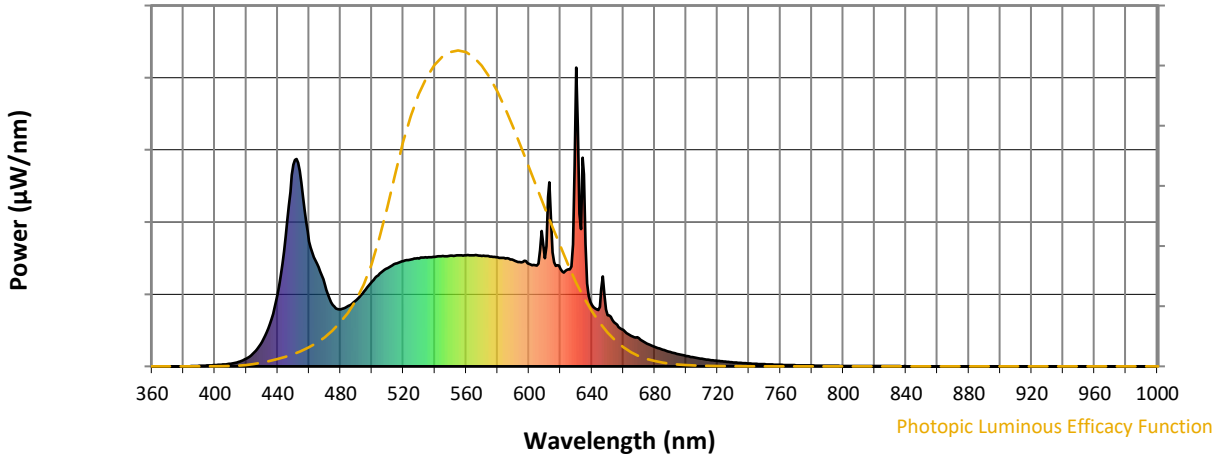

Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-8

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 2.04

λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-8

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 4.41

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

Summary

$R_f = 90.7$
 $R_g = 100.5$
 CIE $R_a = 94.3$
 $R_9 = 72.3$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 91	CES51 = 98	CES76 = 83
CES02 = 61	CES27 = 92	CES52 = 98	CES77 = 87
CES03 = 31	CES28 = 94	CES53 = 97	CES78 = 80
CES04 = 69	CES29 = 94	CES54 = 93	CES79 = 94
CES05 = 48	CES30 = 93	CES55 = 92	CES80 = 91
CES06 = 50	CES31 = 95	CES56 = 95	CES81 = 84
CES07 = 41	CES32 = 86	CES57 = 94	CES82 = 96
CES08 = 40	CES33 = 99	CES58 = 94	CES83 = 96
CES09 = 29	CES34 = 90	CES59 = 97	CES84 = 93
CES10 = 73	CES35 = 94	CES60 = 92	CES85 = 83
CES11 = 56	CES36 = 81	CES61 = 92	CES86 = 86
CES12 = 62	CES37 = 92	CES62 = 86	CES87 = 91
CES13 = 43	CES38 = 88	CES63 = 92	CES88 = 98
CES14 = 74	CES39 = 99	CES64 = 89	CES89 = 87
CES15 = 71	CES40 = 97	CES65 = 88	CES90 = 98
CES16 = 47	CES41 = 97	CES66 = 85	CES91 = 73
CES17 = 48	CES42 = 90	CES67 = 84	CES92 = 79
CES18 = 56	CES43 = 91	CES68 = 86	CES93 = 87
CES19 = 70	CES44 = 99	CES69 = 87	CES94 = 78
CES20 = 65	CES45 = 95	CES70 = 83	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 77	CES96 = 92
CES22 = 77	CES47 = 95	CES72 = 92	CES97 = 95
CES23 = 91	CES48 = 93	CES73 = 77	CES98 = 95
CES24 = 90	CES49 = 95	CES74 = 92	CES99 = 94
CES25 = 70	CES50 = 98	CES75 = 79	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)