

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: METALUX

Report Number:

Luminaire Tested: EHBR1-36-UNV-TASM-L950-UPL36

Issue Date: 3/20/2026

**Test Information**


Test Method: LM-79-2019  
Report Number:  
REPORT IS A COMBINATION OF REPORTS P1431777 AND P1431635  
Test Lab: INNOVATION CENTER  
Issue Date: 3/20/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: METALUX  
Catalog Number: EHBR1-36-UNV-TASM-L950-UPL36  
Description: Elevate Round Highbay at, 36000 lumens, 5000K 90CRI LEDs with TASM lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 36935.0 lumens  
Efficiency: N/A  
Efficacy: 168.0 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.84 / 0.9  
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 0.1')  
CIE Type: Direct  
  
Input Watts (W): 219.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER:  
CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

### Luminous Intensity Polar Plot

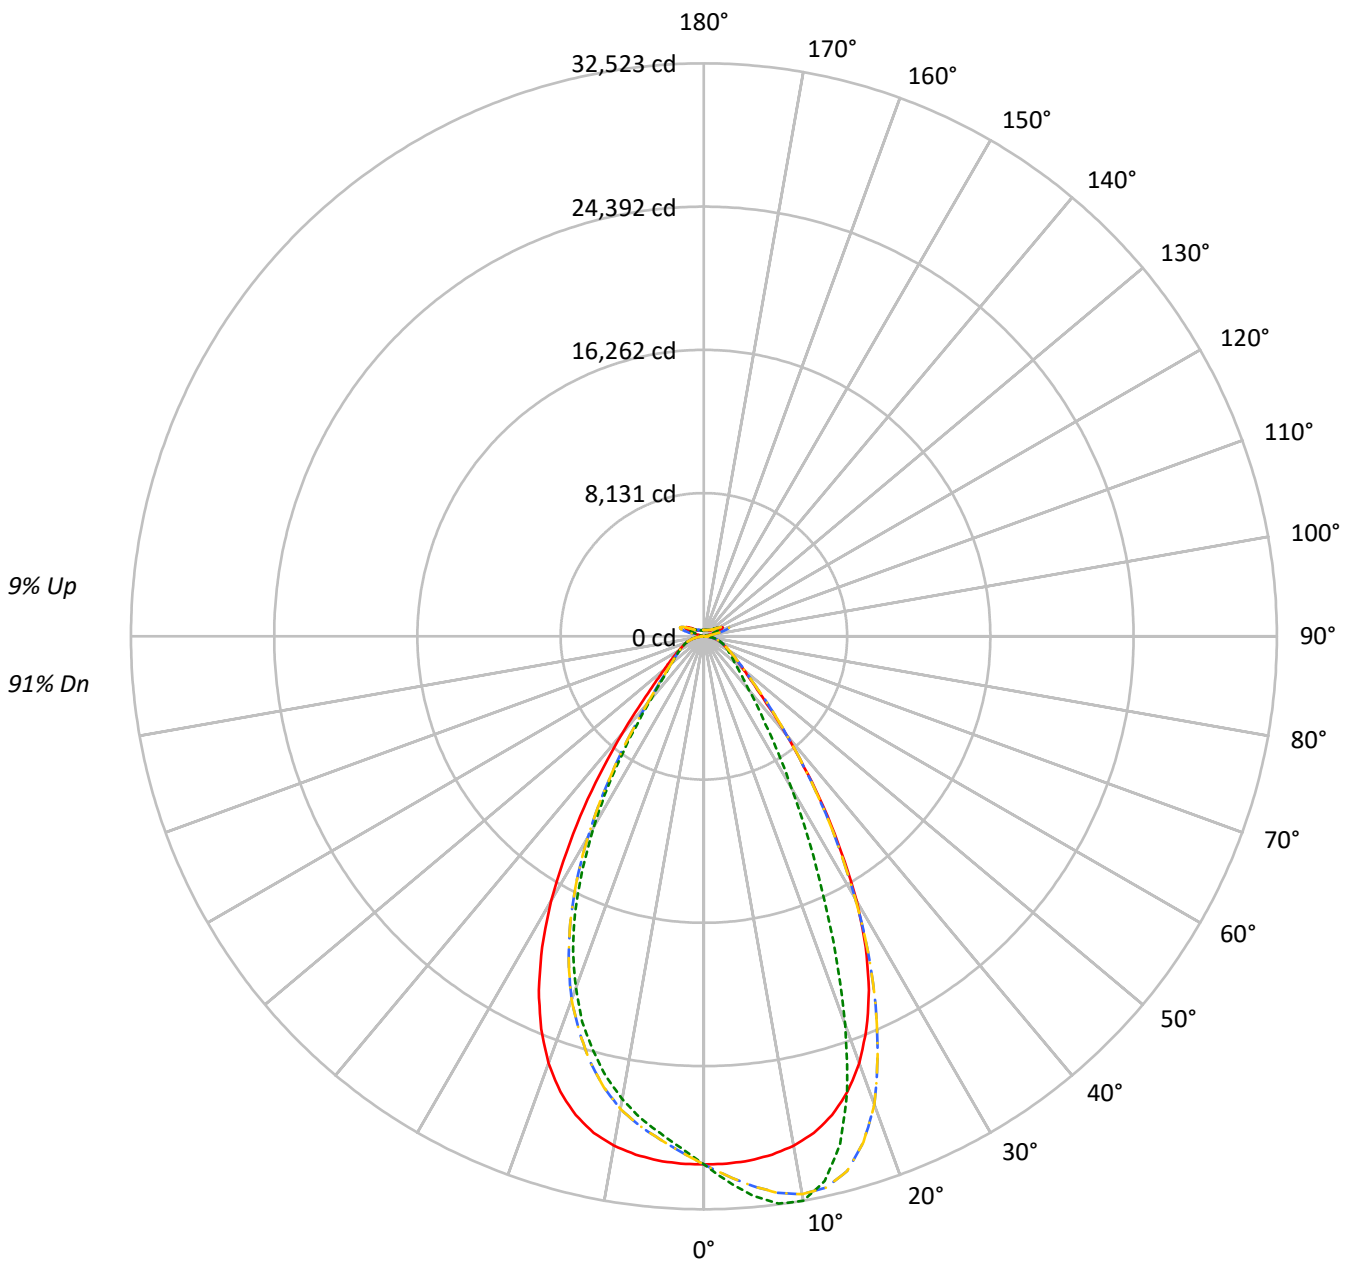

— 0°-180°    - - 45°-225°    - · - · 90°-270°    - · - · 135°-315°



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	113	113	113	113	106	106	106	99	99	99	93	93	93	93	93	93	91
1	110	106	103	100	106	103	100	98	97	95	93	92	90	89	87	86	84	87	86	84	82
2	103	97	92	87	99	94	89	86	89	86	82	85	82	79	81	78	76	81	78	76	74
3	96	88	82	77	93	86	81	76	82	78	74	78	75	71	75	72	69	75	72	69	67
4	90	81	75	70	88	79	73	69	76	71	67	73	68	65	70	66	63	70	66	63	61
5	85	75	68	63	82	73	67	62	70	65	61	68	63	60	65	61	58	65	61	58	56
6	80	70	63	58	78	68	62	57	66	60	56	63	58	55	61	57	54	61	57	54	52
7	75	65	58	53	73	64	57	53	61	56	52	59	54	51	57	53	50	57	53	50	48
8	71	60	54	49	69	59	53	49	58	52	48	56	51	47	54	50	46	54	50	46	45
9	67	57	50	46	66	56	50	45	54	48	45	52	47	44	51	47	43	51	47	43	42
10	64	53	47	43	62	52	46	42	51	45	42	50	45	41	48	44	41	48	44	41	39

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	140755	140755	140755	140755
5°	139898	149245	139898	132638
10°	138178	153077	138178	125531
15°	134099	142256	134099	115957
20°	125416	114070	125416	103285
25°	111003	79034	111003	86557
30°	90130	51417	90130	64762
35°	64644	33299	64644	43114
40°	41794	22952	41794	27190
45°	26519	17779	26519	19373
50°	19693	15107	19693	16136
55°	16078	13762	16078	14244
60°	13922	13110	13922	13189
65°	12691	12643	12691	12589
70°	12029	12388	12029	12228
75°	11249	11984	11249	11625
80°	9881	11314	9881	10577
85°	6392	8077	6392	7702

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 37283 cd/sqm



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2849.9	7.7
10°-20°	7753.5	21.0
20°-30°	9093.2	24.6
30°-40°	6323.8	17.1
40°-50°	3142.6	8.5
50°-60°	1879.6	5.1
60°-70°	1323.0	3.6
70°-80°	852.2	2.3
80°-90°	276.7	0.7
90°-100°	91.6	0.2
100°-110°	598.2	1.6
110°-120°	1105.1	3.0
120°-130°	656.8	1.8
130°-140°	397.2	1.1
140°-150°	274.8	0.7
150°-160°	179.4	0.5
160°-170°	103.0	0.3
170°-180°	34.3	0.1
0°-30°	19696.6	53.3
0°-40°	26020.4	70.4
0°-60°	31042.6	84.0
0°-90°	33494.5	90.7
90°-120°	1794.9	4.9
90°-150°	3123.8	8.5
90°-180°	3440.0	9.3
0°-180°	36935.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	29973	29973	29973	29973	29973	
5°	29870	31866	29870	28320	29870	2835
15°	28133	29844	28133	24327	28133	7862
25°	22167	15783	22167	17285	22167	10036
35°	11864	6112	11864	7913	11864	7407
45°	4291	2876	4291	3134	4291	3511
55°	2173	1860	2173	1925	2173	1987
65°	1325	1320	1325	1314	1325	1330
75°	792	844	792	819	792	832
85°	220	278	220	265	220	244
90°	25	29	25	25	25	22
95°	49	46	49	42	49	52
105°	275	140	275	208	275	370
115°	1176	1005	1176	955	1176	1072
125°	753	788	753	690	753	693
135°	476	550	476	504	476	377
145°	431	450	431	419	431	270
155°	383	400	383	372	383	179
165°	361	372	361	354	361	103
175°	360	366	360	354	360	34
180°	359	359	359	359	359	



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8
2.5°	29955.3	30342.5	30656.1	30863.0	30965.2	30863.0	30656.1	30342.5	29955.3	29570.3	29305.6
5°	29870.5	30646.1	31303.1	31733.1	31866.2	31733.1	31303.1	30646.1	29870.5	29137.6	28651.4
7.5°	29667.5	30875.9	31852.2	32354.1	32476.6	32354.1	31852.2	30875.9	29667.5	28630.0	28015.8
10°	29357.9	31020.9	32148.9	32508.6	32523.3	32508.6	32148.9	31020.9	29357.9	27960.1	27235.6
12.5°	28863.9	30969.2	32049.4	31931.4	31663.3	31931.4	32049.4	30969.2	28863.9	27141.7	26227.9
15°	28133.2	30662.9	31419.4	30458.9	29844.5	30458.9	31419.4	30662.9	28133.2	26036.8	24976.8
17.5°	27103.6	30089.6	30104.2	28204.0	27045.1	28204.0	30104.2	30089.6	27103.6	24685.6	23518.3
20°	25776.6	29170.2	28293.4	24817.7	23444.7	24817.7	28293.4	29170.2	25776.6	23088.4	21943.0
22.5°	24112.9	27930.3	25771.5	21411.2	19538.0	21411.2	25771.5	27930.3	24112.9	21230.8	20038.8
25°	22167.2	26411.1	23058.6	17699.6	15783.0	17699.6	23058.6	26411.1	22167.2	19017.6	17939.6
27.5°	19878.6	24485.6	20169.8	14463.4	12695.2	14463.4	20169.8	24485.6	19878.6	16732.3	15631.3
30°	17336.5	22017.1	17163.4	11518.3	9890.1	11518.3	17163.4	22017.1	17336.5	14165.0	13179.1
32.5°	14490.4	19597.6	14276.2	9229.2	7849.9	9229.2	14276.2	19597.6	14490.4	11715.0	10684.8
35°	11864.5	16570.5	11672.9	7251.9	6111.5	7251.9	11672.9	16570.5	11864.5	9402.3	8390.6
37.5°	9311.2	13710.3	9305.1	5839.6	4957.1	5839.6	9305.1	13710.3	9311.2	7309.8	6488.7
40°	7244.0	10720.2	7290.7	4661.6	3978.1	4661.6	7290.7	10720.2	7244.0	5561.9	5036.4
42.5°	5488.8	8197.3	5730.5	3825.8	3378.9	3825.8	5730.5	8197.3	5488.8	4382.2	3988.8
45°	4290.6	6032.3	4474.9	3227.7	2876.5	3227.7	4474.9	6032.3	4290.6	3529.1	3264.8
47.5°	3494.2	4662.1	3626.8	2768.6	2522.5	2768.6	3626.8	4662.1	3494.2	2985.0	2787.2
50°	2935.0	3577.4	3011.4	2416.7	2251.5	2416.7	3011.4	3577.4	2935.0	2556.1	2424.1
52.5°	2521.2	2917.5	2564.5	2153.7	2042.5	2153.7	2564.5	2917.5	2521.2	2236.4	2154.2
55°	2172.8	2452.7	2230.2	1936.7	1859.8	1936.7	2230.2	2452.7	2172.8	1990.2	1929.5
57.5°	1908.1	2080.7	1936.7	1751.8	1700.7	1751.8	1936.7	2080.7	1908.1	1771.0	1738.4
60°	1673.7	1801.9	1709.1	1590.6	1576.0	1590.6	1709.1	1801.9	1673.7	1593.3	1572.0
62.5°	1493.4	1574.3	1511.3	1445.5	1432.6	1445.5	1511.3	1574.3	1493.4	1431.5	1435.5
65°	1324.7	1400.0	1350.6	1315.2	1319.6	1315.2	1350.6	1400.0	1324.7	1296.0	1302.2
67.5°	1194.3	1233.7	1212.3	1192.1	1197.2	1192.1	1212.3	1233.7	1194.3	1166.2	1175.8
70°	1055.5	1097.7	1075.7	1078.5	1087.0	1078.5	1075.7	1097.7	1055.5	1047.1	1054.4
72.5°	922.9	955.5	948.2	954.9	963.9	954.9	948.2	955.5	922.9	921.8	922.3
75°	792.4	817.2	820.6	830.2	844.2	830.2	820.6	817.2	792.4	784.1	794.1
77.5°	650.3	678.3	689.0	701.9	722.8	701.9	689.0	678.3	650.3	655.9	661.0
80°	519.8	532.8	556.4	565.9	595.2	565.9	556.4	532.8	519.8	510.4	517.6
82.5°	380.5	392.3	412.5	430.6	447.4	430.6	412.5	392.3	380.5	376.0	376.6
85°	219.7	237.8	251.2	272.6	277.6	272.6	251.2	237.8	219.7	224.8	219.7
87.5°	77.0	82.6	94.4	102.9	103.4	102.9	94.4	82.6	77.0	78.7	71.4
90°	25.3	42.9	73.9	41.3	29.2	41.3	73.9	42.9	25.3	44.2	68.9
92.5°	32.9	58.2	104.3	54.6	38.7	54.6	104.3	58.2	32.9	57.6	110.8
95°	48.6	71.4	132.8	60.4	46.3	60.4	132.8	71.4	48.6	76.6	154.5
97.5°	75.3	88.5	149.9	64.2	55.7	64.2	149.9	88.5	75.3	93.7	177.3
100°	100.0	100.0	273.4	73.7	63.4	73.7	273.4	100.0	100.0	115.1	276.1
102.5°	151.3	195.5	633.2	146.4	76.7	146.4	633.2	195.5	151.3	215.8	585.9
105°	274.7	446.3	1114.0	376.4	139.9	376.4	1114.0	446.3	274.7	451.5	1043.9
107.5°	519.9	832.1	1435.1	741.2	324.3	741.2	1435.1	832.1	519.9	799.3	1377.0
110°	831.6	1162.8	1566.3	1015.0	654.9	1015.0	1566.3	1162.8	831.6	1097.7	1443.6



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	1082.4	1295.8	1530.2	1125.2	905.8	1125.2	1530.2	1295.8	1082.4	1211.7	1382.7
115°	1176.2	1276.9	1366.7	1121.3	1004.7	1121.3	1366.7	1276.9	1176.2	1183.1	1234.5
117.5°	1136.2	1168.5	1180.4	1053.0	1010.3	1053.0	1180.4	1168.5	1136.2	1064.0	1048.2
120°	1026.0	1012.7	994.8	952.2	953.4	952.2	994.8	1012.7	1026.0	929.1	875.3
122.5°	887.9	859.3	840.8	850.1	875.4	850.1	840.8	859.3	887.9	790.9	750.4
125°	752.9	724.4	733.1	762.7	788.5	762.7	733.1	724.4	752.9	671.7	661.7
127.5°	639.4	626.1	655.2	688.6	710.6	688.6	655.2	626.1	639.4	588.1	599.0
130°	558.3	561.5	600.1	628.4	642.2	628.4	600.1	561.5	558.3	533.6	559.6
132.5°	507.5	522.2	558.9	583.3	591.6	583.3	558.9	522.2	507.5	500.4	532.2
135°	475.8	497.4	530.9	546.6	549.8	546.6	530.9	497.4	475.8	478.2	507.5
137.5°	457.3	479.0	504.2	516.8	513.6	516.8	504.2	479.0	457.3	463.5	485.8
140°	446.4	468.2	479.5	494.0	491.4	494.0	479.5	468.2	446.4	450.2	467.3
142.5°	435.8	455.5	461.1	471.8	468.6	471.8	461.1	455.5	435.8	439.6	450.9
145°	430.6	445.2	440.8	454.7	450.2	454.7	440.8	445.2	430.6	431.9	438.2
147.5°	421.1	431.9	426.2	438.2	433.6	438.2	426.2	431.9	421.1	421.1	423.5
150°	410.2	417.8	409.6	423.5	422.7	423.5	409.6	417.8	410.2	408.3	410.8
152.5°	395.6	403.1	395.6	411.3	410.0	411.3	395.6	403.1	395.6	393.7	396.2
155°	383.4	387.2	383.4	399.1	399.7	399.1	383.4	387.2	383.4	382.8	383.9
157.5°	375.0	377.5	375.5	389.4	389.9	389.4	375.5	377.5	375.0	375.0	375.5
160°	367.7	371.6	370.2	382.1	382.7	382.1	370.2	371.6	367.7	369.0	369.6
162.5°	365.0	365.0	364.3	376.2	377.3	376.2	364.3	365.0	365.0	365.0	366.9
165°	361.1	362.9	360.2	369.0	372.0	369.0	360.2	362.9	361.1	362.4	362.4
167.5°	360.2	358.4	359.6	366.9	370.0	366.9	359.6	358.4	360.2	361.6	361.6
170°	357.0	357.6	356.9	364.2	367.3	364.2	356.9	357.6	357.0	358.9	360.2
172.5°	358.7	358.7	356.6	362.1	367.0	362.1	356.6	358.7	358.7	360.1	362.0
175°	359.8	358.5	357.7	361.3	366.3	361.3	357.7	358.5	359.8	359.3	359.3
177.5°	358.0	359.1	360.2	363.7	370.6	363.7	360.2	359.1	358.0	359.3	359.3
180°	359.1	359.1	359.1	359.1	359.1	359.1	359.1	359.1	359.1	359.1	359.1



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**CANDELA DISTRIBUTION (continued):**

	247.5°	270°	292.5°	315°	337.5°	360°
0°	29972.8	29972.8	29972.8	29972.8	29972.8	29972.8
2.5°	29102.2	29083.0	29102.2	29305.6	29570.3	29955.3
5°	28426.0	28320.3	28426.0	28651.4	29137.6	29870.5
7.5°	27638.6	27577.3	27638.6	28015.8	28630.0	29667.5
10°	26809.6	26670.8	26809.6	27235.6	27960.1	29357.9
12.5°	25787.8	25604.1	25787.8	26227.9	27141.7	28863.9
15°	24488.4	24327.1	24488.4	24976.8	26036.8	28133.2
17.5°	23094.0	22947.8	23094.0	23518.3	24685.6	27103.6
20°	21342.7	21228.0	21342.7	21943.0	23088.4	25776.6
22.5°	19505.4	19398.0	19505.4	20038.8	21230.8	24112.9
25°	17343.8	17285.3	17343.8	17939.6	19017.6	22167.2
27.5°	15008.0	14908.6	15008.0	15631.3	16732.3	19878.6
30°	12621.6	12456.9	12621.6	13179.1	14165.0	17336.5
32.5°	10287.4	10168.9	10287.4	10684.8	11715.0	14490.4
35°	8031.4	7912.9	8031.4	8390.6	9402.3	11864.5
37.5°	6258.2	6048.6	6258.2	6488.7	7309.8	9311.2
40°	4746.4	4712.7	4746.4	5036.4	5561.9	7244.0
42.5°	3864.0	3772.4	3864.0	3988.8	4382.2	5488.8
45°	3170.4	3134.5	3170.4	3264.8	3529.1	4290.6
47.5°	2726.4	2742.2	2726.4	2787.2	2985.0	3494.2
50°	2395.3	2404.9	2395.3	2424.1	2556.1	2935.0
52.5°	2151.5	2143.0	2151.5	2154.2	2236.4	2521.2
55°	1935.6	1924.9	1935.6	1929.5	1990.2	2172.8
57.5°	1746.8	1754.6	1746.8	1738.4	1771.0	1908.1
60°	1578.2	1585.5	1578.2	1572.0	1593.3	1673.7
62.5°	1436.0	1440.5	1436.0	1435.5	1431.5	1493.4
65°	1308.9	1314.0	1308.9	1302.2	1296.0	1324.7
67.5°	1187.6	1187.6	1187.6	1175.8	1166.2	1194.3
70°	1073.5	1072.9	1073.5	1054.4	1047.1	1055.5
72.5°	936.4	949.8	936.4	922.3	921.8	922.9
75°	803.1	818.9	803.1	794.1	784.1	792.4
77.5°	668.2	692.5	668.2	661.0	655.9	650.3
80°	530.0	556.4	530.0	517.6	510.4	519.8
82.5°	391.7	411.4	391.7	376.6	376.0	380.5
85°	233.2	264.7	233.2	219.7	224.8	219.7
87.5°	74.8	95.5	74.8	71.4	78.7	77.0
90°	40.5	25.3	40.5	68.9	44.2	25.3
92.5°	61.4	36.7	61.4	110.8	57.6	32.9
95°	70.9	42.4	70.9	154.5	76.6	48.6
97.5°	78.5	54.4	78.5	177.3	93.7	75.3
100°	91.8	71.4	91.8	276.1	115.1	100.0
102.5°	194.4	120.9	194.4	585.9	215.8	151.3
105°	409.2	208.2	409.2	1043.9	451.5	274.7
107.5°	732.2	360.3	732.2	1377.0	799.3	519.9
110°	971.7	671.9	971.7	1443.6	1097.7	831.6



TEST NUMBER:

CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**CANDELA DISTRIBUTION (continued):**

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	1043.9	907.7	1043.9	1382.7	1211.7	1082.4
115°	1004.0	955.1	1004.0	1234.5	1183.1	1176.2
117.5°	916.6	922.8	916.6	1048.2	1064.0	1136.2
120°	815.9	854.4	815.9	875.3	929.1	1026.0
122.5°	723.3	768.8	723.3	750.4	790.9	887.9
125°	643.4	689.6	643.4	661.7	671.7	752.9
127.5°	588.3	619.3	588.3	599.0	588.1	639.4
130°	545.2	571.8	545.2	559.6	533.6	558.3
132.5°	515.4	532.5	515.4	532.2	500.4	507.5
135°	489.3	504.0	489.3	507.5	478.2	475.8
137.5°	467.1	479.8	467.1	485.8	463.5	457.3
140°	447.3	458.1	447.3	467.3	450.2	446.4
142.5°	426.9	434.5	426.9	450.9	439.6	435.8
145°	412.9	418.7	412.9	438.2	431.9	430.6
147.5°	400.7	404.5	400.7	423.5	421.1	421.1
150°	388.6	392.4	388.6	410.8	408.3	410.2
152.5°	375.8	380.2	375.8	396.2	393.7	395.6
155°	367.4	371.7	367.4	383.9	382.8	383.4
157.5°	362.8	365.8	362.8	375.5	375.0	375.0
160°	358.8	361.2	358.8	369.6	369.0	367.7
162.5°	354.2	356.7	354.2	366.9	365.0	365.0
165°	353.4	354.0	353.4	362.4	362.4	361.1
167.5°	352.0	354.0	352.0	361.6	361.6	360.2
170°	352.6	353.2	352.6	360.2	358.9	357.0
172.5°	353.8	354.4	353.8	362.0	360.1	358.7
175°	353.1	353.6	353.1	359.3	359.3	359.8
177.5°	355.5	356.0	355.5	359.3	359.3	358.0
180°	359.1	359.1	359.1	359.1	359.1	359.1



TEST NUMBER: CATALOG  
 CATALOG NUMBER: EHBR1-36-UNV-TASM-L950-UPL36

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.62	18.69	18.14	19.19	19.73	16.94	18.01	17.46	18.51	19.05
	3H	19.16	20.11	19.70	20.63	21.22	18.78	19.73	19.32	20.25	20.84
	4H	19.80	20.69	20.36	21.22	21.83	19.56	20.45	20.12	20.98	21.59
	6H	20.28	21.09	20.85	21.64	22.26	20.20	21.02	20.78	21.57	22.18
	8H	20.43	21.20	21.02	21.77	22.39	20.42	21.20	21.01	21.76	22.39
	12H	20.50	21.24	21.09	21.80	22.44	20.55	21.29	21.14	21.85	22.50
4H	2H	18.03	18.92	18.59	19.45	20.06	17.51	18.40	18.07	18.93	19.54
	3H	19.82	20.56	20.40	21.14	21.76	19.56	20.30	20.14	20.88	21.50
	4H	20.60	21.26	21.19	21.85	22.50	20.47	21.13	21.06	21.72	22.38
	6H	21.21	21.78	21.83	22.39	23.07	21.24	21.81	21.86	22.42	23.10
	8H	21.41	21.94	22.03	22.55	23.23	21.51	22.04	22.13	22.65	23.33
	12H	21.51	21.98	22.15	22.62	23.31	21.68	22.15	22.31	22.79	23.47
8H	4H	20.85	21.38	21.47	21.99	22.67	20.75	21.28	21.37	21.89	22.57
	6H	21.59	22.02	22.24	22.68	23.36	21.65	22.08	22.30	22.74	23.43
	8H	21.86	22.24	22.53	22.91	23.61	22.01	22.39	22.67	23.06	23.76
	12H	22.03	22.37	22.69	23.01	23.79	22.25	22.59	22.92	23.24	24.01
12H	4H	20.85	21.32	21.49	21.96	22.65	20.76	21.23	21.40	21.87	22.55
	6H	21.63	22.02	22.30	22.68	23.38	21.70	22.08	22.37	22.75	23.45
	8H	21.95	22.28	22.61	22.93	23.70	22.10	22.44	22.76	23.08	23.86

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Metalux

Report Number: SP1-2506-472-8

Test Date: 08/04/2025

Luminaire Tested: EHBR-60-L950-N

Data in this report applies to families of products including EHBR-60-L950-N

**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2506-472-8  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 08/05/2025  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Metalux  
 Catalog Number: **EHBR-60-L950-N**  
 Description: Elevate Round Highbay at, 60000 lumens, 5000K 90CRI LEDs with N lens

**Spectral Parameters**

CCT (K): 4901  
 CIE u': 0.2131  
 CIE v': 0.4853  
 Duv: -0.0008  
 CIE x: 0.3477  
 CIE y: 0.3520  
 CIE z: 0.3003  
 Peak Wavelength (nm): 630  
 Dominant Wavelength (nm): 574  
 Purity: 9.953987  
 Rf: 90.7  
 Rg: 100.5

CRI (Ra):	94.3		
R1:	95.8	R9:	72.3
R2:	96.5	R10:	89.1
R3:	94.4	R11:	94.9
R4:	95.3	R12:	68.4
R5:	94.1	R13:	96.4
R6:	92.5	R14:	96.4
R7:	95.5	R15:	93.9
R8:	90.1		



**Test Conditions**

Stabilization Time: 35M  
 Operation Time: 1H 35M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2506-472-8

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-472-8

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2506-472-8

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-8

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 2.04**

$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)	$\lambda$ (nm)	Power W <sup>^</sup> /nm	Lumens ( $\phi$ /nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

REPORT NUMBER: SP1-2506-472-8

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: NR**

**M/P: 4.41**


λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	221	NR	620	326	NR	750	7	NR	880	0	NR
365	0	NR	495	250	NR	625	325	NR	755	6	NR	885	0	NR
370	0	NR	500	284	NR	630	1000	NR	760	5	NR	890	0	NR
375	0	NR	505	311	NR	635	643	NR	765	4	NR	895	0	NR
380	0	NR	510	329	NR	640	206	NR	770	4	NR	900	0	NR
385	1	NR	515	344	NR	645	199	NR	775	3	NR	905	0	NR
390	2	NR	520	353	NR	650	172	NR	780	3	NR	910	0	NR
395	3	NR	525	357	NR	655	143	NR	785	2	NR	915	0	NR
400	5	NR	530	362	NR	660	122	NR	790	2	NR	920	0	NR
405	6	NR	535	365	NR	665	102	NR	795	2	NR	925	0	NR
410	9	NR	540	367	NR	670	94	NR	800	2	NR	930	0	NR
415	15	NR	545	369	NR	675	76	NR	805	1	NR	935	0	NR
420	26	NR	550	370	NR	680	65	NR	810	1	NR	940	0	NR
425	47	NR	555	372	NR	685	56	NR	815	1	NR	945	0	NR
430	81	NR	560	372	NR	690	48	NR	820	1	NR	950	0	NR
435	143	NR	565	371	NR	695	41	NR	825	1	NR	955	0	NR
440	243	NR	570	370	NR	700	35	NR	830	1	NR	960	0	NR
445	434	NR	575	367	NR	705	30	NR	835	1	NR	965	0	NR
450	675	NR	580	365	NR	710	25	NR	840	1	NR	970	0	NR
455	615	NR	585	361	NR	715	22	NR	845	0	NR	975	0	NR
460	418	NR	590	356	NR	720	19	NR	850	0	NR	980	0	NR
465	344	NR	595	348	NR	725	16	NR	855	0	NR	985	0	NR
470	272	NR	600	343	NR	730	13	NR	860	0	NR	990	0	NR
475	206	NR	605	337	NR	735	11	NR	865	0	NR	995	0	NR
480	190	NR	610	362	NR	740	10	NR	870	0	NR	1000	0	NR
485	202	NR	615	381	NR	745	8	NR	875	0	NR			

**Summary**

$R_f = 90.7$   
 $R_g = 100.5$   
 CIE  $R_a = 94.3$   
 $R_9 = 72.3$



**Color Vector Graphics**

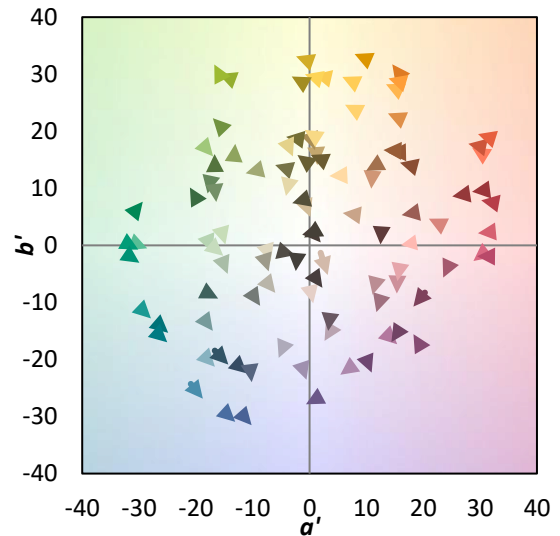

**Individual Sample Fidelity Index ( $R_{f,i}$ )**

CES01 = 85	CES26 = 91	CES51 = 98	CES76 = 83
CES02 = 61	CES27 = 92	CES52 = 98	CES77 = 87
CES03 = 31	CES28 = 94	CES53 = 97	CES78 = 80
CES04 = 69	CES29 = 94	CES54 = 93	CES79 = 94
CES05 = 48	CES30 = 93	CES55 = 92	CES80 = 91
CES06 = 50	CES31 = 95	CES56 = 95	CES81 = 84
CES07 = 41	CES32 = 86	CES57 = 94	CES82 = 96
CES08 = 40	CES33 = 99	CES58 = 94	CES83 = 96
CES09 = 29	CES34 = 90	CES59 = 97	CES84 = 93
CES10 = 73	CES35 = 94	CES60 = 92	CES85 = 83
CES11 = 56	CES36 = 81	CES61 = 92	CES86 = 86
CES12 = 62	CES37 = 92	CES62 = 86	CES87 = 91
CES13 = 43	CES38 = 88	CES63 = 92	CES88 = 98
CES14 = 74	CES39 = 99	CES64 = 89	CES89 = 87
CES15 = 71	CES40 = 97	CES65 = 88	CES90 = 98
CES16 = 47	CES41 = 97	CES66 = 85	CES91 = 73
CES17 = 48	CES42 = 90	CES67 = 84	CES92 = 79
CES18 = 56	CES43 = 91	CES68 = 86	CES93 = 87
CES19 = 70	CES44 = 99	CES69 = 87	CES94 = 78
CES20 = 65	CES45 = 95	CES70 = 83	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 77	CES96 = 92
CES22 = 77	CES47 = 95	CES72 = 92	CES97 = 95
CES23 = 91	CES48 = 93	CES73 = 77	CES98 = 95
CES24 = 90	CES49 = 95	CES74 = 92	CES99 = 94
CES25 = 70	CES50 = 98	CES75 = 79	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)