

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P826550

Luminaire Tested: **OHBL-24SE-MCL-UNV-L830-CD-UPL36**

Issue Date: 5/3/2024



Test Information

Test Method: LM-79-08
Report Number: P826550
REPORT IS A COMBINATION OF REPORTS P826306 AND G3-2310-221-2
Test Lab: INNOVATION CENTER
Issue Date: 5/3/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: OHBL-24SE-MCL-UNV-L830-CD-UPL36
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 25374.5 lumens
Efficiency: N/A
Efficacy: 152.1 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.27 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 3.78' x L: 1.67' x H: 0.17')
CIE Type: Semi-Direct

Input Watts (W): 166.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P826550

CATALOG NUMBER: OHBL-24SE-MCL-UNV-L830-CD-UPL36

Luminous Intensity Polar Plot

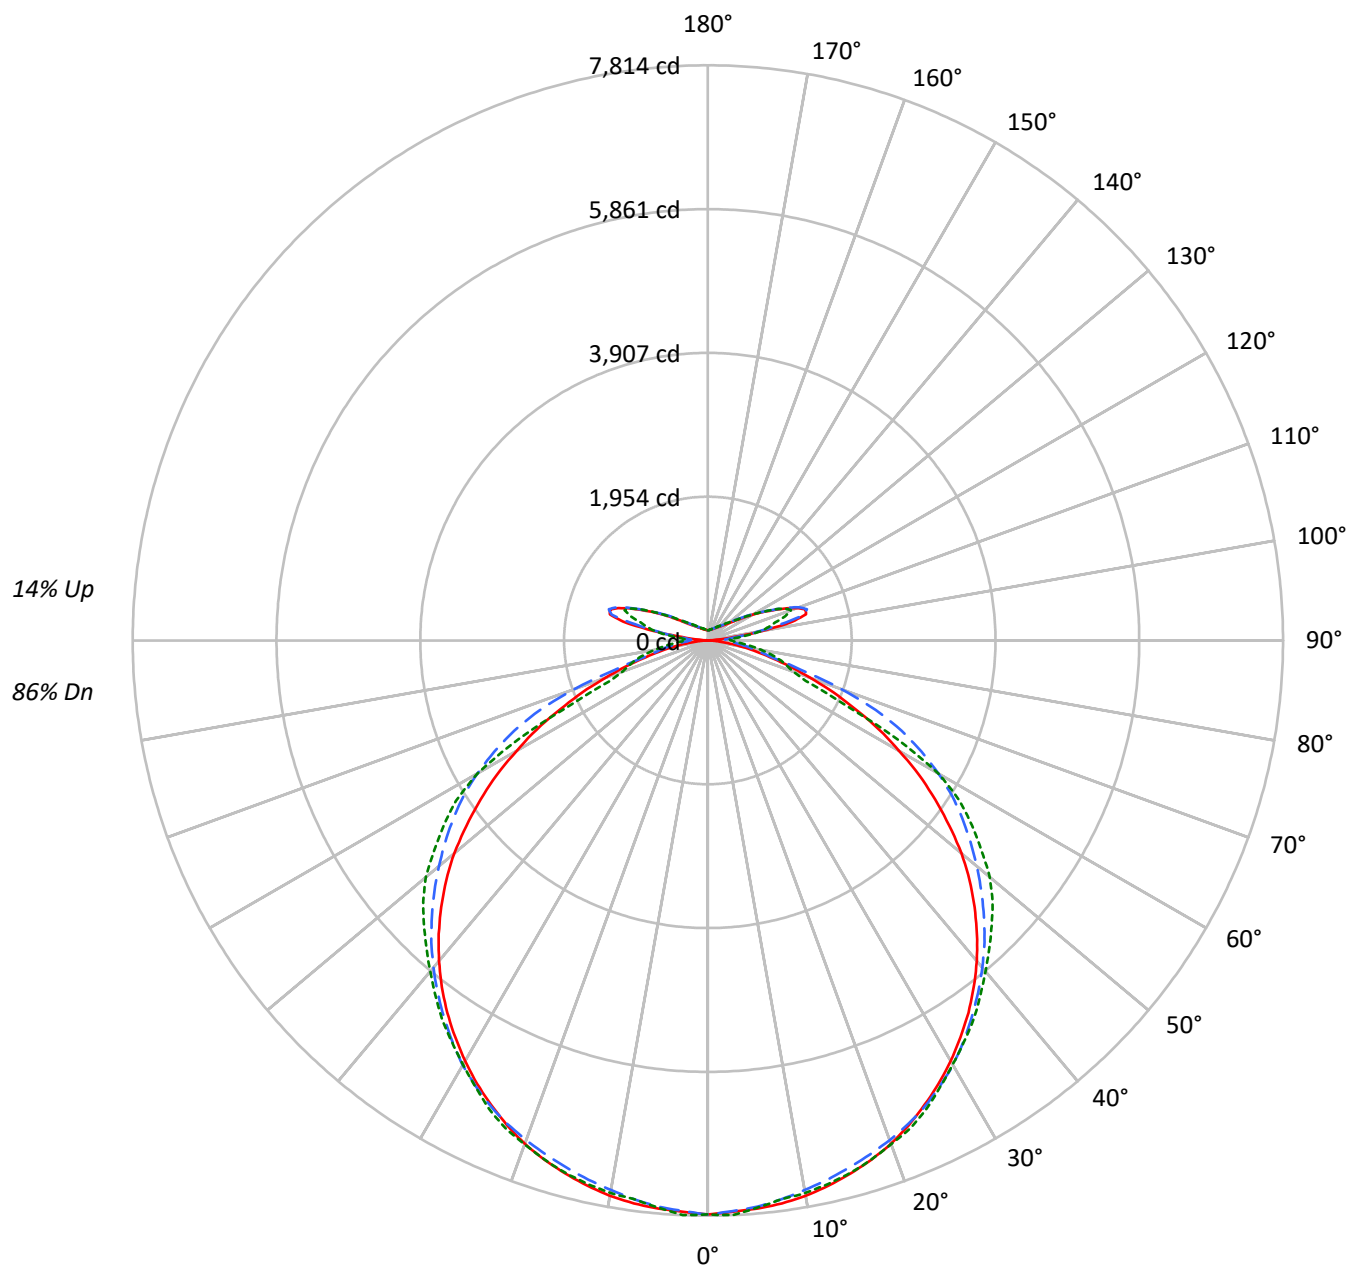



TEST NUMBER: P826550

CATALOG NUMBER: OHBL-24SE-MCL-UNV-L830-CD-UPL36

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	116	116	116	116	111	111	111	111	103	103	103	96	96	96	89	89	89	86		
1	106	101	97	94	102	98	94	91	91	88	85	85	82	80	79	77	75	72		
2	97	89	82	77	93	86	80	75	80	75	71	74	71	67	70	66	64	61		
3	88	78	70	64	84	75	68	62	70	64	60	66	61	57	62	58	54	51		
4	81	69	61	54	77	67	59	53	63	56	51	59	53	49	55	50	47	44		
5	74	62	53	46	71	60	52	46	56	49	44	53	47	42	49	44	40	38		
6	68	55	47	40	66	54	46	40	51	44	38	48	41	37	45	40	36	33		
7	63	50	42	36	61	49	41	35	46	39	34	43	37	33	41	36	31	29		
8	59	46	37	32	56	44	37	31	42	35	30	40	34	29	37	32	28	26		
9	55	42	34	28	53	41	33	28	38	32	27	36	30	26	34	29	25	23		
10	51	38	31	26	49	37	30	25	36	29	25	34	28	24	32	27	23	21		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13319	13319	13319
5°	13168	13120	13209
10°	13056	12915	13118
15°	12909	12761	13086
20°	12761	12661	13028
25°	12539	12561	12974
30°	12301	12406	12792
35°	12027	12164	12726
40°	11690	11914	12616
45°	11248	11624	12620
50°	10676	11296	12622
55°	9822	10971	12268
60°	8736	10499	11480
65°	7362	9633	7390
70°	5786	7505	5475
75°	4183	4442	5738
80°	2738	3676	5784
85°	1372	3338	6083



TEST NUMBER: P826550

CATALOG NUMBER: OHBL-24SE-MCL-UNV-L830-CD-UPL36

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	735.3	2.9
10°-20°	2108.5	8.3
20°-30°	3220.3	12.7
30°-40°	3907.4	15.4
40°-50°	4095.3	16.1
50°-60°	3710.9	14.6
60°-70°	2488.0	9.8
70°-80°	1117.2	4.4
80°-90°	412.6	1.6
90°-100°	378.0	1.5
100°-110°	1217.1	4.8
110°-120°	988.6	3.9
120°-130°	470.1	1.9
130°-140°	240.9	0.9
140°-150°	141.8	0.6
150°-160°	84.3	0.3
160°-170°	44.5	0.2
170°-180°	13.6	0.1
0°-30°	6064.1	23.9
0°-40°	9971.5	39.3
0°-60°	17777.7	70.1
0°-90°	21795.5	85.9
90°-120°	2583.7	10.2
90°-150°	3436.5	13.5
90°-180°	3579.0	14.1
0°-180°	25374.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7798	7798	7798	7798	7798	
5°	7747	7774	7720	7744	7734	737
15°	7496	7467	7414	7479	7488	2116
25°	6964	6933	6982	7046	7026	3210
35°	6172	6187	6250	6317	6292	3858
45°	5122	5206	5303	5438	5455	3946
55°	3769	3951	4220	4390	4379	3365
65°	2212	2558	2904	2451	2001	2204
75°	870	1263	929	951	1012	951
85°	150	288	369	445	467	183
90°	9	141	249	306	318	14
95°	59	175	284	354	374	216
105°	1379	1398	1354	1037	948	1312
115°	968	959	986	1001	994	977
125°	480	498	520	515	507	452
135°	289	297	306	314	316	229
145°	213	219	223	227	229	136
155°	175	179	182	184	182	82
165°	153	155	156	157	158	44
175°	141	141	141	140	140	14
180°	138	138	138	138	138	



TEST NUMBER: P826550

CATALOG NUMBER: OHBL-24SE-MCL-UNV-L830-CD-UPL36

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7798.1	7798.1	7798.1	7798.1	7798.1
2.5°	7766.6	7799.3	7758.7	7802.7	7814.0
5°	7747.4	7774.5	7720.4	7744.1	7733.9
7.5°	7712.4	7721.5	7657.3	7676.4	7656.1
10°	7660.6	7656.1	7580.6	7617.8	7622.3
12.5°	7583.9	7570.4	7502.8	7559.1	7560.3
15°	7496.0	7466.7	7413.6	7479.1	7488.1
17.5°	7394.5	7356.1	7321.2	7405.8	7392.2
20°	7276.1	7231.0	7224.3	7316.7	7282.9
22.5°	7129.5	7094.6	7110.4	7198.3	7176.9
25°	6963.8	6933.4	6981.9	7046.1	7025.8
27.5°	6789.1	6771.0	6826.2	6875.9	6836.3
30°	6597.4	6587.2	6660.5	6701.0	6651.4
32.5°	6388.7	6392.1	6462.1	6517.2	6471.1
35°	6172.3	6186.9	6250.1	6316.6	6291.8
37.5°	5934.3	5967.0	6030.2	6105.7	6079.8
40°	5682.9	5730.3	5800.2	5891.4	5867.8
42.5°	5411.2	5470.9	5561.1	5662.6	5660.3
45°	5122.5	5205.9	5302.9	5438.2	5455.1
47.5°	4822.5	4916.1	5039.1	5219.5	5245.4
50°	4496.7	4614.0	4767.3	4983.8	4999.6
52.5°	4133.6	4293.8	4496.7	4704.1	4685.0
55°	3769.4	3951.0	4220.4	4389.6	4379.4
57.5°	3406.3	3610.5	3937.5	4058.1	4056.9
60°	3000.4	3258.6	3616.0	3707.4	3617.2
62.5°	2624.9	2902.3	3273.3	3206.8	2897.8
65°	2212.3	2558.5	2904.5	2451.3	2001.4
67.5°	1845.8	2206.6	2467.1	1678.9	1437.6
70°	1477.1	1875.2	1923.6	1245.9	1229.1
72.5°	1150.1	1574.0	1327.2	1066.7	1120.8
75°	870.4	1262.9	929.1	950.6	1012.5
77.5°	634.8	969.7	722.8	833.2	884.0
80°	436.3	686.7	589.7	700.2	735.1
82.5°	274.0	453.3	472.4	563.8	599.8
85°	150.0	287.5	368.7	445.4	466.8
87.5°	62.0	173.6	281.9	343.9	362.0
90°	8.6	141.4	249.2	306.1	318.2
92.5°	24.4	129.2	227.2	282.1	295.6
95°	58.8	175.1	284.4	354.4	373.8
97.5°	350.3	421.4	434.1	520.0	546.8
100°	750.6	806.2	685.9	709.7	731.8
102.5°	1175.1	1218.0	1014.7	868.6	844.0
105°	1378.9	1397.6	1354.1	1037.2	947.5



TEST NUMBER: P826550

CATALOG NUMBER: OHBL-24SE-MCL-UNV-L830-CD-UPL36

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1133.9	1144.6	1156.9	1163.3	1135.7
115°	967.5	958.9	985.6	1001.1	994.1
117.5°	828.8	821.8	846.2	849.2	841.2
120°	698.6	699.7	723.7	716.2	709.9
122.5°	580.4	593.4	612.3	608.7	597.7
125°	479.7	497.6	520.0	515.0	506.9
127.5°	413.8	419.4	441.5	440.2	441.3
130°	357.1	365.6	381.5	387.9	386.0
132.5°	319.1	327.6	340.4	347.7	350.4
135°	289.3	296.9	305.5	314.0	316.0
137.5°	266.2	271.8	277.4	287.7	289.8
140°	245.8	251.3	255.8	264.1	265.2
142.5°	227.9	234.6	238.1	244.3	245.5
145°	213.0	218.8	223.4	227.3	229.4
147.5°	203.0	206.7	211.3	212.3	214.3
150°	192.7	195.5	199.2	201.1	202.0
152.5°	183.4	186.2	189.9	190.9	191.8
155°	175.0	178.9	181.7	183.6	182.5
157.5°	167.6	171.5	174.3	175.2	175.2
160°	162.0	165.0	167.8	167.8	168.7
162.5°	157.5	159.4	161.3	162.2	163.1
165°	152.9	154.8	155.7	156.6	157.5
167.5°	149.2	151.2	151.0	152.0	152.0
170°	145.4	146.4	147.3	146.2	147.1
172.5°	142.7	143.6	144.5	143.4	143.4
175°	140.8	140.8	140.6	139.5	140.4
177.5°	140.0	139.9	138.7	137.6	137.4
180°	137.8	137.8	137.8	137.8	137.8



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - 90°-270°







107.5°	1393.1	1411.7	1412.0	1261.4	1101.7
110°	1287.2	1310.6	1317.4	1274.5	1203.2



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

METALUX

Report Number: SP1-2307-100-4

Test Date: 07/27/2023

Luminaire Tested: OHB-15SE-N-UNV-L830-CD

Data in this report applies to families of products including OHB-15SE-N-UNV-L830-CD.

Test Information


Test Method: LM-79-2019
 Report Number: SP1-2307-100-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/04/2023
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: METALUX
 Catalog Number: **OHB-15SE-N-UNV-L830-CD**
 Description: 15000 LUMEN OHB SE LED LUMINAIRE WITH 80CRI, 3000K LEDS AND NARROW LENS

LENS

Spectral Parameters

CCT (K): 3094
 CIE u': 0.2471
 CIE v': 0.5200
 Duv: 0.0004
 CIE x: 0.4308
 CIE y: 0.4028
 CIE z: 0.1664
 Peak Wavelength (nm): 601
 Dominant Wavelength (nm): 582
 Purity: 50.4
 Rf: 85.5
 Rg: 95.7

CRI (Ra): 83.1
 R1: 81.4
 R2: 91.2
 R3: 96.3
 R4: 81.2
 R5: 81.8
 R6: 89.5
 R7: 83.2
 R8: 59.8
 R9: 8.0
 R10: 80.2
 R11: 80.9
 R12: 72.3
 R13: 83.8
 R14: 98.6

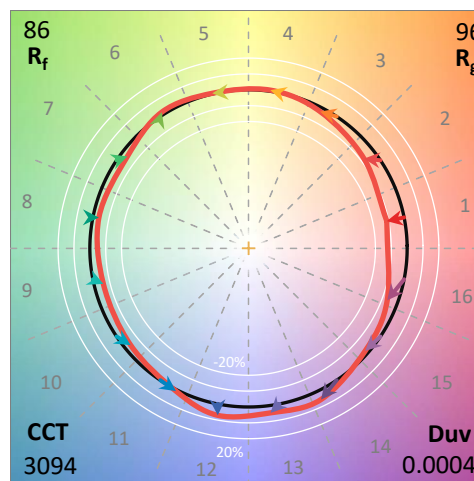

Test Conditions


Stabilization Time: 23M
 Operation Time: 12H
 Room Temperature (°C) / RH%: 25.7/57%
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2307-100-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	2/9/2023	8/9/2023
Power Meter	XITRON 2801 IN0071	11/29/2022	11/29/2023
AC Power Source	CHROMA 61603 IN0063	11/28/2022	11/28/2023
DC Power Source	AGILENT E3634A IN0208	11/28/2022	11/28/2023
Sphere Thermometer	ONSET IN0085	11/28/2022	11/28/2023
Room Thermometer	ONSET IN0046	11/28/2022	11/28/2023

REPORT NUMBER: SP1-2307-100-4

CIE 1931 Chromaticity Diagram

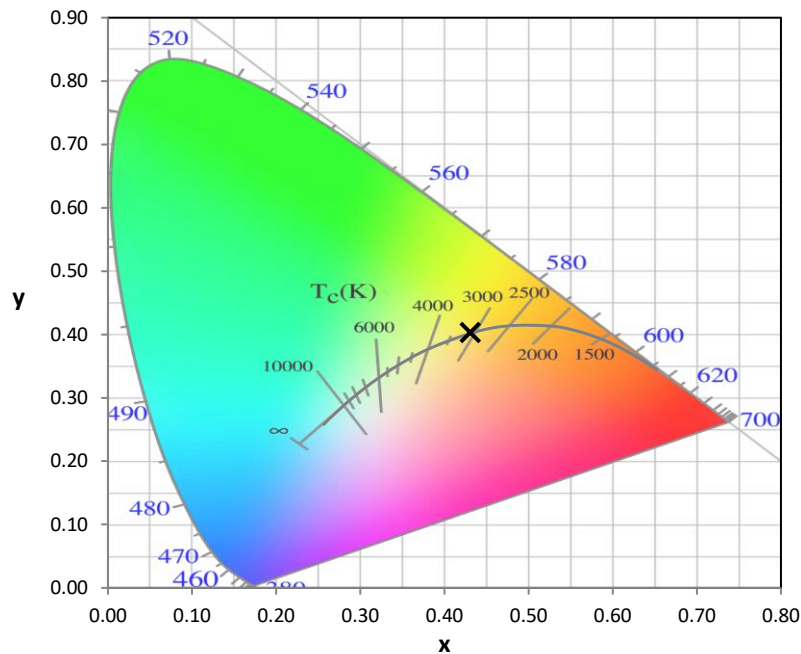

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

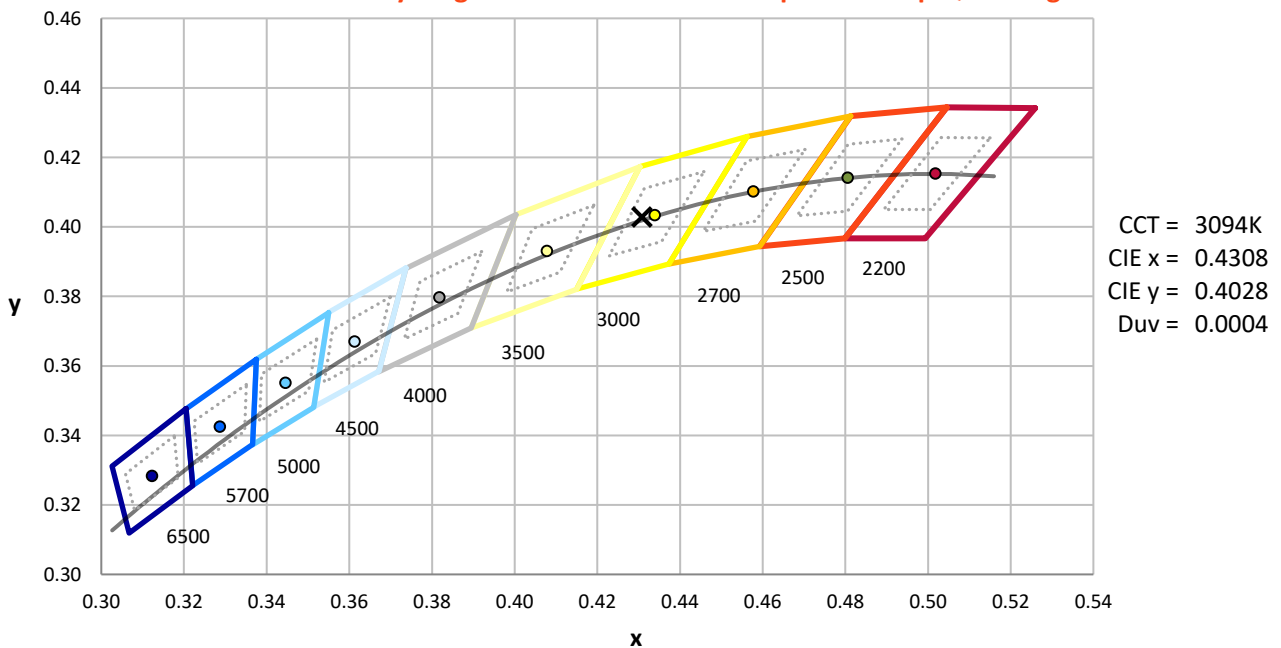

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2307-100-4

Photopic Flux vs. Wavelength



#####

λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)
360	5588	NR	490	67760	NR	620	245592	NR	750	12500	NR	880	5775	NR
365	4653	NR	495	80150	NR	625	233690	NR	755	11226	NR	885	6968	NR
370	4816	NR	500	92862	NR	630	218514	NR	760	10108	NR	890	4448	NR
375	5382	NR	505	106466	NR	635	203332	NR	765	9635	NR	895	3971	NR
380	5471	NR	510	115999	NR	640	188047	NR	770	8591	NR	900	4881	NR
385	5274	NR	515	124150	NR	645	172926	NR	775	7303	NR	905	5743	NR
390	4889	NR	520	130163	NR	650	155620	NR	780	6289	NR	910	5113	NR
395	4299	NR	525	135224	NR	655	141125	NR	785	5911	NR	915	4407	NR
400	4023	NR	530	140755	NR	660	126216	NR	790	5635	NR	920	4245	NR
405	3768	NR	535	146504	NR	665	111397	NR	795	5646	NR	925	3908	NR
410	4601	NR	540	152733	NR	670	97878	NR	800	5673	NR	930	5417	NR
415	6365	NR	545	159328	NR	675	85741	NR	805	5281	NR	935	4964	NR
420	9813	NR	550	166801	NR	680	74760	NR	810	5525	NR	940	3949	NR
425	16211	NR	555	175954	NR	685	65227	NR	815	4927	NR	945	4140	NR
430	25392	NR	560	187354	NR	690	56436	NR	820	5126	NR	950	3965	NR
435	39464	NR	565	198482	NR	695	48938	NR	825	4905	NR	955	4799	NR
440	61997	NR	570	210996	NR	700	42760	NR	830	5269	NR	960	3231	NR
445	101388	NR	575	223758	NR	705	37659	NR	835	4331	NR	965	3690	NR
450	140880	NR	580	236632	NR	710	33026	NR	840	4092	NR	970	6116	NR
455	134821	NR	585	248639	NR	715	29202	NR	845	4761	NR	975	5312	NR
460	103575	NR	590	256555	NR	720	25763	NR	850	4730	NR	980	4400	NR
465	86441	NR	595	264551	NR	725	22755	NR	855	4934	NR	985	4764	NR
470	70678	NR	600	268886	NR	730	20059	NR	860	5495	NR	990	4803	NR
475	58575	NR	605	267857	NR	735	17717	NR	865	5241	NR	995	3507	NR
480	55102	NR	610	262898	NR	740	15495	NR	870	5223	NR	1000	6247	NR
485	58801	NR	615	255346	NR	745	14094	NR	875	5501	NR			

REPORT NUMBER: SP1-2307-100-4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 18580

S/P: 1.39

λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)
360	5588	NR	490	67760	NR	620	245592	NR	750	12500	NR	880	5775	NR
365	4653	NR	495	80150	NR	625	233690	NR	755	11226	NR	885	6968	NR
370	4816	NR	500	92862	NR	630	218514	NR	760	10108	NR	890	4448	NR
375	5382	NR	505	106466	NR	635	203332	NR	765	9635	NR	895	3971	NR
380	5471	NR	510	115999	NR	640	188047	NR	770	8591	NR	900	4881	NR
385	5274	NR	515	124150	NR	645	172926	NR	775	7303	NR	905	5743	NR
390	4889	NR	520	130163	NR	650	155620	NR	780	6289	NR	910	5113	NR
395	4299	NR	525	135224	NR	655	141125	NR	785	5911	NR	915	4407	NR
400	4023	NR	530	140755	NR	660	126216	NR	790	5635	NR	920	4245	NR
405	3768	NR	535	146504	NR	665	111397	NR	795	5646	NR	925	3908	NR
410	4601	NR	540	152733	NR	670	97878	NR	800	5673	NR	930	5417	NR
415	6365	NR	545	159328	NR	675	85741	NR	805	5281	NR	935	4964	NR
420	9813	NR	550	166801	NR	680	74760	NR	810	5525	NR	940	3949	NR
425	16211	NR	555	175954	NR	685	65227	NR	815	4927	NR	945	4140	NR
430	25392	NR	560	187354	NR	690	56436	NR	820	5126	NR	950	3965	NR
435	39464	NR	565	198482	NR	695	48938	NR	825	4905	NR	955	4799	NR
440	61997	NR	570	210996	NR	700	42760	NR	830	5269	NR	960	3231	NR
445	101388	NR	575	223758	NR	705	37659	NR	835	4331	NR	965	3690	NR
450	140880	NR	580	236632	NR	710	33026	NR	840	4092	NR	970	6116	NR
455	134821	NR	585	248639	NR	715	29202	NR	845	4761	NR	975	5312	NR
460	103575	NR	590	256555	NR	720	25763	NR	850	4730	NR	980	4400	NR
465	86441	NR	595	264551	NR	725	22755	NR	855	4934	NR	985	4764	NR
470	70678	NR	600	268886	NR	730	20059	NR	860	5495	NR	990	4803	NR
475	58575	NR	605	267857	NR	735	17717	NR	865	5241	NR	995	3507	NR
480	55102	NR	610	262898	NR	740	15495	NR	870	5223	NR	1000	6247	NR
485	58801	NR	615	255346	NR	745	14094	NR	875	5501	NR			

REPORT NUMBER: SP1-2307-100-4

Melanopic Flux vs. Wavelength



Melanopic Lumens: 7125.5

M/P: 0.53

λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)
360	5588	NR	490	67760	NR	620	245592	NR	750	12500	NR	880	5775	NR
365	4653	NR	495	80150	NR	625	233690	NR	755	11226	NR	885	6968	NR
370	4816	NR	500	92862	NR	630	218514	NR	760	10108	NR	890	4448	NR
375	5382	NR	505	106466	NR	635	203332	NR	765	9635	NR	895	3971	NR
380	5471	NR	510	115999	NR	640	188047	NR	770	8591	NR	900	4881	NR
385	5274	NR	515	124150	NR	645	172926	NR	775	7303	NR	905	5743	NR
390	4889	NR	520	130163	NR	650	155620	NR	780	6289	NR	910	5113	NR
395	4299	NR	525	135224	NR	655	141125	NR	785	5911	NR	915	4407	NR
400	4023	NR	530	140755	NR	660	126216	NR	790	5635	NR	920	4245	NR
405	3768	NR	535	146504	NR	665	111397	NR	795	5646	NR	925	3908	NR
410	4601	NR	540	152733	NR	670	97878	NR	800	5673	NR	930	5417	NR
415	6365	NR	545	159328	NR	675	85741	NR	805	5281	NR	935	4964	NR
420	9813	NR	550	166801	NR	680	74760	NR	810	5525	NR	940	3949	NR
425	16211	NR	555	175954	NR	685	65227	NR	815	4927	NR	945	4140	NR
430	25392	NR	560	187354	NR	690	56436	NR	820	5126	NR	950	3965	NR
435	39464	NR	565	198482	NR	695	48938	NR	825	4905	NR	955	4799	NR
440	61997	NR	570	210996	NR	700	42760	NR	830	5269	NR	960	3231	NR
445	101388	NR	575	223758	NR	705	37659	NR	835	4331	NR	965	3690	NR
450	140880	NR	580	236632	NR	710	33026	NR	840	4092	NR	970	6116	NR
455	134821	NR	585	248639	NR	715	29202	NR	845	4761	NR	975	5312	NR
460	103575	NR	590	256555	NR	720	25763	NR	850	4730	NR	980	4400	NR
465	86441	NR	595	264551	NR	725	22755	NR	855	4934	NR	985	4764	NR
470	70678	NR	600	268886	NR	730	20059	NR	860	5495	NR	990	4803	NR
475	58575	NR	605	267857	NR	735	17717	NR	865	5241	NR	995	3507	NR
480	55102	NR	610	262898	NR	740	15495	NR	870	5223	NR	1000	6247	NR
485	58801	NR	615	255346	NR	745	14094	NR	875	5501	NR			

REPORT NUMBER: SP1-2307-100-4



TM-30-18

Summary

$R_f = 85.5$
 $R_g = 95.7$
 $CIE R_a = 83.1$
 $R_9 = 8.0$



Color Vector Graphics

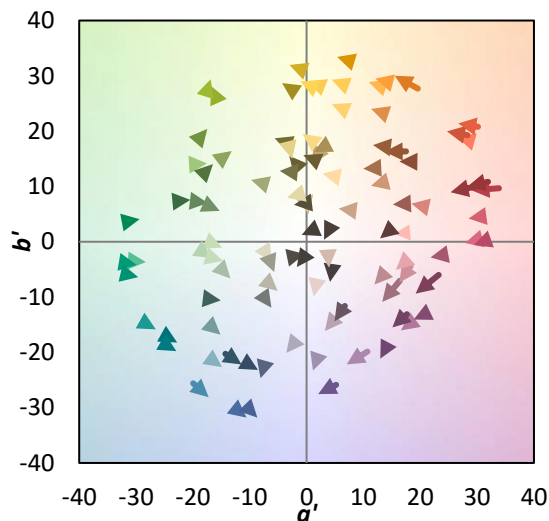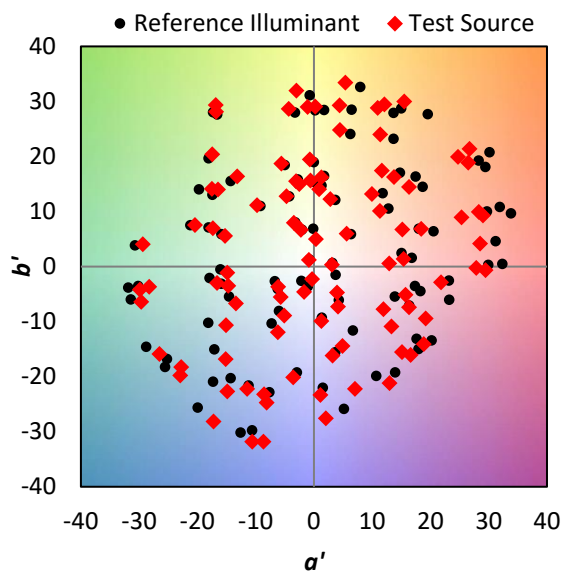


REPORT NUMBER: SP1-2307-100-4

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)




CES01 = 86	CES26 = 85	CES51 = 94	CES76 = 81
CES02 = 63	CES27 = 94	CES52 = 94	CES77 = 85
CES03 = 31	CES28 = 94	CES53 = 90	CES78 = 81
CES04 = 70	CES29 = 89	CES54 = 91	CES79 = 91
CES05 = 49	CES30 = 96	CES55 = 90	CES80 = 90
CES06 = 51	CES31 = 90	CES56 = 87	CES81 = 74
CES07 = 42	CES32 = 83	CES57 = 86	CES82 = 96
CES08 = 41	CES33 = 94	CES58 = 87	CES83 = 95
CES09 = 29	CES34 = 91	CES59 = 92	CES84 = 92
CES10 = 76	CES35 = 95	CES60 = 92	CES85 = 77
CES11 = 59	CES36 = 87	CES61 = 89	CES86 = 70
CES12 = 65	CES37 = 95	CES62 = 90	CES87 = 85
CES13 = 43	CES38 = 94	CES63 = 88	CES88 = 88
CES14 = 74	CES39 = 98	CES64 = 82	CES89 = 76
CES15 = 71	CES40 = 96	CES65 = 80	CES90 = 89
CES16 = 47	CES41 = 98	CES66 = 80	CES91 = 79
CES17 = 50	CES42 = 96	CES67 = 79	CES92 = 66
CES18 = 56	CES43 = 91	CES68 = 82	CES93 = 79
CES19 = 72	CES44 = 99	CES69 = 87	CES94 = 63
CES20 = 66	CES45 = 94	CES70 = 79	CES95 = 75
CES21 = 87	CES46 = 91	CES71 = 77	CES96 = 84
CES22 = 79	CES47 = 94	CES72 = 92	CES97 = 90
CES23 = 92	CES48 = 85	CES73 = 75	CES98 = 86
CES24 = 91	CES49 = 91	CES74 = 92	CES99 = 77
CES25 = 72	CES50 = 95	CES75 = 79	

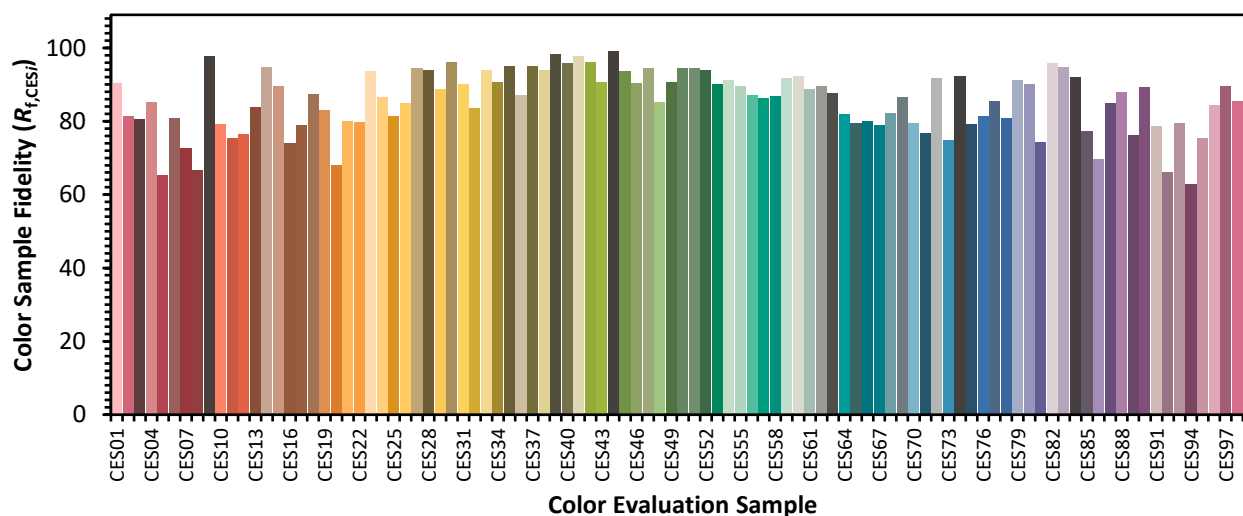

REPORT NUMBER: SP1-2307-100-4

TM-30-18



Color Rendition by Hue-Angle Bin

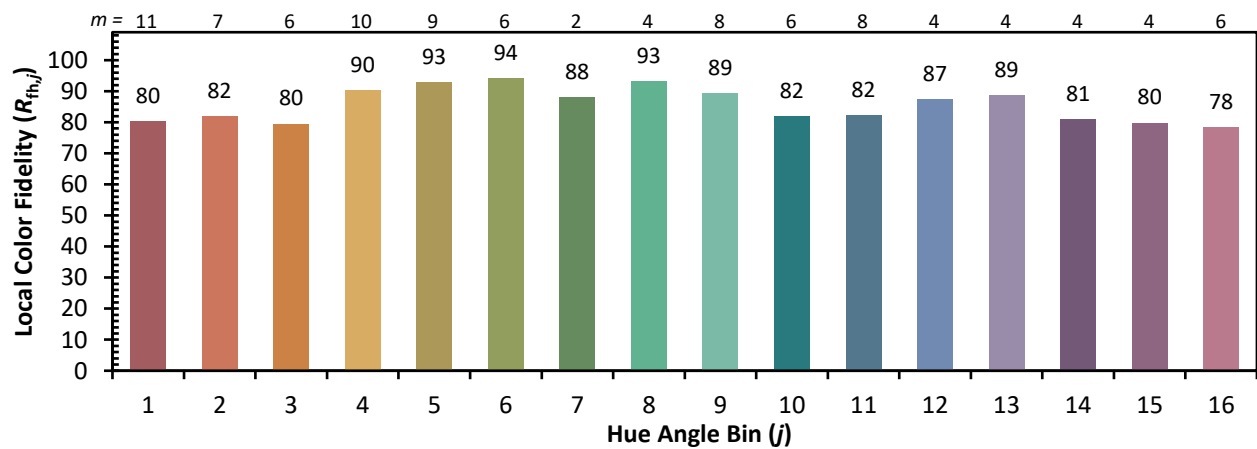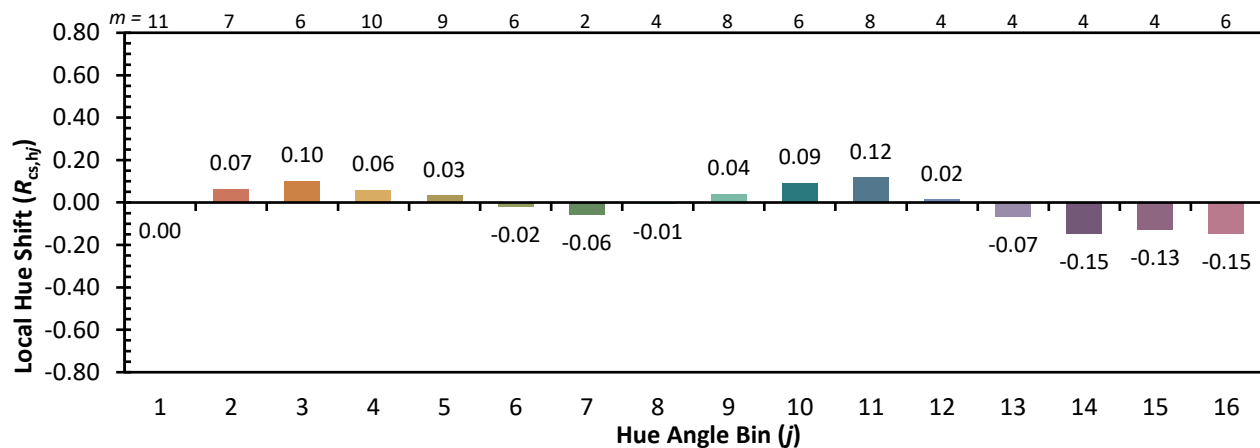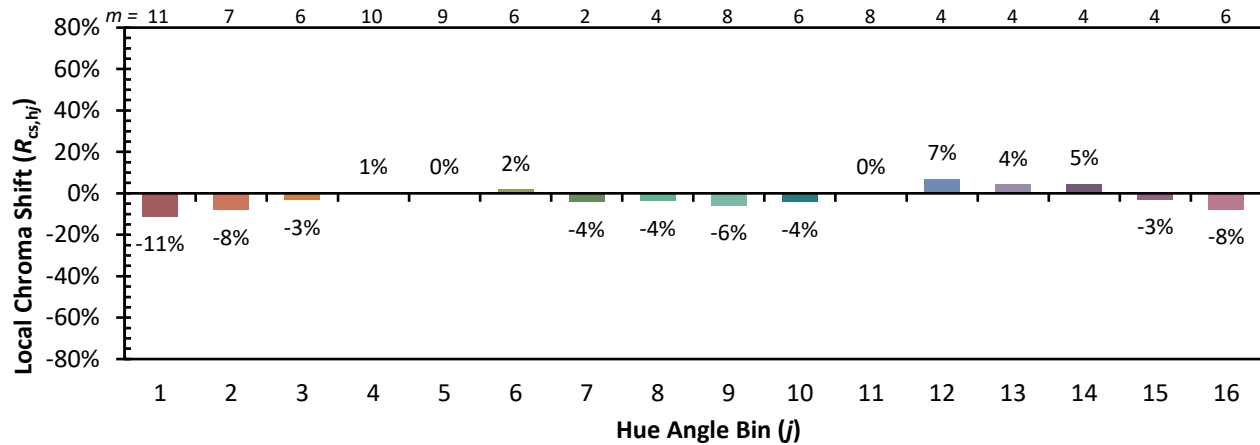

REPORT NUMBER: SP1-2307-100-4

TM-30-18

Measure Comparisons

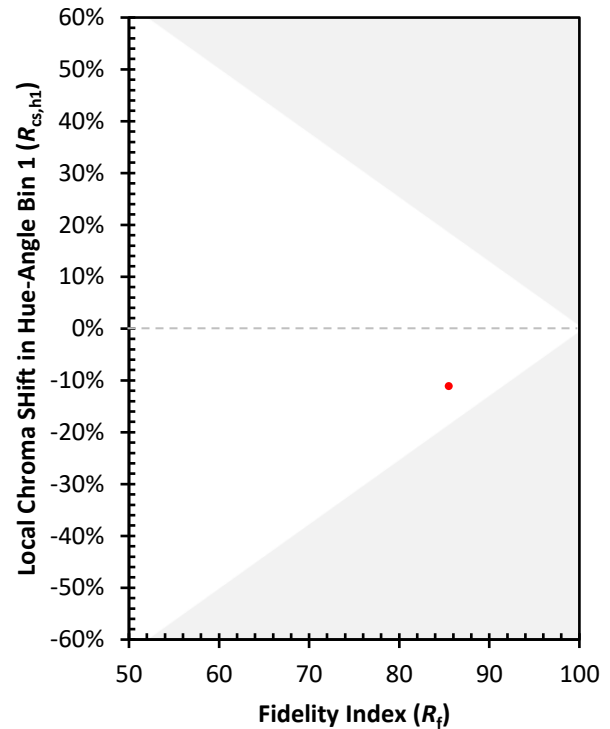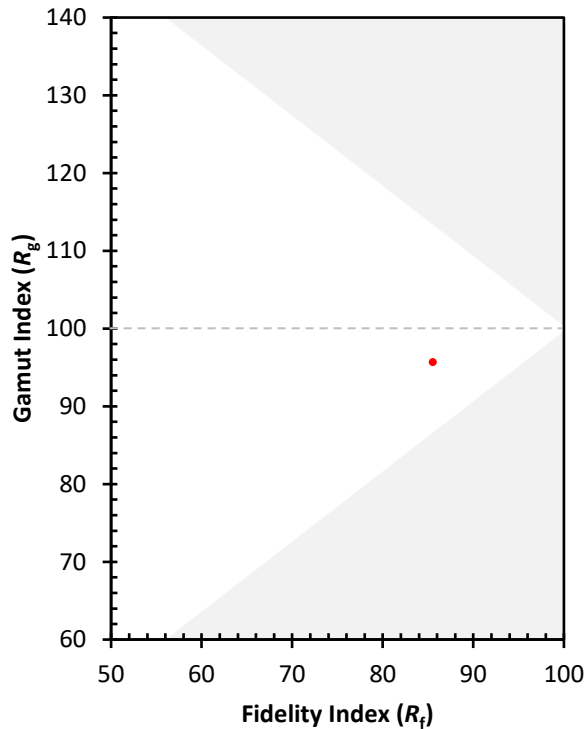

(END OF REPORT)