

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: METALUX

Report Number: P980698

Luminaire Tested: UHBS2-2436-M-L83065-MID-4000K-FRR6

Issue Date: 4/4/2025

Test Information

Test Method: LM-79-2019
Report Number: P980698
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-344-8)
Test Lab: INNOVATION CENTER
Issue Date: 4/4/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: METALUX
Catalog Number: UHBS2-2436-M-L83065-MID-4000K-FRR6
Description: UHBS2 LED High Bay at 4000K and MID lumen setting 3in Deep Frosted Refractor
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 28816.0 lumens
Efficiency: N/A
Efficacy: 151.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.13
Luminous Opening: Vertical Cylinder (Dia: 1.47' x H: 0.5')
CIE Type: Direct

Input Watts (W): 190
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.998
Total Harmonic Distortion (THDi): 5.15
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P980698

CATALOG NUMBER: UHBS2-2436-M-L83065-MID-4000K-FRR6

Luminous Intensity Polar Plot

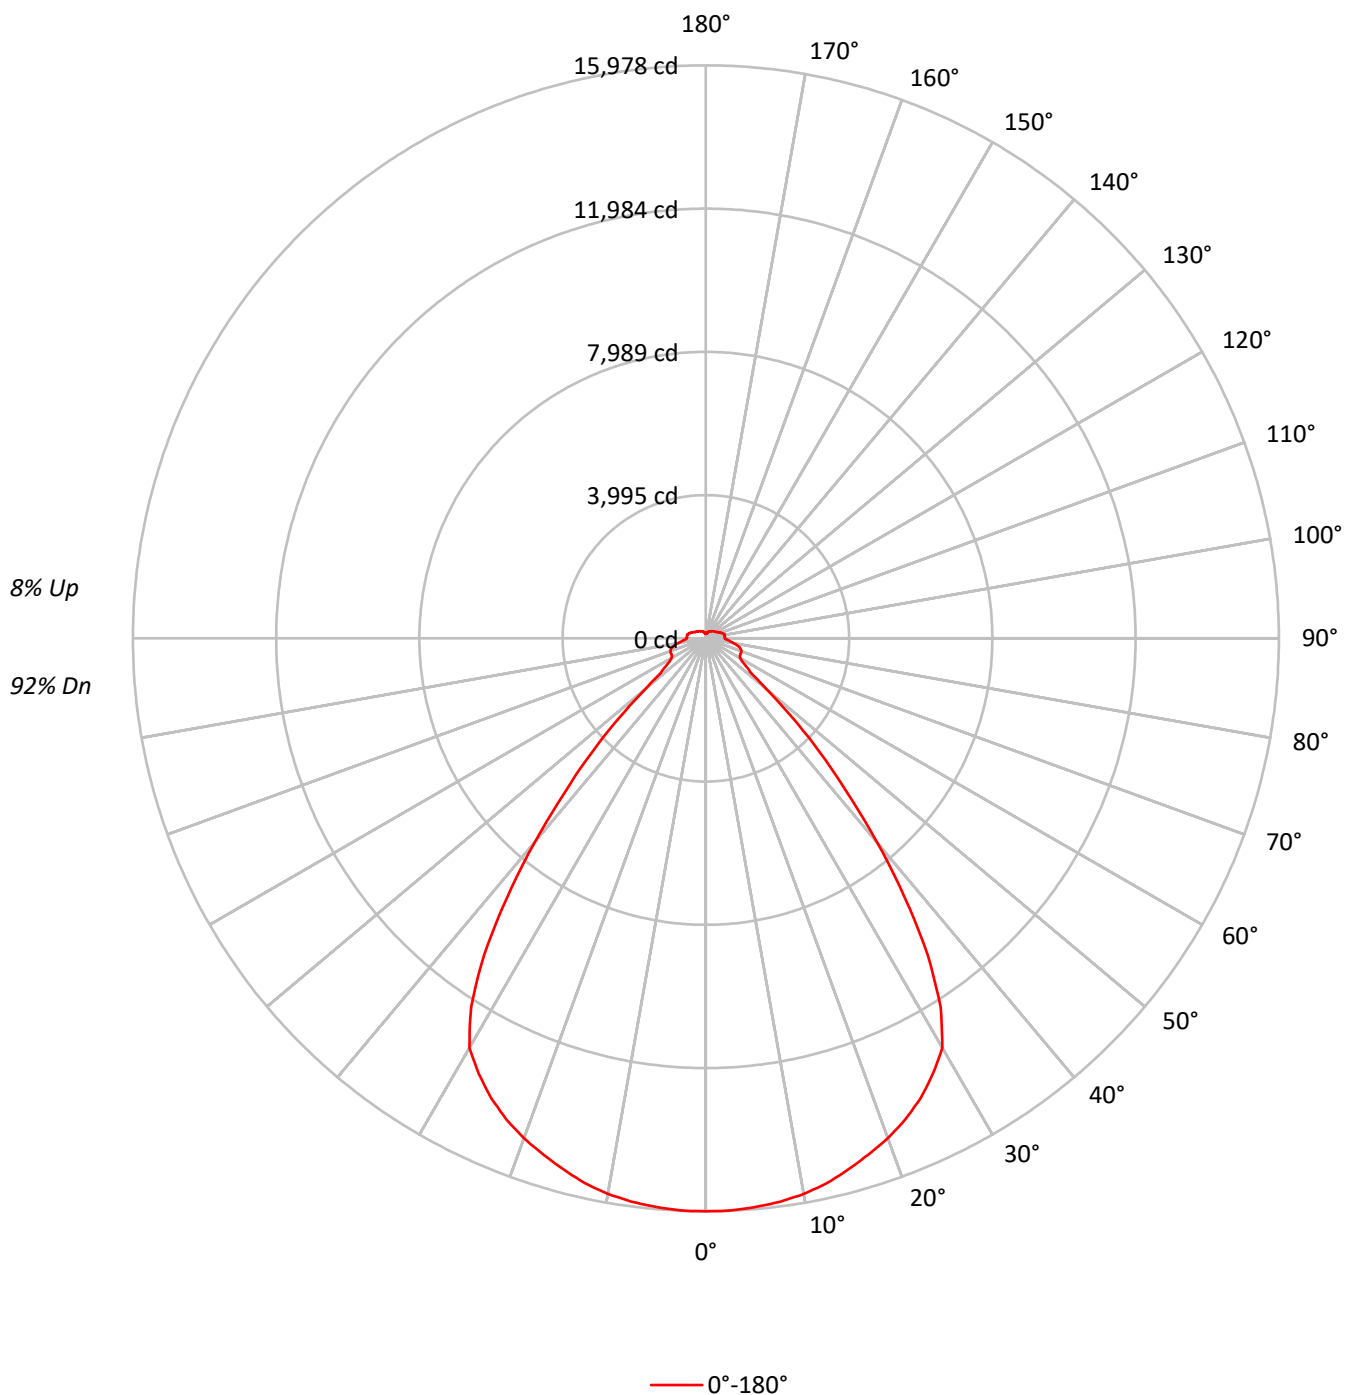

TEST NUMBER: P980698

CATALOG NUMBER: UHBS2-2436-M-L83065-MID-4000K-FRR6

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	117	117	117	117	113	113	113	113	107	107	107		100	100	100		95
1	109	105	101	98	105	102	98	96	96	93	91		91	89	87		86
2	101	94	89	84	98	92	87	83	87	83	79		83	80	77		79
3	94	86	79	74	91	83	77	73	80	74	70		76	72	68		72
4	88	78	71	65	85	76	70	64	73	67	63		70	65	61		67
5	82	71	64	58	80	70	63	58	67	61	57		64	59	55		62
6	77	66	58	53	75	64	57	52	62	56	51		60	54	50		57
7	72	61	53	48	70	59	52	47	57	51	47		55	50	46		53
8	68	56	49	44	66	55	48	43	53	47	43		51	46	42		50
9	64	52	45	40	62	51	44	40	50	43	39		48	43	39		47
10	60	48	42	37	59	48	41	37	46	40	36		45	40	36		44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	101062
5°	97399
10°	93885
15°	90007
20°	86266
25°	82193
30°	77068
35°	63938
40°	44961
45°	28040
50°	14266
55°	9380
60°	7978
65°	8210
70°	8897
75°	9091
80°	8420
85°	7645

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 28040 cd/sqm

TEST NUMBER: P980698

CATALOG NUMBER: UHBS2-2436-M-L83065-MID-4000K-FRR6

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1513.9	5.3
10°-20°	4328.9	15.0
20°-30°	6503.2	22.6
30°-40°	6585.5	22.9
40°-50°	3504.5	12.2
50°-60°	1295.4	4.5
60°-70°	1058.3	3.7
70°-80°	1008.0	3.5
80°-90°	697.1	2.4
90°-100°	577.1	2.0
100°-110°	527.1	1.8
110°-120°	396.2	1.4
120°-130°	290.8	1.0
130°-140°	217.3	0.8
140°-150°	153.7	0.5
150°-160°	97.7	0.3
160°-170°	48.7	0.2
170°-180°	12.7	0.0
0°-30°	12346.0	42.8
0°-40°	18931.5	65.7
0°-60°	23731.4	82.4
0°-90°	26494.8	91.9
90°-120°	1500.4	5.2
90°-150°	2162.2	7.5
90°-180°	2321.0	8.1
0°-180°	28816.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15978	
5°	15921	###
15°	15338	4329
25°	14152	6503
35°	10788	6586
45°	4490	3504
55°	1376	1295
65°	1057	1058
75°	972	1008
85°	626	548
90°	528	294
95°	530	433
105°	502	527
115°	397	396
125°	321	291
135°	280	217
145°	243	154
155°	211	98
165°	170	49
175°	128	13
180°	126	



TEST NUMBER: P980698

CATALOG NUMBER: UHBS2-2436-M-L83065-MID-4000K-FRR6

CANDELA DISTRIBUTION (FULL):

0°	
0°	15978.0
2.5°	15971.2
5°	15920.7
7.5°	15845.0
10°	15732.6
12.5°	15562.9
15°	15338.2
17.5°	15088.2
20°	14833.6
22.5°	14526.3
25°	14152.5
27.5°	13703.0
30°	13187.0
32.5°	12184.8
35°	10788.1
37.5°	9116.2
40°	7421.4
42.5°	5822.9
45°	4490.5
47.5°	3261.2
50°	2197.1
52.5°	1584.7
55°	1376.0
57.5°	1201.7
60°	1103.1
62.5°	1071.0
65°	1057.3
67.5°	1059.5
70°	1052.7
72.5°	1027.4
75°	972.4
77.5°	889.8
80°	798.1
82.5°	706.4
85°	626.1
87.5°	561.9
90°	527.5
92.5°	525.2
95°	529.8
97.5°	532.1
100°	529.8
102.5°	520.6
105°	502.3
107.5°	479.3
110°	449.5

TEST NUMBER: P980698

CATALOG NUMBER: UHBS2-2436-M-L83065-MID-4000K-FRR6

CANDELA DISTRIBUTION (continued):

	0°
112.5°	422.0
115°	396.8
117.5°	373.8
120°	353.2
122.5°	337.1
125°	321.1
127.5°	309.6
130°	300.4
132.5°	289.0
135°	279.8
137.5°	270.6
140°	261.4
142.5°	252.3
145°	243.1
147.5°	236.2
150°	227.0
152.5°	220.2
155°	211.0
157.5°	199.5
160°	190.4
162.5°	181.2
165°	169.7
167.5°	160.5
170°	144.5
172.5°	130.7
175°	128.4
177.5°	128.4
180°	126.1

(END OF REPORT)