

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P284616

Luminaire Tested: **4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P284616
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P#)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U
Description: 4FT LINEAR SNLED LED FIXTURE
SQUARE FROSTED LENS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1748.0 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.56 / 1.59
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.12')
CIE Type: Semi-Direct


Input Watts (W): 18
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P284616

CATALOG NUMBER: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U

Luminous Intensity Polar Plot

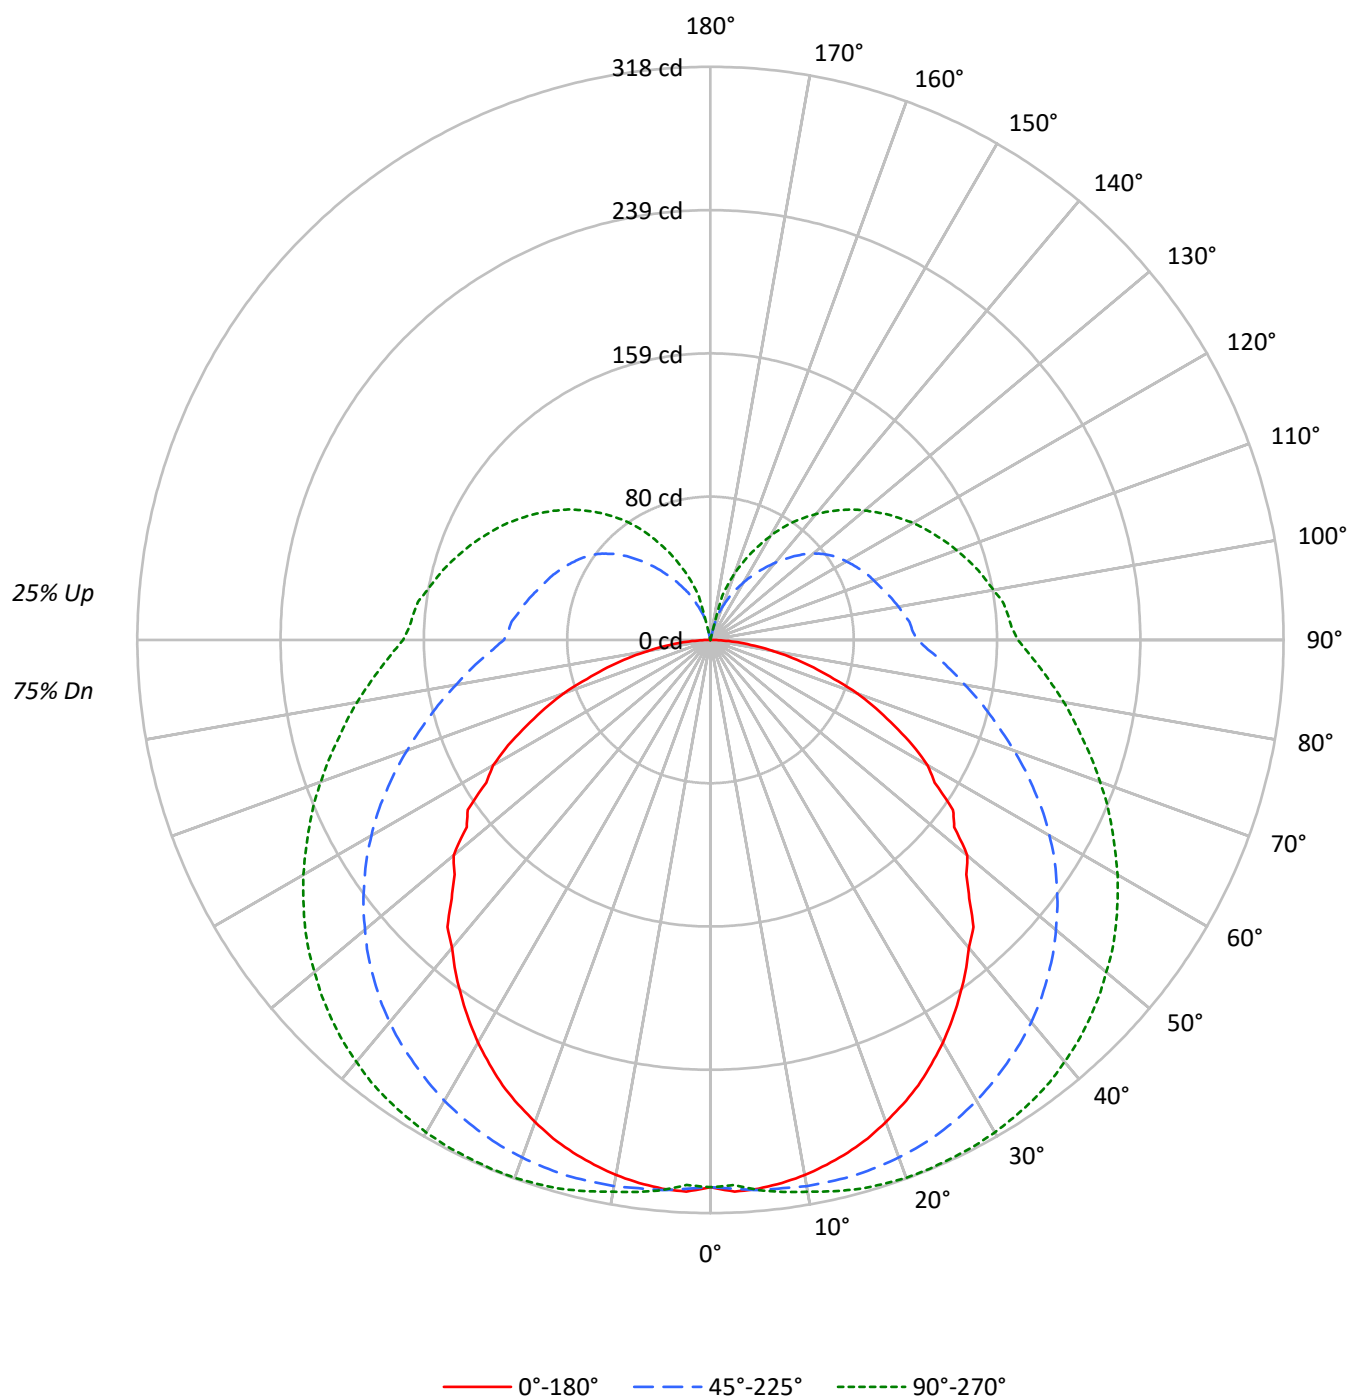



TEST NUMBER: P284616

CATALOG NUMBER: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	113	113	113	113	107	107	107	107	97	97	97	88	88	88	79	79	79			75
1	100	94	89	84	95	89	84	80	80	76	73	72	69	66	64	62	60			56
2	90	80	72	66	85	76	69	63	68	63	58	61	57	53	55	51	48			44
3	81	69	60	53	76	66	58	51	59	53	47	53	48	43	47	43	39			36
4	74	61	51	44	69	58	49	43	52	45	39	47	41	36	42	37	33			30
5	67	54	44	37	63	51	43	36	46	39	33	42	35	31	37	32	28			25
6	62	48	39	32	58	46	37	31	41	34	29	37	31	27	34	28	24			22
7	57	43	34	28	54	41	33	27	37	30	25	34	28	23	30	25	21			19
8	53	39	31	25	50	37	29	24	34	27	22	31	25	21	28	23	19			17
9	49	36	27	22	47	34	26	21	31	24	20	28	23	18	26	21	17			15
10	46	33	25	20	44	31	24	19	29	22	18	26	21	16	24	19	15			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2453	2453	2453
5°	2472	2424	2406
10°	2460	2403	2393
15°	2443	2390	2398
20°	2420	2379	2403
25°	2397	2370	2406
30°	2364	2363	2420
35°	2328	2354	2436
40°	2292	2353	2452
45°	2250	2348	2471
50°	2256	2343	2490
55°	2216	2342	2520
60°	2134	2343	2554
65°	2016	2347	2602
70°	1887	2364	2675
75°	1655	2419	2783
80°	1399	2535	2963
85°	1038	2771	3225



TEST NUMBER: P284616

CATALOG NUMBER: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.2	1.7
10°-20°	86.5	4.9
20°-30°	137.4	7.9
30°-40°	176.4	10.1
40°-50°	199.2	11.4
50°-60°	203.2	11.6
60°-70°	188.3	10.8
70°-80°	159.4	9.1
80°-90°	127.3	7.3
90°-100°	108.1	6.2
100°-110°	96.3	5.5
110°-120°	82.0	4.7
120°-130°	65.1	3.7
130°-140°	46.2	2.6
140°-150°	27.6	1.6
150°-160°	12.9	0.7
160°-170°	3.1	0.2
170°-180°	0.0	0.0
0°-30°	253.1	14.5
0°-40°	429.5	24.6
0°-60°	831.9	47.6
0°-90°	1306.9	74.8
90°-120°	286.3	16.4
90°-150°	425.2	24.3
90°-180°	441.0	25.2
0°-180°	1748.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	304	304	304	304	304	
5°	306	303	306	306	306	29
15°	294	297	308	313	316	83
25°	273	282	302	312	317	126
35°	241	259	287	304	312	151
45°	203	230	264	288	297	158
55°	164	192	234	263	275	144
65°	112	150	198	232	246	112
75°	59	105	161	200	214	63
85°	15	67	128	170	184	17
90°	1	55	115	156	170	1
95°	0	52	111	152	166	0
105°	0	48	101	139	153	0
115°	0	44	92	125	138	0
125°	0	38	82	110	121	0
135°	0	28	66	93	102	0
145°	0	18	46	70	80	0
155°	0	12	28	43	53	0
165°	0	6	13	18	25	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P284616

CATALOG NUMBER: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	303.6	303.6	303.6	303.6	303.6
2.5°	306.4	303.2	304.8	304.4	302.7
5°	305.6	303.2	306.4	306.4	306.4
7.5°	303.9	302.3	306.8	308.5	308.9
10°	301.5	301.5	307.7	310.1	310.9
12.5°	298.2	299.4	307.7	311.4	313.3
15°	294.5	296.9	307.7	313.3	315.5
17.5°	290.0	294.1	306.8	313.8	316.7
20°	284.6	290.8	305.6	313.8	317.6
22.5°	278.9	286.7	303.9	313.0	317.6
25°	272.8	281.8	301.5	312.1	317.1
27.5°	265.4	276.9	298.6	310.9	316.7
30°	257.9	271.1	295.3	309.2	315.5
32.5°	249.7	264.9	291.2	306.8	313.8
35°	241.1	258.8	286.7	304.4	311.8
37.5°	232.4	251.4	282.2	301.0	309.2
40°	223.0	244.0	276.9	296.9	305.6
42.5°	216.0	236.2	271.1	292.8	301.9
45°	203.0	230.4	264.5	287.5	297.4
47.5°	192.6	219.4	257.9	282.2	292.4
50°	186.1	210.3	250.2	276.0	286.7
52.5°	170.5	204.2	242.7	269.9	281.3
55°	164.3	191.9	234.5	263.2	274.8
57.5°	147.4	183.2	226.3	255.9	267.8
60°	139.2	171.2	217.2	248.5	260.8
62.5°	126.5	161.1	208.3	240.3	253.1
65°	112.5	150.0	198.4	232.4	245.6
67.5°	99.4	138.9	189.0	224.2	238.2
70°	86.7	127.4	179.1	216.0	230.0
72.5°	71.8	115.8	169.6	208.3	222.2
75°	59.2	104.7	160.6	200.1	214.0
77.5°	46.8	94.1	152.0	192.6	206.6
80°	35.4	83.8	143.3	184.9	199.2
82.5°	24.6	75.2	135.6	177.5	191.4
85°	15.2	67.4	128.1	169.6	184.0
87.5°	7.0	60.4	120.7	162.3	177.0
90°	0.8	55.1	114.6	156.1	170.5
92.5°	0.4	53.4	112.2	153.2	167.1
95°	0.0	51.8	111.0	151.5	165.5
97.5°	0.0	50.1	108.1	149.1	163.5
100°	0.0	49.3	106.0	145.4	159.4
102.5°	0.0	48.1	103.5	142.1	156.1
105°	0.0	47.7	101.1	139.2	152.9
107.5°	0.0	46.8	98.5	135.6	149.1
110°	0.0	46.0	96.5	132.2	145.4



TEST NUMBER: P284616

CATALOG NUMBER: 4SNLED-LD5-22SL-SLW-UNV-L930-CD1-U

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	0.0	45.2	94.4	129.0	141.7
115°	0.0	44.3	92.0	125.3	137.6
117.5°	0.0	43.1	89.6	121.6	133.9
120°	0.0	41.5	87.1	118.3	129.8
122.5°	0.0	39.8	84.6	114.2	125.3
125°	0.0	38.2	81.7	110.5	121.1
127.5°	0.0	35.7	78.5	106.4	116.3
130°	0.0	33.3	74.4	102.3	111.7
132.5°	0.4	30.8	70.3	97.8	107.2
135°	0.0	28.4	65.7	93.2	101.9
137.5°	0.0	26.3	60.7	88.3	96.5
140°	0.0	23.8	55.9	82.6	91.2
142.5°	0.0	20.9	51.0	76.4	85.5
145°	0.0	18.5	46.0	69.8	79.7
147.5°	0.4	16.4	41.5	62.8	73.5
150°	0.4	14.7	37.0	55.9	66.5
152.5°	0.4	13.2	32.5	49.3	59.5
155°	0.4	11.5	28.4	42.7	53.0
157.5°	0.4	9.9	23.8	36.1	46.0
160°	0.4	8.6	19.7	30.4	39.5
162.5°	0.4	7.4	16.1	23.8	32.5
165°	0.4	6.2	12.7	17.6	25.1
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)