

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P1048439

Luminaire Tested: **GALN-SA6C-750-U-T4BC**

Issue Date: 07/10/2025

Test Information

Test Method: LM-79-08
Report Number: P1048439
Test Lab: INNOVATION CENTER(G3)
Issue Date: 07/10/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: GALN-SA6C-750-U-T4BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 6xLight Square PACKAGE
70CRI 5000K FIXTURE w/ TYPE IV ANGLED BACKLIGHT CONTROL
Light Source: (84) 5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 33787.9 lumens
Efficiency: N/A
Efficacy: 119.6 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B0 - U0 - G5

Input Watts (W): 282.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1048439

CATALOG NUMBER: GALN-SA6C-750-U-T4BC

Iso-Footcandle Lines of Horizontal Illumination

✘ Max cd

--- 1/2 Max cd

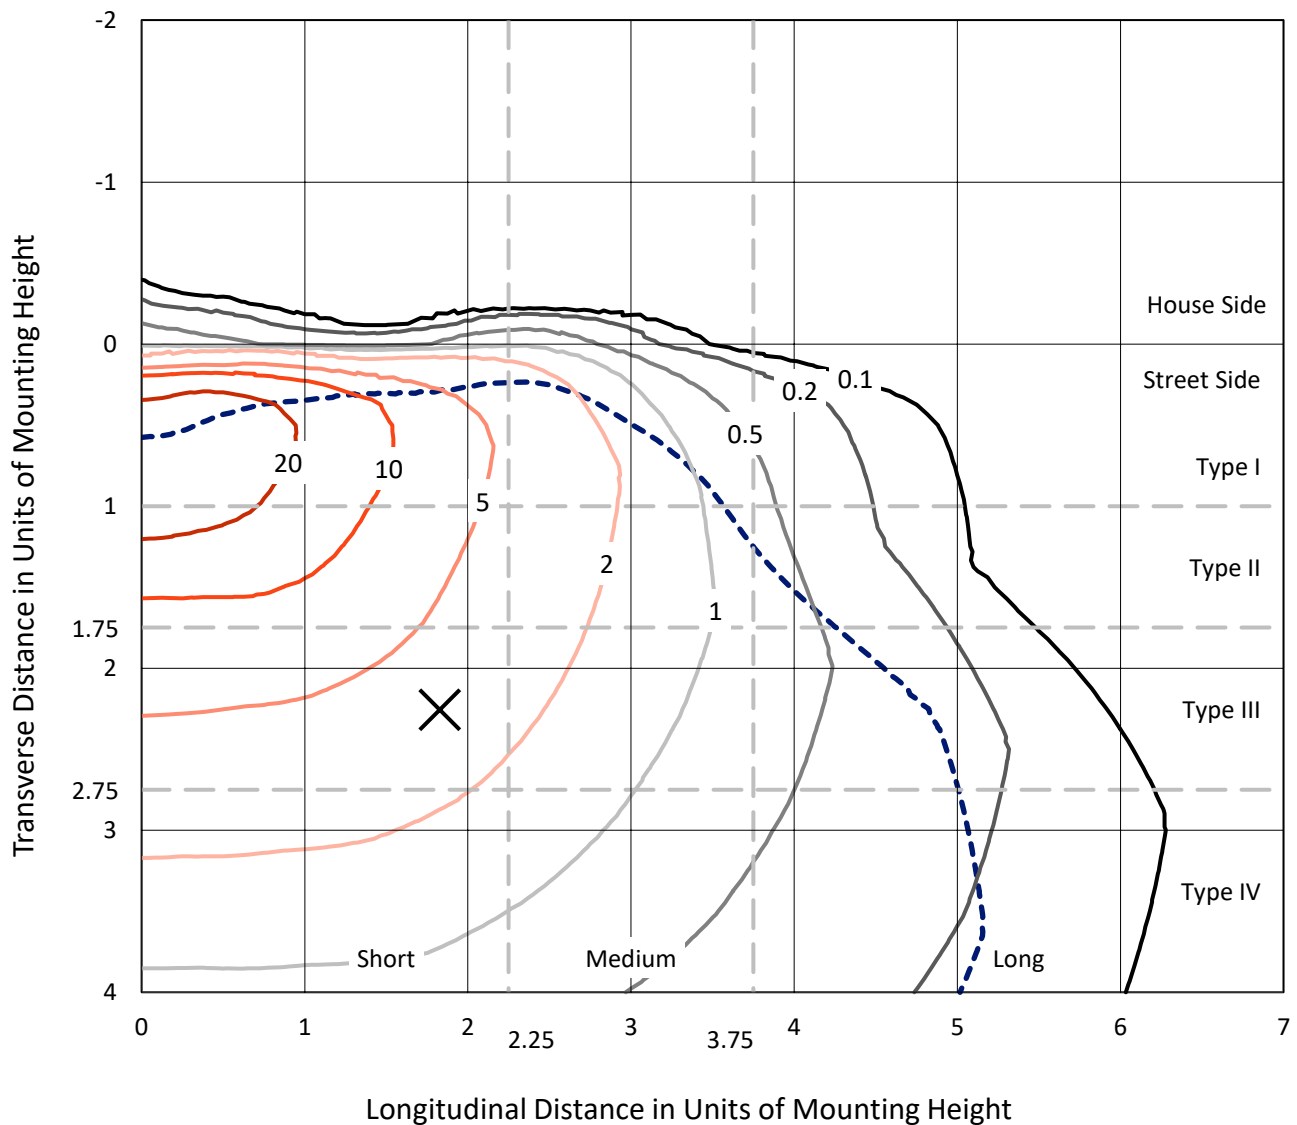


Based on 15 foot mounting height. Maximum calculated value = 34.7 fc
Type IV - Short - N/A

REPORT NUMBER: P1048439

CATALOG NUMBER: GALN-SA6C-750-U-T4BC

Luminous Intensity Polar Plot

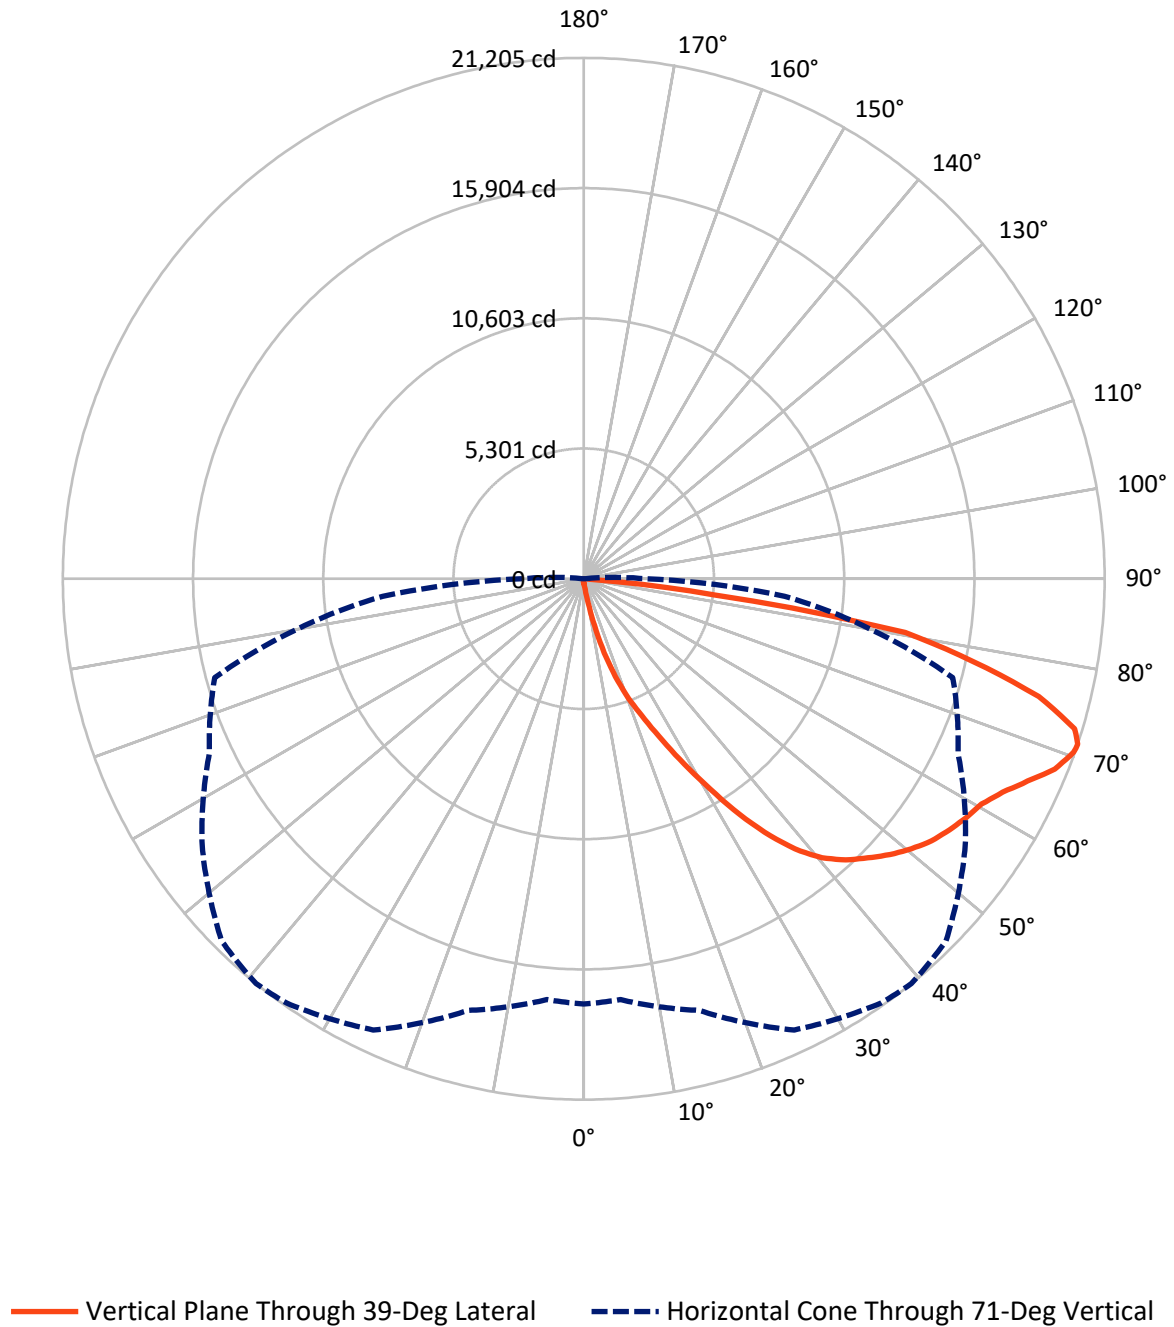

REPORT NUMBER: P1048439

CATALOG NUMBER: GALN-SA6C-750-U-T4BC

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	120.1	0.0	120.1
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	33667.8	0.0	33667.8
	% Fixture	99.6	0.0	99.6
Total	Lumens	33787.9	0.0	33787.9
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.2	0.1
10°-20°	361.1	1.1
20°-30°	1286.1	3.8
30°-40°	3099.5	9.2
40°-50°	5187.3	15.4
50°-60°	6662.4	19.7
60°-70°	8431.3	25.0
70°-80°	7516.9	22.2
80°-90°	1215.1	3.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	33787.9	100.0
0°-180°	33787.9	100.0



REPORT NUMBER: P1048439


CATALOG NUMBER: GALN-SA6C-750-U-T4BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1646.4	4.9			
FM	(30°-60°)	14921.4	44.2			
FH	(60°-80°)	15890.5	47.0			G5
FVH	(80°-90°)	1209.6	3.6			G5
BL	(0°-30°)	29.0	0.1	B0/110		
BM	(30°-60°)	27.8	0.1	B0/220		
BH	(60°-80°)	57.7	0.2	B0/110		G0/110
BVH	(80°-90°)	5.5	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G5

Type IV Short

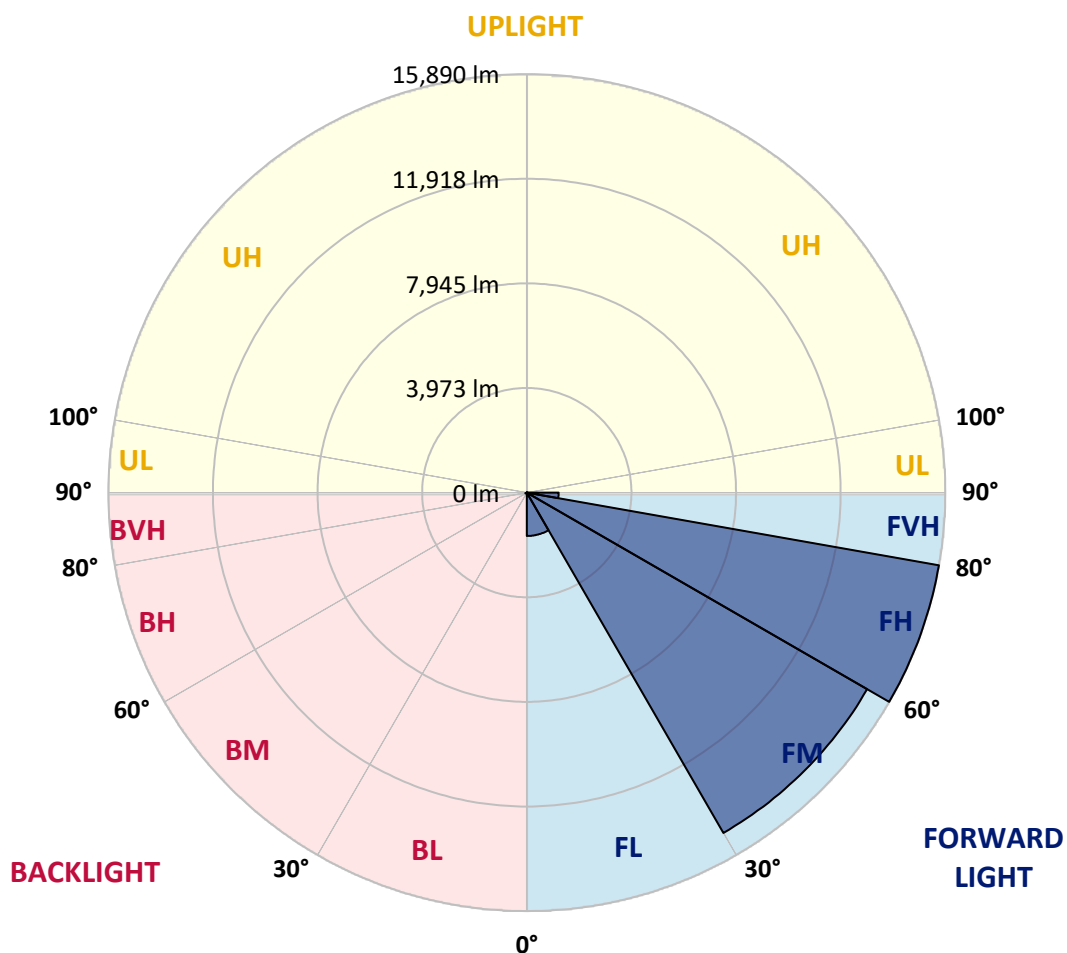

REPORT NUMBER: P1048439

CATALOG NUMBER: GALN-SA6C-750-U-T4BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	39°	45°	55°	65°	75°	85°
0°	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3
2.5°	212.7	212.7	212.7	205.9	205.9	203.6	201.3	201.3	196.7	194.4	189.8
5°	322.5	315.6	299.6	290.5	272.2	260.7	249.3	233.3	217.3	205.9	192.1
7.5°	729.6	745.6	693.0	594.7	494.0	450.6	377.4	304.2	251.6	217.3	194.4
10°	1859.5	1850.4	1672.0	1475.3	1139.1	1004.1	786.8	496.3	324.8	237.9	196.7
12.5°	3163.3	3154.1	2943.7	2676.1	2232.4	1951.0	1539.3	926.3	466.6	269.9	196.7
15°	4258.9	4222.3	4156.0	3890.6	3371.4	3135.8	2591.5	1637.7	754.8	324.8	201.3
17.5°	4983.9	4951.9	4890.2	4794.1	4464.7	4185.7	3748.8	2573.2	1221.4	420.9	210.4
20°	5649.5	5626.7	5576.3	5558.0	5345.3	5196.7	4835.3	3648.2	1903.0	571.8	224.2
22.5°	6564.4	6516.4	6537.0	6427.2	6219.1	6040.7	5818.8	4773.5	2735.6	823.4	249.3
25°	7685.2	7662.3	7605.1	7527.4	7239.2	7083.6	6742.8	5834.8	3666.5	1152.8	276.8
27.5°	9039.3	9014.1	9000.4	8822.0	8490.3	8321.1	7845.3	6836.6	4714.0	1614.8	313.4
30°	10599.2	10610.6	10521.4	10292.7	9906.1	9668.3	9178.8	7886.5	5786.8	2156.9	352.2
32.5°	12214.0	12191.1	12053.9	11784.0	11438.6	11216.7	10594.6	9037.0	6912.1	2872.8	398.0
35°	13954.6	13911.1	13549.7	13241.0	12945.9	12666.9	12099.6	10372.7	8037.4	3675.6	459.7
37.5°	15711.2	15507.6	14782.6	14391.4	14187.9	13959.2	13430.8	11797.7	9155.9	4572.2	535.2
40°	17037.8	16880.0	16020.0	15299.5	15137.1	14942.7	14549.3	13028.2	10345.3	5535.2	626.7
42.5°	17772.0	17685.1	16912.0	16200.7	15818.7	15647.2	15310.9	14103.3	11520.9	6598.7	759.4
45°	18085.4	17950.4	17433.5	17101.8	16493.4	16209.8	15809.5	14915.2	12749.2	7806.4	944.6
47.5°	17989.3	17911.5	17541.0	17662.2	17220.8	16779.3	16191.5	15537.4	13799.0	9192.5	1198.5
50°	17385.5	17319.1	17204.8	17861.2	17806.3	17284.8	16685.6	16029.1	14656.8	10622.0	1591.9
52.5°	16237.3	16209.8	16502.6	17705.7	18138.0	17730.8	17161.3	16463.7	15457.3	12115.6	2154.6
55°	14757.4	14869.5	15706.6	17463.2	18307.2	18060.2	17582.2	16870.8	16100.0	13451.4	2984.9
57.5°	14149.0	14178.7	15224.0	17291.7	18382.7	18350.7	17991.6	17259.7	16690.1	14519.5	4252.0
60°	14860.3	14814.6	15365.8	17422.1	18533.7	18611.4	18355.3	17621.1	17202.5	15436.7	5940.0
62.5°	16145.8	16120.6	16296.7	17977.9	18975.1	19132.9	18860.8	17881.8	17655.4	16040.6	7865.9
65°	17294.0	17241.4	17568.5	18963.7	19750.5	19862.6	19624.7	18327.8	17854.4	16479.7	9675.1
67.5°	17790.3	17778.9	18304.9	19901.5	20564.8	20686.0	20477.8	18943.1	17808.6	16619.2	10473.4
70°	17563.9	17520.4	18362.1	20299.4	21024.5	21161.7	20960.5	19171.8	17312.3	16177.8	9290.9
71°	17314.6	17197.9	18190.6	20272.0	21088.5	21205.2	20853.0	18963.7	16813.7	15551.1	8218.1
72.5°	16541.5	16562.1	17719.4	19986.1	20935.3	20901.0	20244.5	18218.0	16212.1	14128.4	6601.0
75°	14638.5	14759.7	16193.8	18785.3	19567.5	19130.6	18126.5	16793.1	15004.4	10130.3	4583.7
77.5°	11962.4	12143.1	13719.0	16475.1	16253.3	16209.8	16168.6	14796.3	12813.2	5441.4	3188.4
80°	5711.3	6102.4	8275.3	11761.1	12776.6	13268.4	12959.6	11923.5	9908.4	2591.5	1905.3
82.5°	372.8	368.2	521.5	988.1	4165.1	5384.2	8554.4	8522.3	6907.5	1262.6	777.7
85°	176.1	180.7	199.0	226.4	263.0	288.2	398.0	2333.0	3305.1	601.5	169.3
87.5°	102.9	105.2	123.5	157.8	205.9	228.7	272.2	350.0	430.0	331.7	36.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1048439

CATALOG NUMBER: GALN-SA6C-750-U-T4BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3	185.3
2.5°	187.6	185.3	178.4	171.5	164.7	160.1	157.8	160.1	160.1	162.4	162.4
5°	187.6	180.7	169.3	155.5	146.4	137.2	132.7	130.4	132.7	132.7	132.7
7.5°	185.3	173.8	157.8	141.8	130.4	118.9	114.4	112.1	112.1	114.4	114.4
10°	180.7	169.3	148.7	130.4	116.7	102.9	96.1	89.2	89.2	89.2	91.5
12.5°	178.4	162.4	137.2	118.9	100.6	84.6	70.9	64.0	66.3	66.3	66.3
15°	173.8	155.5	130.4	107.5	84.6	64.0	52.6	45.7	48.0	50.3	48.0
17.5°	173.8	153.2	121.2	93.8	66.3	48.0	38.9	34.3	34.3	36.6	36.6
20°	173.8	148.7	114.4	80.1	50.3	36.6	27.4	25.2	25.2	29.7	32.0
22.5°	178.4	148.7	105.2	66.3	41.2	27.4	20.6	18.3	20.6	25.2	27.4
25°	185.3	146.4	96.1	59.5	34.3	20.6	16.0	11.4	13.7	18.3	20.6
27.5°	192.1	144.1	86.9	52.6	27.4	16.0	11.4	9.1	6.9	9.1	9.1
30°	199.0	144.1	77.8	43.5	22.9	11.4	6.9	4.6	2.3	0.0	0.0
32.5°	203.6	139.5	70.9	34.3	18.3	9.1	4.6	2.3	0.0	0.0	0.0
35°	208.1	134.9	61.8	27.4	13.7	6.9	2.3	0.0	0.0	0.0	0.0
37.5°	212.7	128.1	52.6	22.9	11.4	4.6	0.0	0.0	0.0	0.0	0.0
40°	217.3	118.9	43.5	20.6	6.9	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	221.9	112.1	36.6	16.0	4.6	0.0	0.0	0.0	0.0	0.0	0.0
45°	233.3	107.5	29.7	13.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	253.9	102.9	27.4	9.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	283.6	98.4	25.2	6.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	324.8	96.1	22.9	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	398.0	93.8	20.6	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	523.8	91.5	20.6	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	802.8	86.9	20.6	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	1434.1	84.6	18.3	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	2500.0	86.9	18.3	4.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	3584.1	91.5	16.0	6.9	2.3	0.0	0.0	0.0	0.0	0.0	0.0
70°	3067.2	80.1	16.0	9.1	4.6	2.3	0.0	0.0	0.0	0.0	0.0
71°	2500.0	70.9	16.0	9.1	4.6	2.3	2.3	0.0	0.0	0.0	0.0
72.5°	1607.9	54.9	13.7	9.1	4.6	4.6	2.3	0.0	0.0	0.0	0.0
75°	679.3	45.7	13.7	9.1	6.9	4.6	4.6	2.3	0.0	0.0	0.0
77.5°	290.5	34.3	13.7	11.4	9.1	6.9	6.9	4.6	2.3	0.0	0.0
80°	109.8	27.4	16.0	13.7	11.4	11.4	9.1	4.6	2.3	0.0	0.0
82.5°	50.3	22.9	16.0	13.7	13.7	11.4	9.1	6.9	4.6	0.0	0.0
85°	32.0	20.6	16.0	13.7	13.7	11.4	11.4	6.9	4.6	0.0	0.0
87.5°	25.2	20.6	16.0	16.0	13.7	13.7	9.1	6.9	2.3	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-6

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-750-U-5WQ

Data in this report applies to families of products including GSS-SB1A-750-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-6
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-750-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5000K CCT 26 LEDS

Spectral Parameters

CCT (K):	4896	CRI (Ra):	70.2		
CIE u':	0.2101	R1:	68.1	R9:	-35.1
CIE v':	0.4901	R2:	73.9	R10:	39.3
Duv:	0.0035	R3:	79.4	R11:	71.1
CIE x:	0.3489	R4:	72.1	R12:	43.8
CIE y:	0.3618	R5:	69.2	R13:	68.1
CIE z:	0.2893	R6:	65.7	R14:	88.4
Peak Wavelength (nm):	443	R7:	78.1	R15:	59.7
Dominant Wavelength (nm):	570	R8:	55.3		
Purity:	13.25435				
Rf:	70.7				
Rg:	96.8				



Test Conditions

Stabilization Time: 21M
 Operation Time: 1H 21M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-6

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-6

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-6

Photopic Flux vs. Wavelength




Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	118	NR	620	401	NR	750	12	NR	880	0	NR
365	0	NR	495	168	NR	625	365	NR	755	10	NR	885	0	NR
370	0	NR	500	230	NR	630	331	NR	760	9	NR	890	0	NR
375	0	NR	505	299	NR	635	298	NR	765	8	NR	895	0	NR
380	0	NR	510	362	NR	640	266	NR	770	6	NR	900	0	NR
385	2	NR	515	418	NR	645	236	NR	775	6	NR	905	0	NR
390	4	NR	520	461	NR	650	209	NR	780	5	NR	910	0	NR
395	6	NR	525	491	NR	655	184	NR	785	4	NR	915	0	NR
400	9	NR	530	514	NR	660	160	NR	790	4	NR	920	0	NR
405	14	NR	535	530	NR	665	140	NR	795	3	NR	925	0	NR
410	27	NR	540	539	NR	670	122	NR	800	3	NR	930	0	NR
415	55	NR	545	549	NR	675	106	NR	805	2	NR	935	0	NR
420	115	NR	550	557	NR	680	92	NR	810	2	NR	940	0	NR
425	226	NR	555	565	NR	685	79	NR	815	2	NR	945	0	NR
430	395	NR	560	572	NR	690	68	NR	820	2	NR	950	0	NR
435	648	NR	565	580	NR	695	59	NR	825	1	NR	955	0	NR
440	937	NR	570	586	NR	700	51	NR	830	1	NR	960	0	NR
445	953	NR	575	588	NR	705	44	NR	835	1	NR	965	0	NR
450	591	NR	580	588	NR	710	38	NR	840	1	NR	970	0	NR
455	334	NR	585	580	NR	715	32	NR	845	1	NR	975	0	NR
460	221	NR	590	568	NR	720	28	NR	850	1	NR	980	0	NR
465	140	NR	595	550	NR	725	24	NR	855	1	NR	985	0	NR
470	93	NR	600	527	NR	730	21	NR	860	1	NR	990	0	NR
475	79	NR	605	499	NR	735	18	NR	865	0	NR	995	0	NR
480	76	NR	610	469	NR	740	15	NR	870	0	NR	1000	0	NR
485	87	NR	615	435	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-6

Scotopic Flux vs. Wavelength

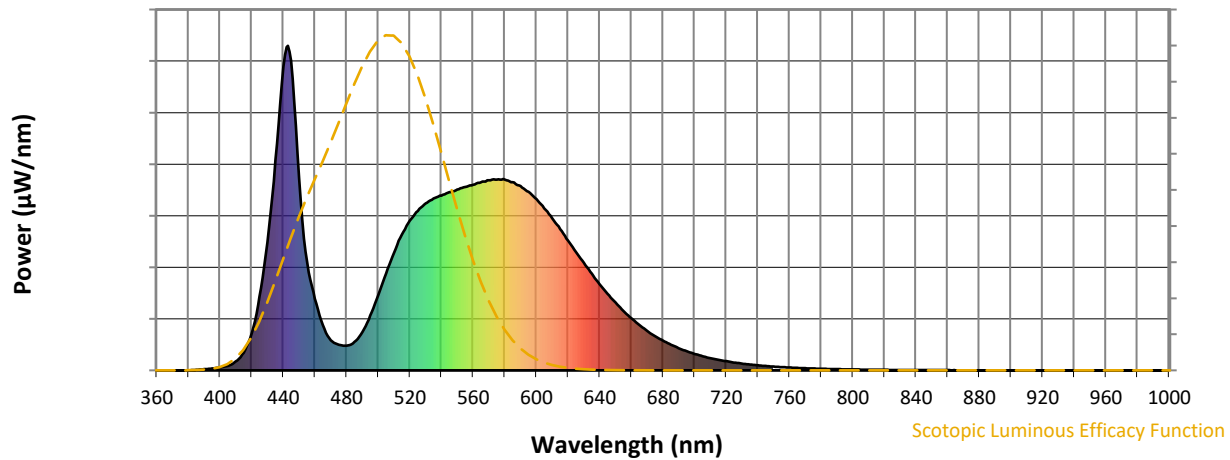

Scotopic Lumens: NR

S/P: 1.7

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	118	NR	620	401	NR	750	12	NR	880	0	NR
365	0	NR	495	168	NR	625	365	NR	755	10	NR	885	0	NR
370	0	NR	500	230	NR	630	331	NR	760	9	NR	890	0	NR
375	0	NR	505	299	NR	635	298	NR	765	8	NR	895	0	NR
380	0	NR	510	362	NR	640	266	NR	770	6	NR	900	0	NR
385	2	NR	515	418	NR	645	236	NR	775	6	NR	905	0	NR
390	4	NR	520	461	NR	650	209	NR	780	5	NR	910	0	NR
395	6	NR	525	491	NR	655	184	NR	785	4	NR	915	0	NR
400	9	NR	530	514	NR	660	160	NR	790	4	NR	920	0	NR
405	14	NR	535	530	NR	665	140	NR	795	3	NR	925	0	NR
410	27	NR	540	539	NR	670	122	NR	800	3	NR	930	0	NR
415	55	NR	545	549	NR	675	106	NR	805	2	NR	935	0	NR
420	115	NR	550	557	NR	680	92	NR	810	2	NR	940	0	NR
425	226	NR	555	565	NR	685	79	NR	815	2	NR	945	0	NR
430	395	NR	560	572	NR	690	68	NR	820	2	NR	950	0	NR
435	648	NR	565	580	NR	695	59	NR	825	1	NR	955	0	NR
440	937	NR	570	586	NR	700	51	NR	830	1	NR	960	0	NR
445	953	NR	575	588	NR	705	44	NR	835	1	NR	965	0	NR
450	591	NR	580	588	NR	710	38	NR	840	1	NR	970	0	NR
455	334	NR	585	580	NR	715	32	NR	845	1	NR	975	0	NR
460	221	NR	590	568	NR	720	28	NR	850	1	NR	980	0	NR
465	140	NR	595	550	NR	725	24	NR	855	1	NR	985	0	NR
470	93	NR	600	527	NR	730	21	NR	860	1	NR	990	0	NR
475	79	NR	605	499	NR	735	18	NR	865	0	NR	995	0	NR
480	76	NR	610	469	NR	740	15	NR	870	0	NR	1000	0	NR
485	87	NR	615	435	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-6

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 3.37


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	118	NR	620	401	NR	750	12	NR	880	0	NR
365	0	NR	495	168	NR	625	365	NR	755	10	NR	885	0	NR
370	0	NR	500	230	NR	630	331	NR	760	9	NR	890	0	NR
375	0	NR	505	299	NR	635	298	NR	765	8	NR	895	0	NR
380	0	NR	510	362	NR	640	266	NR	770	6	NR	900	0	NR
385	2	NR	515	418	NR	645	236	NR	775	6	NR	905	0	NR
390	4	NR	520	461	NR	650	209	NR	780	5	NR	910	0	NR
395	6	NR	525	491	NR	655	184	NR	785	4	NR	915	0	NR
400	9	NR	530	514	NR	660	160	NR	790	4	NR	920	0	NR
405	14	NR	535	530	NR	665	140	NR	795	3	NR	925	0	NR
410	27	NR	540	539	NR	670	122	NR	800	3	NR	930	0	NR
415	55	NR	545	549	NR	675	106	NR	805	2	NR	935	0	NR
420	115	NR	550	557	NR	680	92	NR	810	2	NR	940	0	NR
425	226	NR	555	565	NR	685	79	NR	815	2	NR	945	0	NR
430	395	NR	560	572	NR	690	68	NR	820	2	NR	950	0	NR
435	648	NR	565	580	NR	695	59	NR	825	1	NR	955	0	NR
440	937	NR	570	586	NR	700	51	NR	830	1	NR	960	0	NR
445	953	NR	575	588	NR	705	44	NR	835	1	NR	965	0	NR
450	591	NR	580	588	NR	710	38	NR	840	1	NR	970	0	NR
455	334	NR	585	580	NR	715	32	NR	845	1	NR	975	0	NR
460	221	NR	590	568	NR	720	28	NR	850	1	NR	980	0	NR
465	140	NR	595	550	NR	725	24	NR	855	1	NR	985	0	NR
470	93	NR	600	527	NR	730	21	NR	860	1	NR	990	0	NR
475	79	NR	605	499	NR	735	18	NR	865	0	NR	995	0	NR
480	76	NR	610	469	NR	740	15	NR	870	0	NR	1000	0	NR
485	87	NR	615	435	NR	745	13	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-6



TM-30-18

Summary

$R_f = 70.7$
 $R_g = 96.8$
 $CIE R_a = 70.2$
 $R_g = -35.1$

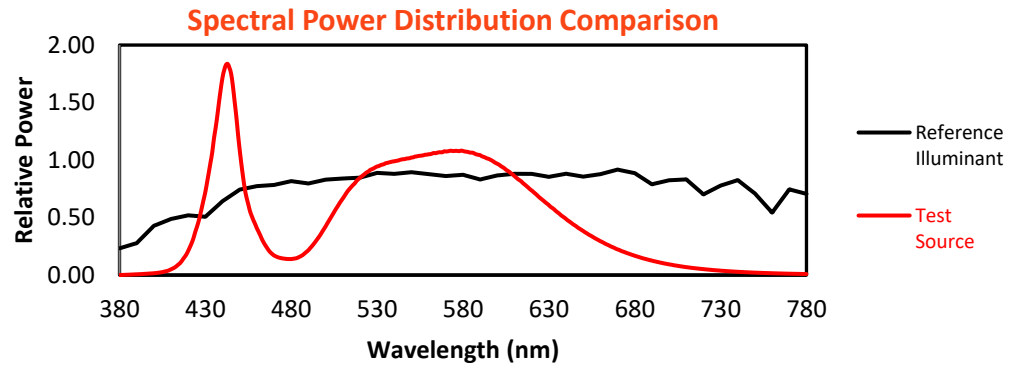

Color Vector Graphics


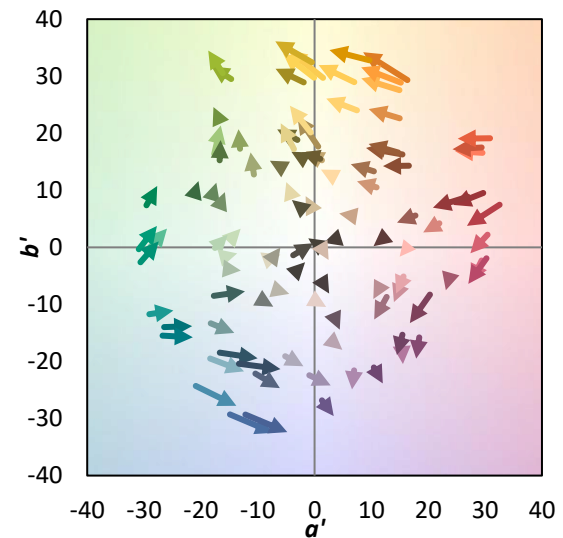
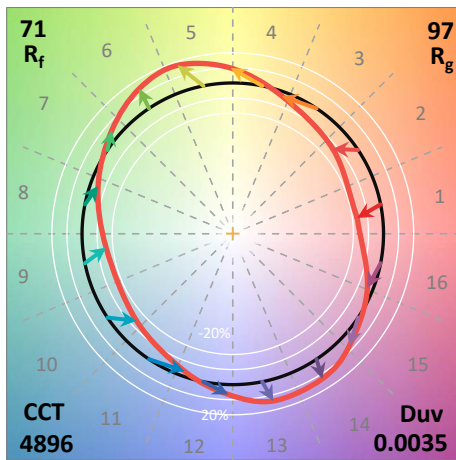


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 53	CES51 = 87	CES76 = 42
CES02 = 59	CES27 = 78	CES52 = 88	CES77 = 64
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 45
CES04 = 69	CES29 = 48	CES54 = 80	CES79 = 74
CES05 = 46	CES30 = 56	CES55 = 79	CES80 = 71
CES06 = 50	CES31 = 54	CES56 = 68	CES81 = 72
CES07 = 39	CES32 = 50	CES57 = 65	CES82 = 88
CES08 = 38	CES33 = 60	CES58 = 67	CES83 = 82
CES09 = 29	CES34 = 62	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 79	CES60 = 91	CES85 = 84
CES11 = 56	CES36 = 90	CES61 = 87	CES86 = 74
CES12 = 61	CES37 = 72	CES62 = 79	CES87 = 75
CES13 = 41	CES38 = 66	CES63 = 72	CES88 = 76
CES14 = 74	CES39 = 91	CES64 = 70	CES89 = 74
CES15 = 70	CES40 = 83	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 83	CES66 = 64	CES91 = 92
CES17 = 49	CES42 = 70	CES67 = 62	CES92 = 67
CES18 = 55	CES43 = 68	CES68 = 69	CES93 = 81
CES19 = 71	CES44 = 98	CES69 = 80	CES94 = 56
CES20 = 64	CES45 = 78	CES70 = 56	CES95 = 71
CES21 = 85	CES46 = 77	CES71 = 53	CES96 = 77
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 46	CES98 = 71
CES24 = 90	CES49 = 76	CES74 = 94	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	



Color Rendition by Hue-Angle Bin

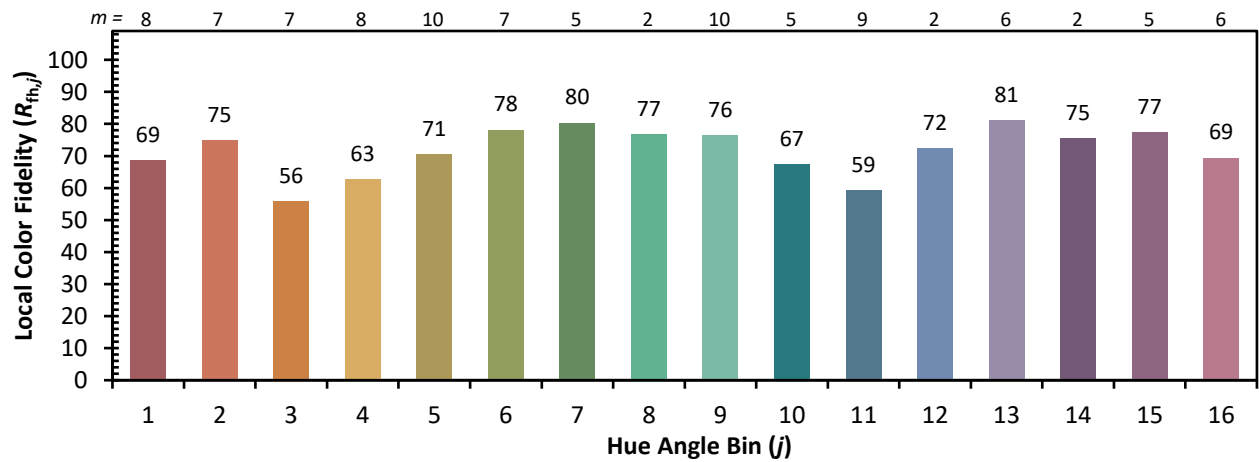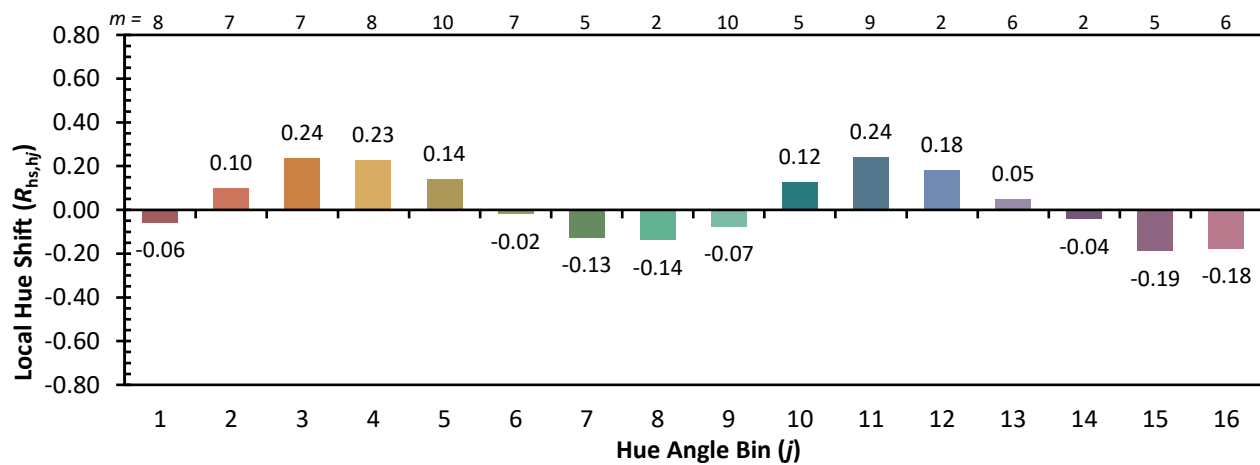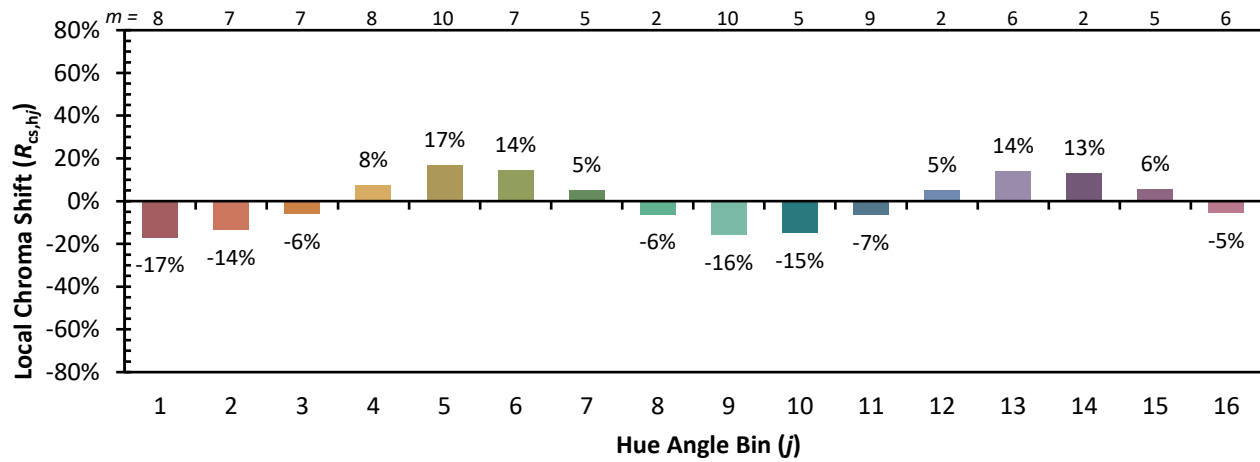

Measure Comparisons

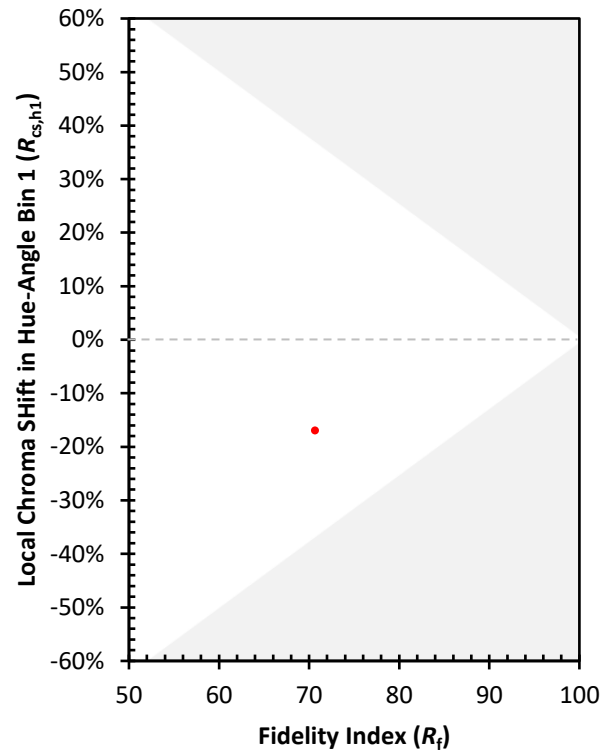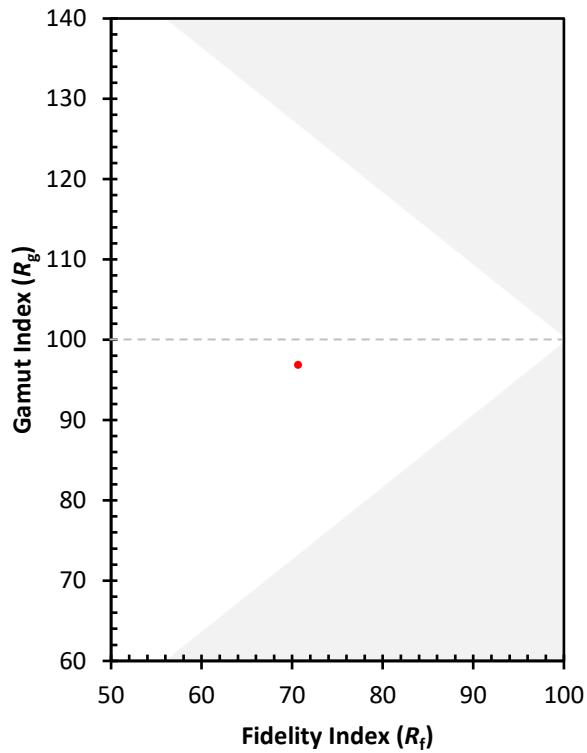

(END OF REPORT)